

WONDERFLOOR

www.wonderfloor.co.in

ADVENTUS

PUR




**High Performance
Homogeneous Flooring**


WONDERFLOOR

ADVENTUS

High Performance Homogeneous Flooring

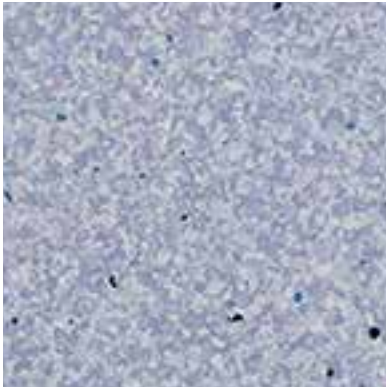


STEEL BLUE

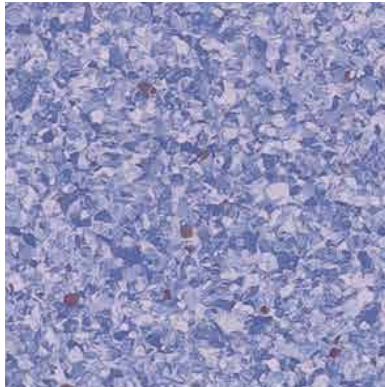


BLUE ICE



CORN

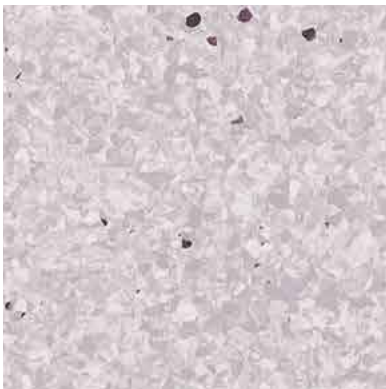

CLOUDY GREY

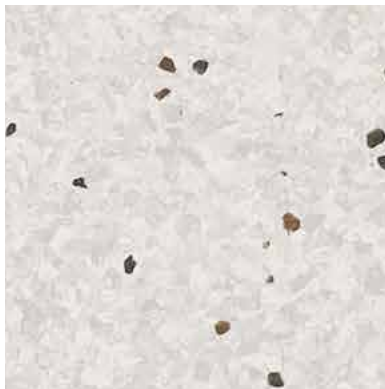


PEARL WHITE




CAPPUCCINO



SLATE GREY

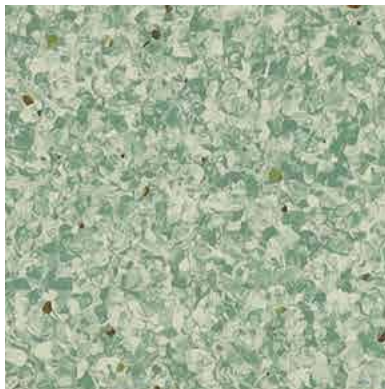

SPRING GREEN

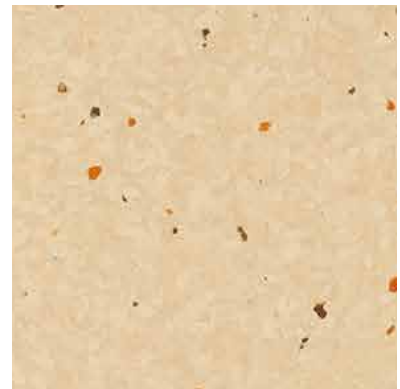

VANILLA



RUSTY GOLD



Thickness: 2mm

Availability: In Sheets (2 mtr x 20 mtr)

SALIENT FEATURES

- High performance flooring
- Homogeneous single layered
- Non-directional design
- PUR surface guard for ease in maintenance and resistance against scratches scuff marks & stains
- Wear group **T** for superior performance
- Anti bacterial / Anti fungal

APPLICATION AREAS:

Hospitals, Pharmaceutical Units, Super markets, Schools, Auditoriums, Library Large public area, Clean rooms etc.



WONDERFLOOR - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

ADVENTUS is a high performance single layered, non directional homogenous flooring with multi colour chips. Adventus is highly suitable for multiple applications area with high footfall like hospitals, pharmaceutical factory, food factory, stores, labs, schools etc. Its long lasting & easy to maintain.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	ADVENTUS
THICKNESS (mm)	EN 428 / ISO 24346	2.00
ROLL WIDTH (mtr)	EN 426 / ISO 24341	2.00
ROLL LENGTH (mtr)	EN 426 / ISO 24341	20
TOTAL WEIGHT (gms/sq mtr)	EN 430 / ISO 23997	2800 gm/m ²
SURFACE PROTECTION	PUR	PUR
HYGIENE / CLEAN ROOM TEST	ISO 14644 - 1	INHIBITS GROWTH OF MICROBES, CLASS A
DIMENSIONAL STABILITY (%)	EN 434 / ISO 23999	≤ 0.40%
RESIDUAL INDENTATION (mm)	EN 433 / ISO 23343-1	≤ 0.10 mm
FLEXIBILITY (mm)	EN 435 / ISO 24344	20mm MANDREL, PASSES
ELECTROSTATIC PROPERTIES	EN 1815 EN 1081	DOES NOT ACCUMULATE CHARGES ABOVE 2kV 10 ⁹ Ohms to 10 ¹⁰ Ohms
ABRASION RESISTANCE	EN: 649 / EN: 660-2	WEAR GROUP T
SURFACE SPREAD OF FLAME	BS 476 PART 7	CLASS 1
ANTI BACTERIAL & ANTI FUNGICIDAL	ISO 846 A,C / ISO 22196	INHIBITS GROWTH
REACTION TO FIRE (kw/m ²)	EN ISO 9239-1	Bf1s1
COLOUR FASTNESS	ISO 105-B02	> BLUE WOOL STANDARD 6
SLIP RESISTANCE	DIN 51130 / ASTM D2047	R9
BEARING CASTOR CHAIR	EN 425 / ISO 4918	SUITABLE/CONTINUOUS
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	Δ LW = 4DB
STAIN RESISTANCE	EN 423 / ISO 26987	EXCELLANT RESISTANCE
PERFORMANCE CLASSIFICATION	EN 685 / ISO 10874	34, 43
MARITIME USAGES		SUITABLE



RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail: mkt@rmgpoly.com

or call: +91 9015313059 (Available between 10am-6.30pm)

For export enquiries, please e-mail : info@rmgpoly.com or call : +91 9873138885

RMG POLYVINYL INDIA LIMITED

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

