


Innovation for office supplies



Pouch Laminator
Roll Laminator
Laminating Film
BOPP Thermal Laminating Film
PP Rigid Sheet
OHP Film

LAMIACE CORP. PRODUCT CATALOGUE

www.lamiace.com

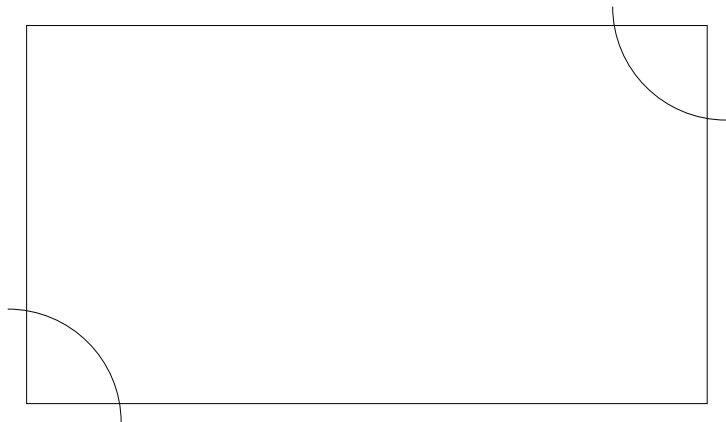

About Lami-Ace

Lami-Ace is a long established global supplier of lamination products. Based in Seoul, Korea, we have been specializing in manufacturing lamination related products for over a decade and with the systematic production line operated by industry experts, we produce superior quality products that are unrivaled by our competitors. With years of experience and accumulated expertise, we are now one of the industry leaders, striving to expand our reach not only to the local customers, but also to the international consumer groups.

Vision & Mission

We, Lami-Ace, have been moving forward with a vision that has guided the company to advancement since its foundation in 1997; we have envisioned ourselves to become a leader of lamination product industry, producing only the finest that receives worldwide recognition.

Two fundamental values observed by every member in the company enable us to get closer to what we aim to accomplish: Integrity and commitment to excellence.

Integrity A higher degree of credibility is one of the key factors that influence the success in business.

We have the industry-recognized expertise in lamination products and years of international trade experience with more than 40 different countries which ensure a reliable and professional business relation. In fact, a number of local and international client groups have responded to our dedication, engaging in a long-term business relationship with us; some of our current clients have been doing business with us since the earlier days of our company.

Commitment to excellence We are determined to provide products and services that respond and exceed client expectations. Numerous awards that our products have received confirm that they indeed demonstrate an outstanding quality that set us apart from other brands. We have high standards and take pride in what we provide. It is our mission to retain our reputation as the premium product providers, cultivating life-time customer loyalty for our products.

We are committed to providing superior value and service to our customers. We lead through innovation, producing exceptional product reliability and customer satisfaction. We are Lami-Ace, the front-runner of lamination products.

Contents

- 04 Heavy Duty Pouch Laminator
High technology, professional use



- 06 Middle Duty Pouch Laminator
High Performance, home & office use



- 08 Heavy Duty Roll Laminator – Double Side
Perfect lamination with PET laminating film



- 09 Heavy Duty Roll Laminator – Single & Double Side
Perfect lamination with BOPP thermal laminating film



- 10 Laminating Film
The highest quality in the world



- 14 BOPP Thermal Laminating Film
Innovation of adhesion power



- 15 PP Rigid Sheet
Complete book-binding cover



- 15 OHP Film
The highest transparency





Heavy Duty Pouch Laminator

TOFO 330R6 / 480R6 / SpeedR10

- Heating Roller Internal Heater
- Full Digital & LCD Display
- "Patent" Air Cooling System
- Hot & Cold Laminating
- Auto Power-Off System
- Auto Electricity Safety System
- Programmable Memory Key
- Installed Heat Treatment Motor Gear
- A2 Wide Entrance -TOFO 480R6
- Infrared Sensor -TOFO SpeedR10
- High Speed Working (Max.4,000mm/min.) -TOFO SpeedR10
- Auto Ejector -TOFO SpeedR10
- Powerful DC Motor -TOFO SpeedR10



TOFO 330R6



TOFO 480R6




TOFO SpeedR10

Specification

	TOFO 330R6	TOFO 480R6	TOFO SpeedR10
Maximum Width	335mm (13.2")	480mm (18.9")	330mm (13")
Maximum Speed	1,350mm/min.	1,150mm/min.	4,000mm/min.
Maximum Laminating Film	350mic. (14mil.)		
Thickness of Mount	3mm		
Heating System	Heating Roller Internal Heater		
Operation Temperature	0~140℃		0~160℃
Quantity of Roller	4 Heating Rollers + 2 Cold Rollers		6 Heating Rollers + 2 Cold Rollers + 2 Ejector Rollers
Display	LCD		
Temperature Controller	Yes		
Speed Controller	Yes		
Reverse Switch	Yes		
Preheating Time	5 min.	6 min.	8 min.
Power Consumption	1,050watts		1,300watts
Dimension	535 x 270 x 140mm	692 x 270 x 140mm	655 x 355 x 140mm
Box Dimension	585 x 320 x 175mm	735 x 320 x 175mm	727 x 420 x 210mm
Weight	16.1kgs(N) / 17.6kgs(G)	20kgs(N) / 21.9kgs(G)	27.4kgs(N) / 29.4kgs(G)
Pallet Packing	28 units / pallet	24 units / pallet	

TOFO 330R6 / 480R6

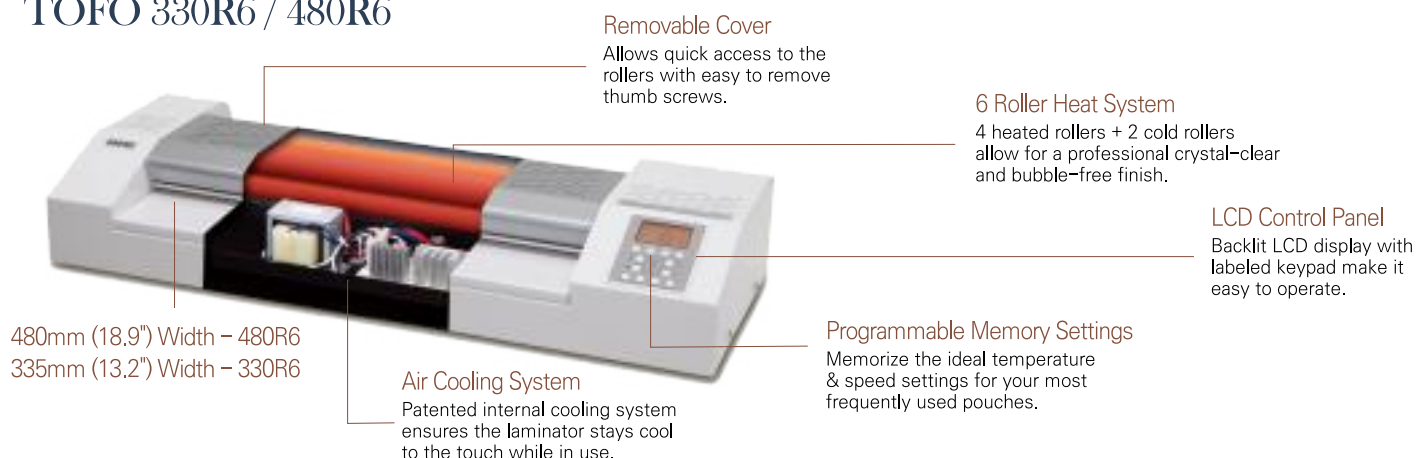

TOFO SpeedR10





Middle Duty Pouch Laminator

TOFO 330R4

- 4 Rollers (2 heating rollers + 2 cold rollers)
- Max 250mic.
- Max. Width 325mm
- Patent Air Cooling System
- LCD Display
- Easy to Use
- Auto Shut-off Function
- Reverse Function
- Simple Compact Design



Specification

	TOFO 330R4
Maximum Width	325mm
Maximum Speed	500mm/min.
Maximum Laminating Film	250mic. (10mil.)
Thickness of Mount	1mm
Heating System	Heating Roller Internal Heater
Operation Temperature	0~145℃
Preheating Time	2~3 min.
Power Consumption	550watts
Dimension	480 x 211 x 115mm
Box Dimension	550 x 280 x 165mm
Weight	10kgs(N) / 12kgs(G)
Pallet Packing	40 units / pallet

TOFO 330R4



- Fancy Designed Display



- Cooling Fan



Heavy Duty Roll Laminator

- Double Side

TOFO 380 / 720 / 1120

- Heating Roller Internal Heater
- Infrared Sensor
- Full Digital & LCD Display
- Auto Power-Off System
- Auto Electricity Safety System
- Programmable Memory Key
- Variable Pressure Controller
- Safety Sensor
- Emergency Stop
- All-In-One Core Size 1~3"
- End Cutter
- Side Cutter-TOFO 720, 1120
- Foot Switch-TOFO 720, 1120
- Auto Re-Winder for Cold Laminating -TOFO 1120
- Stand -TOFO 1120 (Option -TOFO 380, 720)
- Dual Temperature Adjustment (Top & Bottom Rollers) - Special Option



Specification

	TOFO 380	TOFO 720	TOFO 1120
Maximum Width	350mm (13.8")	700mm (27.5")	1,100mm (43.3")
Maximum Speed	4,000mm/min.	3,000mm/min.	
Maximum Laminating Film	350mic. (14mil.)		
Thickness of Mount	13mm		
Heating System	Heating Roller Internal Heater		
Operation Temperature	0~150℃		
Quantity of Roller	2 Heating Rollers + 2 Cold Rollers		
Display	LCD		
Temperature Controller	Yes		
Speed Controller	Yes		
Reverse Switch	Yes		
Preheating Time	6 min.	8 min.	10 min.
Power Consumption	1,550watts		1,800watts
Dimension	710 x 460 x 460mm	1,050 x 460 x 460mm	1,450 x 460 x 1,170mm
Box Dimension	825 x 565 x 385mm	1,155 x 565 x 385mm	Laminator 1,570 x 565 x 385mm Stand 750 x 590 x 150mm
Weight	46kgs(N) / 50kgs(G)	67kgs(N) / 73kgs(G)	122kgs(N) / 130kgs(G)
Pallet Packing	6 units / pallet		5 units / pallet

Heavy Duty Roll Laminator

- Single & Double Side

TOFO 380SD / 720SD

- Single & Double Side Lamination
- Chrome Roller
- Dual Temperature Adjustment (Top & Bottom Rollers)
- Decurling Control Device
- In-Line Perforator
- Infrared Sensor
- Safety Guard
- Emergency Stop
- All-In-One Core Size 1~3"
- Option - Side Slitter, Stand



Chrome Roller



Decurling Control Device



In-Line Perforator



Side Slitter

Specification

	TOFO 380SD	TOFO 720SD
Maximum Width	340mm (13.4")	680mm (26.8")
Maximum Speed	4,000mm/min.	3,000mm/min.
Maximum Laminating Film	350mic. (14mil.)	
Thickness of Mount	7mm	
Heating System	Heating Roller Internal Heater	
Operation Temperature	0~150℃	
Quantity of Roller	2 Heating Rollers (Top Chrome Roller) + 2 Cold Rollers	
Display	LCD	
Temperature Controller	Yes	
Speed Controller	Yes	
Reverse Switch	Yes	
Preheating Time	6~8 min.	
Power Consumption	1,550watts	
Dimension (Stand is not included)	700 x 460 x 272mm	1,040 x 460 x 272mm
Box Dimension	810 x 570 x 395mm	1,150 x 565 x 395mm
Weight (Stand is not included)	58kgs(N) / 62kgs(G)	87kgs(N) / 91kgs(G)
Pallet Packing	6 units / pallet	



Laminating Film

- High Transparency !
- Excellent Adhesion !
- Bright Shiny Finish !
- Enhancing Colors / Sharpening Images !
- Various Applications !



Laminating Pouch Film Specification

Standard Thickness (PET/PE/EVA)		Standard Size (mm)	
75mic.(25/25/25)	175mic.(125/25/25)	54 x 86mm	188 x 263mm
75mic.(38/18/19)	200mic.(125/38/37)	60 x 90mm	190 x 265mm
80mic.(38/21/21)	250mic.(150/50/50)	60 x 95mm	216 x 303mm
80mic.(50/0/30)	250mic.(175/38/37)	70 x 100mm	229 x 292mm
100mic.(50/25/25)	350mic.(150/100/100)	80 x 110mm	220 x 307mm
125mic.(50/38/37)	350mic.(175/75/100)	95 x 135mm	263 x 370mm
125mic.(75/25/25)		100 x 146mm	265 x 380mm
150mic.(75/38/37)		111 x 154mm	303 x 426mm
150mic.(100/25/25)		134 x 188mm	307 x 430mm
175mic.(100/38/37)		154 x 216mm	310 x 430mm

* Custom thickness and size also available on orders



Laminating Roll Film Specification

Standard Thickness (PET/PE/EVA)		Standard Size (mm Width * m Length)
32mic.(12/0/20)	125mic.(75/25/25)	Width : Minimum 100mm Maximum 1,650mm Length : Vary upon request
38mic.(12/0/26)	150mic.(75/38/37)	
42mic.(12/0/30)	150mic.(100/25/25)	
50mic.(25/0/25)	175mic.(100/38/37)	
75mic.(25/25/25)	175mic.(125/25/25)	
75mic.(38/18/19)	200mic.(125/38/37)	Paper Core Size
80mic.(38/21/21)	250mic.(150/50/50)	1 inch core 2 1/4 inch core 3 inch core 6 inch core
80mic.(50/0/30)	250mic.(175/38/37)	
100mic.(50/25/25)	350mic.(150/100/100)	
125mic.(50/38/37)	350mic.(175/75/100)	

* Custom thickness and size also available on orders



Glossy Laminating Film



UV Cut Laminating Film



Matt Laminating Film / Soft Touch Matt Laminating Film



Sticky Back Laminating Film



Hyper-Digital (Ultra Bond) Laminating Film



Glossy Laminating Film

Feature : High glossy & Transparency finish.

Application : Document, Card, Photo, Picture, Menu etc., General purpose.



UV Cut Laminating Film

Feature : Blocking UV to prolong original color & transparency Average UV blocking rate 80%.

Application : High resolution photo & picture, To prolong original color & transparency etc., Outdoors.



Matt Laminating Film

Feature : Glare-free. Soft & matt texture finish.

Application : Luxurious image direction,
A place where is lots of reflected light, Writing on surface.



Soft Touch Matt Laminating Film

Feature : This is up-graded version of matt film.

The surface is so soft, the feeling is as like velvet-fabric.




Stick & Remove

Sticky Back Laminating Film

Feature : One side of this film has adhesion strong adhesion.

Application : Any surface.



Excellent
Adhesion Power

Hyper-Digital (Ultra Bond) Laminating Film

Feature : In the graphic and digital printed large format market, the current market has the existing problems of high cost and difficult usage of cold laminating film.

Lami-Ace's Hyper-Digital(Ultra Bond) laminating film with the excellent adhesion power, low price and easy usage is an innovated item can solve the current market's difficulties.

Application : for all digital printed out put.
Xerox, HP, Epson, etc.

BOPP Thermal Laminating Film



- Co-Polymer Adhesive Extrusion !
 - Special Adhesion & Coating !
 - Precise Slitting & Cutting !
 - Various Applications !
- **Standard Glossy Laminating Film**
This provides a perfect finish to virtually any printed output which requires a bright glossy finish.
 - **Standard Matt Laminating Film**
This provides a perfect finish to virtually any printed output which requires a matt finish.
 - **Hyper-Digital (Ultra Bond) Laminating Film**
This with the excellent adhesion power can be used for all digital printed out put. Xerox, HP, Epson, etc.
 - **Digital Glossy Laminating Film**
This with super adhesion power & glossy finish is available for any digital printed output.
 - **Digital Matt Laminating Film**
This with super adhesion power & matt finish is available for any digital printed output.
 - **Anti Scuff Laminating Film**
This has a scratch-resistant materials and has been developed to prevent any scratch on the surfaces.
 - **Soft Touch Laminating Film**
This is one of the special film and has a great feeling as like velvet-fabric.

Specification

Type	Base Film	Adhesion	Treatment	Thickness	Width
Glossy	BOPP (Glossy 12mic.)	EVA	Both sides corona Outside 38dyne EVA side 48dyne	20mic. 24mic. 25mic. 27mic. 38mic.	150mm ~ 2,000mm
Matt	BOPP (Matt 13mic. 15mic.)			21mic. 23mic. 25mic. 26mic. 27mic. 28mic. 41mic.	
Hyper-Digital (Ultra Bond) Glossy	BOPP (Glossy 12mic.)			40mic.	150mm ~ 1,600mm
Hyper-Digital (Ultra Bond) Matt	BOPP (Matt 13mic. 15mic.)			43mic.	
Digital Glossy	Digital (Glossy 12mic.)			32mic.	150mm ~ 2,000mm
Digital Matt	Digital (Matt 13mic.)			33mic.	
Anti Scuff	Anti Scuff BOPP (18mic.)			31mic.	
Soft Touch	Soft Touch (20mic.)			35mic.	

PP Rigid Sheet

- Clean Surface !
- High Transparency !
- Perfect Flat !
- Various Applications !

PP Rigid Sheet has broad application as it can be used for book-binding cover, packaging material and even as a raw material for other manufactured goods.



Specification

Standard Thickness	450mic.
Standard Type & Color	Transparent With Stripe
	Color Transparency With Stripe (Yellow, Blue, Green, Light Green, Pink)
	Frosted (Matt)
Standard Size	A4 210 x 297mm, A3 297 x 420mm

OHP Film

Overhead projector (OHP) is one of the most widely used equipments for professional level presentations, seminars and lectures. Lami-Ace produces a variety of films through which OHP presentation materials can be prepared in a more attractive and effective way.

- Write-On Film
This provides smooth surface to be written on.
- PPC (Plain Paper Copier) Film
This is used in a plain paper copier machine, comes with an interleave paper which prevents scratches.
- Ink-Jet Film
The surface is treated with special chemical which helps easy run-through for ink-jet printers.





www.lamiace.com

Seoul Office

Rm.622 A-dong 161-8 Magokjungang-ro Gangseo-gu,

Seoul, 07788 Republic of KOREA

Tel : 82 2 26052616 Fax : 82 2 26052618

E-mail : webmaster@lamiace.com Website : www.lamiace.com

Factory

206 Aegibong-Ro, Wolgot-Myeon, Gimpo City,

Gyeonggi-Do, Korea 10022

Tel : 82 31 9879495 Fax : 82 31 9879496

