

SAF184.06

Lavoce

18" SUBWOOFER

FERRITE MAGNET
ALUMINIUM BASKET DRIVER

PRELIMINARY

- 4 INCH COPPER VOICE COIL
- 98 dB/SPL SENSITIVITY
- 2000 WATT PROGRAM POWER HANDLING
- FEM OPTIMIZED MOTOR AND SUSPENSIONS
- OPTIMIZED COOLING SYSTEM
- DOUBLE SILICON SPIDER



GENERAL SPECIFICATIONS

Nominal diameter	mm (in.)	460 (18)
Nominal impedance	Ω	8
Minimum impedance	Ω	5,9
Program power (1)	W	2000
AES Power rating (2)	W	1000
Sensitivity (3)	dB	98
Frequency range	Hz	30 ÷ 1000
Voice coil diameter	mm (in.)	100 (4)
Chassis material	Aluminium	
Magnet material	Ferrite	
Magnet dimensions	mm	220 x 115 x 30
OD x ID x h	(in.)	(8.66 x 4.53 x 1.18)
Coil material	Copper	
Former material	Glass Fiber	
Cone material	Water Resistant Treated Paper	
Surround material	Polycotton	
Xmax (4)	mm (in.)	8,9 (0.35)
Xmech (5)	mm (in.)	15,9 (0.63)
Gap height	mm (in.)	12 (0.47)
Voice coil winding height	mm (in.)	23,7 (0.93)
Driver displacement volume	l (ft ³)	8,5 (0,3)
Recommended enclosure	l (ft ³)	150
Recommended tuning	Hz	36


SMALL SIGNAL PARAMETERS

DC resistance	Re	Ohm	4,8
Resonance frequency	Fs	Hz	32
Moving mass	Mms	g (oz)	215 (7.58)
Compliance	Cms	mm/N	0,115
Force factor	BxL	N/A	26,35
Mechanical Q-factor	Qms		5,65
Electrical Q-factor	Qes		0,3
Total Q-factor	Qts		0,29
Equivalent air volume	Vas	l (ft ³)	234,36 (8.28)
Voice coil Inductance	Le	mH	1,77
Diaphragm area	Sd	cm ² (in. ²)	1200 (186)
Reference efficiency	Eta 0	%	2,46
Efficiency bandwidth product	EBP	Hz	107


SHIPPING INFORMATION

Net weight	kg (lb.)	13,5 (26.1)
Multipack size (1)	mm (in.)	489 x 489 x 264 (19.3 x 19.3 x 10.4)
Multipack weight	kg (lb.)	15,48 (34.1)

FREQUENCY RESPONSE AND IMPEDANCE

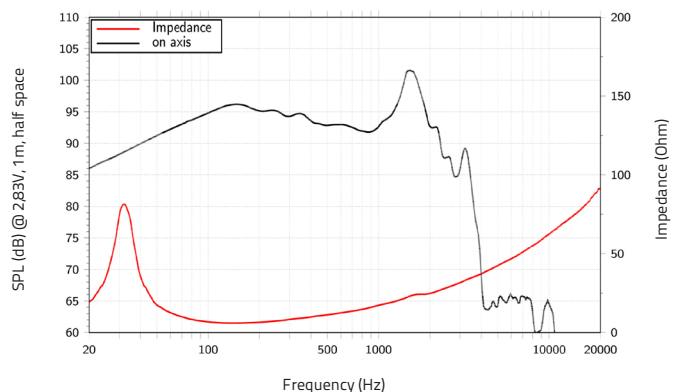

DIMENSIONS mm (in.)

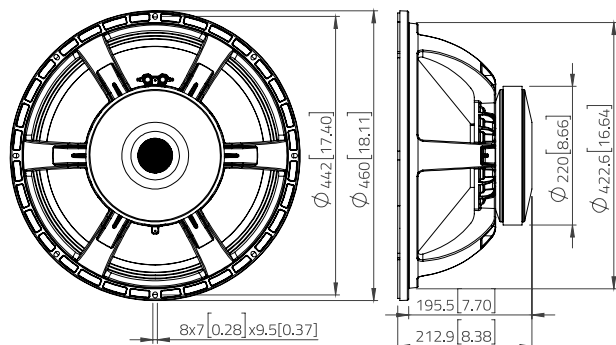

(1) Program power is defined as 3 dB greater than AES Power. (2) Tested for two hours using a continuous, band-limited pink noise signal as per AES 2-1984 Rev. 2003. Loudspeaker tested in free air. (3) From T/S parameters, measured with Klippel DA LPM module. (4) The Xmax is calculated as: $(H_{vc} - H_g)/2 + H_g/4$. Hvc is the voice coil height and Hg the gap height. (5) The Xmech is calculated as: $(H_{vc} - H_g)/2 + (H_g - 2)$. Hvc is the voice coil height and Hg the gap height. (6) Thiele-Small parameters are measured after preconditioning: a) at 20°C - 22°C, 50% humidity for 2 hours; b) by Klippel LSI measurement.

All specifications subject to change without notice..I.a

