

CAMERA CONNECTOR SYSTEM

INNOVATIVE SOLUTIONS

DRAGONFLY
opticalCON[®]



NEUTRIK[®]

2 3

TRUE OUTDOOR PROTECTION

DRAGONFLY opticalCON®

CAMERA CONNECTOR

Neutrik's new fiber optic connector series offers advanced lens technology for the Broadcast and AV Market. DRAGONFLY is more robust, reliable and easier to maintain than common hybrid camera signal transmission systems. With technology based on fiber lenses and fusion splicing, Neutrik's DRAGONFLY achieves an extremely robust signal with minimal loss. opticalCON DRAGONFLY combines all the advantages of lens technology and makes it competitive with physical contact connectivity.

The DRAGONFLY connector offers long life with very low maintenance. It can also withstand harsh and demanding environments and is dust and moisture insensitive. Additionally, DRAGONFLY is robust against vibration and therefore has low potential for damage. And if there ever is a problem, DRAGONFLY is field repairable. With this new technology, DRAGONFLY provides a complete solution for the Broadcast and AV Market.




**TRUE
OUTDOOR
PROTECTION**



DRAGONFLY

NEUTRIK

CORE TECHNOLOGY EXPANDED BEAM


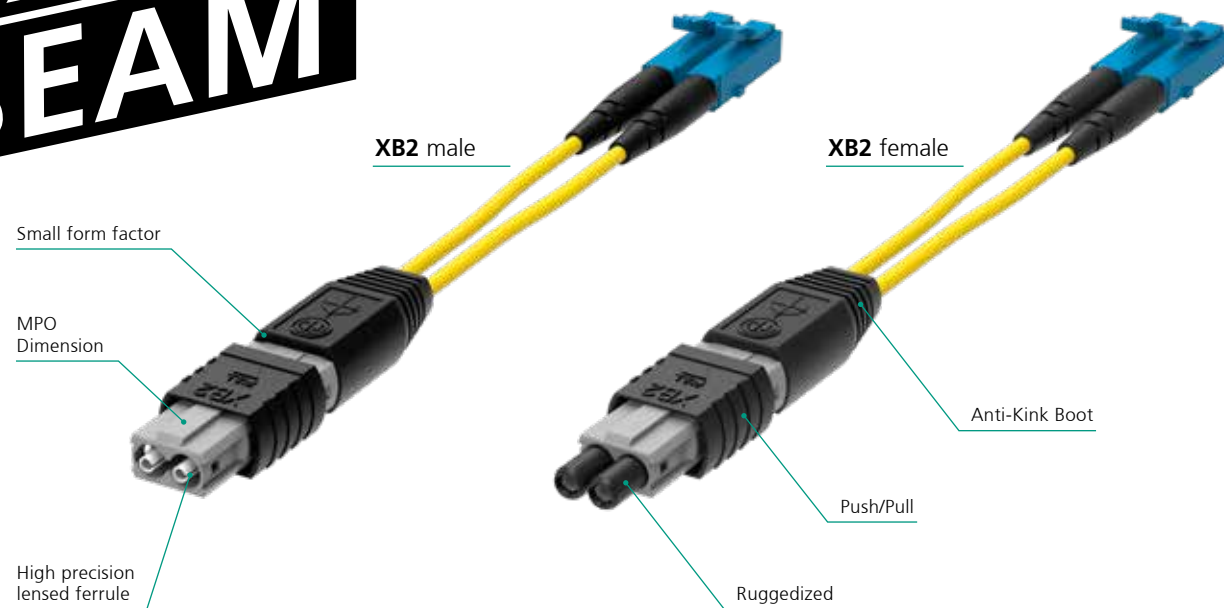


DRAGONFLY is based on the patented XB2-Technology. Its innovative fusion splice high-performance lens transmits UHD 4K and 8K signals with very low loss as the signal surface of the

XB2 lens is 322 times bigger than physical contact surfaces. This further results in low insensitivity against dust and dirt.


STANDARD PHYSICAL CONTACT

Single Mode



XB2 LENSED SOLUTION

Single Mode



DRAGONFLY is a ruggedized and low maintenance hybrid cable connector for indoor and outdoor use.

INNOVATIVE AND FUTURE PROOF

- fusion splice technology – field repairable
- High performance – low loss
- Consistent quality
- 100% reliable even at extreme temperature fluctuations
- Permanent connection

SIMPLE AND EFFICIENT

- hybrid connection – power and data over one connection
- Low maintenance interval
- Easy switching to DRAGONFLY – fits into standardized cutouts
- Easy cleaning with compressed air and water
- Competitive price

ROBUST AND RELIABLE

- Extremely robust system
- Reliable push/pull locking mechanism
- Dust and waterproof according to IP68
- Proven anti-kink boot design
- Long life – 10.000 mating cycles



DRAGONFLY

NEUTRIK

TRUE OUTDOOR PROTECTION



FEATURES AND BENEFITS

Low maintenance and
easy to clean

High performance – low loss



Fusion splice technology –
field repairable

hybrid connection –
power and data

Dust and waterproof according
to IP68 in mated condition

Reliable push/pull
locking mechanism



Long life – 10 000 mating cycles

Proven anti-kink boot design

TRUE OUTDOOR PROTECTION

The highly innovative entertainment industry is permanently evolving accompanied by increasing demands on interconnection systems. Particularly environmentally sealed connectors are highly requested for heavy-duty and harsh environment applications of entertainment equipment like Broadcast, PA systems, signs and LED screens or lightings.

Neutrik took up the challenge and developed a new line of TRUE OUTDOOR PROTECTION (TOP) products for demanding outdoor applications.

This new range includes the popular powerCON TRUE1, etherCON, XLR series and opticalCON DRAGONFLY and ensure highest reliability and very long lifetime in the outdoor applications.

OpticalCON DRAGONFLY was developed and tested in accordance to UL50E and IEC60529. UL50E and IEC60529 are the most common and globally recognized for outdoor applications. The performed tests confirmed opticalCON DRAGONFLY's very high resistance against water and dust ingress, ultraviolet light and corrosion.



DRAGONFLY


NEUTRIK

APPLICATION

APPLICATION

The opticalCON DRAGONFLY system is the perfect solution for live broadcast productions.


OB CONFIGURATION

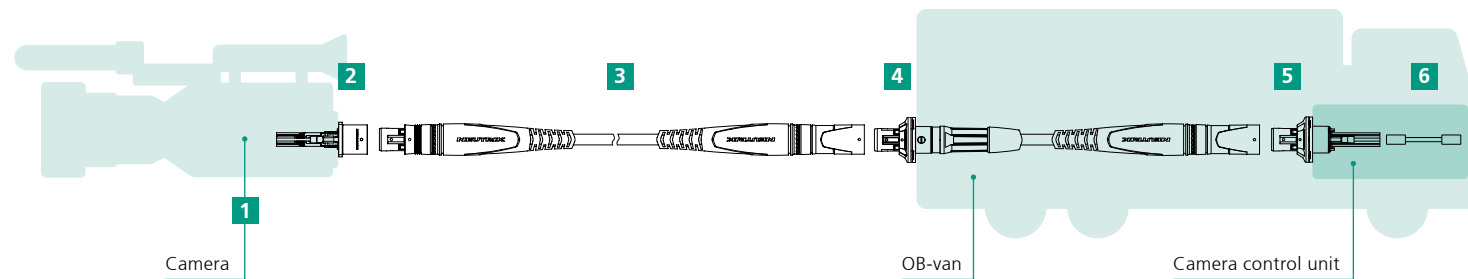

- 1 NK0BF2S-XP-0-1
- 2 NO2FW-XP
- 3 NK02S-XP-0-100

- 4 NK02SMW-XP-0-10
- 5 NO2MW-XP
- 6 NK0BM2S-XP-0-1


STUDIO CONFIGURATION PATCHING

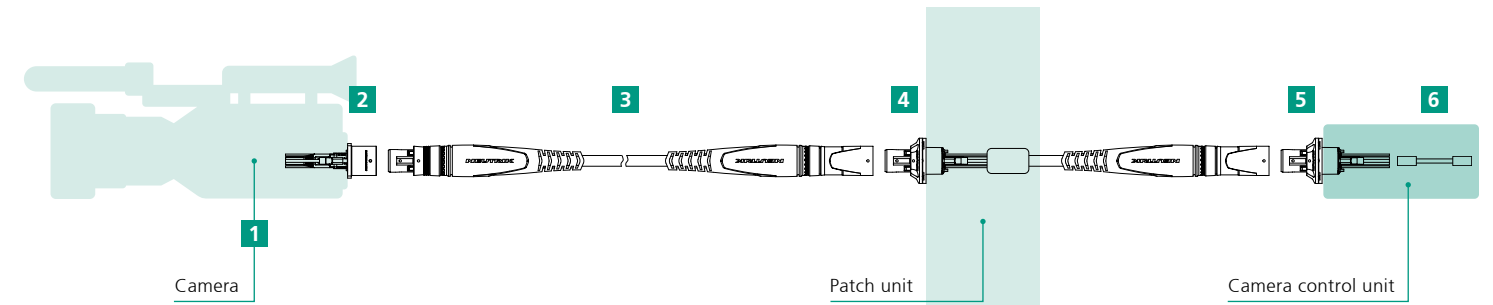

- 1 NK0BF2S-XP-0-1
- 2 NO2FW-XP
- 3 NK02S-XP-0-100

- 4 NO2MW-XP
- 5 NO2MW-XP
- 6 NK0BM2S-XP-0-1

STUDIO CONFIGURATION FIXED

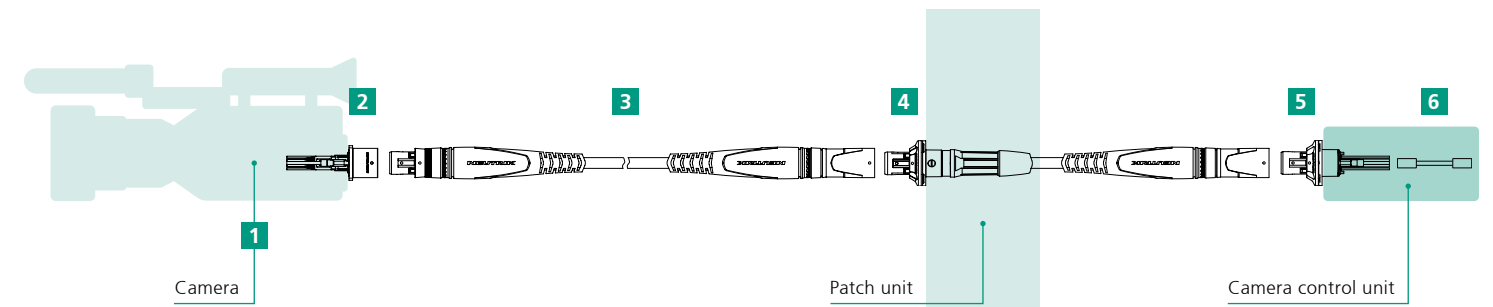

- 1 NK0BF2S-XP-0-1
- 2 NO2FW-XP
- 3 NK02S-XP-0-100

- 4 NK02SMW-XP-0-50
- 5 NO2MW-XP
- 6 NK0BM2S-XP-0-1

CONCEPT AND DESIGN


10

11

CABLE CONNECTOR male




CHASSIS female

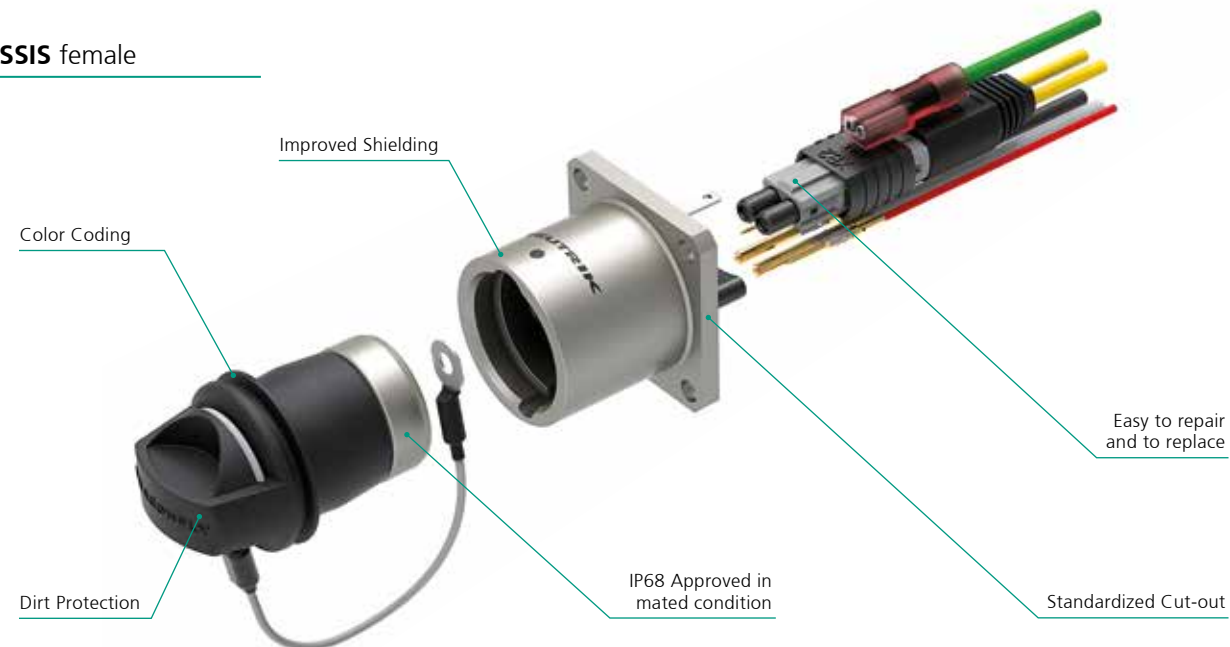

CABLE CONNECTOR female



CHASSIS male

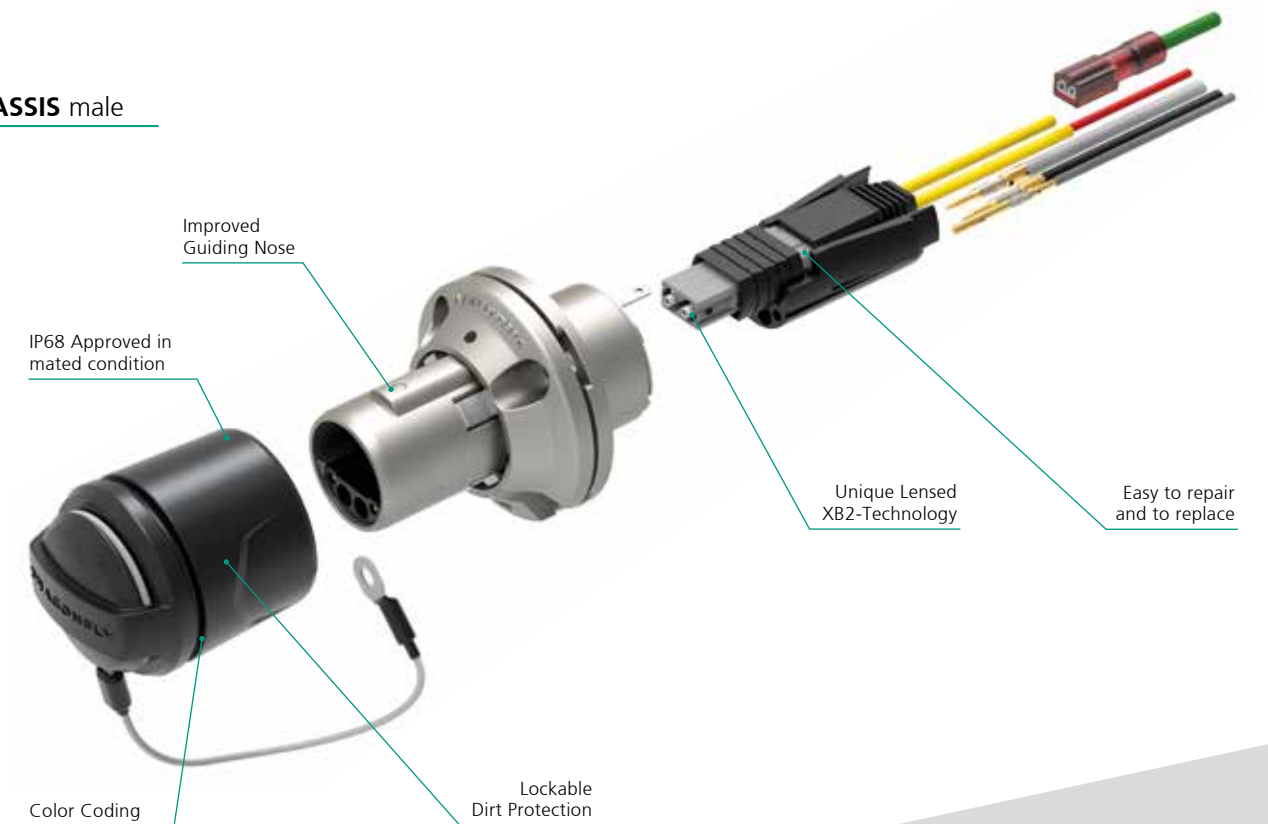

DRAGONFLY


NEUTRIK

CONCEPT AND DESIGN

12

13

FIXED RUGGED CONNECTOR male

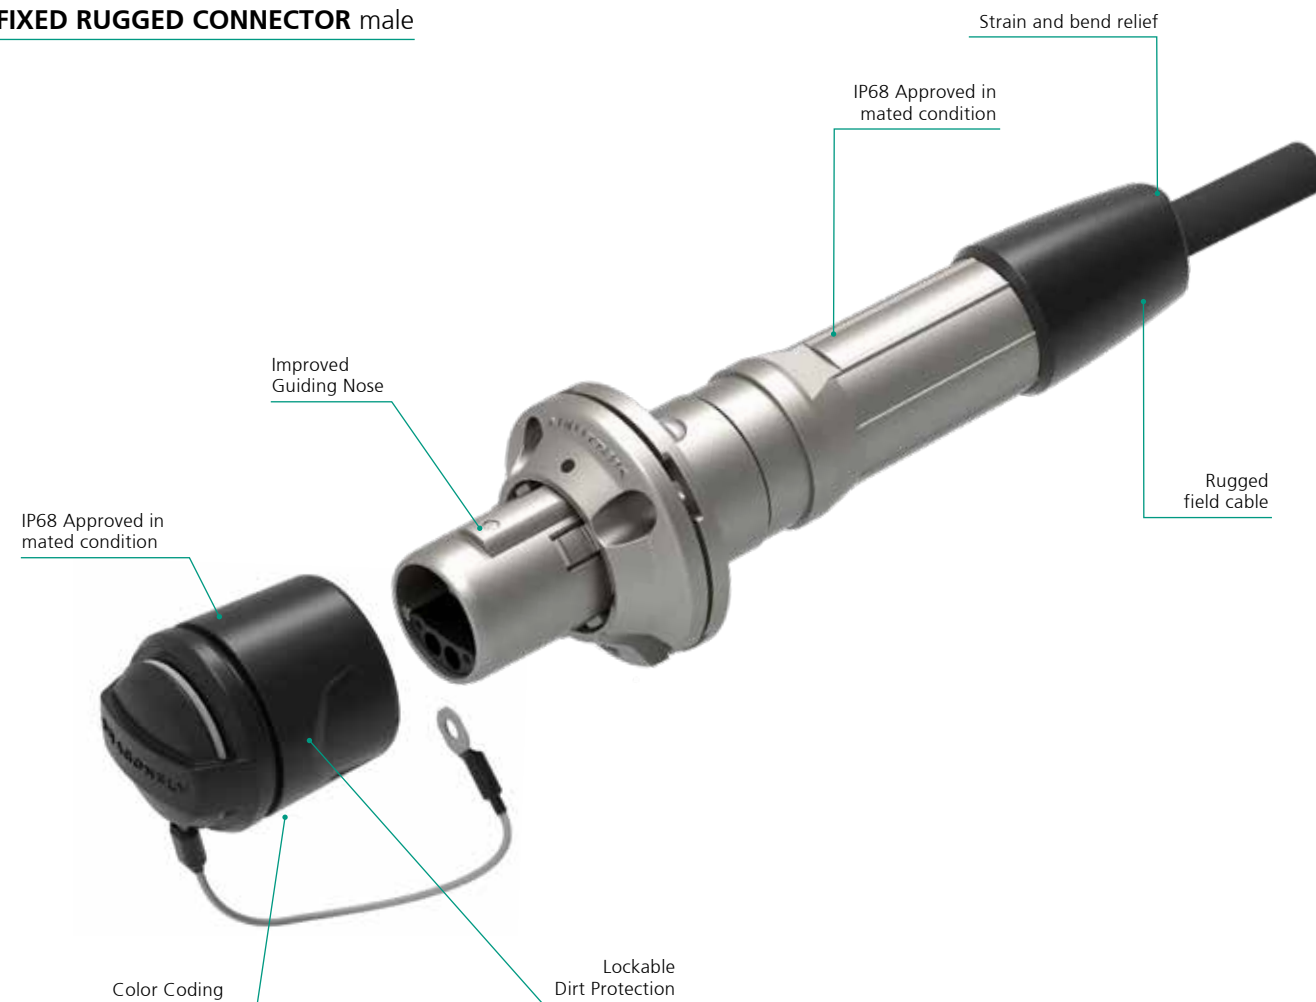

ACCESSORIES



ORDERING INFORMATION

SCNO2MW-XP	Rugged lockable metal sealing cover for opticalCON DRAGONFLY male chassis connector.
SCNO2FW-XP	Rugged metal sealing cover for opticalCON DRAGONFLY female chassis connector
SCNO2SMX-XP	Rugged lockable metal sealing cover for opticalCON DRAGONFLY male cable connector.
SCNO2SFX-XP	Rugged metal sealing cover for opticalCON DRAGONFLY female cable connector.
SCXP-M	SCXP-M sealing kit for dust and water proof assembly of NO2MW-XP chassis connectors.
SCXP-F	SCXP-F sealing kit for dust and water proof assembly of NO2FW-XP chassis connectors.
NOR-*	Color coding ring for opticalCON cable and chassis connectors (SCNO-FDW-A)
NOPF-XP	The NOPF-XP includes 10 power and 10 sense spare contacts for 5 NO2FW-XP Chassis assemblies.
POS-XP-SENSE	The POS-XP-SENSE Crimp die is used for the assembly of the sense cooper pins.
POS-XP-POWER	The POS-XP-POWER Crimp die is used for the assembly of the power cooper pins.
FOPR-XP	FOPR-XP pull-in aid for Dragonfly cables. The pull through tool allows passing the cable through narrow sections and protects the optical fiber during installation.
* Available colors:	NOR-0 – black, NOR-1 – brown, NOR-2 – red, NOR-3 – orange, NOR-4 – yellow, NOR-5 – green, NOR-6 – blue, NOR-7 – violet, NOR-8 – grey, NOR-9 – white



DRAGONFLY

NEUTRIK

TECHNICAL DATA

14

15

OPTICAL SPECIFICATIONS

Insertion Loss	Typical 0.6 dB per connection / Maximum 1 dB per connection	•
	Typical 45 dB / Minimum 40 dB	
Return Loss	SM: 1310 nm / 1550 nm	•
Wavelengths	SM: 9/125-G657A2	•
Compatible fiber types	-40 °C to +75 °C	•
Operation Temperature	Fusion Splice	•
Termination	Yes	•
WDM Compatibility		•

MECHANICAL SPECIFICATIONS – DRAGONFLY

Strain relief	> 500 N	•
Insertion force	< 45 N	•
Withdrawal force	< 45 N	•
Locking device	Push / Pull	•
Locking force	> 900 N	•
Lifetime	10.000 mating cycles	•
Anti-Kink protection	Identical to proven opticalCON ADVANCED	•
Wiresize	2 x 24 AWG + 4 x 20 AWG	•
Cable	Standard SMPTE 311 Cable ø 9.2 mm	•

ELECTRICAL SPECIFICATIONS – DRAGONFLY

Mains	240 V ac / 10 A / 50 Hz	•
	120 V ac / 10 A / 60 HZ	•
	300 V dc / 7A	•
Sense	42 V ac peak / 1-3 A / ≤ 1 kHz	•
	60 V dc / 1-3 A	•
Contact resistance	< 7 mΩ	•
Transfer resistance ground	< 10 mΩ	•
Insulation Resistance	> 10 GΩ	•

ENVIRONMENTAL

Flammability	UL94 V-0	•
Salt spray test	According to UL50E	•
UV Test	According to UL50E	•
Protection Class	IP68 / IEC60529, NEMA4 / UL50E (mated with sealing KIT SCXP-*)	•
Certification according to	IEC 62368-1 :2014	•
	IEC 60529	•
	UL 1977 :2019	•
	CSA C22.2 No. 182.3 :2016	•
	UL50E Type 4	•



DRAGONFLY

opticalCON®



DRAGONFLY

NEUTRIK

LIECHTENSTEIN (HEADQUARTERS)

Neutrik AG, Im alten Riet 143,
9494 Schaan, Liechtenstein
T +423 237 24 24, F +423 232 53 93, neutrik@neutrikgroup.com

GERMANY / NETHERLANDS / DENMARK / AUSTRIA

Neutrik Vertriebs GmbH, Felix-Wankel-Straße 1,
85221 Dachau, Germany
T +49 8131 28 08 90, neutrik@neutrikgroup.de

GREAT BRITAIN

Neutrik (UK) Ltd., Westridge Business Park, Cothey Way Ryde,
Isle of Wight PO33 1 QT
T +44 1983 811 441, sales@neutrikgroup.co.uk

FRANCE

Neutrik© France, 52 Rue d'aguessseau,
92100 Boulogne
T +33 1 41 31 67 50, info@neutrikgroup.fr

USA

Neutrik Americas., 4115 Taggart Creek Road,
Charlotte, North Carolina, 28208
T +1 704 972 3050, info@neutrikusa.com

JAPAN

Neutrik Limited, Yusen-Higashinibashi-Ekima Bldg., 3-7-19
Higashinibashi, Chuo-ku, Tokyo 103
T +81 3 3663 47 33, mail@neutrik.co.jp

HONG KONG

Neutrik Hong Kong LTD., Suite 18,
7th Floor Shatin Galleria Fatan, Shatin
T +852 2687 6055, sales@neutrik.com.hk

CHINA

Ningbo Neutrik Trading Co., Ltd., Shiqi Street, Yinxian Road West
Fengjia Village, Hai Shu District, Ningbo, Zhejiang, 315153
T +86 574 88250833, sales@neutrik.com.cn


ASSOCIATED COMPANIES

Contrik AG, Steinackerstrasse 35, 8902 Urdorf, Switzerland
T +41 44 736 50 10, contrik@contrik.ch

H. Adam GmbH, Felix-Wankel-Straße 1, 85221 Dachau, Germany
T +49 08131 28 08-0, anfrage@adam-gmbh.de

CONNEX GmbH, Elberstraße 12, 26135 Oldenburg
T +49 441 380398-0, info@connex.de

opticalCON® DRAGONFLY - 2022/03 V07 - NF25 - Data subject to change without prior notice. © 2022 NEUTRIK®.
NEUTRIK®, opticalCON®, DRAGONFLY®, TOP® are registered trademarks of Neutrik AG. ALL RIGHTS RESERVED.



www.neutrik.com