


**aIRSTAR**



THE ALL-IN-ONE



「Crystal Prime Color Dynamic White」

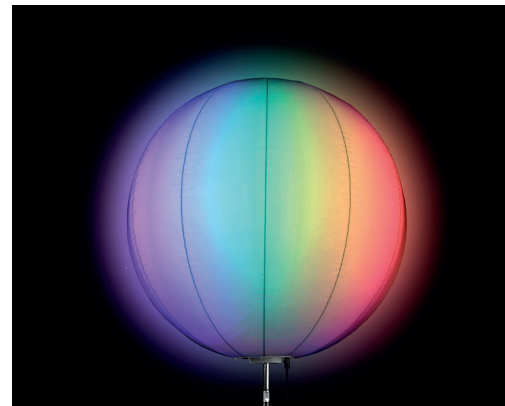

# Crystal Prime Color Dynamic White



## Technical data

Lighted area	1,700 m <sup>2</sup> / 18,300 ft <sup>2</sup>			
Light under the balloon	98 lux (4m - 13 ft high)			
Flicker	20 kHz			
LED Lifetime	50,000 hrs			
Color temperature	Dynamic White		Colors	Full Whites + Colors
	wW	cW	RGBA	
	3000 K	6500 K	/	4300 K
CRI	80	80	/	90
Luminous flux	17,000 lm	10,000 lm	6,000 lm	33,000 lm
Power consumption	175 W	130 W	110 W	350 W
Power Supply	100-240 VAC   50-60 Hz   Recommended generator 1 kVA			

Battery input - 52V /  
Backup power



**PowerSwitch** (optional)

**New!**

Provides flexibility in use and installation, while ensuring safety (continuity in case of power failure) and the serenity of your events.

Envelope diameter

130 cm (4 ft)

Wind resistance

Up to 70 km/h (43,5 mph)

Set-up time

2 minutes

Inflation

Fast and self-regulated inflation

Net weight of the balloon with envelope

10,5 kg (23 lb)

Certifications

CE, IP 54

Light source

Airstar LED Matrix : 8 macro-pixels (RGBAwWcW)


Mesh network balloons

100 m (109 yd) between each balloon

Light controls

> via **push button on the product**  
> Remotely via the **Airstar Light app**

## Illumination

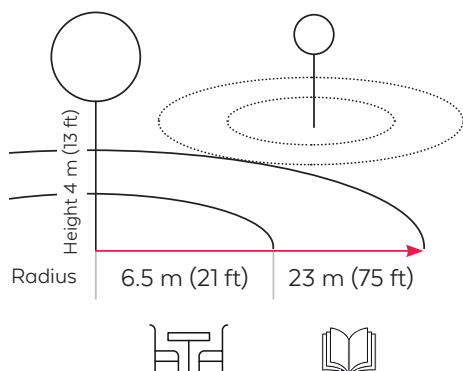

## Packaging

Transport bag  
Dimensions : 108 x 30 x 30 cm  
42 x 11 x 11 in



## Accessories

Various stands  
Stand cover, black or white  
Sandbags  
Suspension kit  
Guying kit

## Customisation

Vinyl graphics  
Coloured slipcovers  
Digitally printed envelopes

## Airstar Light App

Control your balloons easily and remotely!



Control up to 250 balloons



10 light animations available

