



**R&T**  
**Wall-hung Smart Toilet V7201**  
**Presentation**



**01 Introduction**

**02 Specification**

**03 Main Features**

**04 Advantages**


**05 Optional Function**

# 01 Introduction

Compact, streamlined smart toilet with integrated personal cleansing

Operation : Side control button+ remote control

Dimension : 398\*606\*434mm

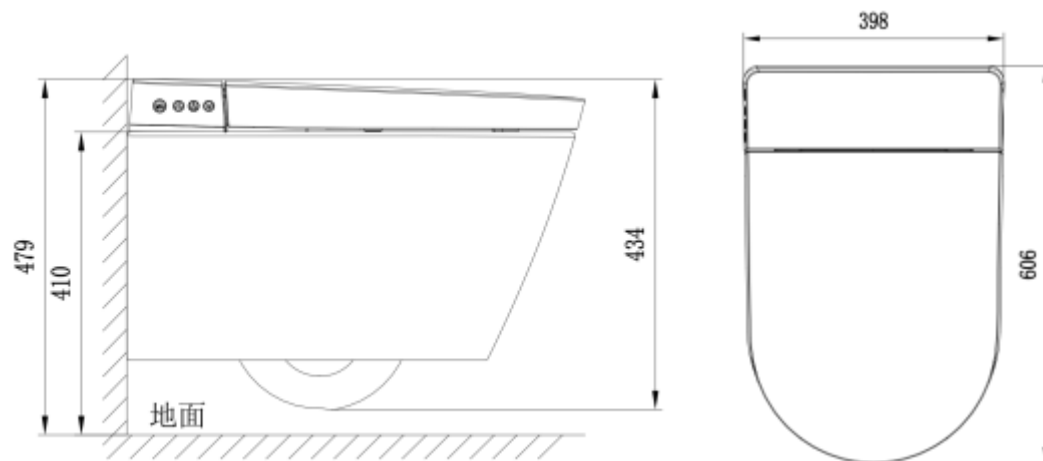

## 02 Specification

Item	V7201
Rated voltage	220-240V
Rated frequency	50/60Hz
Rate power	1080W-1130W(
Heating method	Instant heating
Environment temperature	0-40°C
Operating pressure	0.08MPa ( Static pressure ) -0.8MPa ( Static pressure )
Flushing volume	6.0/4.0L
Flushing technology	Wash down/back to wall
Waterproof	IPX4
Seat temperature range	6 Settings (including neutral position)
Water temperature range	6 Settings (including neutral position)
Warm air temperature range	6 Settings (including neutral position)
Warm air speed	>0.2m³/min
Safety device	Temperature sensor, anti-air burning device, temperature controller, temperature fuse, earth protection, leakage protection device, anti-freeze cracking device, anti-low temperature scald, filter device, air-gap anti flow
Worldwide Certification	CE/EN997/Comply with EN1717 testing requirements (test report ) /Watermark



## 03 Main Features

Model	V7201	
Heating	Instant heating	●
Cleaning	Rear wash	●
	Front wash	●
	Move wash	●
	water temperature adjustment	●
	water pressure adjustment	●
	Spray location adjustment	●
	Continuous warm water wash	●
Self-cleaning	Spray nozzle self-cleaning	●
	Anti-bacterial nozzle	●
	Anti-bacterial seat	●
Comfort	Heated seat	●
	Warm wind drying	●
	Light sensitive night light	●
	Deodorization	●
	Sensor seat	●
Open & close	Seat soft closing	●
	Lid soft closing	●
Control	Side button control	●
	Remote control	●
Flushing	Remote control flushing / <b>Off Seat Automatic Flushing</b>	●



## 04 Advantages—streamline appearance

- 69mm slim cover;
- U-shape stylish outlook
- Modern white control button.



## 04 Advantages—Side control button

Stop/ECO



Press it to start up drying

Press Stop button to finish drying



Press it to start up front washing

Press again during front washing to start up moving wash



Press it to start up rear washing

Press again during rear washing to start up moving wash

When not seated, press Rear/Move button, the rod extends and it can manually clean the nozzle and rod.  
Press Stop button to retract the rod.



## 04 Advantages—Remote control



### **Waterproof---IPX7**

- applicable in humid environment

### **Good endurance and high quality**

- Two brand new AAA batteries up to half a year usage
- Withstand 100,000+ times of repeated press to ensure the durable usage



## 04 Advantages

**Off seat auto flushing**



## 04 Advantages


### - in-wall quiet flushing system

- Quiet in-wall carrier system
- Higher water level for more high efficient flushing




## 04 Advantages- in-wall quiet flushing system

### G3003 concealed cistern + G3004111 actuator

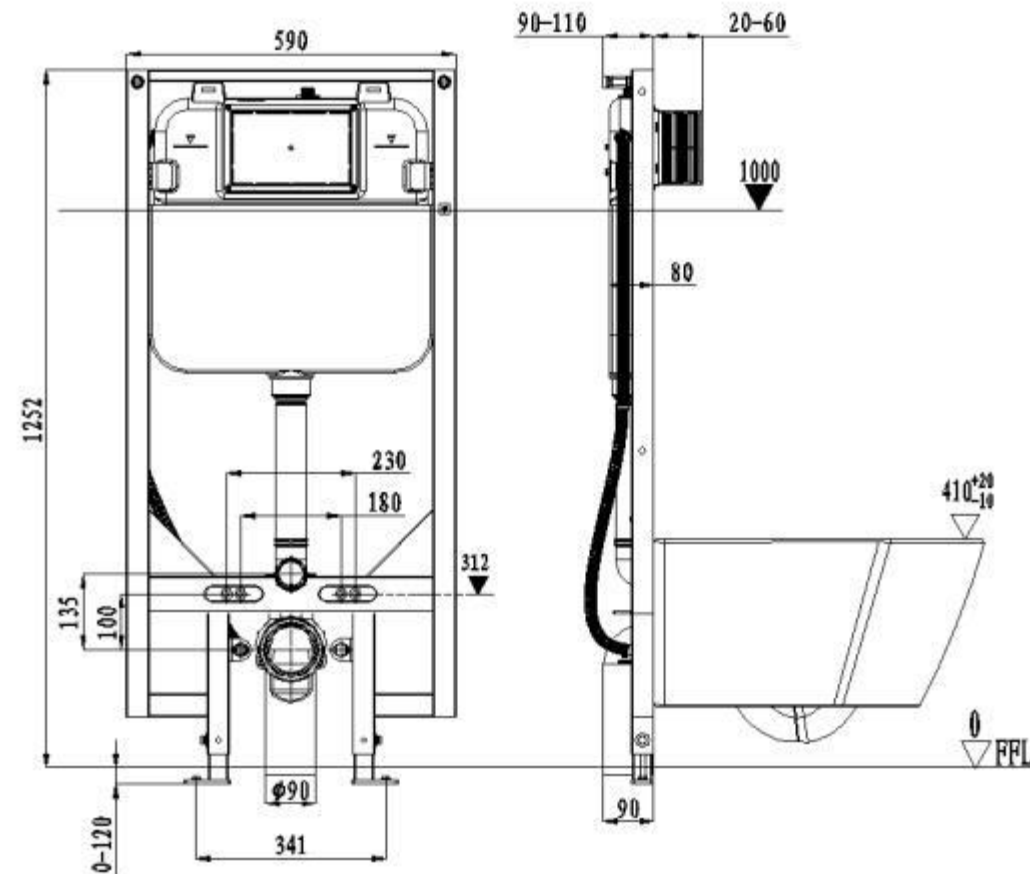


## 04 Advantages- in-wall quiet flushing system

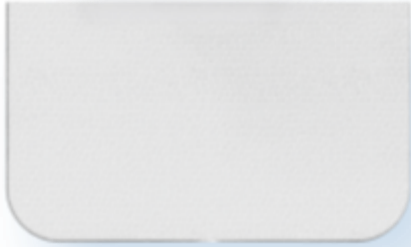


### **EPS insulation**

High density EPS insulation protecting cistern and reduce noise

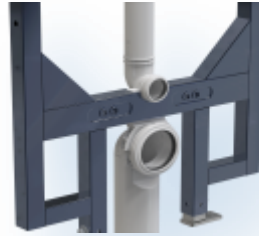

### **Strong PVC drainage pipe**

Intense sealing to avoid water leakage

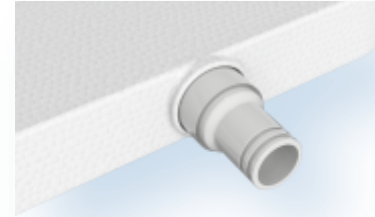


### **One-piece cistern**

Blow injection one-piece HDPE cistern with connecting tube to ensure tightness, better resist compression, more durable



### **Anti-corrosion frame**

Made by high density cast iron technology to effectively prevent rusting

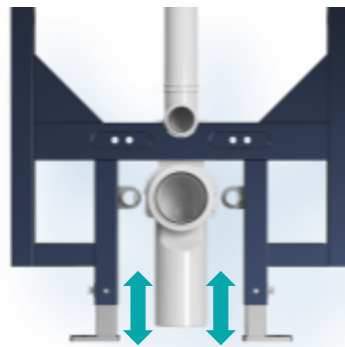

### **Adjustable support feet** flexible and convenient



### **Quick-install actuator** for easy installation and maintenance

The actuator is the access to cistern fittings for maintenance. No need screw driver, convenient for cleaning and replacement.




## 04 Advantages- in-wall quiet flushing system

### Optional actuators

Various finish : chrome, matt chrome, painting white, painting black, ceramic white

Optional materials of actuators : ABS, stainless steel, glass

Operation: Front push

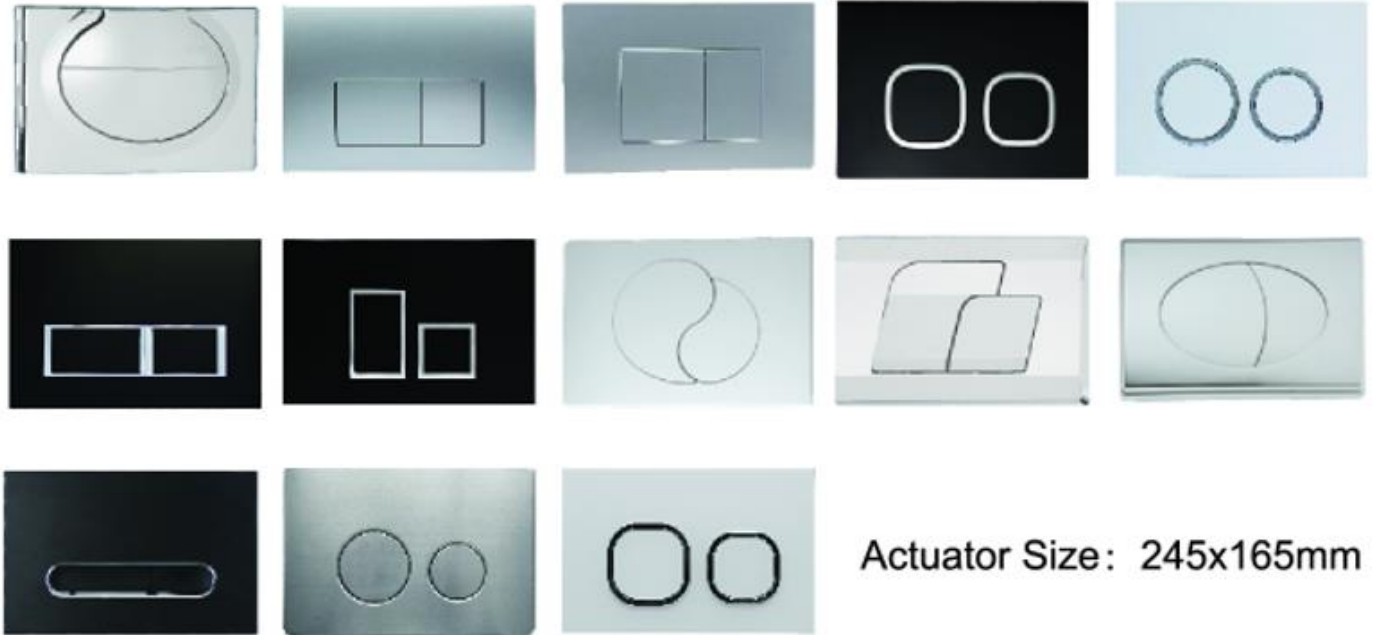

Actuator Size: 245x165mm

Stainless steel plate   Glass actuator


## 04 Advantages- anti back-flow



**Water inlet air gap design, effectively  
prevent waste backflow, in compliance  
with EN1717 standard.**


## 04 Advantages- Arc spray wand

### Patented arc spray wand

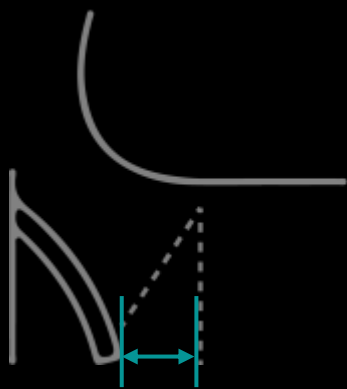


#### R&T arc spray wand:

Optimizes the cleaning range and provide wider spray range and far away from falling waste

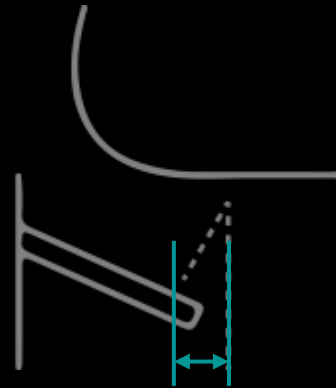

#### Competitors'

The spray wand extends too long. The distance between spray rod and falling waste is short.

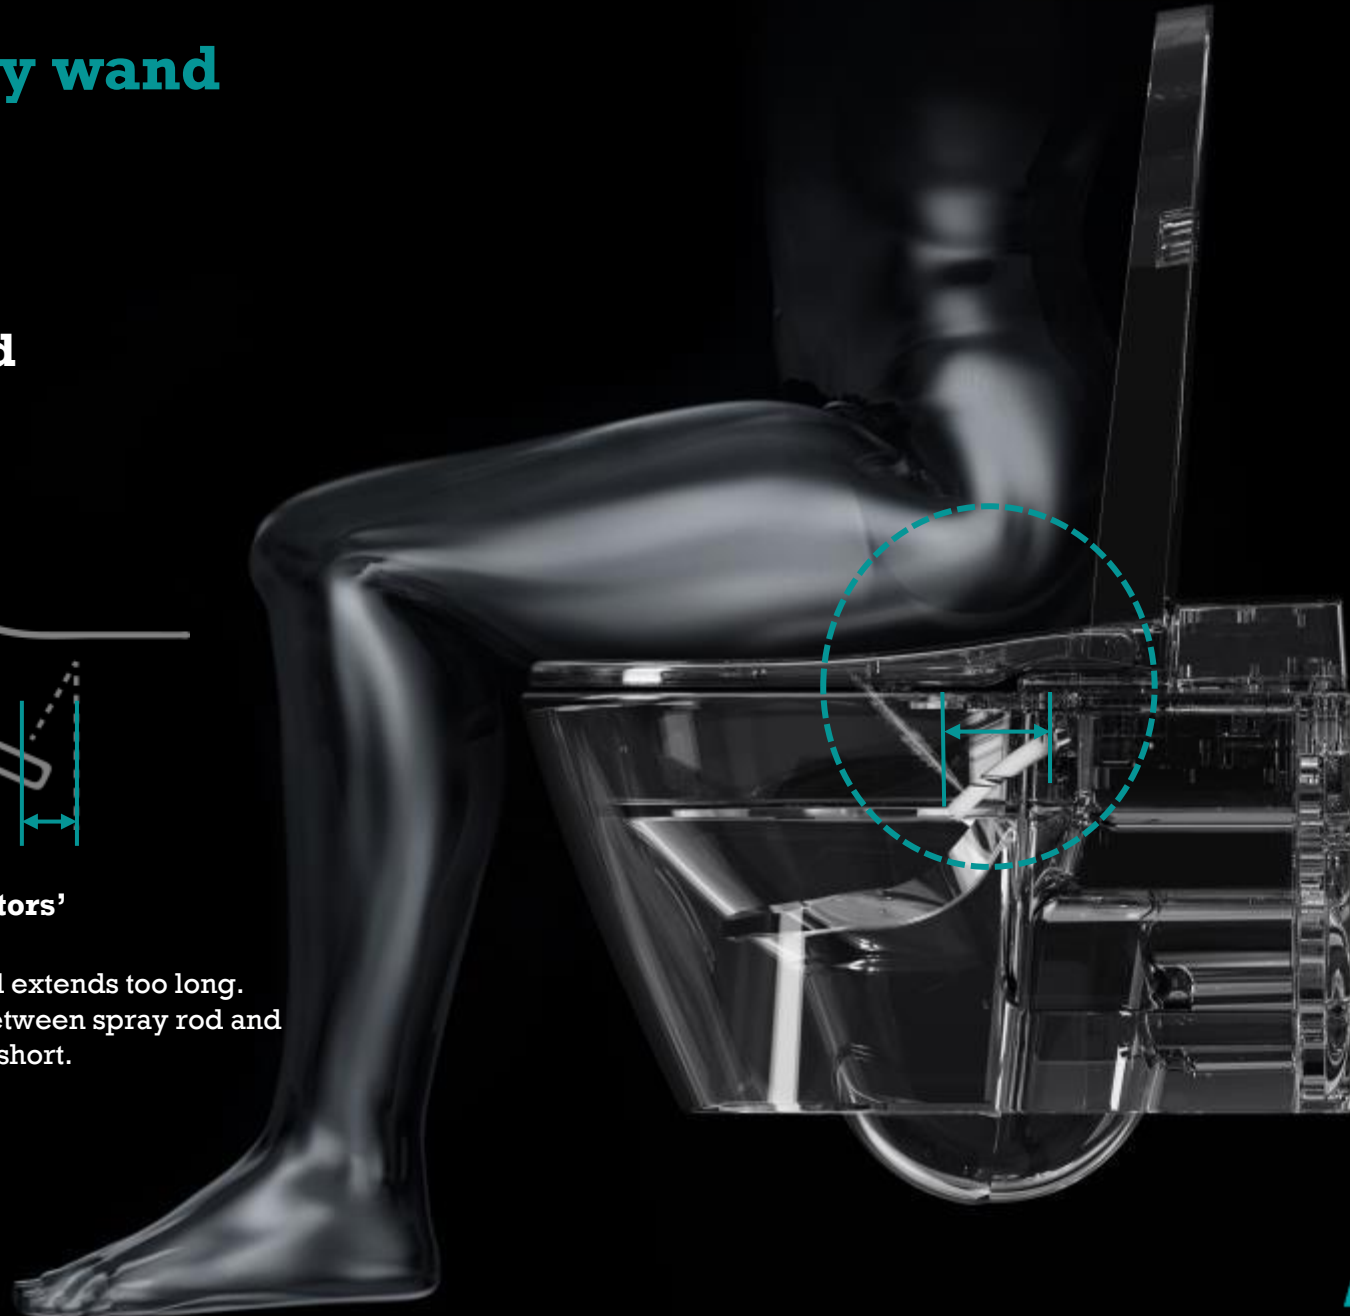

## 04 Advantages-detachable nozzle



### **Detachable nozzle**

When the nozzle is blocked, the nozzle can be removed for cleaning for maximum hygiene.



## 04 Advantages-Comfortable warm air



6-setting warm air  
temperature for fast drying

## 04 Advantages-Diatom deodorization

The super adsorption force of diatom can not only adsorb odorous particles but also convert harmful particles into oxygen particles, creating an oxygen-enriched space, keeping a fresh bathroom environment at all times.

Long time validity



## 04 Advantages-Heated seat



**6 settings**



**Fuse protect**



**Overheat protect**


### **6-settings seat temperature:**

Precise temperature setting, Desired temperature

### **3 protections for safe temperature control:**


heating balance, prevent overheating or burning

## 04 Advantages-Soft night light

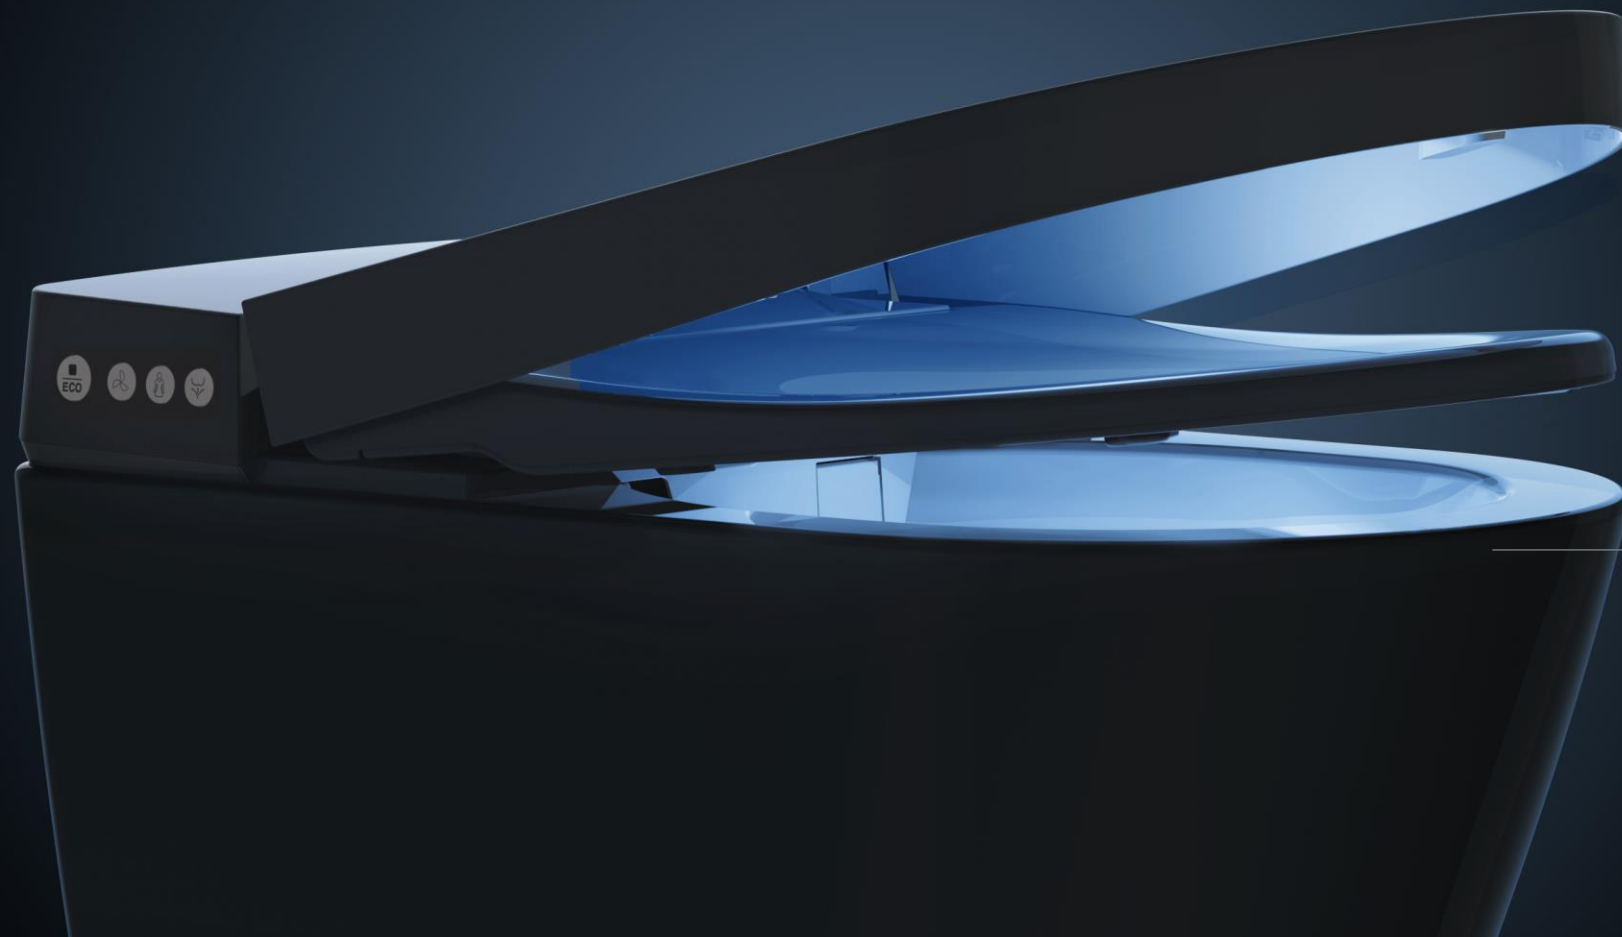

- Blue light

## 04 Advantages-Instant heating

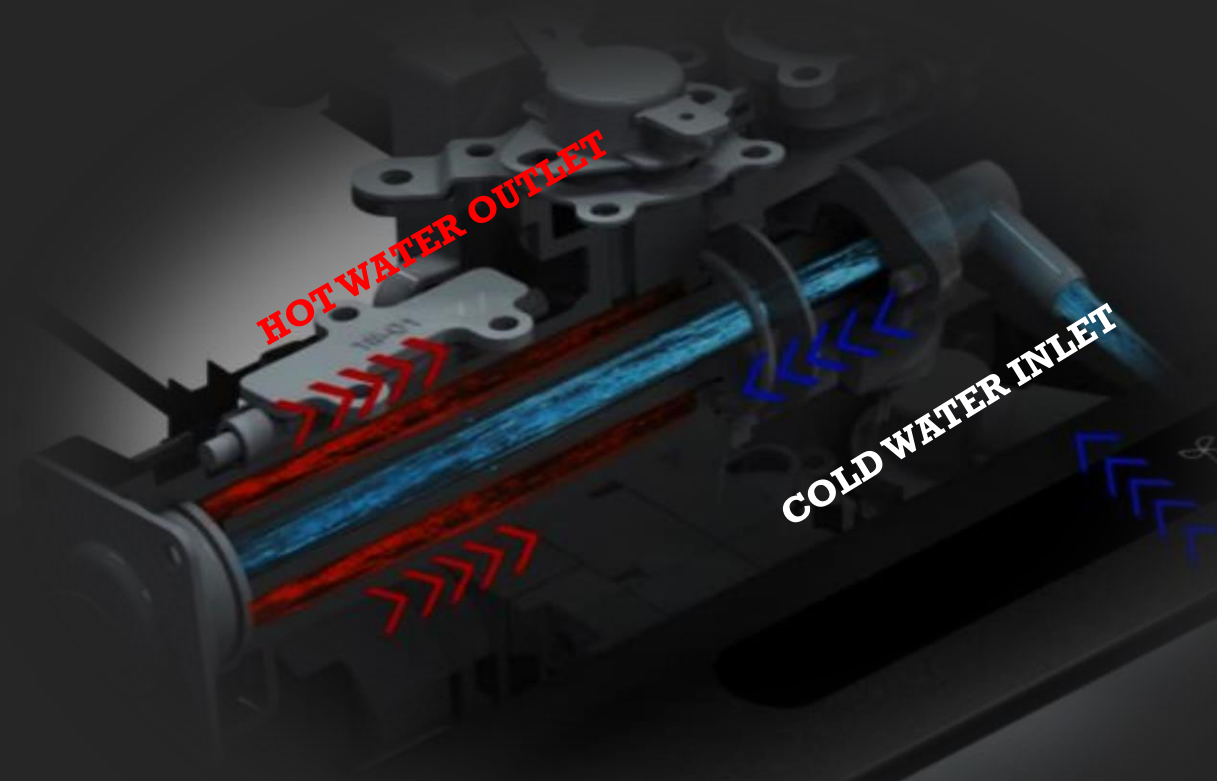

### Instant heating principle illustration



cold water in - ceramic heating tube - hot water out

### High-quality heating tube, heats in one second

Ceramic instant heating tube - even cold water as low as 5°C can be heated to 35°C in one second, giving you the most intimate care in the cold winter. Meanwhile the remain cold water will be drained to ensure comfortable use.



## 04 Advantages- Antifreeze crack device



During logistics transportation or long time no use in low room temperature, water freezes in 0°C and the volume increases and expands, which puts pressure on the plastic and results in plastic crack.

V7216 is designed to prevent freezing and cracking within the instant heating system.

**Thank you for your  
time!**