


# AXIAL PRESS FITTINGS

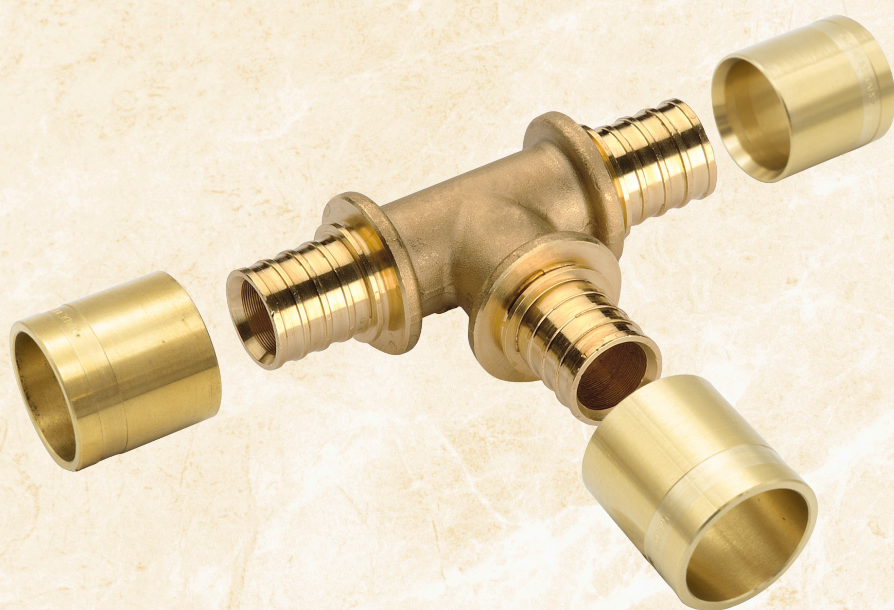

**NEW!**

## DESCRIPTION

Series 1000 axial press brass fittings can be used for the supply of hot and cold water in radiator heating systems and radiant heating /cooling panels.

## TECHNICAL FEATURES

**Working fluid:** Water and glycol solutions

**Maximum operating pressure:** 10 bar

**Working temperature range:** : -20 ÷ 95°C

- Maximum working temperature: 95°C (pipe+fitting)
- Minimum working temperature: -20°C

**Available sizes:** Ø16 – Ø20 – Ø25 – Ø32

**Available threads:** G½” – G¾” – G1”

Also available with Ø15 welded copper pipe (angle, tee) and with swivel nut (G½”, G¾”).

## STRENGTHS

Guaranteed watertightness with RWC Pe-Xa pipe and NOVOPRESS (Set AAP102/AXI102) press.

**Icma S.p.a.**

Via Garavaglia 4 Cuggiono (MI) - Italy

+39 02 97 24 9134

sales@icmaspa.it



[WWW.ICMASPA.IT](http://WWW.ICMASPA.IT)

# PRODUCT RANGE



DOUBLE STRAIGHT FITTING



REDUCED STRAIGHT FITTING



FEMALE STRAIGHT FITTING



MALE STRAIGHT FITTING



TEE



REDUCED TEE



DOUBLE ELBOW



FEMALE ELBOW



MALE ELBOW



WALLPLATE ELBOW WITH 2 HOLES

**Icma S.p.a.**

Via Garavaglia 4 Cuggiono (MI) - Italy

+39 02 97 24 9134

[sales@icmaspa.it](mailto:sales@icmaspa.it)



[WWW.ICMASPA.IT](http://WWW.ICMASPA.IT)