

Heat pumps

Hot, Cold, Domestic Hot Water



COMFORT FOR THE
PLANET & PEOPLE

Contents

The heat pump

Why choosing Clivet heat pumps?

Guarantees and Services

Certifications

A solution for every home

Three solutions for every need

Refrigerant-Split

- Full electric heat pumps

- Hybrid heat pumps

Monobloc

- Monobloc heat pumps

Hydro-Split

- Hydro-Split heat pumps

The data contained in this document are not binding and may be changed by the manufacturer without prior notice.

Images may vary depending on the system layout.

No part of this publication may be reproduced.

Clivet, in compliance with Regulation 517/2014, informs that its products contain or operate with the use of fluorinated greenhouse gases

NATURAL COMFORT

Reasons to believe in a more comfortable future, thanks to Clivet

Over 35 years of expertise in heat pumps.

Clivet has been leading heat pump innovation since 1989. We were among the first to recognise the technology's potential for efficient and sustainable comfort .

Purpose-built solutions.

Clivet engineer its solutions from the ground up to offer specialised systems designed for a diverse range of applications and environments. Boasting the widest range of heat-pump solutions, our flexible, adaptable approach ensures a perfect fit for your specific requirements.

Crafted in Europe.

We understand the unique needs and demands of this market. Our heat pump solutions are designed with your comfort in mind, considering everything from climate variations to specific building requirements.

A simplified product experience.

Clivet systems streamline every step, from simplified design and installation to effortless operation and control. Engineered for efficiency from the ground up, Clivet delivers unparalleled ease of use, lower operating costs, and a lasting commitment to sustainability.



COMFORT FOR THE
PLANET & PEOPLE

OUR NUMBERS

More than **1000 employees** in Italy and abroad

53.500m² of plants in Feltre - (Belluno) and Verona

8 branches: UK, Germany, India, Russia, UAE, China, Balkans and France

More than **100 countries** we export to

More than **700** professionals worldwide

- Sales network
- Distributors and wholesalers
- Installers
- Service Centres

MideaGroup
humanizing technology

2016: strategic alliance with Midea Group

277° of the fortune global 500 in 2024

48.5\$M of Midea Turnover

2023: Clivet first sustainability report



The heat pump

The heat pump is a unique system for heating, cooling and domestic hot water production.

How does it work?

It transfers thermal energy from the external environment to the internal environment and vice versa.

Its operation is similar to a refrigerator, but reversed: as the refrigerator subtracts heat from food keeping it cool and disperses it in the room where it is located, in the same way the heat pump draws heat energy from outside and transfers it to the indoor environment to heat or cool or produce domestic hot water.

To distribute the heat or cold inside a building, the heat pump normally uses water, as a boiler, and flows it through radiators, terminal units or radiant floors.

There are various types of heat pumps. They can exchange the thermal energy with the outside in different ways:

- AIR - called Air-Water: they exchange heat with outside air and are the most common;
- WATER - called Water-Water: they exchange heat with groundwater, a well or a water loop specifically realized;
- GROUND - called Geothermal: they exchange heat with the ground through geothermal probes.

Why is it a good solution for you and the planet?

The heat pump saves energy, reduces carbon dioxide emissions and respects the environment. During its operation uses about 75% of renewable energy from the external environment: unlimited energy and always available energy. For the remaining 25% of energy requirements, photovoltaic panels can be combined, for a 100% ecological solution.

Where is it installed?


Depending on the type, the heat pump can be installed in a technical room inside the house, in the understairs, on the hallway, outside the house, on the balcony.

How to size the heat pump?

The heat pump suitable for a system must be selected by a specialist.

The main parameters normally are: insulation and climatic zone of the building, volume and rooms to be air conditioned, number of inhabitants, type of heating (radiators, radiant floor, ...).

THE SUN
Primary energy source

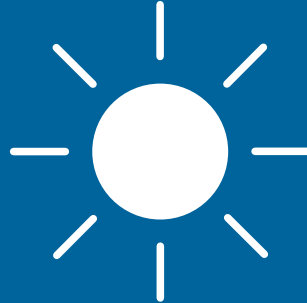

indirect solar energy

direct solar energy



power from the grid

25%

renewal

water

ground

75%

100%

HEAT
PUMP

Heating
Cooling
Domestic hot water

Why choose a Clivet heat pump?

Annual Savings

- Savings on heating, reducing energy consumption and hence bill costs by up to 50% compared to a traditional condensing boiler.
- Heating and cooling with a single system: so there is no need to install two systems.

Environmental Impact

- In 2009, with the European RES Directive (Renewable Energy Sources), heat pumps were recognized as technologies that use renewable energy. Therefore the heat pump systems contribute to increase energy efficiency and the use of thermal renewables, improves the energy class of the building, the quality of the air and contributes to the achievement of the share of renewable energy assigned to each country
- It does not use fossil fuels or release emissions from combustion into the environment.



More than 35 years of experience

For more than 35 years Clivet has been successfully supplying heat pump systems for the commercial sector, a segment that in recent years has been able to identify the heat pump as an efficient system that allows considerable savings.

The experience gained in this sector allowed Clivet to have a revolutionary approach also in the residential sector, offering innovative air conditioning systems that take advantage of the heat pump technology and guarantee year-round well-being for all the types of houses with a single system.

Flexibility and quietness

La pompa di calore è **adatta a ogni situazione**:

- New buildings or retrofit: it can be integrated into an existing system or in a new one;
- All residential areas: maximum quietness both outside and inside the dwellings;
- Hot or cold climates, even with an integrated additional boiler to operate in extreme environmental conditions.



Warranty and services

Clivet's after-sales service reaches its Customers through a well-organized support network that is always on hand, as high technology levels require fast and skilled services.

Moreover, Clivet has facilities dedicated to the training of its after-sales service, Clivet University, with over 500 m² rooms for practical and theoretical trainings, where professionals can test Clivet systems operating in real conditions.

The service is available in most of the countries around the world through subsidiaries or selected Service Centres.

Learn more about the warranty and service conditions for your country by contacting the distributor or the branch closest to you.





Certifications




They optimise the solution based on the needs of the **various applications** and integrate it in specialised products and in complete dedicated systems:



With the aim of providing Customer satisfaction, Clivet S.p.A. has supplemented and certified its Quality, Environment and Safety Management Systems, in accordance with the ISO 9001, ISO 14001 and ISO 45001 International Standards.



Clivet is committed in promoting the green building principles and has become a member of GBC Italia. This organization collaborates with **GBC Italia**., the U.S. nonprofit organization that promotes worldwide the **LEED®** system of independent certification.



In 2015, Clivet became a partner of **CasaClima**, as a result, Clivet is now part of a network of companies renowned for their technical expertise and constant focus on sustainable home management.

Where applicable.

<https://www.agenziacasaclima.it/en>



KEYMARK is a mark recognized in many European countries for the provision of incentives for the installation of heat pumps for room heating and the production of domestic hot water.

The countries that recognize the mark and the Certified Products are available on <https://keymark.eu/en/products/heatpumps/heat-pumps>. Where applicable.



Clivet participates in the EUROVENT "Liquid Chilling Packages and Heat Pumps", "Rooftops", "Air Handling Units" and "VRF" Certification programmes. The products concerned feature in the EUROVENT guide to certified products and on the website www.eurovent-certification.com. The programmes cover water chillers and heat pumps up to the limits set by the purpose of each programme. Where applicable.

Check the validity of the current certificate: www.eurovent-certification.com



The wide range of Clivet products and complete systems comply with the requirements of the implementing measures for ErP (Energy related Products) Directives 2009/125/EC (Eco-design) and 2010/30/EU (Energy labelling), whose purpose is to reduce the energy consumption of products for heating, cooling, ventilation and hot water production, encouraging the user towards energy-efficient choices.

Directives 2009/125/EC and 2010/30/EU include the following Regulations: (EU) 206/2012, (EU) 626/2011; (EU) 811/2013, (EU) 812/2013, (EU) 813/2013, (EU) 814/2013; (EU) 1253/2014, (EU) 1254/2014; (EU) 2016/2281.



Clivet is involved in the BEYOND GREEN project to promote sustainability and the circular economy together with the other members of SAFE, the consortium system for the circular economy which works to raise public awareness regarding environmental issues, management and valorisation waste, education and training on environmental protection, research on environmental protection.

A solution for every home

New builds

Building and system working together as one

Solutions designed to be fully **integrated into the configuration of each house**, following specific requirements that may depend on the climate, the need for mechanical ventilation or dehumidification, structural insulation, the presence of renewable sources and much more.

These systems are complete and highly customisable: they are already **conceived at the design stage** to not only fulfil Heating, Cooling and Domestic Hot Water production, but also Ventilation, Air renewal and heat recovery. They are also optimised to provide maximum efficiency and quiet operation, as well as the lowest possible consumption levels.

- SPHERA EVO 2.0
- SPHERA EVO 2.0 Invisible
- Edge EVO 2.0 / Edge F
- Hydro-Split TOWER/INVISIBLE Version
- ELFOSun³
- ELFOFresh EVO
- AQUA Plus

Renovations

Turn your ideas into reality and create comfort

Solutions designed to **enhance systems in existing houses by also intervening on the distribution and control system**, which require building works such as renovating the distribution system, installing an intelligent management system or creating a thermal cladding system. Incentives make these interventions extremely cost-effective, even with low investments.

These are cutting-edge systems that significantly increase comfort levels: they are **designed at the renovation stage** to replace the Heating system and the production of Domestic Hot Water, but also to add cooling, renewable energy sources (e.g. solar panels) or intelligent management systems such as Control4 NRG

- SPHERA EVO 2.0
- SPHERA EVO 2.0 Box
- SPHERA EVO 2.0 EASYHybrid Tower
- Edge EVO 2.0 / Edge F
- Hydro-Split TOWER/BOX Version
- Edge EVO 2.0 Versione Hybrid
- ELFOSun³
- ELFOFresh EVO

Replacements

Get maximum results with minimum effort

Solutions designed to **update old generators without modifying the system**, using stage-of-the-art products that require similar overall dimensions and no significant masonry works. Incentives and extremely quick intervention times clearly make this an obvious choice.

These systems are very versatile and can adapt to any existing facilities: they simply replace the generator that provides Heating and Domestic Hot Water, improving comfort and efficiency, as well as ensuring peace of mind.

- SPHERA EVO 2.0 Box
- SPHERA EVO 2.0 EASYHybrid Box
- SPHERA EVO 2.0 EASYHybrid Tower
- SPHERA EVO 2.0 Box Hybrid
- Edge EVO 2.0 / Edge F
- Hydro-Split TOWER /INVISIBLE / BOX Version
- AQUA Plus


Three solutions for every need

1

REFRIGERANT-SPLIT

The system consists of an outdoor unit and an indoor unit, which are connected by connections in which refrigerant flows. This type of solution is extremely flexible and guarantees various installation possibilities.

The installation requires an F-GAS licence and is perfect for professionals used to working with systems requiring this type of technology.

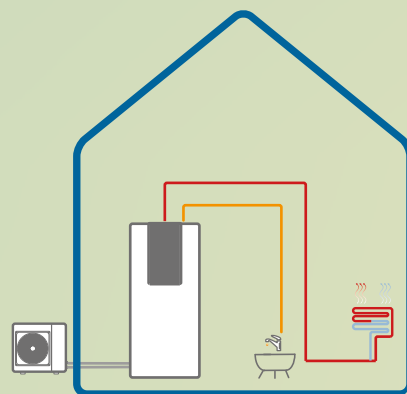


2

MONOBLOC

The system consists of an outdoor unit that directly supplies the system through piping in which water flows. This type of solution is plug&play and very easy to install.

The installation does not require an F-GAS licence and is perfect for non-invasive interventions on the building.

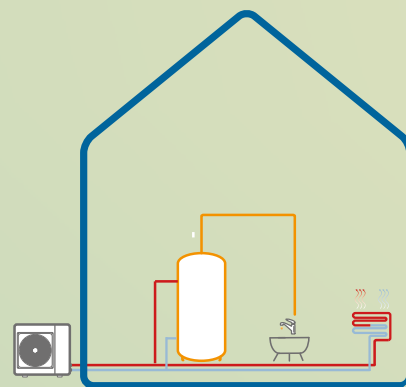


3

HYDRO-SPLIT

The system consists of an outdoor unit and an indoor unit, which are connected by hydraulic connection in which water flows. This type of solution is complete and very easy to install, while still being highly versatile.

The installation does not require an F-GAS licence and is a good compromise between plug&play systems and more complex installations.

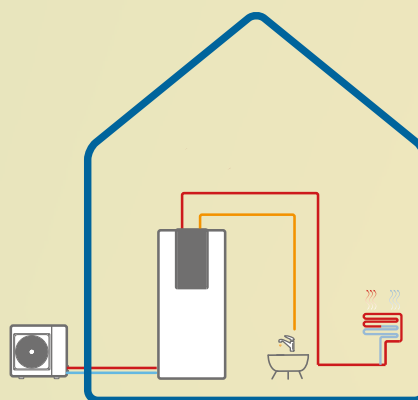

full electric



SPHERA EVO 2.0



SPHERA EVO 2.0 BOX



SPHERA EVO 2.0
INVISIBLE



SPHERA EVO 2.0
EASYHYBRID BOX



SPHERA EVO 2.0
EASYHYBRID TOWER

1

Refrigerant-Split

Hot, Cold, Domestic Hot Water

ECO
BONUS

CONTO
TERMICO

SUPER
BONUS


RELAX
4
YEARS

Electric heat pumps

SPHERA EVO 2.0 Tower - Fully integrated heat pump

It allows to modulate the power supplied according to the real demand of the system, avoiding frequent on-off cycles, safeguarding the durability of all components over time.

- Water tank and additional system elements integrated inside the heat pump
- DC inverter compressor

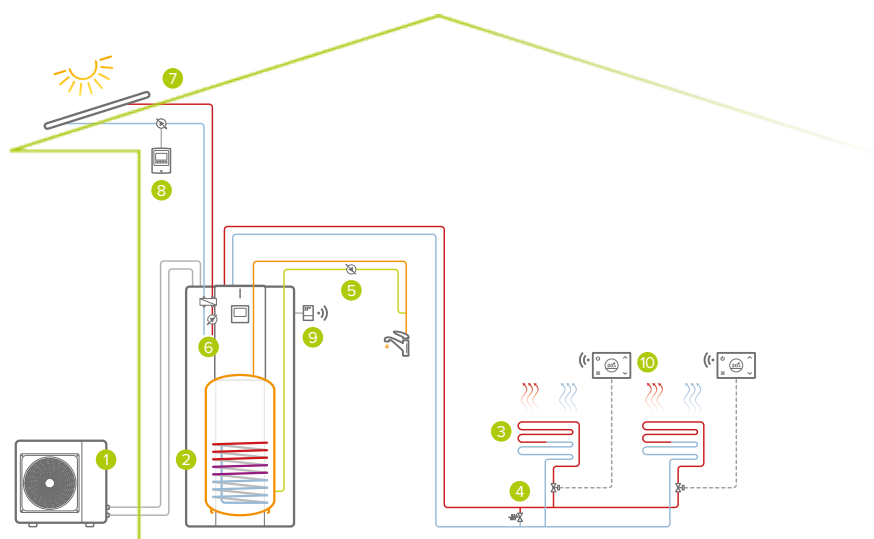

Full electric single-area system with thermal solar:
Heating / Cooling / DHW

1. outdoor unit
2. indoor unit
3. heating/cooling zone
4. bypass*
5. DHW recirculation pump*
6. solar connection kit (optional)
7. ELFOSun³ thermal solar (optional)
8. solar circulation kit (optional)
9. SwitchConnect Wi-Fi receiver (optional)
10. HID-TConnect2 Wi-Fi chronothermostat (optional)

*from external supply



1. High efficiency DC inverter circulator
2. Domestic hot water storage:
 - 190 or 250 litres for SPHERA EVO 2.0 TC
 - 150 litres for SPHERA EVO 2.0 Invisible
3. Ready for connection with solar thermal panels (ELFOSun³)
4. 15-litre inertial tank



App



CONTROL4 NRG



Full Inverter DC



Refrig.




ErP

Compliant
models at
www.clivet.com

SPHERA EVO 2.0 Box - Simplified heat pump

- Water tank and additional system elements not integrated inside the heat pump
- DC inverter compressor

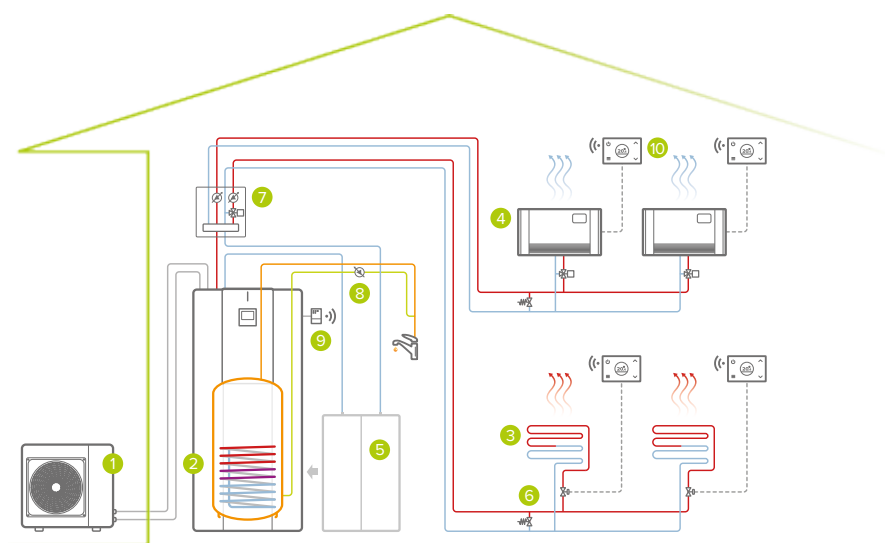

Full electric two-zone system:

Heating / Cooling / DHW

1. outdoor unit
2. indoor unit
3. heating area
4. cooling zone
5. system inertial storage (optional)
6. bypass*
7. kit for managing 2 areas (optional)
8. DHW recirculation pump*
9. SwitchConnect Wi-Fi receiver (optional)
10. HID-TConnect2 Wi-Fi chronothermostat (optional)

Solar connection kit and booster kit can coexist


*from external supply



1. High efficiency DC inverter circulator
2. System expansion tank
3. Domestic hot water production valve
4. Magnetic dirt separator filter

SPHERA EVO 2.0 external unit


- Compact design
- Silence
- DC Inverter compressor
- Ice Protection System: to prevent the formation of ice at the base of the battery thanks to the special subcooling circuit, ensuring a reduction of defrosting

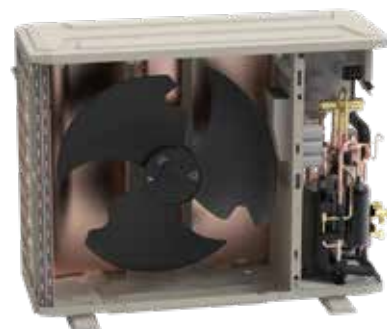

Sphera EVO 2.0

SQKN-YEE 1 TC + MiSAN-YEE 1 S

Split heat pump for houses with low-medium demand



Capacity from 4 to 16 kW

Air temperature range from -25 °C to +43 °C

COP > 5

- Energy efficiency at the highest level
- Designed not to disturb, operating very quietly
- Suitable for every need, thanks to the dual version with 190-litre or 250-litre DHW storage tank
- Compact outdoor unit requiring very little installation space
- Simultaneous operation in system and DHW (Hybrid version)

Everything under control

The discreet and effective warning LED on the front of the unit indicates the unit's operating status in real time.

If the LED is pulsing white the unit is in stand-by or operating normally, if the LED is orange with quick pulsing there is a fault.




Configurations and Accessories

SOLX	Thermal solar management kit
KCSX	Kit for secondary circuit (1 liter circuit breaker + circulation pump)
KIRE2HLX	Two-zone distribution kit: direct + mixed
KIRE2HX	Double zone distribution unit: direct + direct
ACI40X	40 liter system inertial storage tank
DI50-2X	50 liter hydraulic separator
COFX	Aesthetic cover for inertial storage tank
T1BX	10m water temperature probe
T1B30X	30m water temperature probe
VDACSX	Thermostated diverter valve for DHW
DTX	Drain pan with antifreeze electrical heater
APAVX	Kit of antivibration mounts for floor installation
ASTFX	Antivibration mounts kit for installation on the brackets for wall installation or drain pan
KSIPX	Kit with wall fixing brackets
HTC2WX	White HID-TConnect2 chronothermostat for temperature control
SWCX	Receiver / IoT switch SwitchConnect

Sphera EVO 2.0 BOX

SQKN-YEE 1 BC + MiSAN-YEE 1 S

Split heat pump for houses with low-medium demand

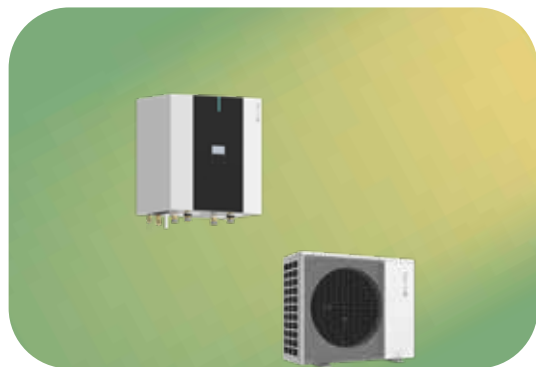

Capacity from 4 to 16 kW

Air temperature range from -25 °C to +43 °C

COP > 5

- It does not need to be coupled to a boiler if DHW is produced by the boiler (Hybrid version)
- Energy efficiency at the highest level
- Designed not to disturb, operating very quietly
- Can be combined with DHW tanks of a volume suitable for the application in which it is to be installed
- Up to 6 units can be connected in cascade, for demands up to 100 kW

Ideal with AQUA PLUS

SPHERA EVO Box 2.0 is an excellent alternative for installations where it is not possible to install the tower or uncased version.

Combined with AQUA Plus, the heat pump for domestic hot water production, SPHERA EVO Box 2.0 offers the advantage of a system that provides simultaneous heating or cooling and domestic hot water production.



Configurations and Accessories

ACS200X	200 liter DHW tank
ACS300X	300 liter DHW tank
ACS500X	500 liter DHW tank
SCS08X	Solar coil for ACS200X/ACS300X DHW tank
SCS12X	Solar coil for ACS500X DHW tank
KCSX	Kit for secondary circuit (1 liter circuit breaker + circulation pump)
KIRE2HLX	Two-zone distribution kit: direct + mixed
KIRE2HX	Double zone distribution unit: direct + direct
ACI40X	40 liter system inertial storage tank
DI50-2X	50 liter hydraulic separator
T1BX	10m water temperature probe
T1B30X	30m water temperature probe
VDACSX	Thermostated diverter valve for DHW
DTX	Drain pan with antifreeze electrical heater
APAVX	Kit of antivibration mounts for floor installation

ASTFX	Antivibration mounts kit for installation on the brackets for wall installation or drain pan
KSIPX	Kit with wall fixing brackets
KISX	Kit di installazione semplificata con raccordi per SPHERA EVO 2.0 Box Hybrid
HTC2WX	White HID-TConnect ² chronothermostat for temperature control
SWCX	Receiver / IoT switch SwitchConnect
ANEDX	Electronic anode
KSIPX	Kit with wall fixing brackets
ANEDX	Electronic anode to protect DHW boiler
HTC2WX	White HID-TConnect ² chronothermostat for temperature control
SWCX	Receiver / IoT switch SwitchConnect
AI15X	15 litre inertial storage tank for indoor installation

SPHERA EVO 2.0 Invisible

SQKN-YEE 1 IC + MiSAN-YEE 1 S

Split heat pump for block of flats with medium-low energy consumption



Capacity from 4 to 10 kW

Air temperature range from -25 °C to +43 °C

COP > 5

- Space-saving: completely outdoor installation with uncased wall-mounted unit only 36cm deep
- It adapts to every need: solar kit / inertial tank kit / additional tank / integrated combinable boiler
- Components and uncased cabinet with telescopic frame can be supplied separately
- New additional aesthetic practical cabinet for system accessories in full view for outdoor installation.
- Advanced connectivity: management via the dedicated Smart Home App or via the Modbus port with CONTROL4 NRG standard supplied

Optimize the space

SPHERA EVO 2.0 Invisible is the ideal choice for all homes that do not have a technical room and which need to make the unit invisible by embedding it in the wall.

The cabinet has an adjustable telescopic frame and can be painted to make the unit disappear completely.

Configurations and Accessories


AENVX	Additional aesthetic practical cabinet for system accessories in full view	ACE50X	50 liter system inertial storage tank (for installation outside the unit)
DPX	Template for connecting the additional aesthetic practical cabinet for system accessories in full view	ADI50X	In-wall cabinet for inertial storage tank or solar kit
ADIAX	In-wall cabinet for 150 liter DHW tank	KCIBOIX	IH hybrid version connection kit
ACSA150X	Additional 150 liter DHW tank	KSDFX	Splitter for suction and flue gas discharge (d. 80/80 mm)
KCI150X	Pipe connection kit for additional DHW tank for SPHERA Invisible	CCOAX	90° coaxial curve for suction and flue gas discharge, 360° adjustable (d. 60/100 mm)
ACSA50X	Additional 50 liter DHW tank	DTX	Drain pan with antifreeze electrical heater
SHWTX	150 liter DHW tank with solar coil	APAVX	Kit of antivibration mounts for floor installation
KCVEX	Circulation group, control unit and expansion vessel	ASTFX	Antivibration mounts kit for installation on the brackets for wall installation or drain pan
KPRSX	DHW recirculation pump kit (for installation inside the unit)	KSIPX	Kit with wall fixing brackets
KCSX	Kit for secondary circuit (1 liter circuit breaker + circulation pump)	ANEDX	Electronic anode to protect DHW boiler
KIR2HLX	Two-zone distribution kit: direct + mixed	HTC2WX	White HID-TConnect2 chronothermostat for temperature control
KIR2HX	Two-zone distribution kit: direct + mixed (for installation inside the unit)	SWCX	Receiver / IoT switch SwitchConnect
AC50X	50 liter system inertial storage tank (for installation inside the unit)	AI15X	15 litre inertial storage tank for indoor installation

Hybrid heat pumps

SPHERA EVO 2.0 EASYHybrid Box - Split hybrid heat pump

It allows to modulate the power supplied according to the real demand of the system, avoiding frequent on-off cycles, safeguarding the durability of all components over time.

- The heat pump and boiler can work at the same time supporting each other or replacing each other
- DC inverter compressor

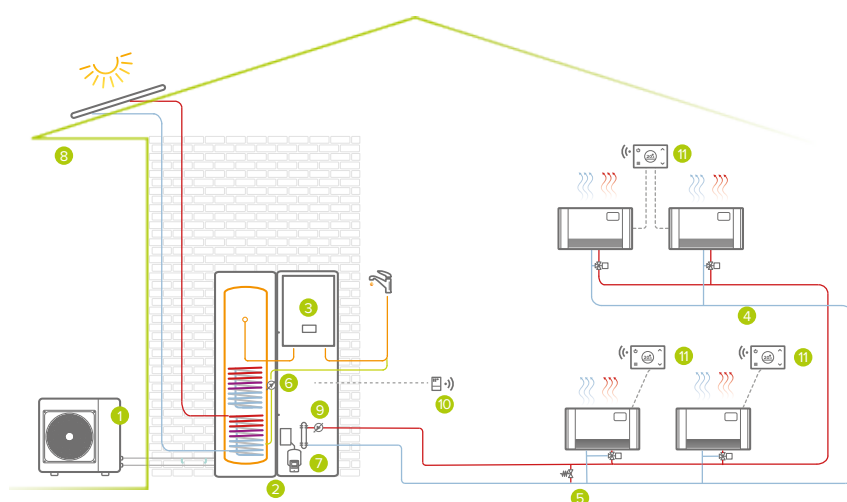

Hybrid single-area system with thermal solar:

Heating / Cooling / DHW

1. outdoor unit
2. indoor unit
3. modulo ibrido (pompa di calore / caldaia)
4. heating area
5. bypass*
6. DHW recirculation pump (optional)
7. kit di collegamento solare (opzionale)
8. ELFOSun3 solar thermal panels (optional)
9. secondary circuit kit (optional)
10. SwitchConnect Wi-Fi receiver (optional)
11. HID-TConnect2 Wi-Fi chronothermostat (optional)

*from external supply



1. Instantaneous condensing boiler
2. 8- or 10-litre system expansion tank
3. Electrical control panel
4. High efficiency DC inverter circulator
5. Gas/water plate exchanger



App



CONTROL4 NGR



Refrig.




ErP

Compliant models at www.clivet.com

SPHERA EVO 2.0 EASYHybrid Tower - Fully integrated hybrid heat pump

It allows to modulate the power supplied according to the real demand of the system, avoiding frequent on-off cycles, safeguarding the durability of all components over time.

- Installation elements and storage tank integrated in the heat pump
- DC inverter compressor

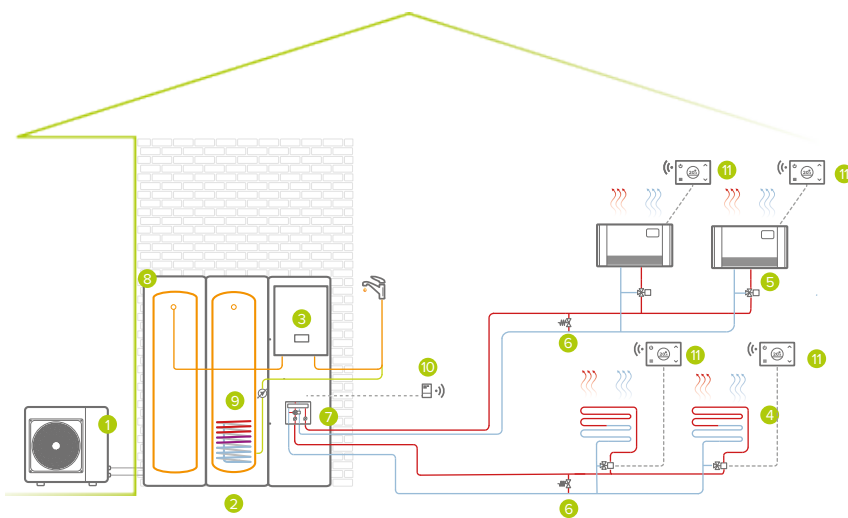


Hybrid single-zone system with additional DHW boiler:

Heating / Cooling / DHW

1. outdoor unit
2. indoor unit
3. modulo ibrido (pompa di calore / caldaia)
4. mixed heating/cooling zone
5. direct heating/cooling zone
6. bypass*
7. kit for managing 2 areas (optional)
8. additional DHW tank (optional)
9. DHW recirculation pump (optional)
10. SwitchConnect Wi-Fi receiver (optional)
11. HID-TConnect 2 Wi-Fi chronothermostat (optional)


*from external supply

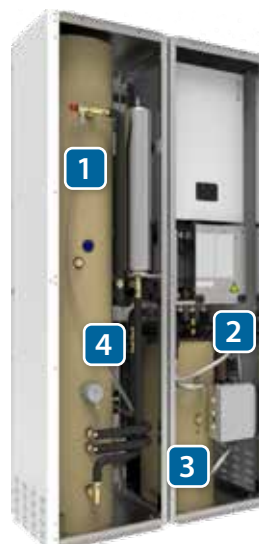

1. 150 L DHW tank with coil
2. 1-zone booster kit (optional)
3. System inertial storage kit (optional)
4. 3-way valve

SPHERA EVO 2.0 external unit

- Compact design
- Silence
- DC Inverter compressor
- Ice Protection System: to prevent the formation of ice at the base of the battery thanks to the special subcooling circuit, ensuring a reduction of defrosting

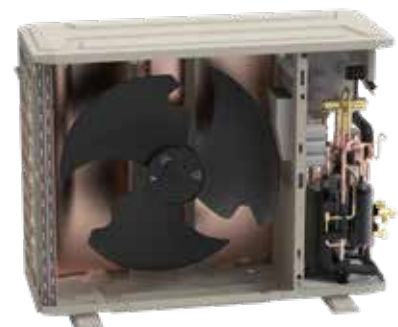

SPHERA EVO 2.0 EASYHybrid Box

SQKN-YEE 1 BH + MiSAN-YEE 1 S

Wall-mounted air-to-water Refrigerant-split hybrid heat pump
for heating, cooling and domestic hot water production



Capacity from 4 to 16 kW
Boiler capacity from 24 to 34 kW
Air temperature range -25 °C to +43 °C
COP > 5

- Ideal for replacing old systems while keeping existing radiators
- Perfect for replacing a boiler: designed with similar overall dimensions
- 24 or 34 kW boiler to fulfil all requirements, with instant DHW production
- Simultaneous heating and cooling operation and DHW supply
- Connectivity and APP to keep the system under control

The €/Switch function

Sphera EVO 2.0 EASYHybrid Box has a function that can be selected directly from the interface, which makes it possible to calculate the resource (heat pump and/or boiler) that is able to fulfil the heat demand with the lowest economic cost in every operating condition. To use the €/Switch function, simply enter the cost per kWh of electricity and the cost per m³ of methane gas from the energy provider's supply contract, and define the main type of terminals in the building (radiant panel, fan coil, radiator).

Configurations and Accessories

ACS200X	200 liter DHW tank	CCOAX	90° coaxial curve for suction and flue gas discharge, 360° adjustable (d. 60/100 mm)
ACS300X	300 liter DHW tank	TCOAX	1 m coaxial pipe with terminal (d. 60/100 mm)
ACS500X	500 liter DHW tank	VDACSX	Thermostated diverter valve for DHW
SRICX	Additional PCB for 2-zone management	3DHWX	3-way deviating valve for system/DHW 1" connections
KCSX	Kit for secondary circuit (1 liter circuit breaker + circulation pump + management PCB)	DTX	Drain pan with antifreeze electrical heater
SCS08X	Solar coil for ACS200X/ACS300X DHW tank	APAVX	Kit of antivibration mounts for floor installation
SCS12X	Solar coil for ACS500X DHW tank	ASTFX	Antivibration mounts kit for installation on the brackets for wall installation or drain pan
KIRE2HLX	Two-zone distribution kit management PCB: direct + mixed	KSIPX	Kit with wall fixing brackets
KIRE2HX	Two-zone distribution kit management PCB: direct + direct	HTC2WX	White HID-TConnect ² chronothermostat for temperature control
DI50-2X	50 liter hydraulic separator	SWCX	Receiver / IoT switch SwitchConnect
ACI40X	40 liter system inertial storage tank		
KSDFX	Splitter for suction and flue gas discharge (d. 80/80 mm)		
KCSAFX	Vertical coaxial fitting for smoke intake and discharge (d. 60/100 mm)		

SPHERA EVO 2.0 EASYHybrid T

SQKN-YEE 1 BH + MiSAN-YEE 1 S

Air-to-water hybrid split heat pump

for heating, cooling and domestic hot water production



Capacity from 4 to 16 kW

Boiler capacity from 24 to 34 kW

Air temperature range from -25 °C to +43 °C

COP > 5

- Optimised to maximise energy savings without sacrificing comfort
- Compatible with a radiator system: water temperature up to 80 °C
- Customisable with numerous kits for a complete, yet discreet, central heating plant
- Domestic hot water volume can be increased to up to 300 litres
- Connectivity and the APP to keep the system under control

Flexible and compact

Sphera EVO 2.0 EASYHybrid Tower has the indoor Box unit fitted into modular units, so you can create the perfect solution for your system. Each module can be created and customised with all the necessary components for an efficient and reliable system, all inside a compact cabinet with an appearance that blends in with the environment in which it is installed.

Configurations and Accessories

TUNOX	Main aesthetic cabinet for Sphera EVO 2.0 EASYHybrid	KSDFX	Smoke intake and exhaust splitter (d. 80/80 mm)
TDUEX	Additional 150 liter DHW tank with aesthetic cabinet	KCSAFX	Vertical coaxial fitting for smoke intake and discharge (d. 60/100 mm)
TDUESX	Additional 150 liter DHW tank with solar coil with aesthetic cabinet	CCOAX	90° coaxial curve for suction and flue gas discharge, 360° adjustable (d. 60/100 mm)
KCACSX	Pipe connection kit for TDUEX, TDUESX accessories	TCOAX	1 m coaxial pipe with terminal (d. 60/100 mm)
TTREX	Additional aesthetic cabinet for system accessories	3DHWX	3-way deviating valve for system/DHW 1" connections
TTREAX	Second additional 150 liter DHW tank with aesthetic cabinet	DTX	Drain pan with antifreeze electrical heater
KC150X	Pipe connection kit for TTREAX accessory	APAVX	Kit of antivibration mounts for floor installation
SRICX	Additional PCB for 2-zone management	ASTFX	Antivibration mounts kit for installation on the brackets for wall installation or drain pan
KCSIX	Kit for secondary circuit for installation inside the unit (1 liter circuit breaker + circulation pump + management PCB)	KSIPX	Kit with wall fixing brackets
KIR2HLX	Two-zone distribution kit management PCB: direct + mixed (for installation inside the unit)	KCVEX	Solar kit: circulation unit, control unit and expansion vessel
KIR2HX	Two-zone distribution kit with management PCB: direct + direct (for installation inside the unit)	HTC2WX	White HID-TConnect2 chronothermostat for temperature control
AC50X	50 liter system inertial storage tank with connection kit for EASYHybrid (for installation inside the unit)	SWCX	Receiver / IoT switch SwitchConnect
KPRSX	DHW recirculation pump kit (for installation inside the unit)		
ANEDX	Electronic anode to protect DHW boiler		

monoblock



EDGE EVO 2.0 - EXC



EDGE F

2

Monobloc

Hot, Cold, Domestic Hot Water




Monobloc heat pumps

EDGE F

The internal design of the machine has been optimised to work with the new R290 refrigerant.

- New layout of the electrical panels, hermetically separated from the refrigeration circuit
- Relief valve on the hydraulic circuit
- New inverter module cooling technology.

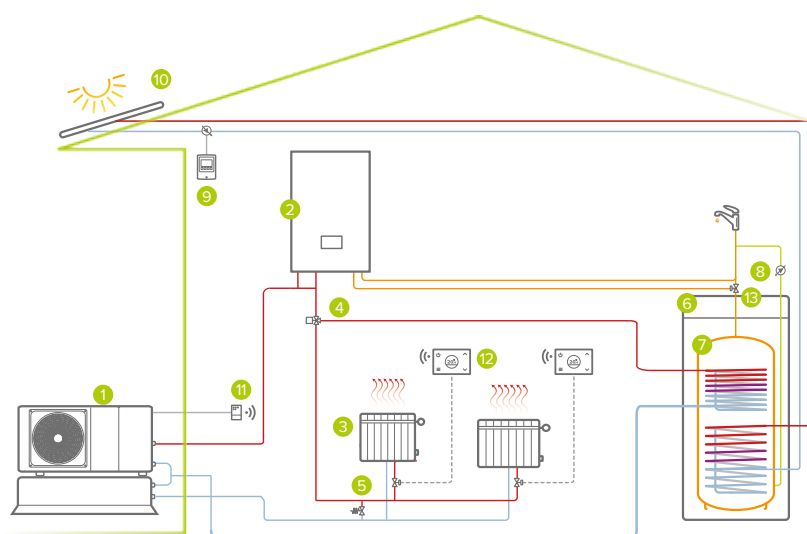


Hybrid single-area system with thermal solar:

Heating / DHW

1. outdoor unit
2. instantaneous boiler (Hybrid version)
3. heating/cooling zone
4. 3-way switching valve (optional)
5. bypass*
6. boiler connection kit (optional)
7. DHW boiler with solar coil (optional)
8. DHW recirculation pump (optional)
9. kit di circolazione solare (opzionale)
10. ELFOSun3 solar thermal panels (optional)
11. SwitchConnect Wi-Fi receiver (optional)
12. HID-TConnect2 Wi-Fi chronothermostat (optional)
13. thermostatic switching valve for DHW (optional)

*from external supply

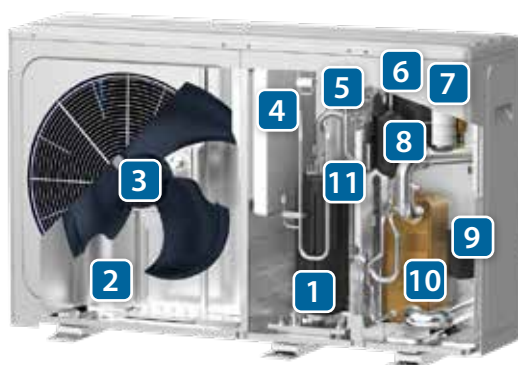

1. Compressor
2. Source side exchanger
3. Fan
4. Sealed inverter panel
5. 4-way reverse cycle valve
6. Relief valve (safety)
7. Sealed electrical panel
8. System expansion vessel (4.8 litres)
9. Water supply pump
10. User side exchanger
11. Lamination valve



App



CONTROL4 NRG





ErP

Compliant
models at
www.clivet.com

High efficiency DC inverter circulator

The maximum power generated by the system is only required for short periods of time. It is therefore essential to have the maximum efficiency in the operation at partial loads. This allows a reduction in annual costs.

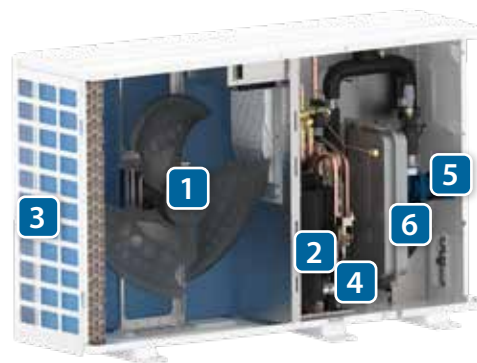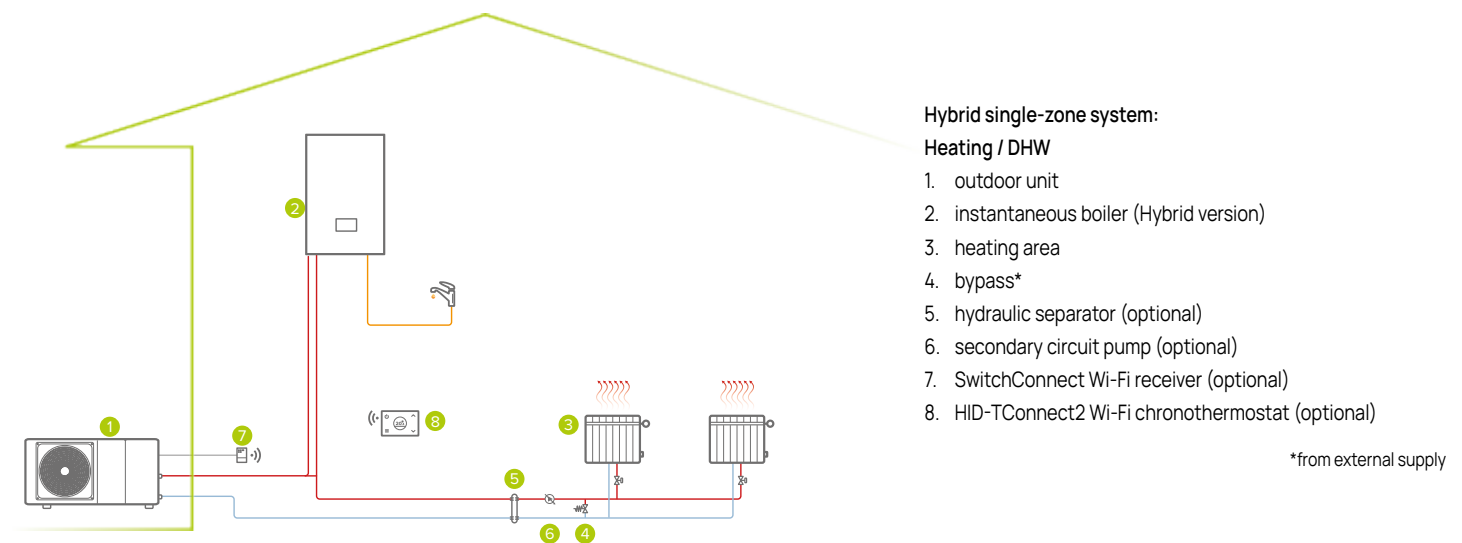

1. Inverter DC fan
2. Inverter DC twin-rotary compressor
3. Air-gas finned exchanger (blue fin treatment)
4. Gas/water plate exchanger
5. Inverter DC high efficiency pump
6. 4.8-litre system expansion tank

WiSAN-PME 1 S 2.1÷8.1

Air-to-water packaged unit heat pump
for heating, cooling and domestic hot water production



Capacity ranging from 4 to 15 kW
Air temperature range from -25 °C to +46 °C
COP > 5

- R-290 technology: combines high performance with full respect for the environment
- Versatile: wide range of applications in both packaged and hydro-split versions
- Renovation is easy: supply temperature up to 75 °C, perfect for any distribution system
- Modular: combines up to 6 units in cascade
- Advanced connectivity: management via the dedicated App or via the Modbus port with CONTROL4 NRG standard supplied

For the future

Edge F is the heat pump with R-290 refrigerant designed for the future, it is in fact a natural gas, and already in accordance with the current strict European regulations. The high thermodynamic qualities of this new refrigerant allow the production of water at unprecedented temperatures, 75 °C supply down to -10 °C ambient.

Respect for the environment and temperatures comparable to a boiler for a full-electric future.

Configurations and Accessories

KTFLX	Hose kit for connecting the unit to the system	DI100X	100-litre circuit breaker
FDMX	Magnetic dirt separator filter for water distribution systems	T1BX	DHW temperature probe and additional heating source at 10 m
VAGX	Safety antifreeze valve for system	T1B30X	DHW temperature probe and additional heating source at 30 m
ACS200X	200 liter DHW tank	TANKX	System inertial storage tank
ACS300X	300 liter DHW tank	KTCAX	Piping kit for the connection to the buffer tank
ACS500X	500 liter DHW tank	PCSX	Secondary circuit pump
ACS1000X	1000 liter DHW tank	PCS2X	Oversized secondary circuit pump
ACS10SX	1.000 liter DHW tank with solar coil	PRSX	DHW recirculation pump
SCS08X	Solar coil for ACS200X/ACS300X DHW tank	VDACSX	Thermostat-controlled switching valve for domestic hot water
SCS12X	1.2 m ² solar exchanger for flange installation (for ACS500X)		
QERAX	Electrical panel for single-phase heater connection on DHW storage tank	IBHX	Single-phase back-up electric heater (2/4/6kW)
QERATX	Electrical panel for three-phase heater connection on DHW storage tank	IBHTX	Three-phase back-up electric heater (3/6/9kW)
3DHWX	Three-way valve for domestic hot water	DTX	Auxiliary condensate collection tray
KCSX	Secondary circuit kit (1-litre circuit breaker + pump)	AMRX	Kit of antivibration mounts for floor installation
KIRE2HLX	Double zone distribution unit: direct + mixed (with mixing valve)	AMMSX	Kit of antivibration anti-seismic mounts for floor installation
KIRE2HX	Double zone distribution unit: direct + direct	ASTFX	Kit of antivibration mounts for wall bracket installation
DIX	1 liter hydraulic separator	KSIPX	Kit with wall fixing brackets
DI50-2X	50 liter hydraulic separator	HTC2WX	White HID-TConnect ² chronothermostat for temperature control
		SWCX	Receiver / IoT switch SwitchConnect

EDGE EVO 2.0 - EXC



Refrig.

WiSAN-YME 1 s 2.1÷14.1

Air-to-water packaged unit heat pump
for heating, cooling and domestic hot water production



Capacity from 4 to 30 kW
Boiler capacity from 24 to 200 kW
Air temperature range from -25 °C to +46 °C
COP > 5

- Versatile: wide range of applications in both packaged and hydro-split versions
- Designed for harsh climates: excellent performance at low temperatures and optional 3 to 9 kW auxiliary heaters
- Simultaneous production of DHW and cooling/heating (Hybrid version)
- Modular: combines up to 6 units in cascade for capacities up to 180 kW
- Advanced connectivity: management via the dedicated App or via the Modbus port with Control4 NRG standard supplied

The perfect combination

Edge EVO 2.0 - EXC combined with an EASY module is the solution designed to fulfil any system requirement, ensuring a simple and complete installation while optimising the space needed. Simply choose the perfect combination for your house and we'll take care of the rest.

Configurations and Accessories

KTFLX	Hose kit for connecting the unit to the system	T1BX	DHW temperature probe and additional heating source at 10 m
FDMX	Magnetic dirt separator filter for water distribution systems	T1B30X	DHW temperature probe and additional heating source at 30 m
VAGX	Safety antifreeze valve for system	TANKX	System inertial storage tank
ACS200X	200 liter DHW tank	KTCAX	Piping kit for the connection to the buffer tank
ACS300X	300 liter DHW tank	PCSX	Secondary circuit pump
ACS500X	500 liter DHW tank	PCS2X	Oversized secondary circuit pump
ACS1000X	1000 liter DHW tank	PRSX	DHW recirculation pump
ACS10SX	1.000 liter DHW tank with solar coil	VDACSX	Thermostat-controlled switching valve for domestic hot water
SCS08X	Solar coil for ACS200X/ACS300X DHW tank	IBHX	Single-phase back-up electric heater (2/4/6kW)
SCS12X	1.2 m ² solar exchanger for flange installation (for ACS500X)	IBHTX	Three-phase back-up electric heater (3/6/9kW)
QERAX	Electrical panel for single-phase heater connection on DHW storage tank	DTX	Auxiliary condensate collection tray
QERATX	Electrical panel for three-phase heater connection on DHW storage tank	AMRX	Kit of antivibration mounts for floor installation
3DHWX	Three-way valve for domestic hot water	AMMSX	Kit of antivibration anti-seismic mounts for floor installation
KCSX	Secondary circuit kit (1-litre circuit breaker + pump)	ASTFX	Kit of antivibration mounts for wall bracket installation
KIRE2HLX	Double zone distribution unit: direct + mixed (with mixing valve)	KSIPX	Kit with wall fixing brackets
KIRE2HX	Double zone distribution unit: direct + direct	HTC2WX	White HID-TConnect2 chronothermostat for temperature control
DIX	1 liter hydraulic separator	SWCX	Receiver / IoT switch SwitchConnect
DI50-2X	50 liter hydraulic separator		
DI100X	100-litre circuit breaker		

Air-to-water packaged unit heat pump
for heating, cooling and domestic hot water production



Capacity ranging from 4 to 40 kW
Air temperature range from -25 °C to +46 °C
COP > 5

- R-290 technology: combines high performance with full respect for the environment
- New silence levels: sound levels never before seen on the market; with this series, Clivet sets a new standard of silence
- Space saving: installed outdoors, no indoor unit is required
- Renovation is easy: supply temperature up to 85 °C, perfect for any distribution system
- ALTODesign: Clivet design for unique aesthetics and easy maintenance
- Advanced connectivity: management via the dedicated App or via the Modbus port with CONTROL4 NRG standard supplied

New level

Edge PRO combines the features of Edge F with market-leading quietness, a new ALTODesign aesthetic, and even greater efficiency in ultra-high temperature water production.



Hydro-Split



**HYDRO-SPLIT
TOWER VERSION**



**HYDRO-SPLIT
BOX VERSION**



**HYDRO-SPLIT
MINI VERSION**



**HYDRO-SPLIT
INVISIBLE VERSION**

3

Hydro-Split


Hot, Cold, Domestic Hot Water



Hydro-Split heat pumps

Versatility

Each module is designed to be combined with the EDGE EVO 2.0 and EDGE F packaged heat pumps.

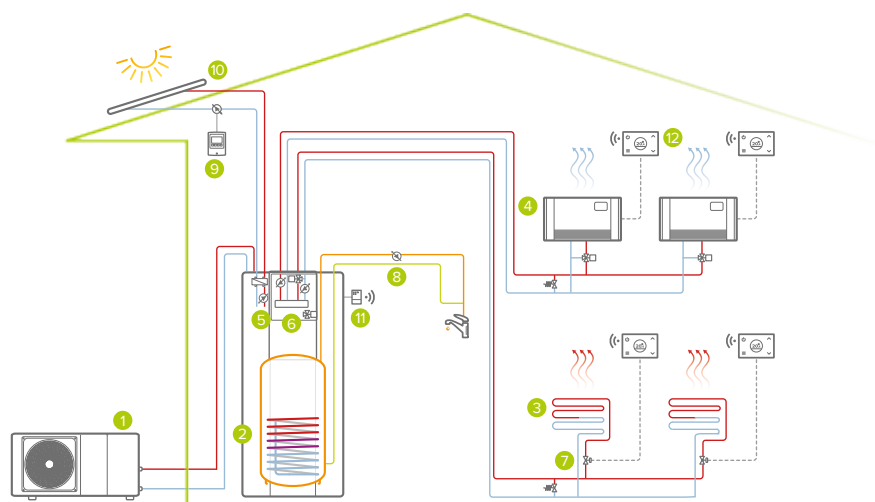

Two zone + solar system

Heating / DHW

1. outdoor unit
2. indoor unit
3. heating area
4. cooling zone
5. solar connection kit
6. Two-zone kit
7. bypass*
8. DHW recirculation pump*
9. solar circulation kit
10. ELFOSun3 thermal solar
11. SwitchConnect Wi-Fi receiver
12. Wi-Fi chronothermostat HID-TConnect2

*from external supply



1. Inertial tank
2. Plant expansion tank
3. Magnetic deflector filter + safety valve
4. Domestic hot water storage tank
5. 3-way valve for DHW
6. Thermostatic anti-scald valve
7. Backup electric heater



App



CONTROL4 NRG



Refrig.




ErP

Compliant models at www.clivet.com

Compactness


The hydronic modules of the EASY family feature countless combinations of accessories installed inside the modules, limiting the installation impact on the indoor environment.

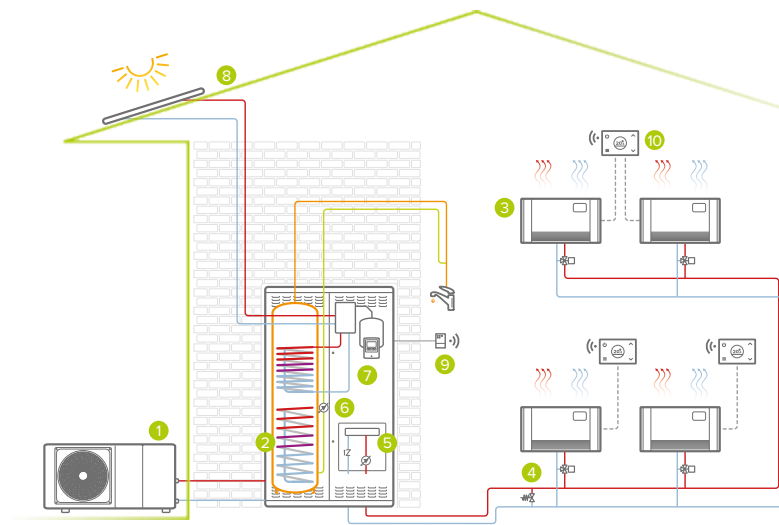

Single-zone + solar system:

Heating / DHW

1. outdoor unit
2. indoor unit
3. cooling zone
4. Bypass
5. Single zone kit circuit breaker + pump
6. DHW recirculation pump
7. solar connection kit
8. ELFOSun thermal soalre
9. Receiver / IoT switch SwitchConnect
10. Hid-TConnect2 chronothermostat

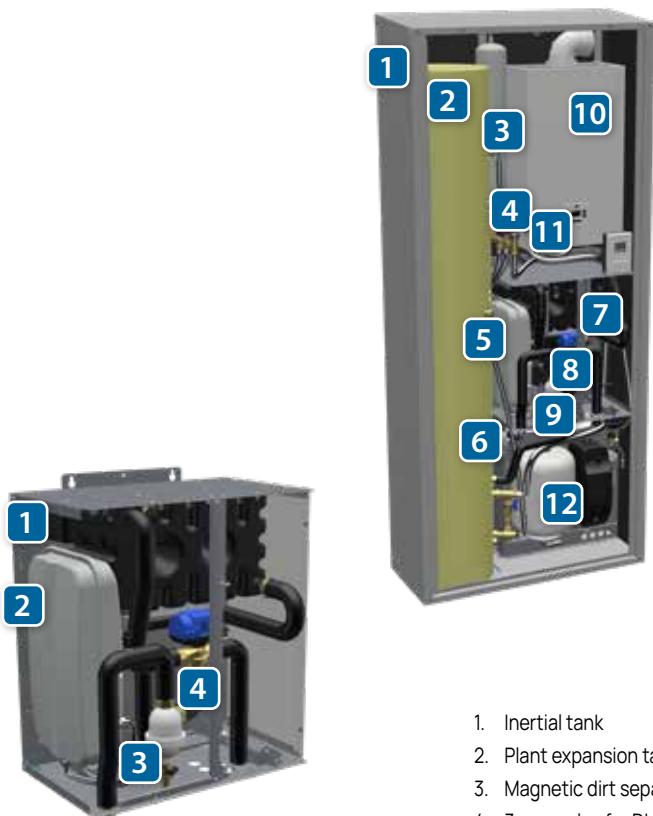

1. Visible cabinet
2. Domestic hot water storage tank
3. Sanitary expansion tank
4. Thermostatic anti-scald valve
5. Plant expansion tank
6. Backup electric heater
7. Inertial tank
8. 3-way valve for DHW
9. Magnetic deflector filter+safety valve
10. Condensation boiler with instantaneous DHW
11. Thermostated boiler bypass valve
12. Solar kit (control unit-expansion tank-pump unit)


1. Inertial tank
2. Plant expansion tank
3. Magnetic dirt separator filter
4. 3-way valve for DHW

Hydro-Split TOWER version

WiSAN-YME 1 S + HQCN-NEE 1 TC A

WISAN-PME 1 S + HQCN-NEE 1 TC A

Indoor hydronic unit with base with DHW tank for Hydro Split systems



- 190 or 250 l ACS storage tank
- Wide range of integrable accessories
- Can be combined with EDGE outdoor units
- Reduced space requirements
- Easy installation

Capacity from 4 to 16 kW

Air temperature range -25 °C to +43 °C

COP > 5

Versatile to suit every type of system

Hydronic TOWER version modules are designed to be combined with the EDGE family of packaged heat pumps. In addition to the DHW tank, a 15-litre buffer tank, magnetic dirt separator filter, system expansion tank and anti-burn valve are fitted as standard.

Interior accessories

EH246X	Additional electric heater adjustable to three capacities of 2, 4 or 6 kW
EH9X	Additional electric heater adjustable to one capacity of 9 kW
KCSIX	Secondary circuit kit (1L hydraulic circuit breaker + pump)
KIR2HX	Hydraulic kit for managing two areas with the same temperature
KIR2HLX	Hydraulic kit for managing two areas with high and mixed temperature
SOLX	DHW plate exchanger kit for solar thermal connection
SICGX	Intermediate exchanger for clean separation between primary and secondary circuit

External accessories

ACI40X	40 liter system inertial storage tank
COFX	Aesthetic cover for inertial storage tank
VEACSX	Sanitary expansion tank
KCAIAX	Additional inertial tank connection kit

Hydro-Split BOX version

WiSAN-YME 1 S + HQCN-NEE 1 BC A

WISAN-PME 1 S + HQCN-NEE 1 BC A

Wall-mounted indoor unit for Hydro-split systems



- Compact module
- Plug and play
- Complete (filter - 3-way - inertial)
- Intuitive connections
- Dirt separator filter, 3-way DHW valve

Capacity from 4 to 16 kW

Air temperature range from -25 °C to +43 °C

COP > 5

Universal

The BOX version is the hydraulic module similar in size to a boiler that can house the hydraulic components to connect the heat pump to the heating and cooling system. Ready to be combined with the EDGE EVO 2.0 and Edge F range of packaged heat pumps from size 2.1 to 8.1, for a high-level heating and cooling system.

Interior accessories

EH246X	Additional electric heater adjustable to three capacities of 2, 4 or 6 kW
EH9X	Additional electric heater adjustable to one capacity of 9 kW
KIR2HX	Hydraulic kit for managing two areas with the same temperature
KIR2HLX	Hydraulic kit for managing two areas with high and mixed temperature
KCSIX	Kit for hydraulic separation between primary and secondary circuit with pump on secondary circuit
SICGX	Intermediate exchanger for clean separation between primary and secondary circuit

External accessories

ACS200X	200 liter DHW tank
ACS300X	300 liter DHW tank
ACS500X	500 liter DHW tank
SCS08X	Solar coil for ACS200X/ACS300X DHW tank
SCS12X	Solar coil for ACS500X DHW tank
ACI40X	40 liter system inertial storage tank
ANEDX	Electronic anode
T1BX	10m water temperature probe
T1B30X	30m water temperature probe
VDACSX	Thermostated diverter valve for DHW
KISX	Simplified installation kit with fittings for EASYBOX
HTC2WX	White HID-TConnect2 chronothermostat for temperature control
SWCX	Receiver / IoT switch SwitchConnect

Hydro-Split INVISIBLE version

WiSAN-YME 1 S + HQCN-NEE 1 IC A

WiSAN-YME 1 S + HQCN-NEE 1 IC A

Uncased indoor unit for Hydro-split systems



Capacity from 4 to 16 kW

Air temperature range -25 °C to +43 °C

COP > 5

- Ultra thin only 35 cm
- Complete (deflector filter - expansion vessel - anti-scalding - 15 l inertia)
- Versatile with a wide range of accessories
- Aesthetic additional practical cabinet for system accessories for outdoor installation

Installation also visible

The INVISIBLE version is the uncased hydronic module, which makes it possible to have the complete heating and DHW production system inside the wall, without occupying any surface area in the building

Interior accessories

AENVX	Additional aesthetic practical cabinet for system accessories in full view ^(NEW)
DPX	Template for connecting the additional aesthetic practical cabinet for system accessories in full view
KCIACSX	Storage tank connection kit (Std)
KCSX	Single zone kit
KIR2HX	Hydraulic kit for managing two areas with the same temperature
KIR2HLX	Hydraulic kit for managing two areas with high and mixed temperature
EH246X	Additional electric heater adjustable to three capacities of 2, 4 or 6 kW
EH9X	Additional electric heater adjustable to one capacity of 9 kW
SICGX	Intermediate exchanger for glycol circuit ^(NEW)
ACSA150X	Additional 150-litre DHW tank
ACSA50X	Additional 50-litre DHW tank
KCI150X	Additional 150-litre tank connection kit
ADIAX	Cabinet for additional 150-litre DHW tank
KCVEX	Solar controller module + pump + expansion tank
SHWTX	DHW tank with heat exchanger for connection to solar panel
ADI50X	Additional built-in cabinet for storage tank / solar kit
KCIBOIX	Boiler connection kit for instantaneous DHW production

Hydro-Split MINI version

WiSAN-YME 1 S + HQCN-NEE 1 MC A

WiSAN-PME 1 S + HQCN-NEE 1 MC

Wall-mounted indoor unit with DHW tank for Hydro-split systems



- 50 l DHW storage tank
- Complete unit
- Integrated hydraulic separator
- Can be combined with EDGE outdoor units
- Reduced space requirements
- Easy installation

Capacity from 4 to 16 kW

Air temperature range from -25 °C to +43 °C

COP > 5

Versatile to suit every type of system

Hydronic MINI version modules are designed to be combined with the EDGE family of packaged heat pumps.

In addition to the DHW tank, they contain a 15-litre buffer tank, magnetic baffle filter, system expansion tank and anti-burn valve as standard.

Configurations


HMIR32	Can be combined with EDGE EVO 2.0
HMIR290	Can be combined with EDGE F

Clivet Smart Living



PHOTOVOLTAIC PANELS*

Energy production through a photovoltaic system



SINERGY

Electrical energy storage, to ensure maximum efficiency of independent supply during evening hours



HEAT PUMP

Smart modulation of the heat pump and domestic hot water tank charging based on the energy available from the photovoltaic system



AIR RENEWAL UNIT

Active thermodynamic recovery ventilation system to ensure the maximum level of indoor air quality.

CONTROL4 NRG

System energy assistant with electricity and thermal storage management. Remote automatic software updates to keep the system in line with new available functions



CLIVET EYE

Cloud solution for remote system control and management from a single App with display of energy levels produced and consumed by the home



SMART THERMOSTATS

These provide simple, intuitive and immediate access to the home system's main operating parameters (temperature and humidity, air quality, battery charge level, electric energy produced by the photovoltaic system)



AIR QUALITY SENSOR

Acquisition of temperature, humidity, noise, VOC, carbon monoxide, carbon dioxide and methane values



FAN COILS, RADIANT PANELS

Silent, efficient fan coils with slimline design



*not supplied by Clivet

