

MIRROR GLASS

600W
60×90cm
11.85kg/13.9kg*

VCIR-60-90-600-G-B, G-W, G-M

MIRROR GLASS

800W
60×120cm
16.1kg/18.45kg*

VCIR-60-120-800-G-B, G-W, G-M

MIRROR GLASS

400W
60×60cm
7.35kg/9.35kg*

VCIR-60-60-400-G-B, G-W, G-M

Infrared heater mirror, glass

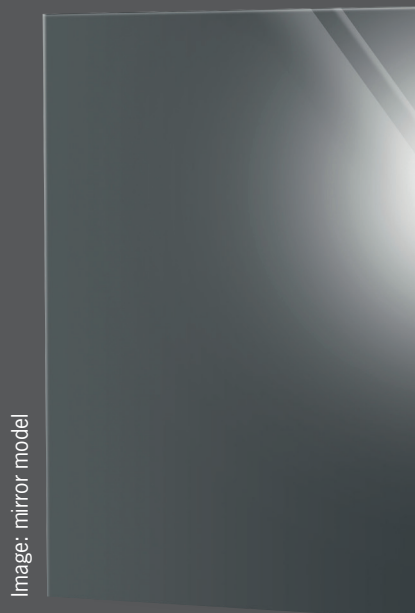


Image: mirror model

Conformity:

EN 60335-1: 2012+A11
EN 60335-2-30 : 2009+A11
EN 62233 : 2008
EN60601-1 : 2006
EN60601-1 : 2001
EN 6100.3.3.2013
EN 61000.3.2.2014
EN 60529 :1991+A1+A2

Heatness

Rudolf Hausner Gasse 3
1220 Vienna
www.heatness.at
office@heatness.at
Tel.: +43 (0) 1 890 36 28

Voltage

Overheating protection

Protection class

Connection

Control/Thermostat

Radiation array

Degree of efficiency

Emission ratio

Color front/ frame

Surface temperature

front / rear at
22°C room temperature

230V/50Hz

Integrated
temperature sensors

IP65

(3 × 0.75mm²)
Length 1.8m color white
with „schuko plug“

compatible with "Öko-
design" conform units

130° – 140°

Class I according to
DIN EN60675/A2
VDE 0705-675/A2:2018-11


Glass, mirror=84%

6mm glass white, glass
black, mirror

100° C / 50° C

* weight incl. packaging

©2023 Heatness GmbH, Subject to changes, printing and typesetting errors.
All specs within a tolerance of +/- 10%

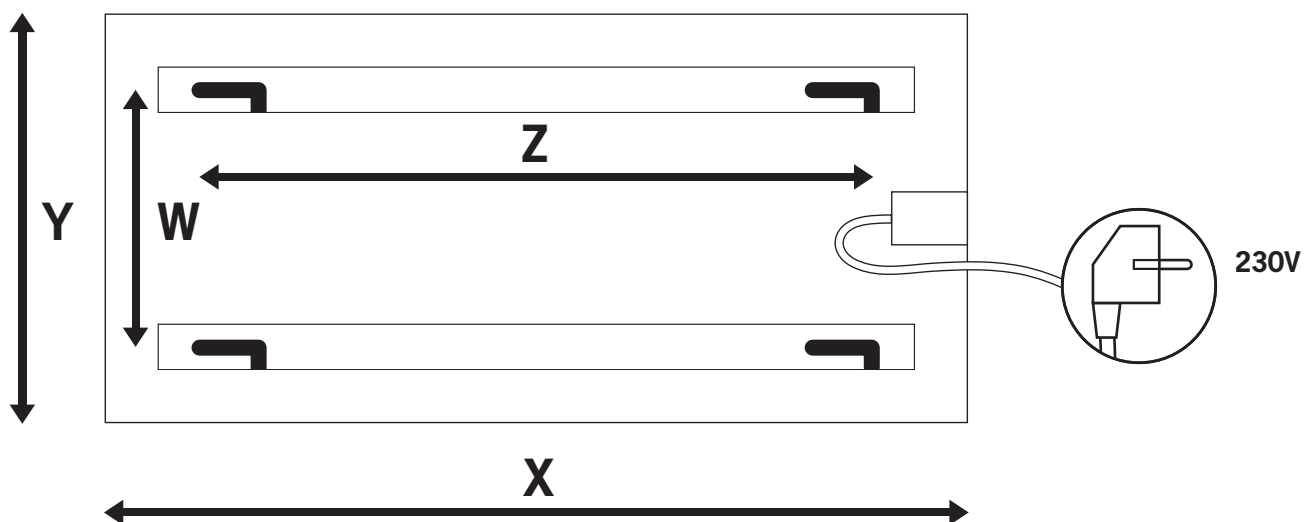

	X	Y	Z	W
800W	1200mm	600mm	500mm	300mm
600W	900mm	600mm	500mm	300mm
400W	600mm	600mm	200mm	300mm

