

## Serie: PEKI-VA - Stainless steel

Connection thread:  $\frac{3}{8}$ " and  $\frac{1}{2}$ "


Mechanical stainless serie PEKI-VA

- simple and safe operation
- infinitely adjustable without tools at the wing screw
- maintenance-free and low-wear
- very compact design (length approx. 220-250mm)

PEKI valves can be manufactured according to customer requirements in a different construction length, float rod 155/170/290mm.



Material	Stainless steel V2A
max. temperature	70°C - 100°C - 100 °C
Seal	NBR - EPDM - Viton
Valve seat	Stainless steel V2A

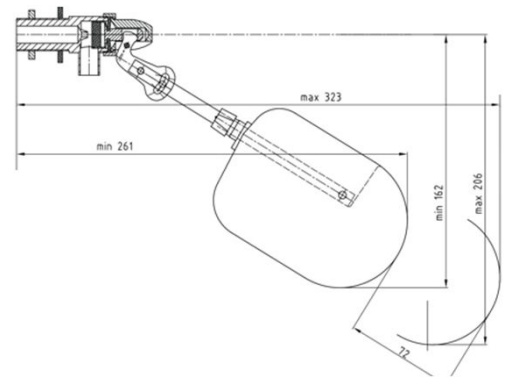

Article number	8G3 VA	8G12/2 VA
Connection thread	$\frac{3}{8}$ "	$\frac{1}{2}$ "
Thread length	24 mm	24 mm
Valve seat [mm]	Ø 3 VA	Ø 12 VA
Filling capacity at 3 bar	8 l/min	30 l/min
max. line pressure	6 bar	6 bar
Weight	180 g	184 g
Recommended float	500-90VA / 8-90 VAB	500-110VA / 8-120 VAB
Length approx. without float	228 mm	243 mm

Depending on the requirements or the medium in which the valve is used, seals can be made out of NBR / EPDM or VITON.

Recommended floater stainless steel

- with internal thread or
- specially for our PEKI series with flange

