



CACHENG

Multistage Submersible Pump

Integrated Automatic Control

- Working temperature: < 35°C
- Protection level: IP X8
- Max grain size: 1mm



Home garden



Irrigation



Booster pond



Deep well

Operating Conditions:

- Working temperature: < 35°C

Motor:

- Protection level: IP X8

Materials:


- Plastic MPPO impeller
- Stainless iron shaft
- Stainless steel / plastic

Features:

- High lift
- Stable performance
- Qmax: 6.0m³/h
- Hmax: 40m
- Integrated Automatic Control
- Outlet: G1"
- Max grain size: 1mm

Applications:

- Home garden
- Booster pond
- Irrigation
- Deep well

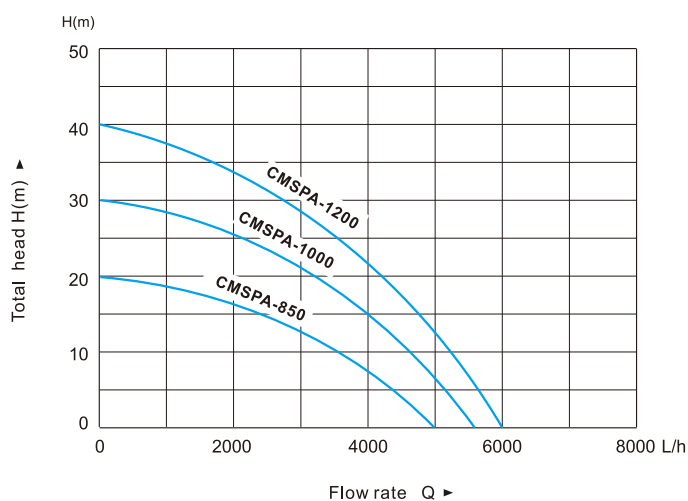

MODEL	POWER (W)	VOLTAGE (V)	MAX.FLOW (m ³ /h)	MAX.HEIGHT (M)	MAX.DEPTH (M)	CABLE LENGTH (M)
CMSPA-850	850	230V/50Hz 115V/60Hz	5	20	7	10
CMSPA-1000	1000		5.5	30	7	10
CMSPA-1200	1200		6	40	12	15