

FANSKI

WE CREATE OUTSTANDING PRODUCTS ALWAYS

PLUMBING PRODUCTS

FANSKI

0086-576-87276781

0086-576-87276797

fanski@fanski.com

www.fanskichina.com

No.7,Shengyuan Road,Yucheng Street,Yuhuan City,Zhejiang Province,China 317600



WE CREATE OUTSTANDING PRODUCTS ALWAYS

FANSKI
WE CREATE OUTSTANDING PRODUCTS ALWAYS

FANSKI GROUP INC.set up in 1992, with the registered brand name of “Shida”, is located in Mechanical and Electrical Industrial Zone, Yuhuan City, on the bank of East Sea. "We create outstanding products always" is the faith of FANSKI. There is a Chinese saying of "Hard working for ten years to achieve an excellent sword". Successfully cooperating with international groups, FANSKI becomes the largest hose manufacturer in Asia.

With the passion and pursuit of healthy life and innovative quality, Mr. Chen Jianxin has established PPW and FANSKI Brands. Nowadays, FANSKI GROUP is expanding constantly: FANSKI GROUP INC, Nanjing PPW Co., Ltd, Yuhuan FANSKI Plumbing Co., Ltd., Nanjing FANSKI Artificial Environment Co., Ltd. and Nanjing Pearl Garden Real Estate Development Co., Ltd. The Range of FANSKI GROUP refers to several fields of pipe system, plumbing and sanitary, comfortable residences, high-efficiency energy utilization and real estates.

FANSKI creates a place, where you could feel safe, comfortable and elegant. FANSKI products make families all over the world enjoy a high quality life with safe water, comfortable environment, considerable design, efficient service and an advanced science and technology. FANSKI has established a Chinese State Laboratory (CNASL3011-Chinese State Laboratory authorized number), two research and development bases, a scientific researching team with 160 staffs, a production base of 333000 square meters, 5 0 automatic production lines, a capacity of 60000 tons per year for plastic pipes, a warehouse of 30000 square meters and 40000 sales & services networks in 200 cities in China.

FANSKI has the advanced automatic production lines and strict quality inspection up to thirty sectors, which ensures each product, every accessory and process are of high quality. With the advantages of specialization and the excellent service, FANSKI can provide a complete set of logistics solutions with individuation, low cost and high efficiency. FANSKI products have earned a great popularity in America, Europe, Southeast Asia and other regions.

Offering high quality products and perfect services to international families is the constant principle. Everywhere in the world, customers can feel the meticulous care from FANSKI.

FANSKI will focus on higher quality in the future, make progress along with world-health -service, and provide effective safeguard for health of families all over the world.


FANSKI keeps improving the consistent quality and offering service around the world to all the international families.

FANSKI、ppe are registered brands.



GLOBAL CERTIFICATION

The products of FANSKI have been approved by the certifications of DVGW,WATERMARK,CUPC,NSF, CSA,WRAS,ACS,CSTB,CE etc.Our main markets are Eu countries,USA, Canada,South America and Asian countries,we have more than 30 provincial distributors in domestic China and 30 exclusive agents in the world.

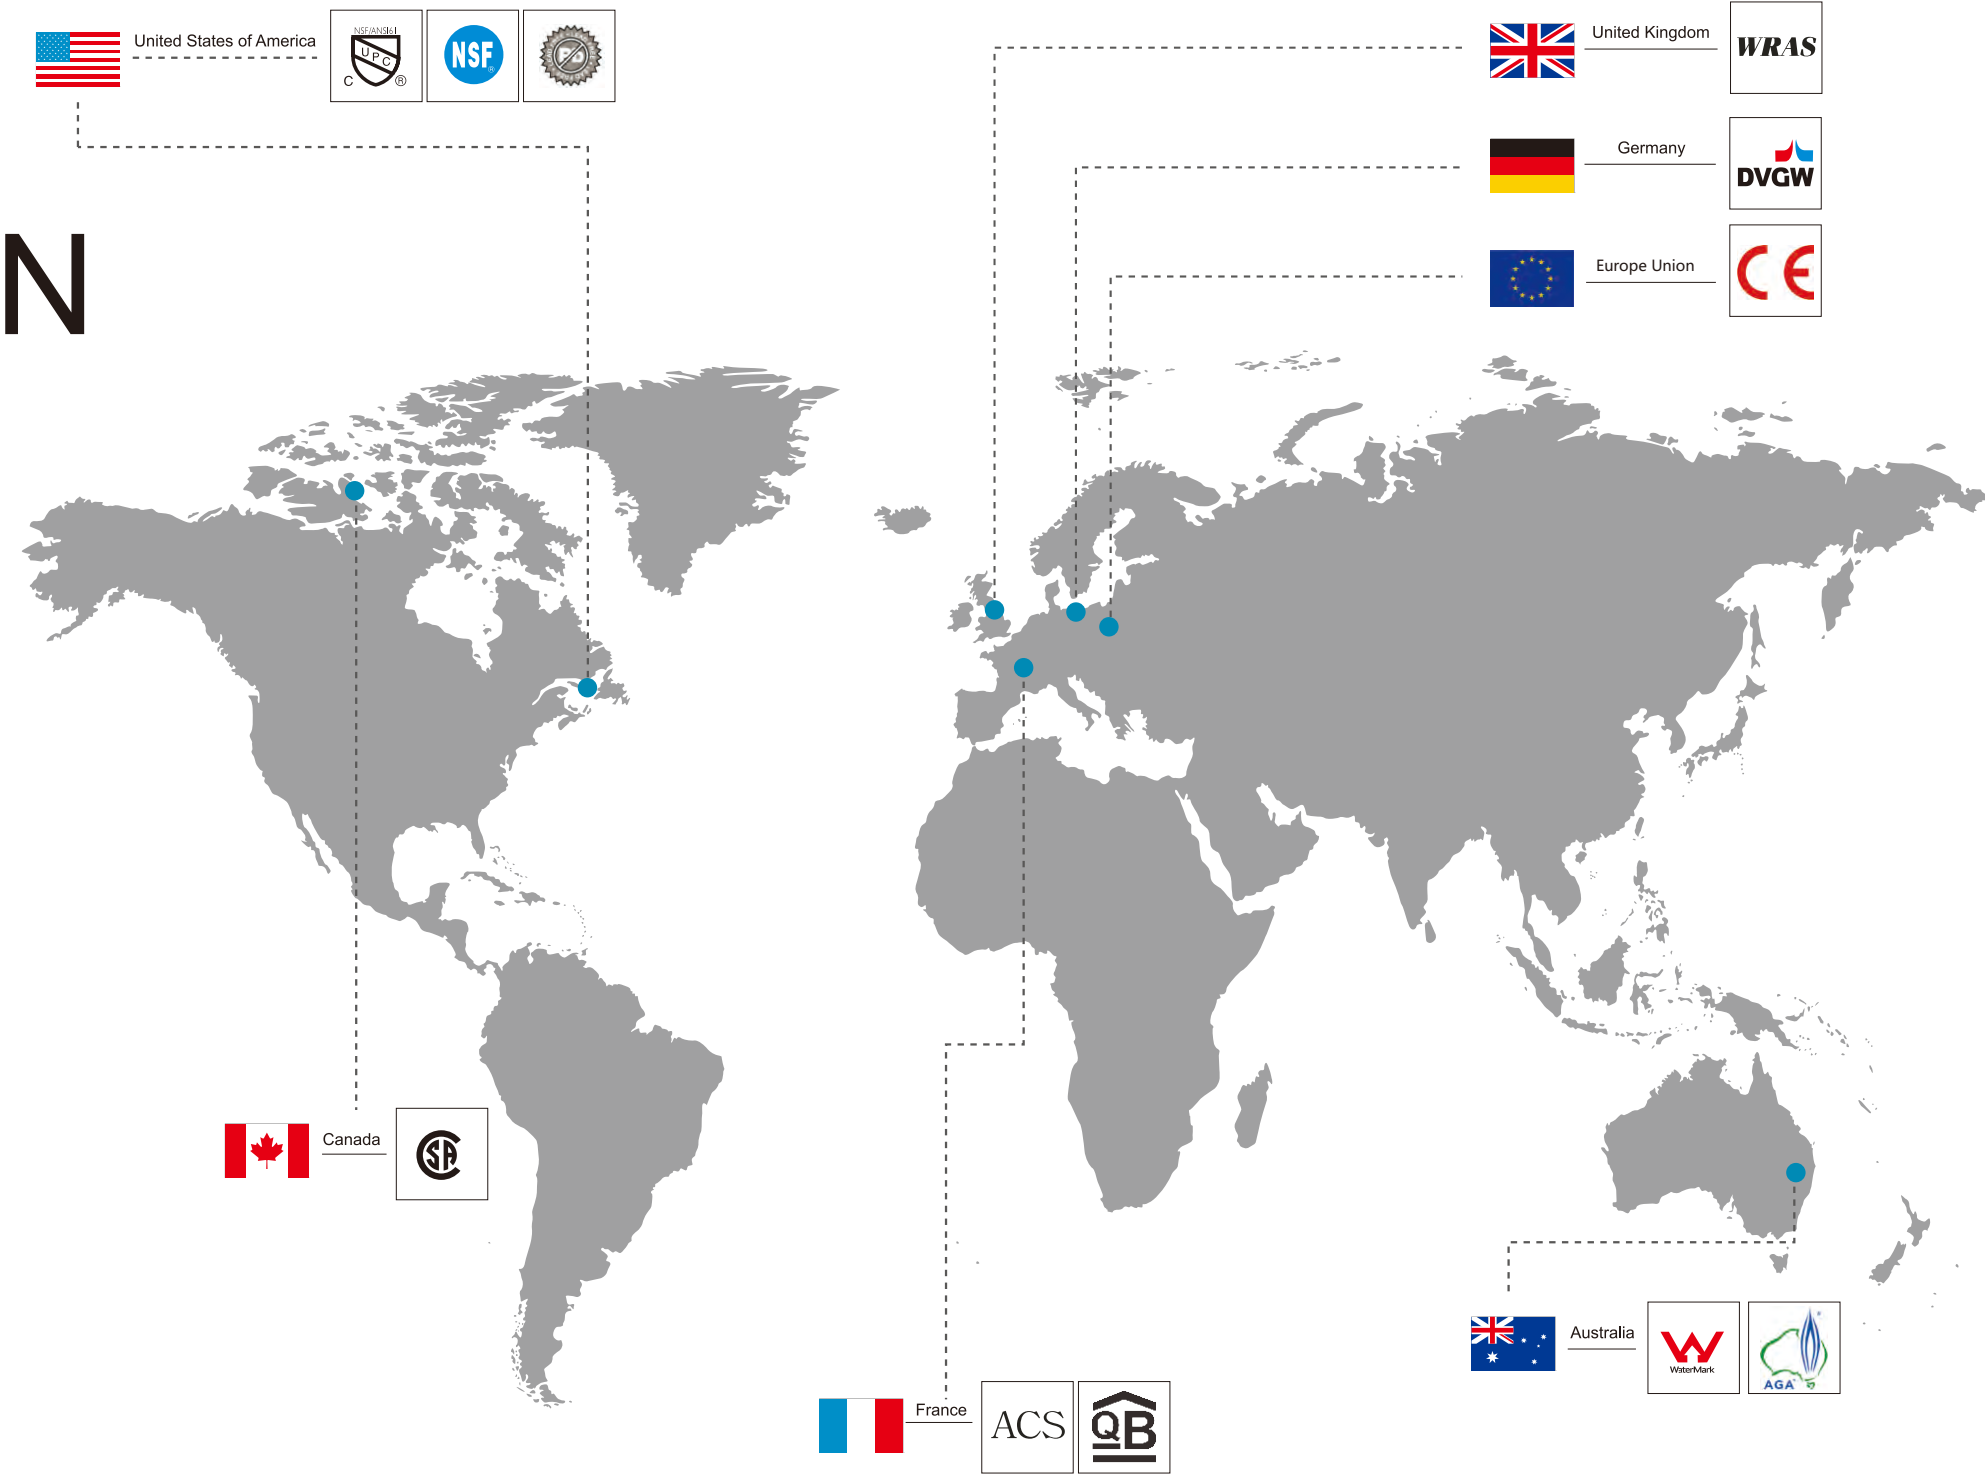

PRODUCING EQUIPMENT




FANSKI Research And Test Center

CNASL3611-The National Laboratory Of China Authorized Number



Fanski laboratory is with the international standard. There are 24 different testing equipments for the different functional and sanitary performance tests.

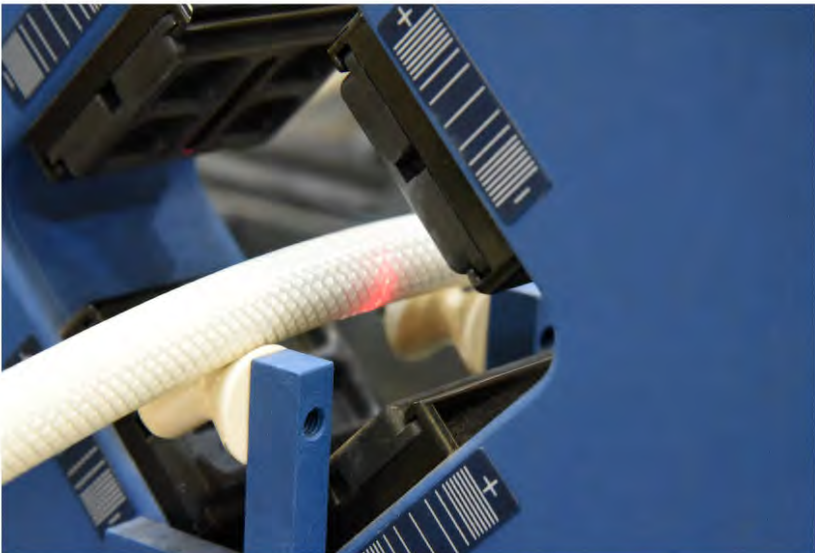

The world advanced automatic production line and over thirty strict tests ensures the high quality of any kind of products and the fittings, so each piece is classic.



- TPS production line;
- Advanced automation equipment;
- Stable quality control;
- Clean and orderly filed environment;
- Unity and cooperation of staff management.



A noble office building equipped with modern appliances.A convenient information communication platform.A harmonious working environment.

The Company Exhibition



Every year, FANSKI attend the exhibitions. Such as National Hardware Show,Kitchen & Bath of China, ISH, MCE and Cantoon Fair in different countries.We welcome all friends globally come to us and cooperate with us for a new bright future.



Flexible Hose	01-23
Push-Fit	24-25
Copper Corrugated Hose	26
S.S. Corrugated Hose	27-30
Copper/Pex Pipe	31-32
Shower Hose	33-39
Pull-out Hose	40
Gas Hose	41-42
Angle Valve	45-54
Bibcock	57-62
Floor Drain	65-70
Drainer	73
Shower Head	77

CONTENTS



FLEXIBLE HOSE

FANSKI is committed to the product of delicate carving, this persistence is also reflected in the braided hose. Each product is full of personality and taste of elaborate.



Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature:90°C / 194°F

Specification

F3/8" x F3/8"	F3/4" x F3/4"	1/2" FIP x 1/2" FIP
F1/2" x F3/8"	F1" x F1"	1/2" COMP x 1/2" FIP
F1/2" x F1/2"	3/8" COMP x 1/2" FIP	1/2" FLARE x 1/2" FIP
F3/4" x F1/2"	3/8" FLARE x 1/2" FIP	

Applications

Sanitary installations: kitchen,toilet, faucet, water heater.

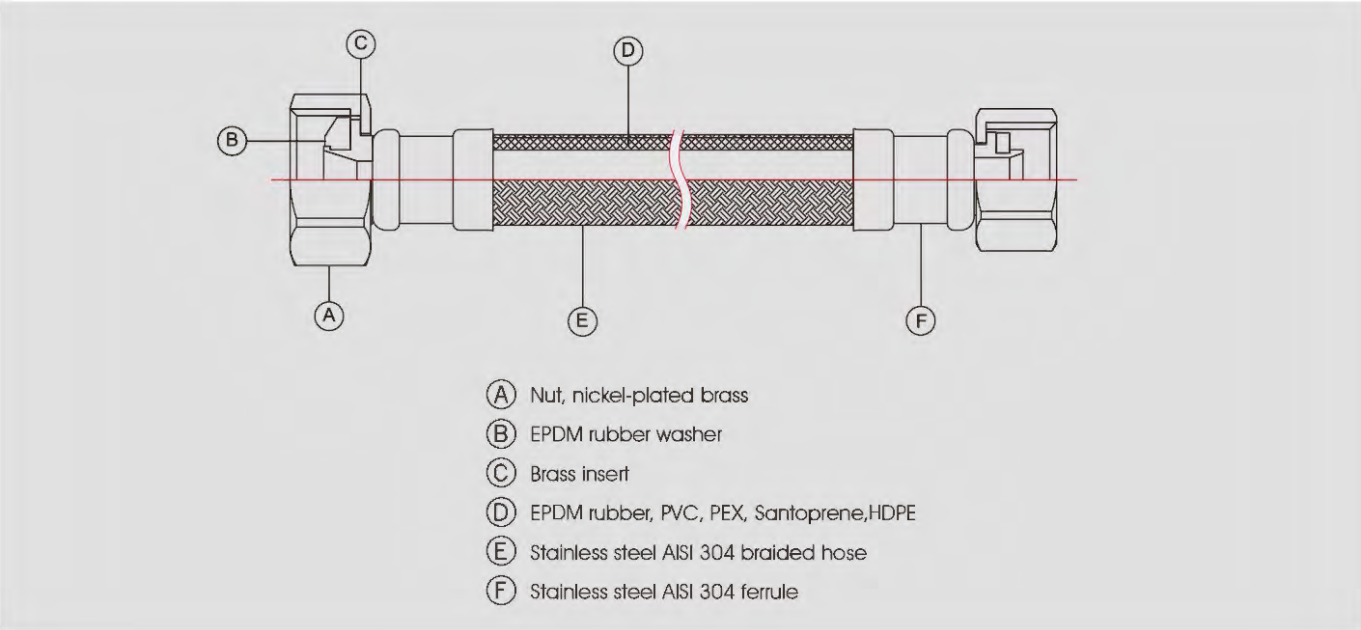

Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature:90°C / 194°F

Specification

F3/8" x M3/8"	F3/4" x M3/4"
F1/2" x M1/2"	F1" x M1"

Applications

Sanitary installations: kitchen,toilet, faucet, water heater.

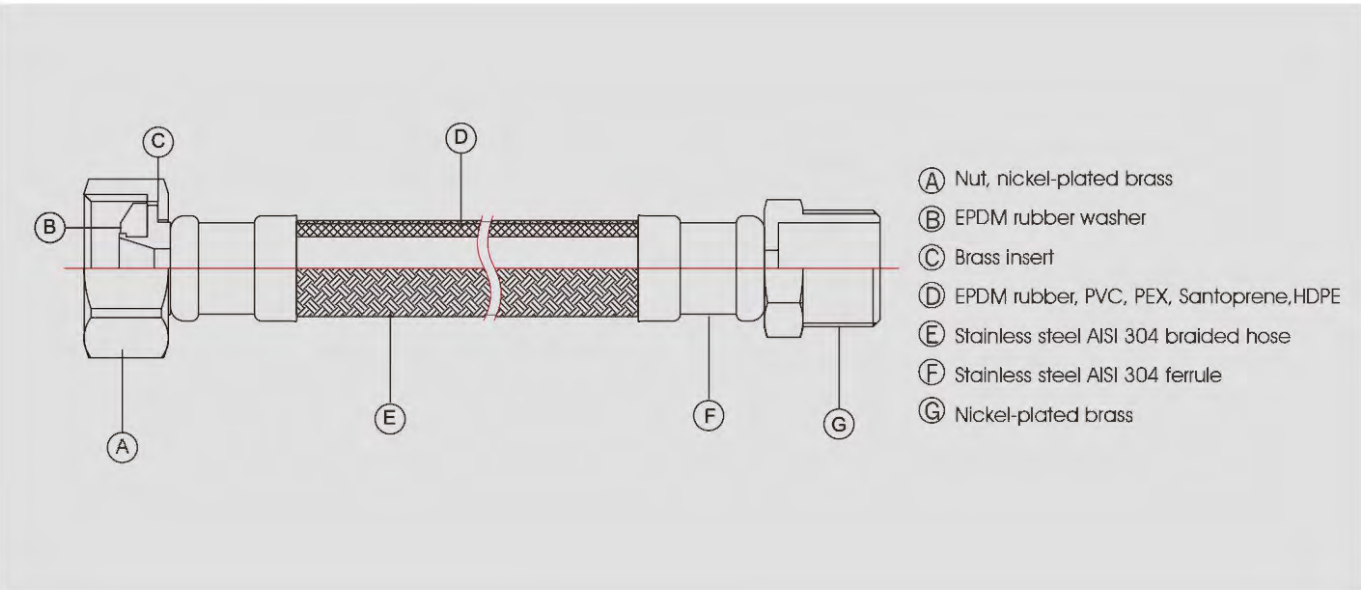



Technical Data

Work pressure: 10Bar / 150PSI


Maximum temperature : 90°C / 194°F

Specification

F3/8" x F3/8" Elbow	M3/8" x F3/8" Elbow
F1/2" x F1/2" Elbow	M1/2" x F1/2" Elbow
F3/4" x F3/4" Elbow	M3/4" x F3/4" Elbow
F1" x F1" Elbow	M1" x F1" Elbow
F1-1/4" x F1-1/4" Elbow	M1-1/4" x F1-1/4" Elbow
F1-1/2" x F1-1/2" Elbow	M1-1/2" x F1-1/2" Elbow

Applications

Air-conditioning, water heater, water tank, water pump, solar panel.

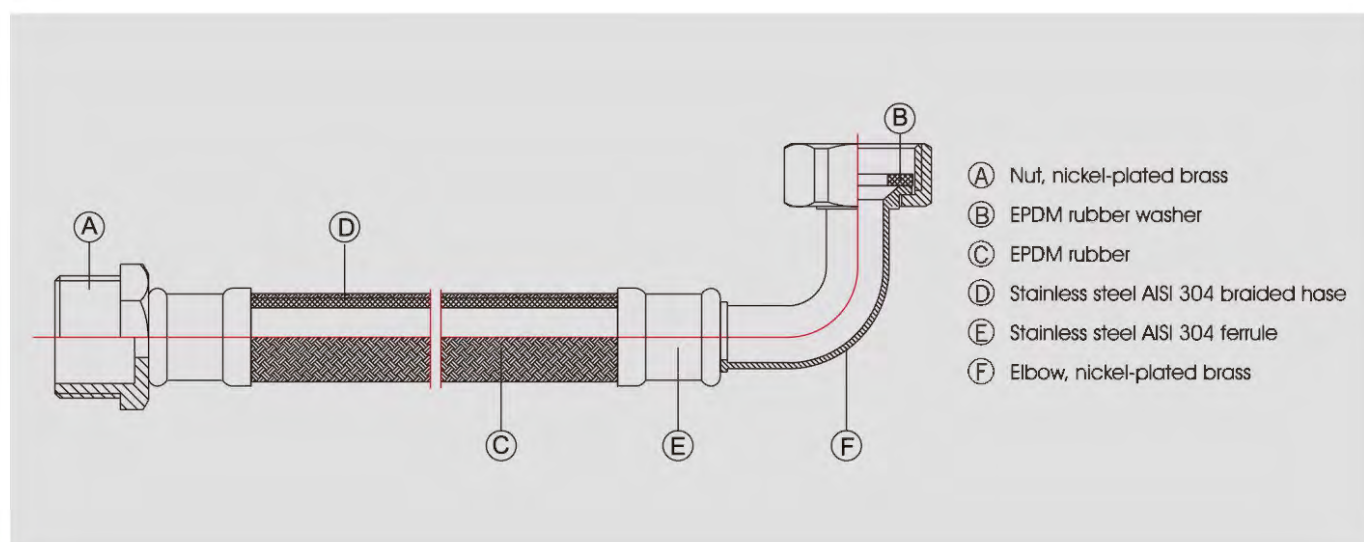

Technical Data

Work pressure: 16Bar / 230PSI


Maximum temperature: 90 °C / 194°F


Specification

F3/8" x M8 x 1	F1/2" x M10 x 1
F3/8" x M10 x 1	F1/2" x M12 x 1
F3/8" x M12 x 1	F1/2" x M12 x 1.5
F1/2" x M8 x 1	F1/2" x M16 x 1

Applications

Mixer, tap.

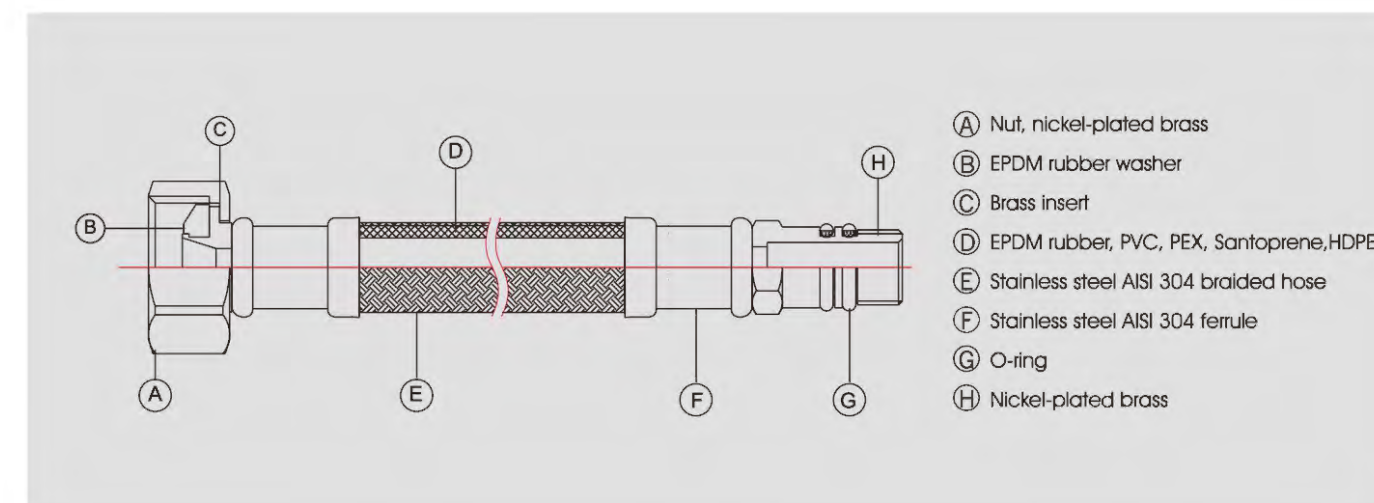

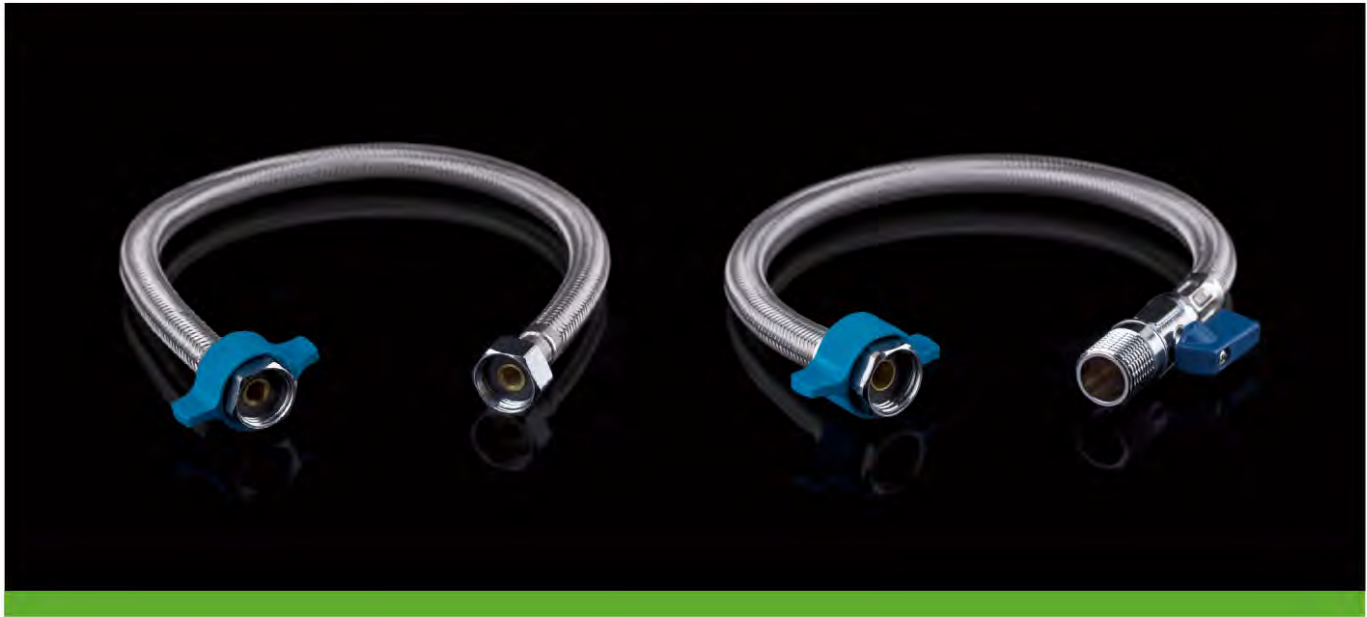

Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature : 90°C / 194°F

Specification

F1/2" x F1/2"
F1/2" x M1/2" BALL VALVE

Applications

Sanitary installations: kitchen, toilet, faucet, water heater.

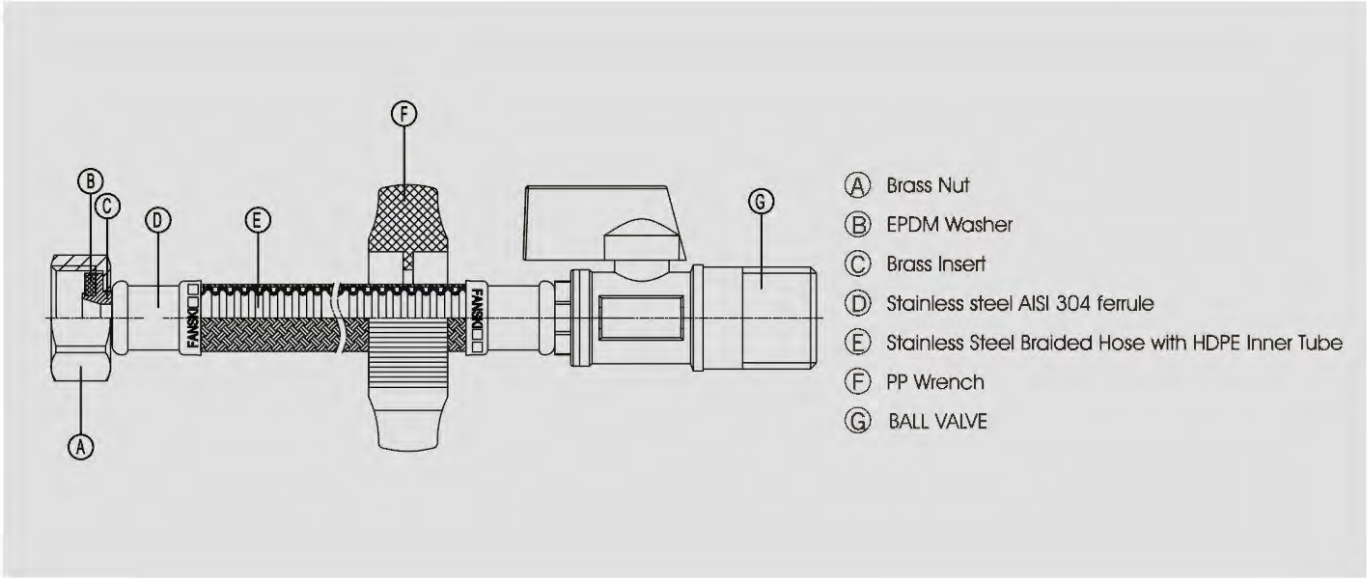

Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature : 90°C / 194°F

Specification

F3/8" x F3/8"	3/8" C x 3/8" C	1/2" C x 1/2" FIP
F1/2" x F1/2"	3/8" C x 1/2" FIP	1/2" FLARE x 1/2" FIP
F3/4" x F3/4"	1/2" FIP x 1/2" FIP	3/4" FGH x 3/4" FGH

Applications

Sanitary installations: kitchen, toilet, faucet, water heater.

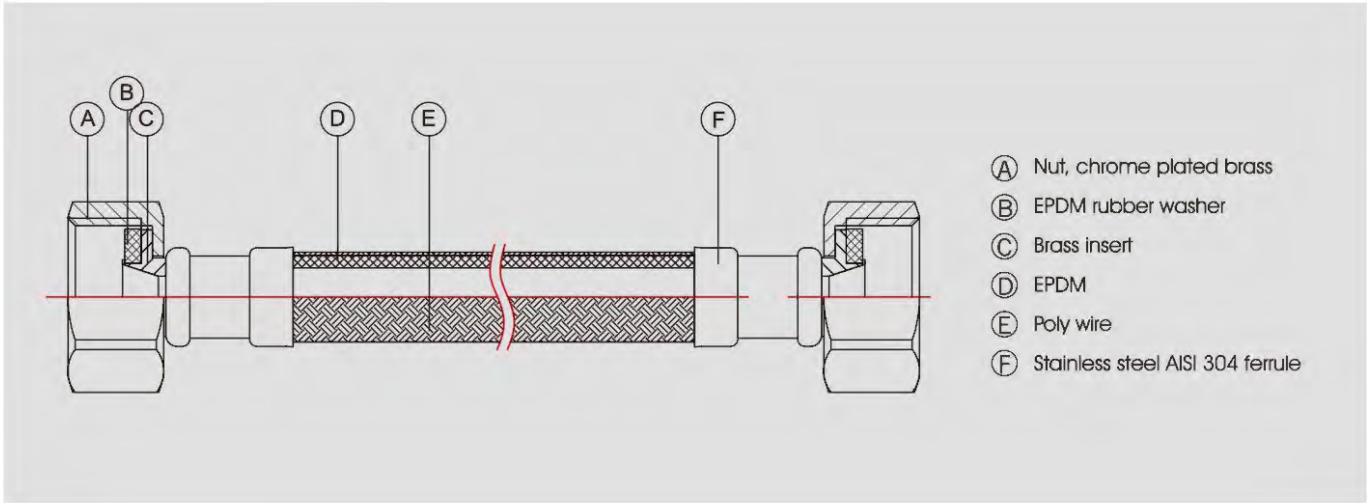



Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature : 90°C / 194°F

Specification

F1/2" x 10mm	F3/4" x 15mm
F1/2" x 15mm	F3/4" x 22mm
F3/8" x 10mm	3/8"COMP x 3/8"OD
F3/8" x 15mm	

Applications

Sanitary installations: kitchen, toilet, faucet, water heater.

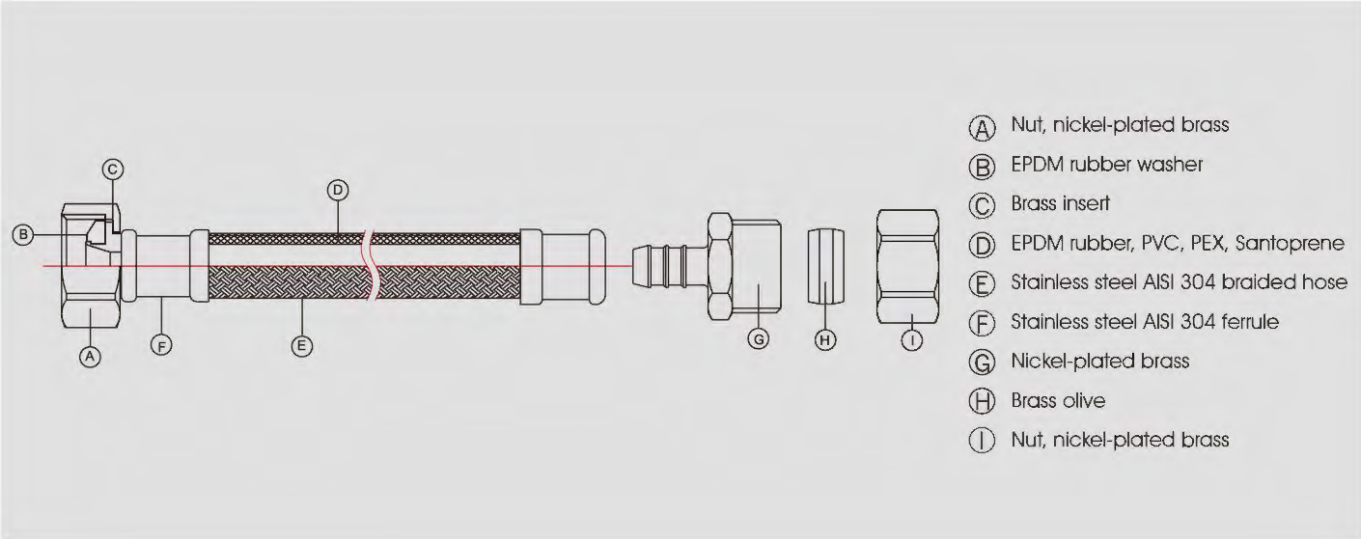

Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature : 90°C / 194°F

Specification

8mm x T10	10mm x T10
12mm x T10	15mm x T10

Applications

Sanitary installations: kitchen, toilet, faucet, water heater.

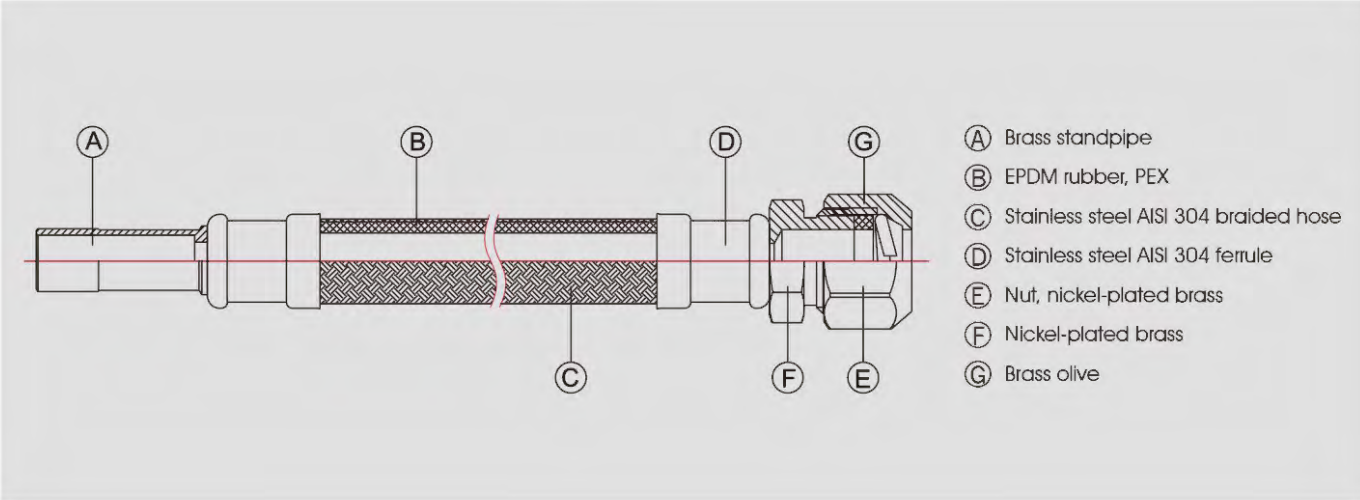



Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature : 90°C / 194°F

Specification

F1/2" x 15mm ISO valve
F3/4" x 22mm ISO valve
15mm x 15mm ISO valve

Applications

Sanitary installations: kitchen,toilet, faucet, water heater.

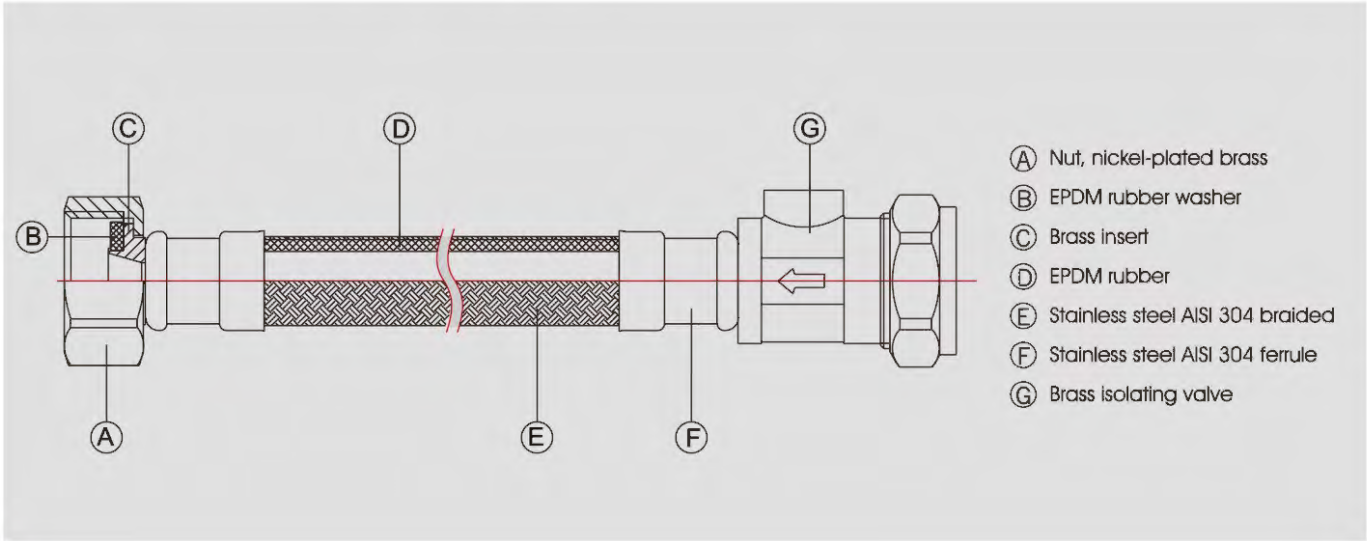

Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature : 90°C / 194°F


Specification

F1/2" x 15mm Push-Fit Connector W / ISO valve
F3/4" x 15mm Push-Fit Connector W / ISO valve
F3/4" x 20mm Push-Fit Connector W / ISO valve

Applications

Sanitary installations: kitchen,toilet, faucet, water heater.

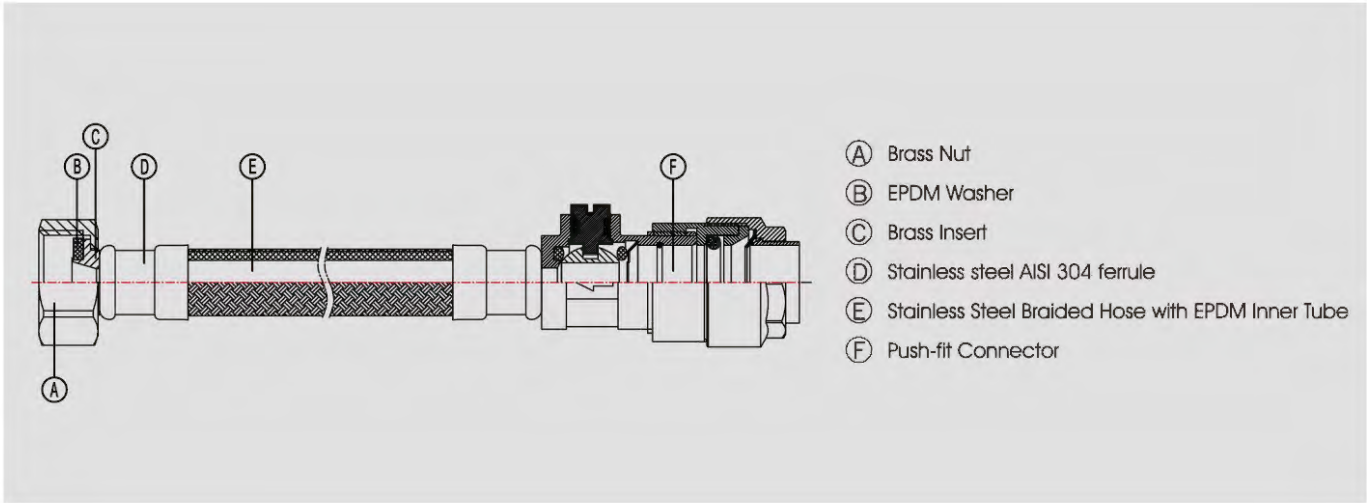

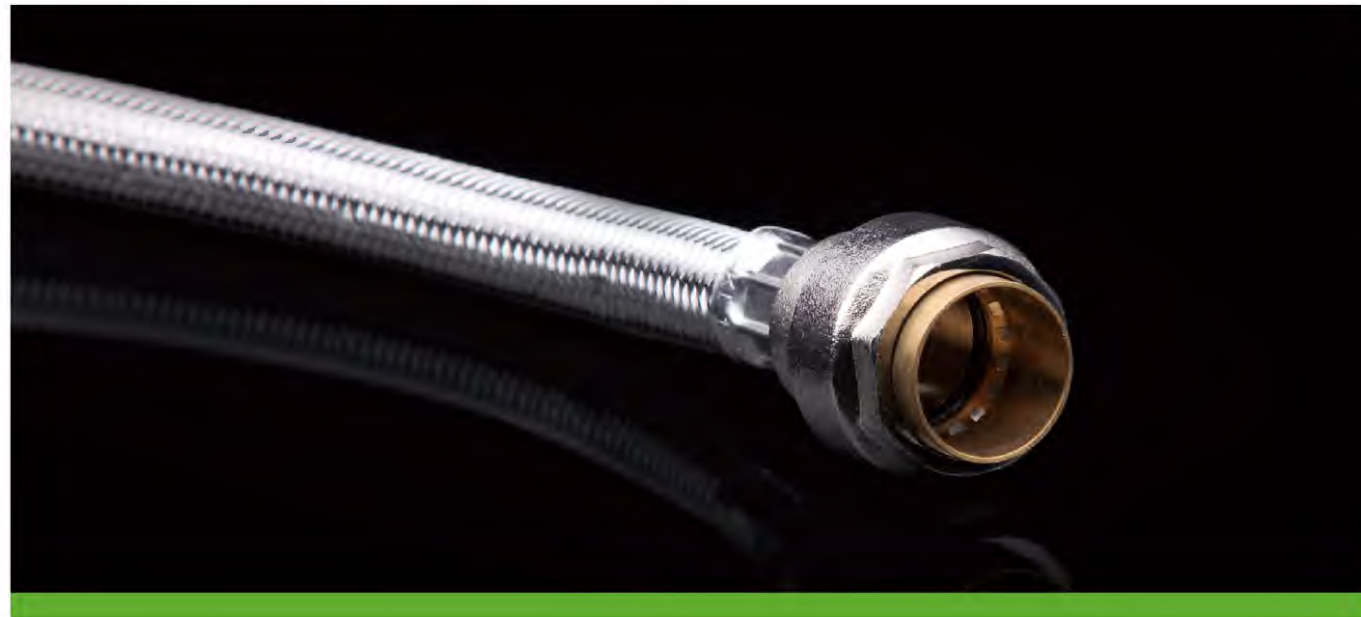

Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature : 90°C / 194°F

Specification

F1/2" X 15mm Push-fit
F3/4" X 15mm Push-fit
F3/4" X 22mm Push-fit

Applications

Sanitary installations:kitchen,toilet, faucet, water heater.

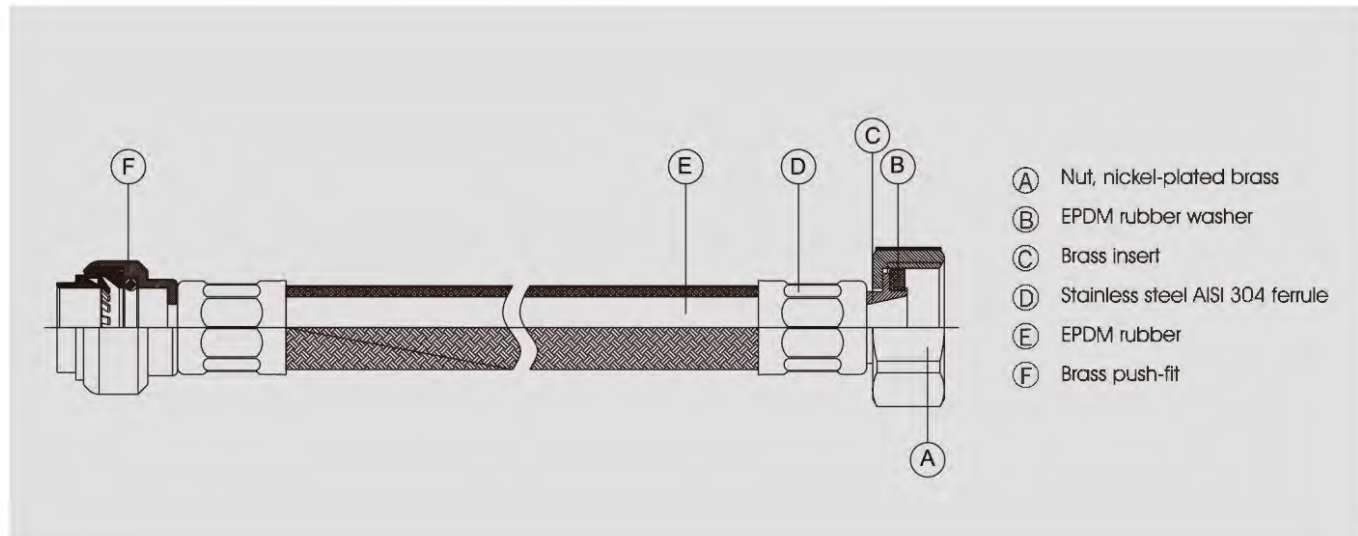

Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature : 82°C / 180°F

Specification

1/2" FIP x 7/8" BC 1/2" FLARE x 7/8" BC
3/8" COMP x 7/8" BC 3/8" FLARE x 7/8" BC
1/2" COMP x 7/8" BC

Applications

Sanitary installations: toilet.

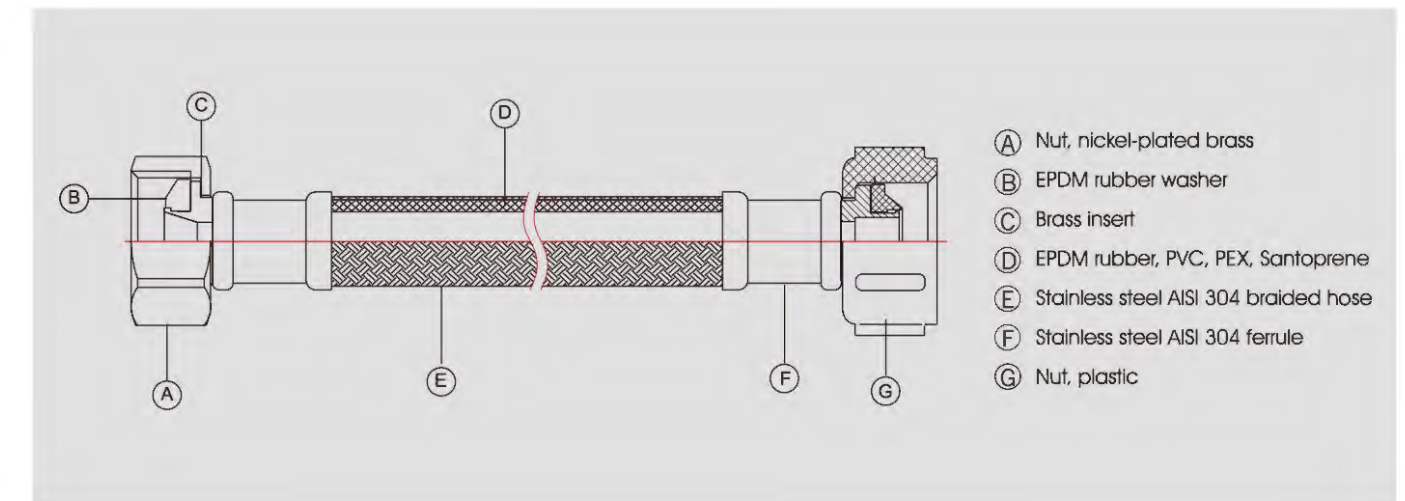



Technical Data


Work pressure: 10Bar / 150PSI
Maximum temperature : 82°C / 180°F

Specification

3/8" COMP x 7/8" BC 1/2" FLARE x 7/8" BC
1/2" FIP x 7/8" BC 3/8" FLARE x 7/8" BC
1/2" COMP x 7/8" BC

Applications

Sanitary installations: toilet .

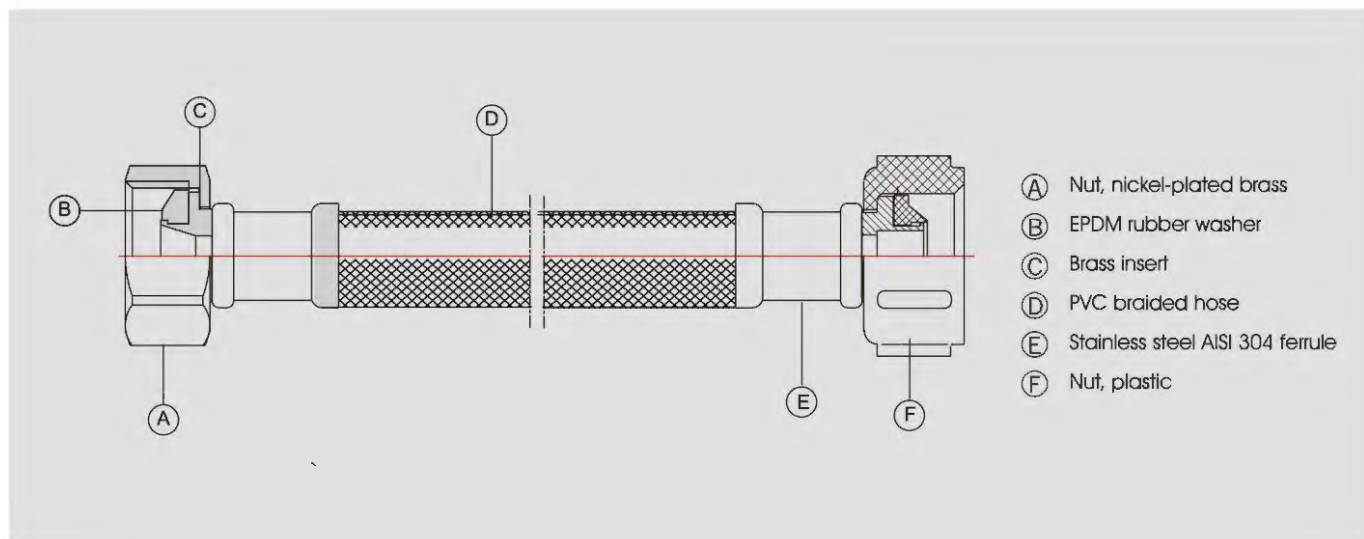

Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature : 82°C / 180°F

Specification

1/4" COMP x 1/4" COMP

Applications

Ice maker.

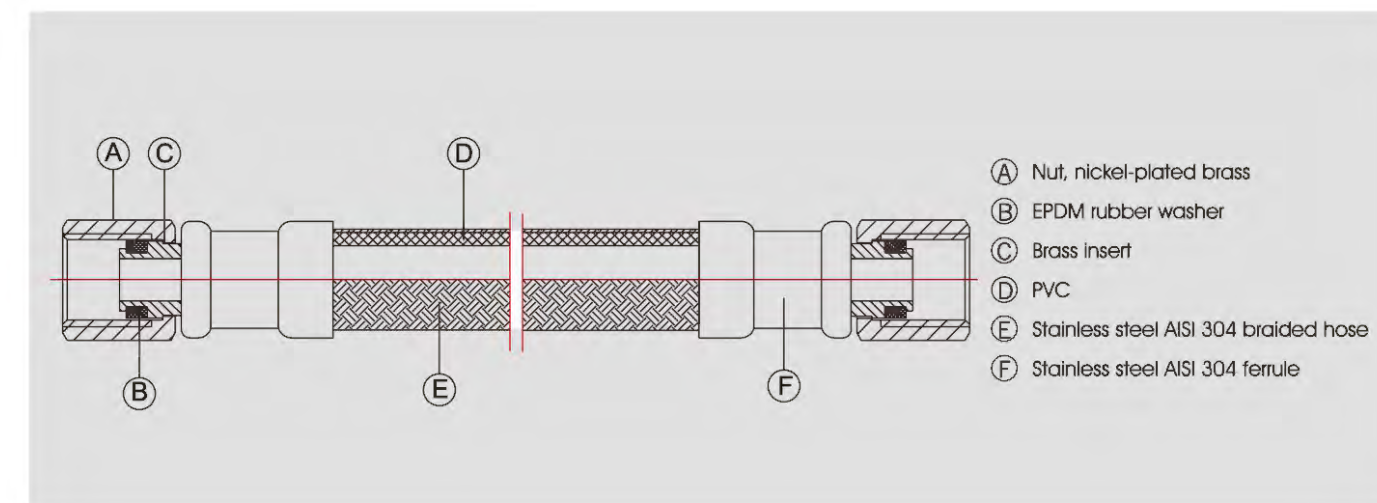



Technical Data


Work pressure: 10Bar / 150PSI
Maximum temperature : 82°C / 180°F

Specification

1/4" COMP x 1/4" COMP

Applications

Ice maker.

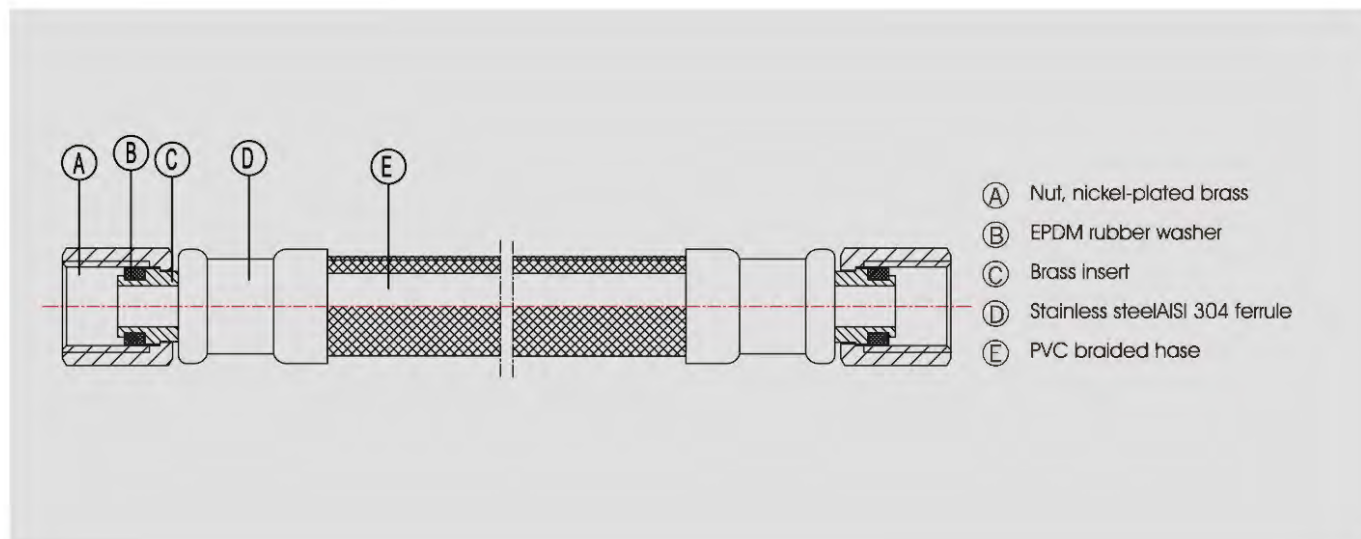

Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature : 82°C / 180°F

Specification

3/8" C x 3/8" C + 3/4" FGH Elbow

Applications

Dishwasher.

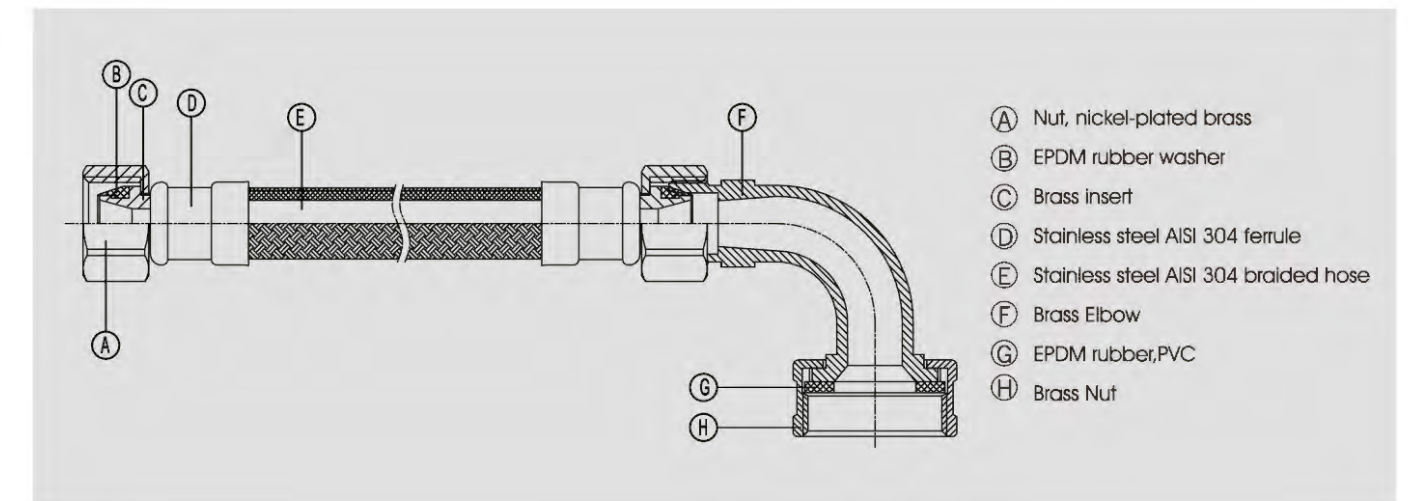



Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature : 82°C / 180°F

Specification

3/8" COMP x 3/8" COMP W / 90° Elbow
3/8" COMP x 3/4" FGH Elbow

Applications

Dishwasher.

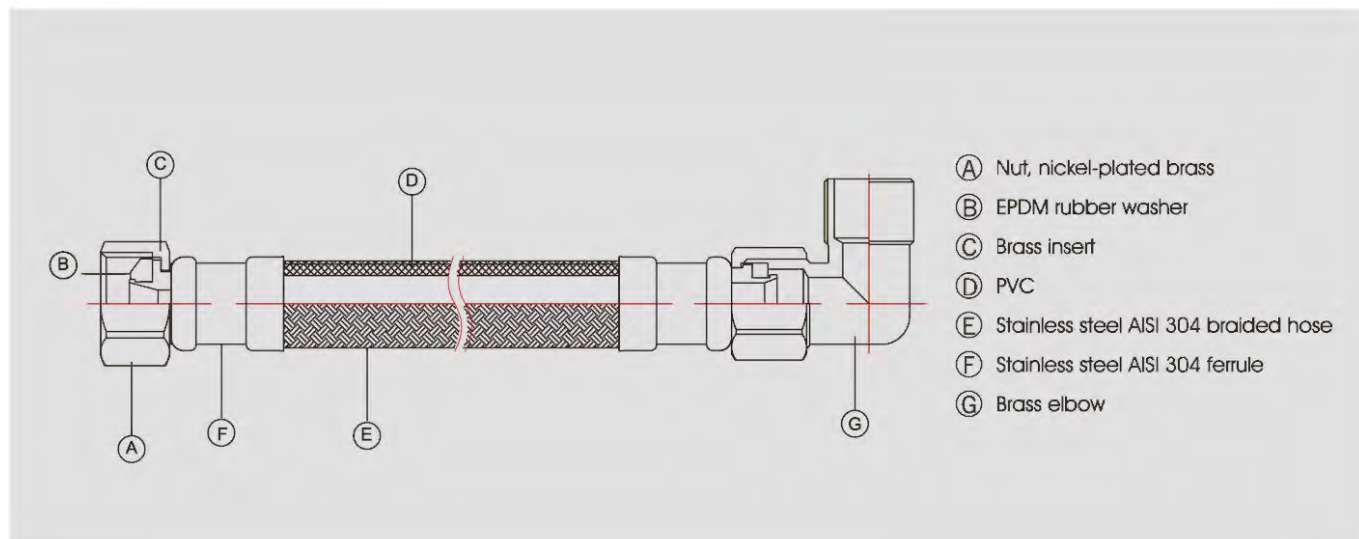

Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature : 82°C / 180°F

Specification

3/4" FGH x 3/4" FGH
3/4" FGH x 3/4" FGH Elbow

Applications

Washing machine.

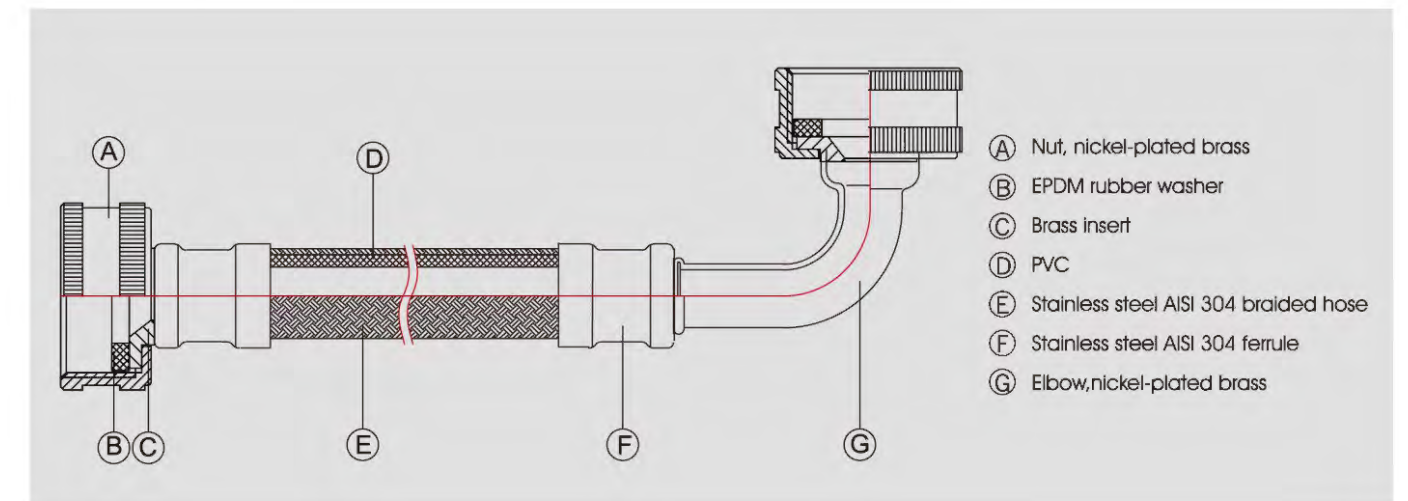



Technical Data


Work pressure: 10Bar / 145PSI
Maximum temperature : 82°C / 180°F

Specification

3/4" FGH x 3/4" FGH
3/4" FGH x 3/4" FGH Elbow

Applications

Washing machine.

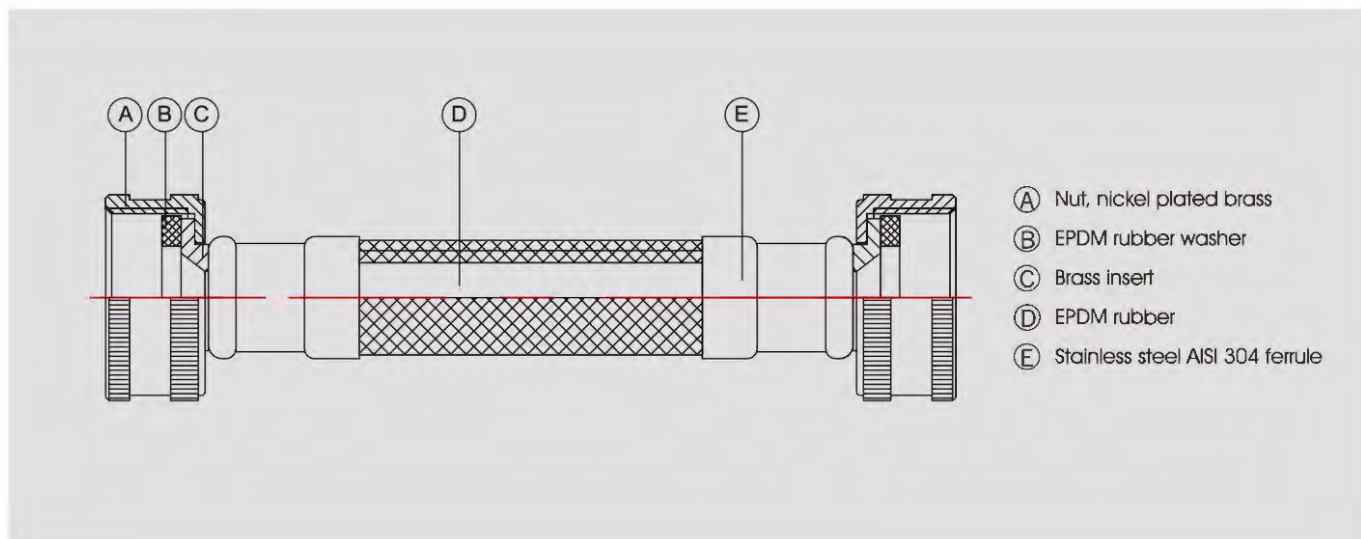

Technical Data


Work pressure: 10Bar / 145PSI
Maximum temperature : 82°C / 180°F

Specification

3/4" FGH x 3/4" FGH

Applications

Washing machine.

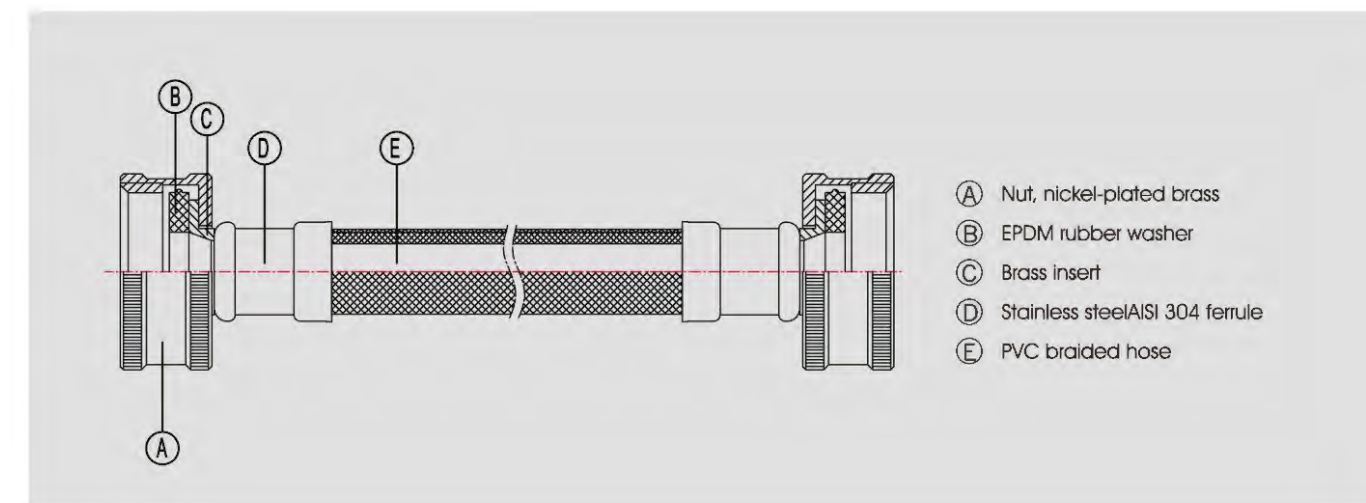



Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature : 82°C / 180°F

Specification

3/4" FIP x 3/4" FIP 3/4" FIP x 7/8" OD
3/4" FIP x 7/8" MIP 3/4" MIP x 7/8" OD

Applications

Water heater.

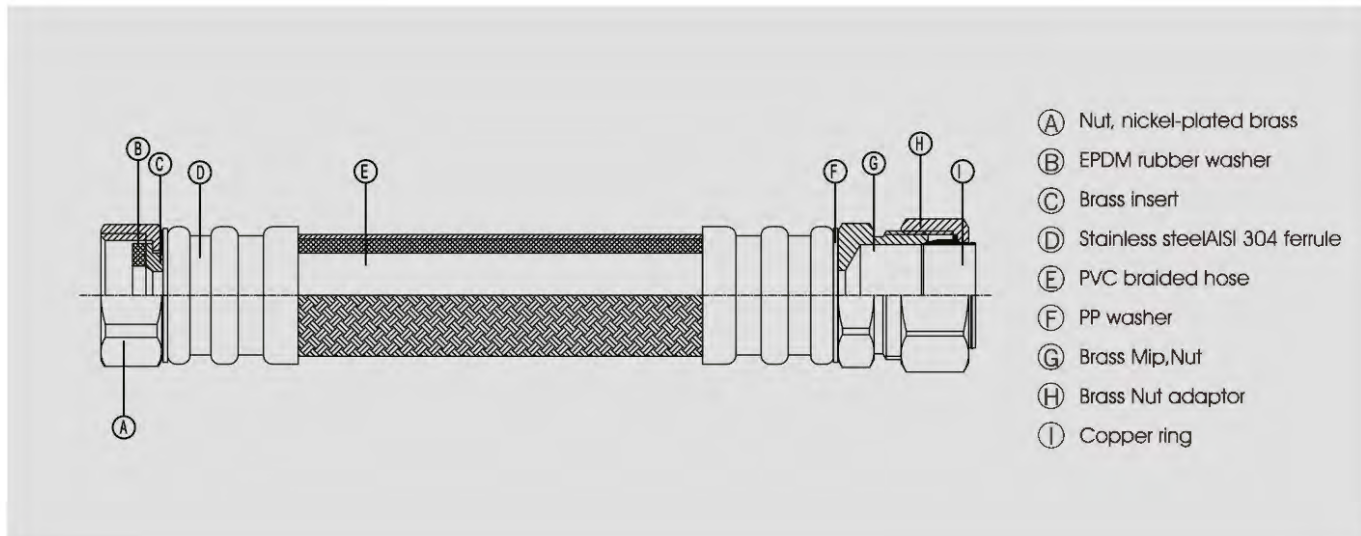

Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature : 82°C / 180°F

Specification

1/2" FIP x 1/2" Push-fit Angle Valve
7/8" BC x 1/2" Push-fit Angle valve

Applications

Sanitary installations: kitchen, toilet, faucet, water heater.

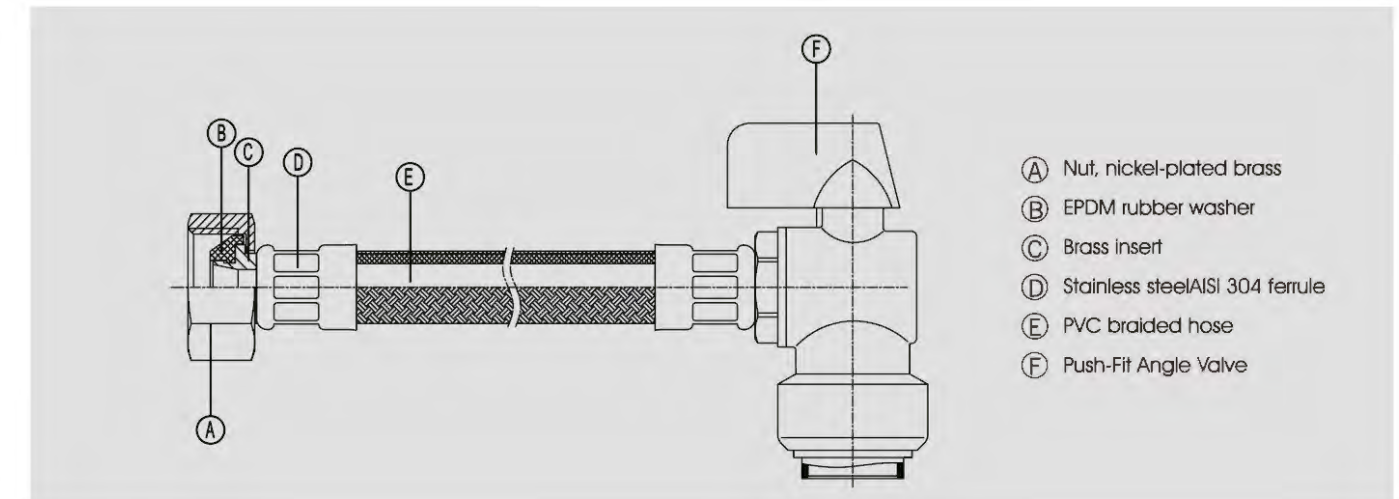

Push-fit

Push-fit Connector, or W / ball Valve



Technical Data


Work pressure: 16Bar / 230PSI
Maximum temperature : 82°C / 180°F

Specification

3/4" FIP X 3/4" Push-fit W / ball valve
3/4" FIP X 1/2" Push-fit W / ball valve
3/4" FIP X 3/4" Push-fit
3/4" FIP X 1/2" Push-fit

Applications

Sanitary installations: kitchen, toilet, faucet, water heater.

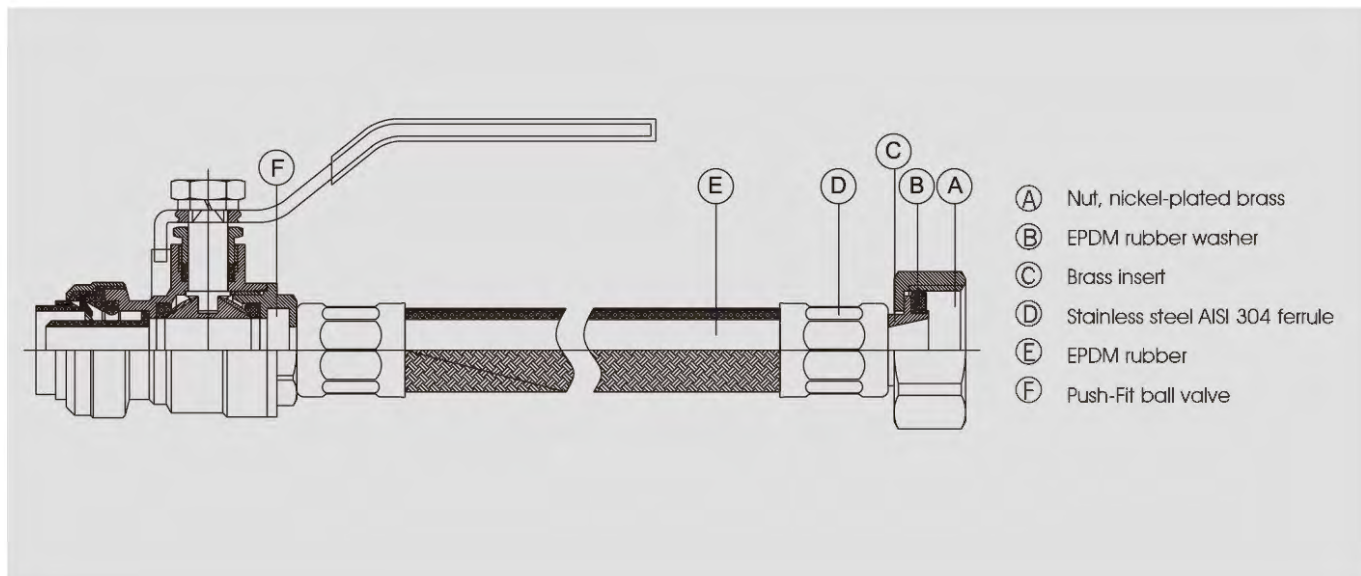

Copper Corrugated Hose

Flexible Hose

Technical Data


Work pressure: 10Bar / 150PSI
Maximum temperature : 82°C / 180°F
Minimum temperature: 0°C / 32°F

Specification

3/4" FIP x 3/4" FIP
3/4" FIP x 3/4" SWEAT
3/4" FIP x 3/4" MIP
3/4" FIP x 3/4" PEX

Applications

Water heater.

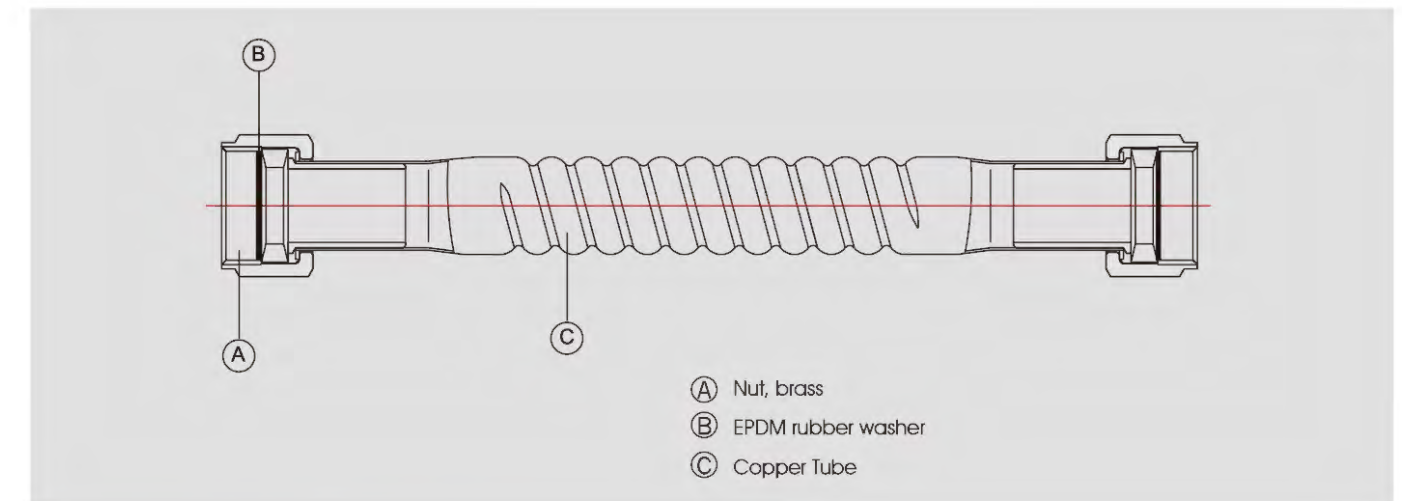



Technical Data


Work pressure: 10Bar / 150PSI
Maximum temperature : 82°C / 180°F

Specification

- | | |
|-----------------------|--------------------------|
| 3/4" FIP x 3/4" FIP | 1-1/4" FIP x 1- 1/4" FIP |
| 3/4" FIP x 1" FIP | 1-1/2" FIP x 1-1/2" FIP |
| 3/4" FIP x 3/4" SWEAT | 2" FIP x 2" FIP |
| 1" FIP x 1" FIP | 3/4" FIP x 3/4" PUSH-FIT |

Applications

Water heater.

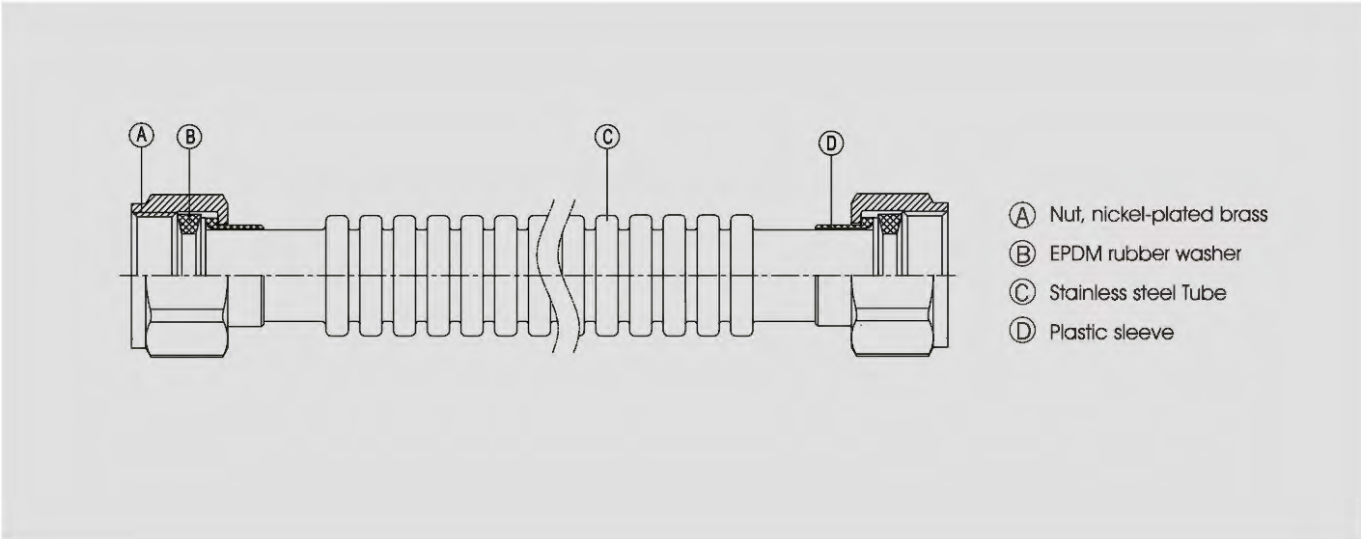

Technical Data


Work pressure: 10Bar / 150PSI
Maximum temperature : 90°C / 194°F
Minimum temperature:0°C / 32°F

Specification

- | | |
|-------------------|-------------------|
| F1/2" x M1/2" | F1/2" x F1/2" |
| F3/4" x M3/4" | F3/4" x F3/4" |
| F1" x M1" | F1" x F1" |
| F1-1/4" x M1-1/4" | F1-1/4" x F1-1/4" |
| F1-1/2" x M1-1/2" | F1-1/2" x F1-1/2" |
| F2" x M2" | F2" x F2" |

Applications

Connection to kitchen,toilet, faucet, water heater, water tank and air-conditioning.

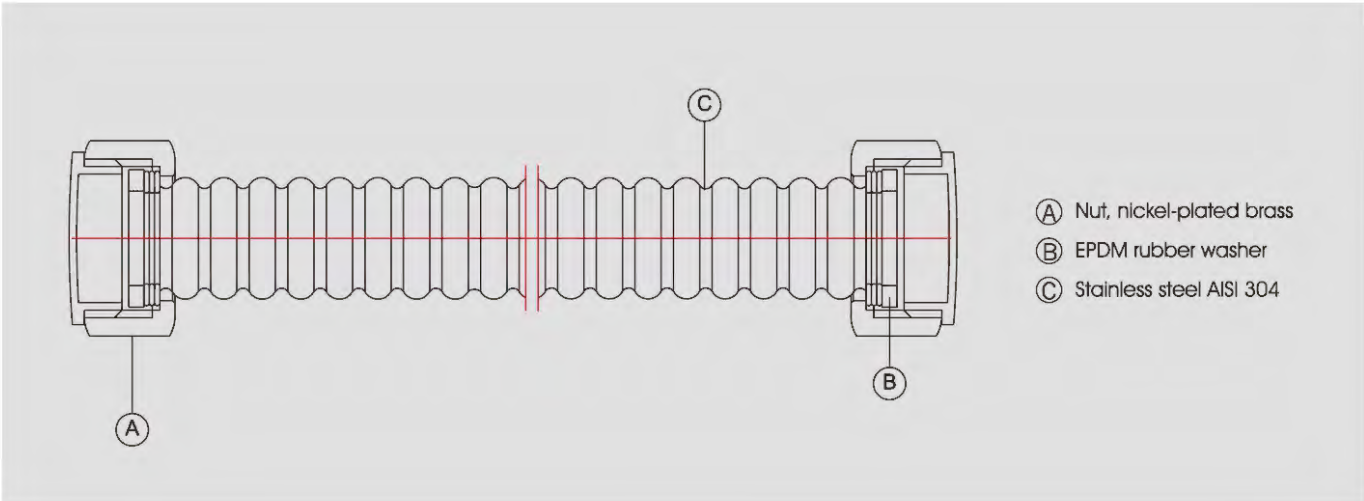



Technical Data


Specification

Work pressure: 10Bar / 150PSI
Maximum temperature : 90°C / 194°F

F1/2" x M1/2"
F1/2" x F1/2"

Applications

Sanitary installations: kitchen, toilet, faucet, water heater.

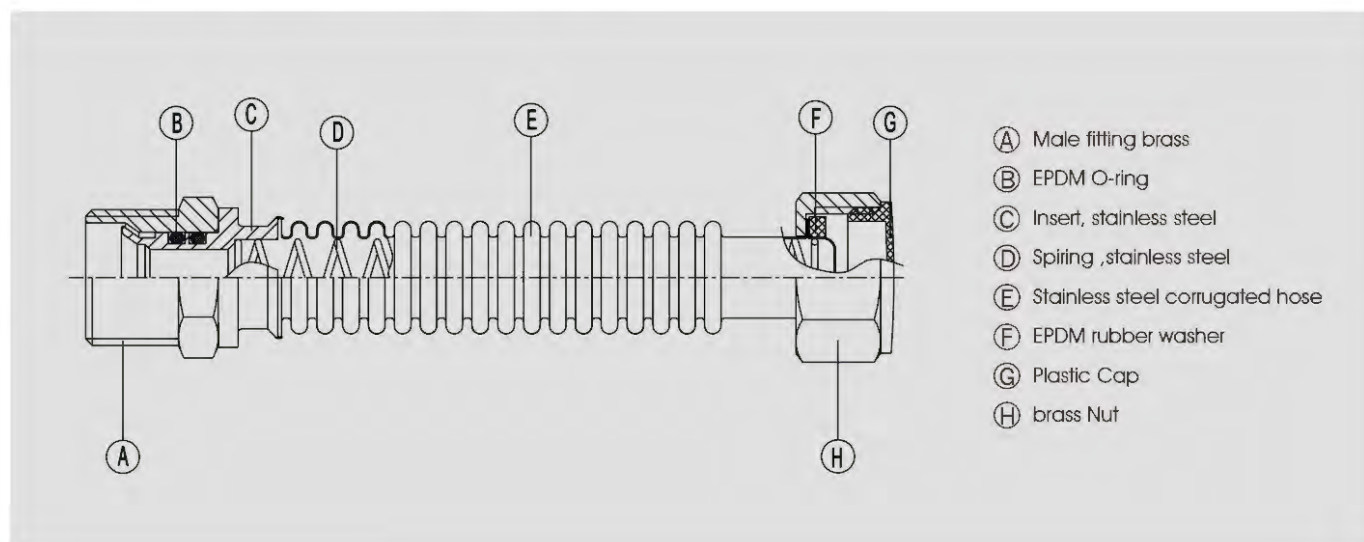

Technical Data


Specification

Work pressure: 10Bar / 150PSI
Maximum temperature : 90°C / 194°F

F1/2" x M10 x 1(S)
F1/2" x M10 x 1(L)

Applications

Sanitary installations: kitchen, Mixer, faucet, water heater.

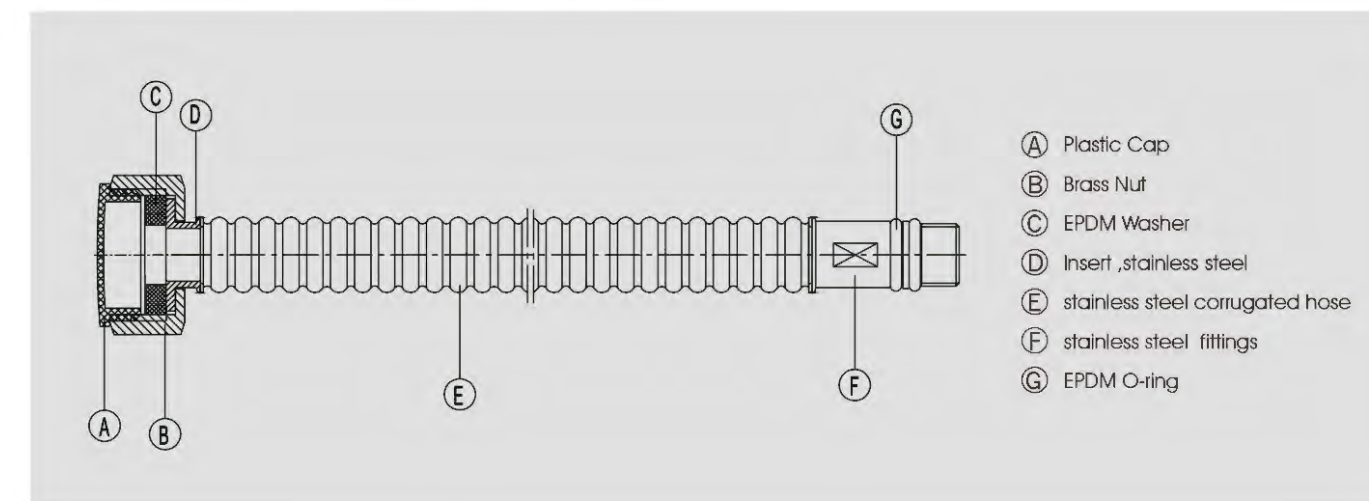

**Technical Data**


Work pressure: 10Bar / 150PSI
 Maximum temperature: 90°C / 194°F
 Minimum temperature: 0°C / 32°F

Specification

3/8" OD x 12" / 20" / 30" / 36"

Applications

Faucet, toilet.

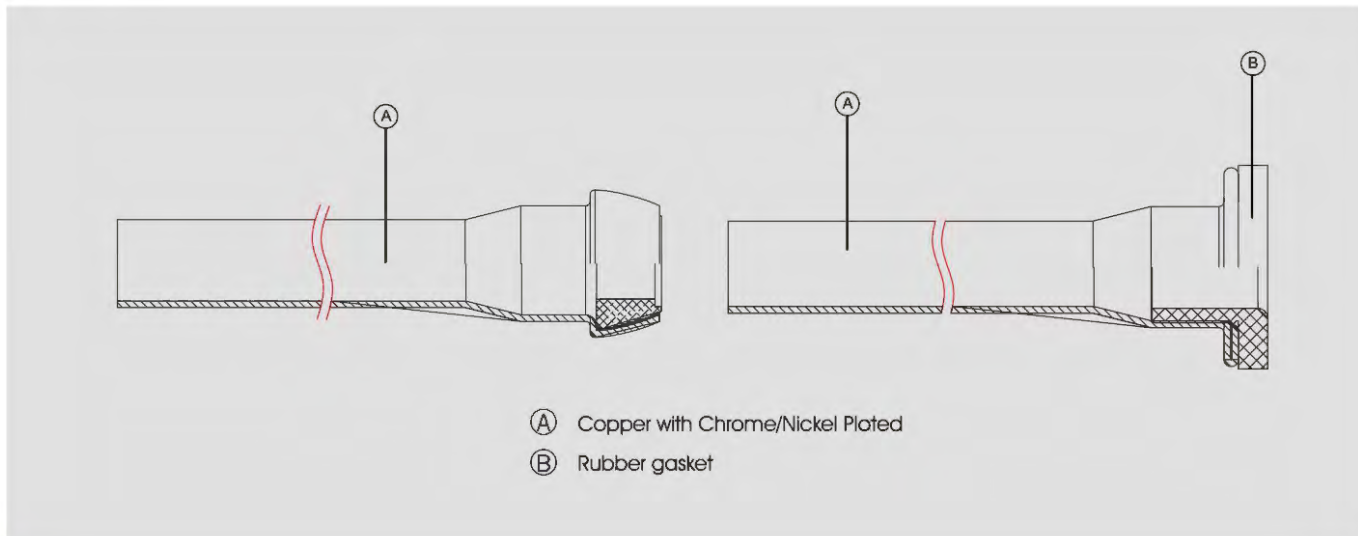**Technical Data**


Work pressure: 10Bar / 150PSI
 Maximum temperature: 82°C / 180°F
 Minimum temperature: 0°C / 32°F

Specification

3/8" OD x 12" / 20" / 30" / 36"

Applications

Faucet, toilet.

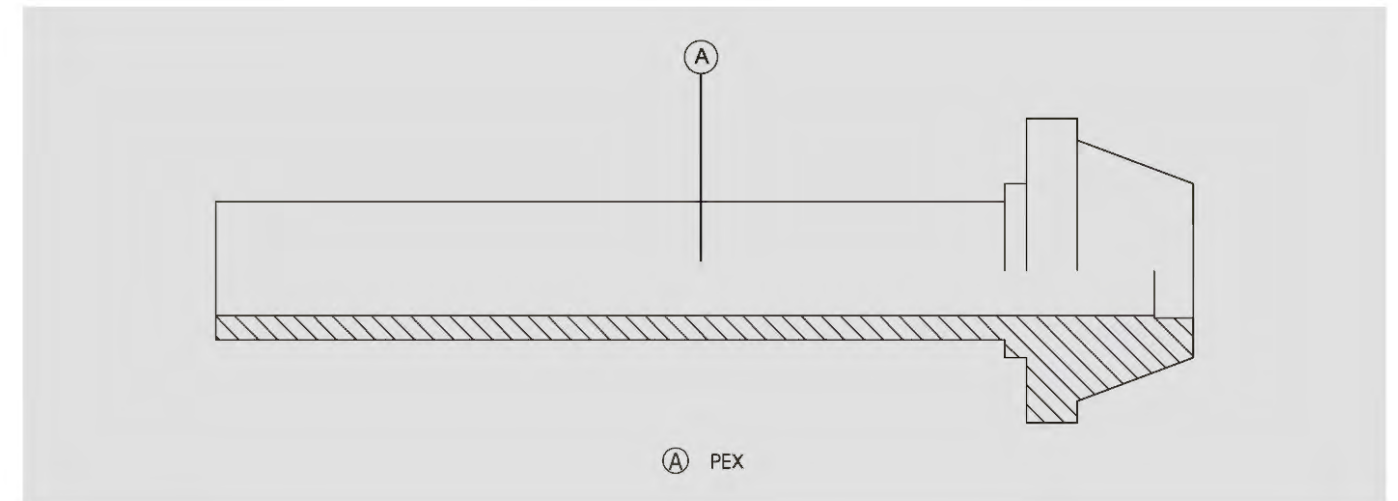



Technical Data


Work pressure: 10Bar / 150PSI
Maximum temperature : 75°C / 165°F

Specification

F1/2" x F1/2"

Applications

Bathroom.

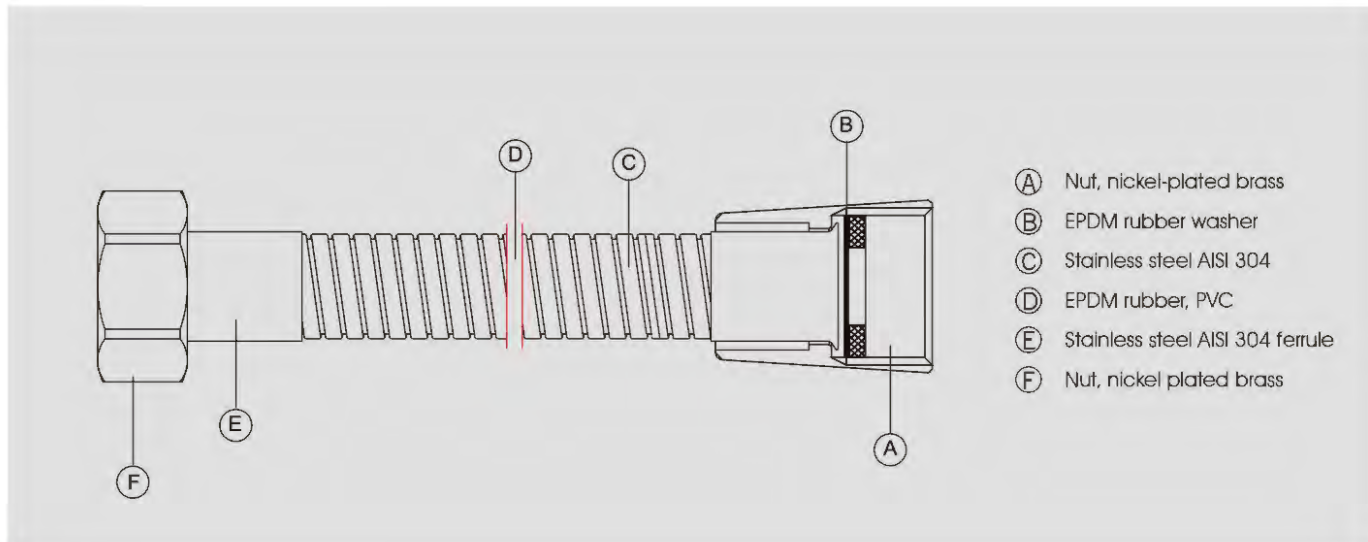

Technical Data


Work pressure: 10Bar / 150PSI
Maximum temperature : 75°C / 165°F

Specification

F1/2" X F1/2"

Applications

Bathroom.

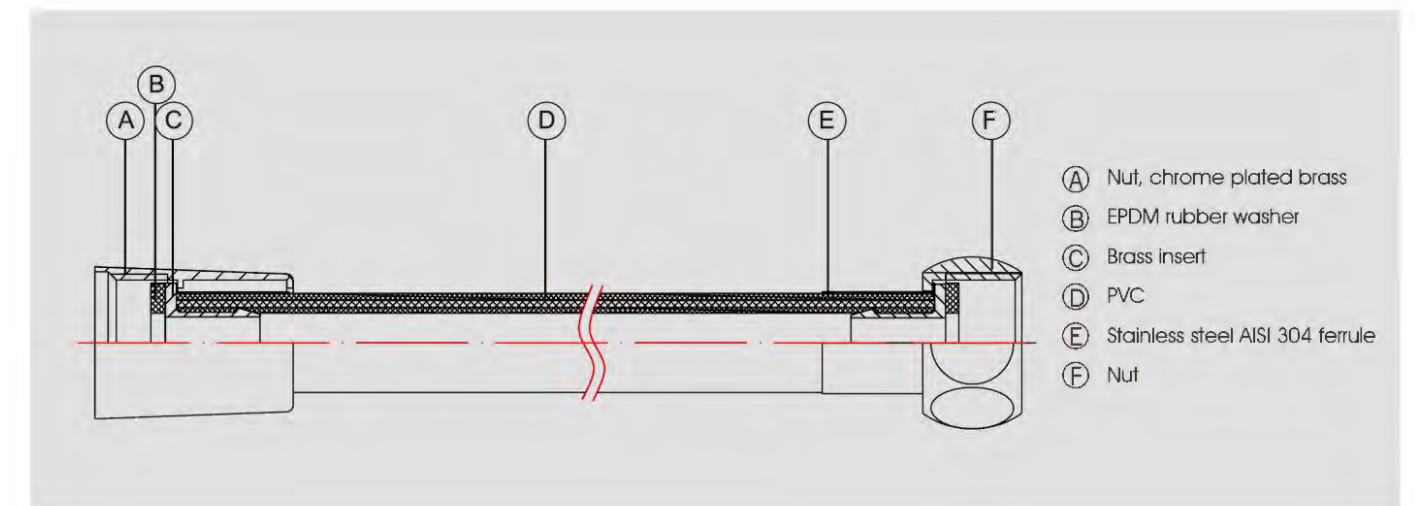



Technical Data


Work pressure: 10Bar / 150PSI
Maximum temperature : 75°C / 165°F

Specification

F1/2" x F1/2"

Applications

Bathroom.

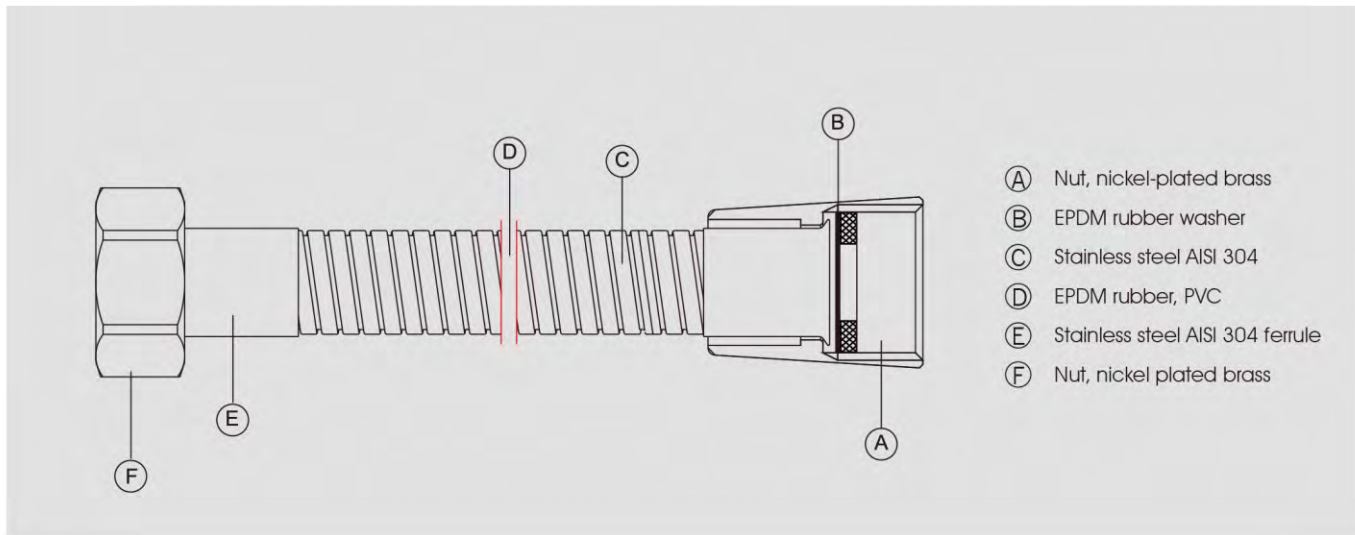

Technical Data


Work pressure: 10Bar / 150PSI
Maximum temperature : 75°C / 165°F

Specification

F1/2" X F1/2"

Applications

Bathroom.

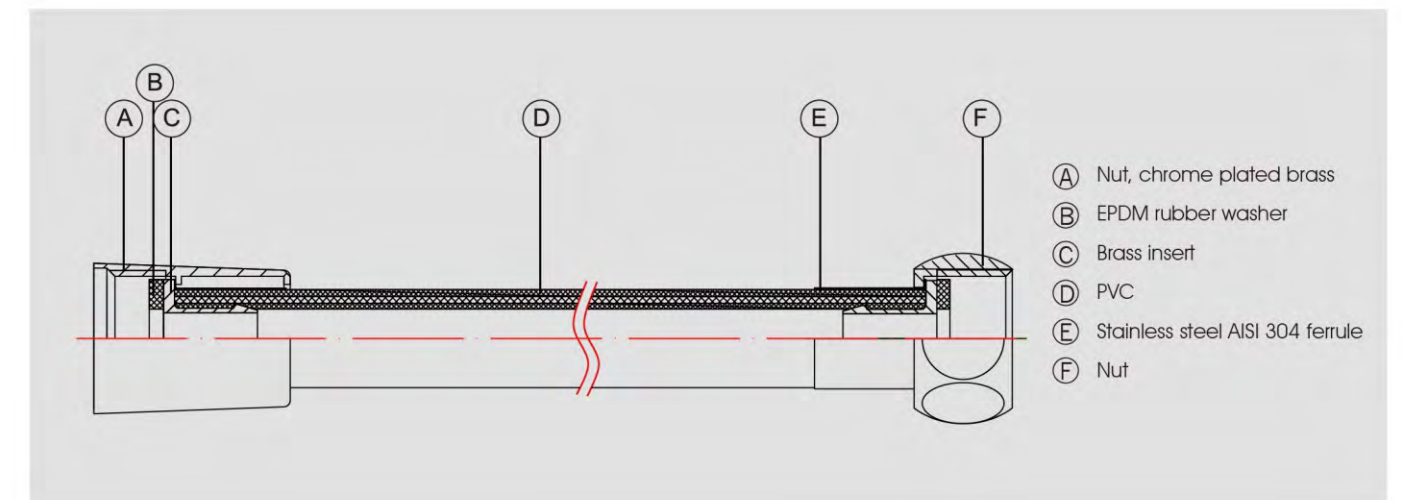



Technical Data


Work pressure: 10Bar / 150PSI
Maximum temperature : 75°C / 165°F

Specification

F1/2" x F1/2"

Applications

Bathroom.

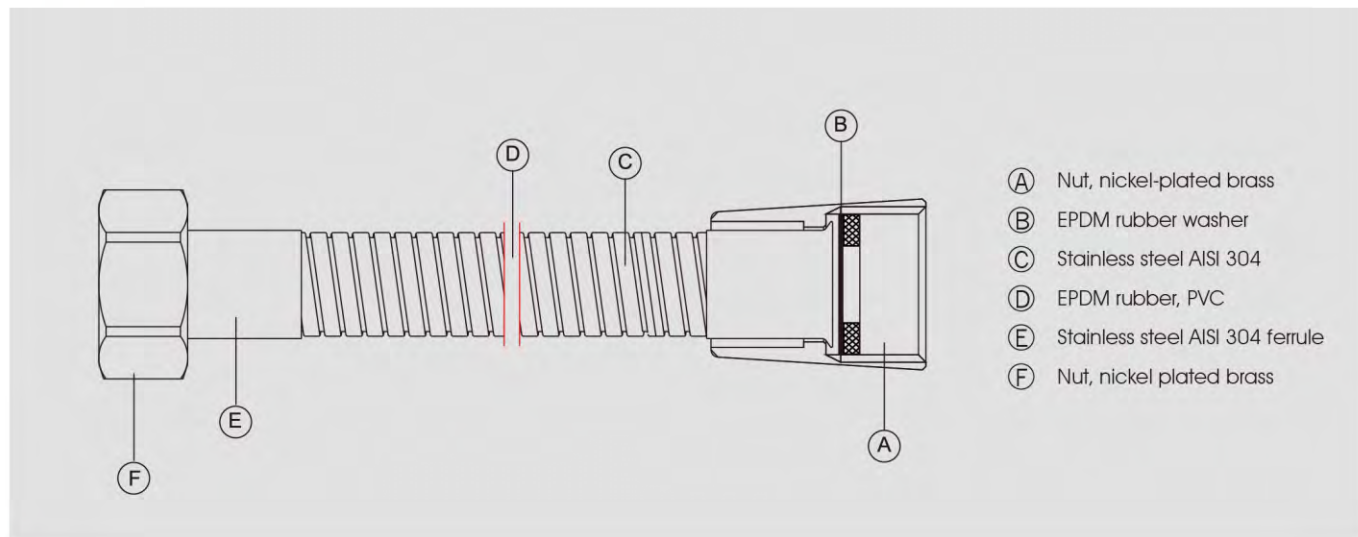

Technical Data


Work pressure: 10Bar / 150PSI
Maximum temperature : 75°C / 165°F

Specification

F1/2" X F1/2"

Applications

Bathroom.

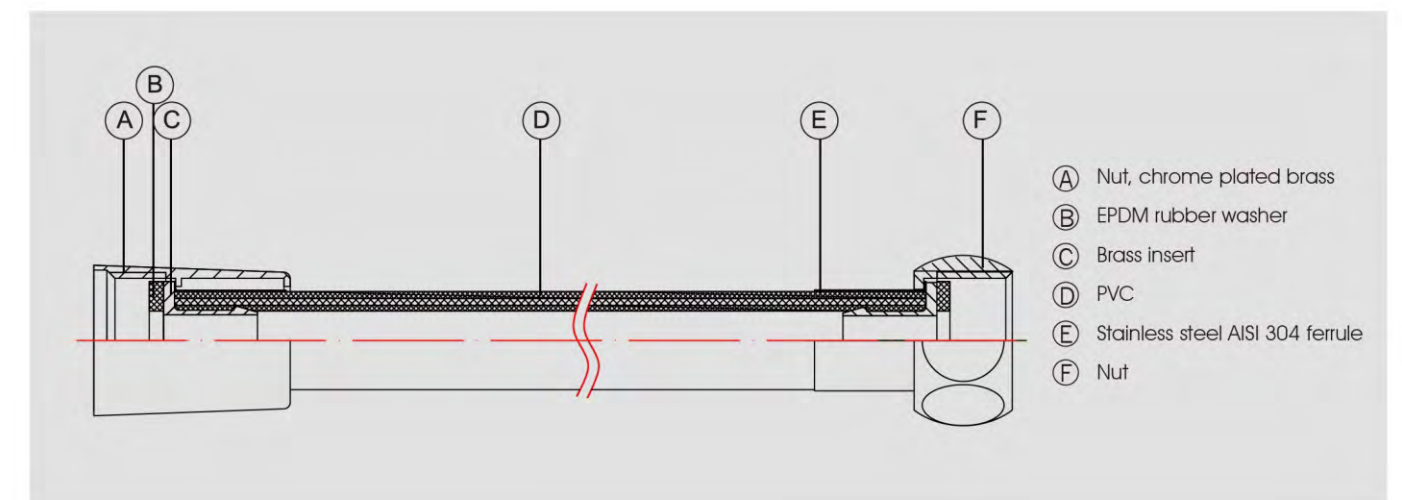



Technical Data


Work pressure: 10Bar / 150PSI
Maximum temperature : 75°C / 165°F

Specification

F1/2" x F1/2"

Applications

Bathroom.

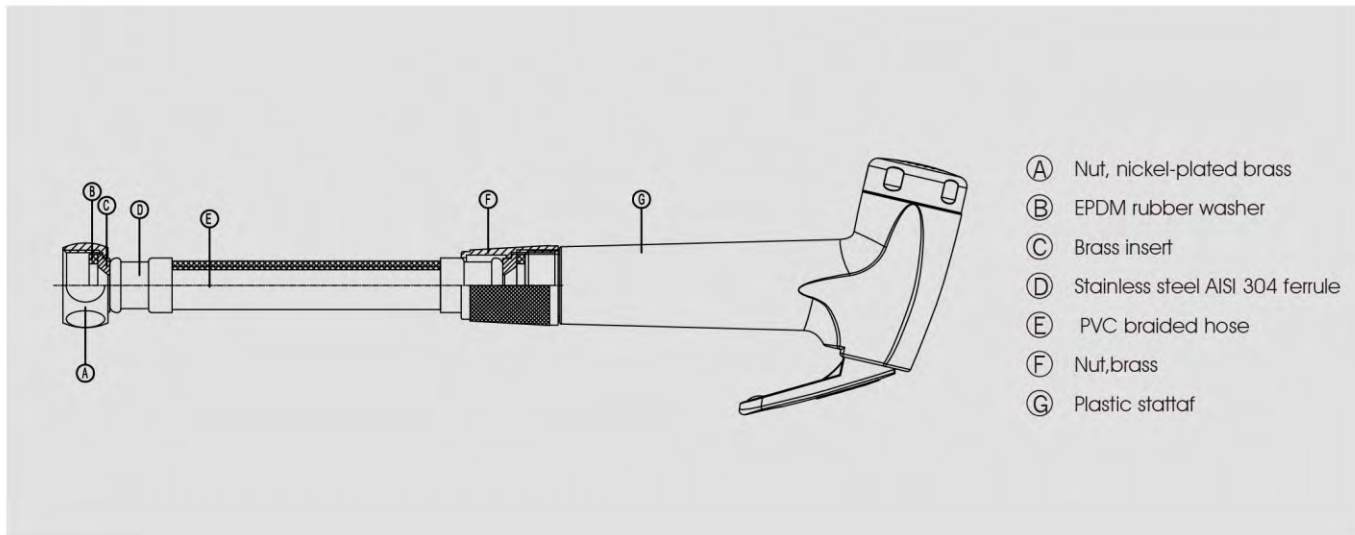

Technical Data


Work pressure: 10Bar / 150PSI
Maximum temperature : 90°C / 194°F


Specification

F1/2" x M15 x1

Applications

Connection to faucets for bath and kitchen.

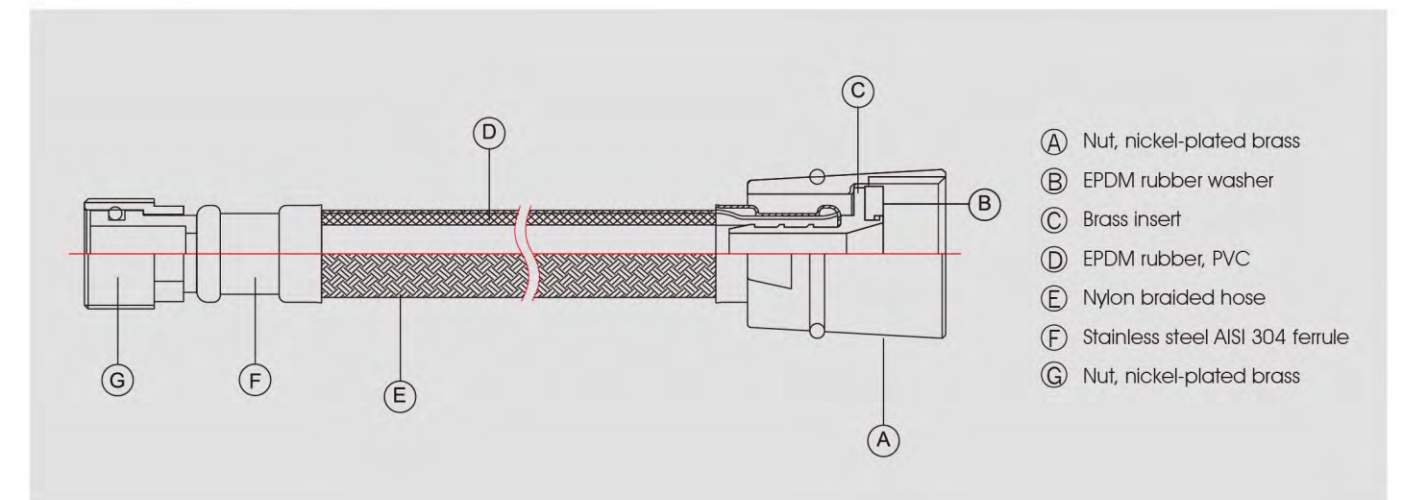

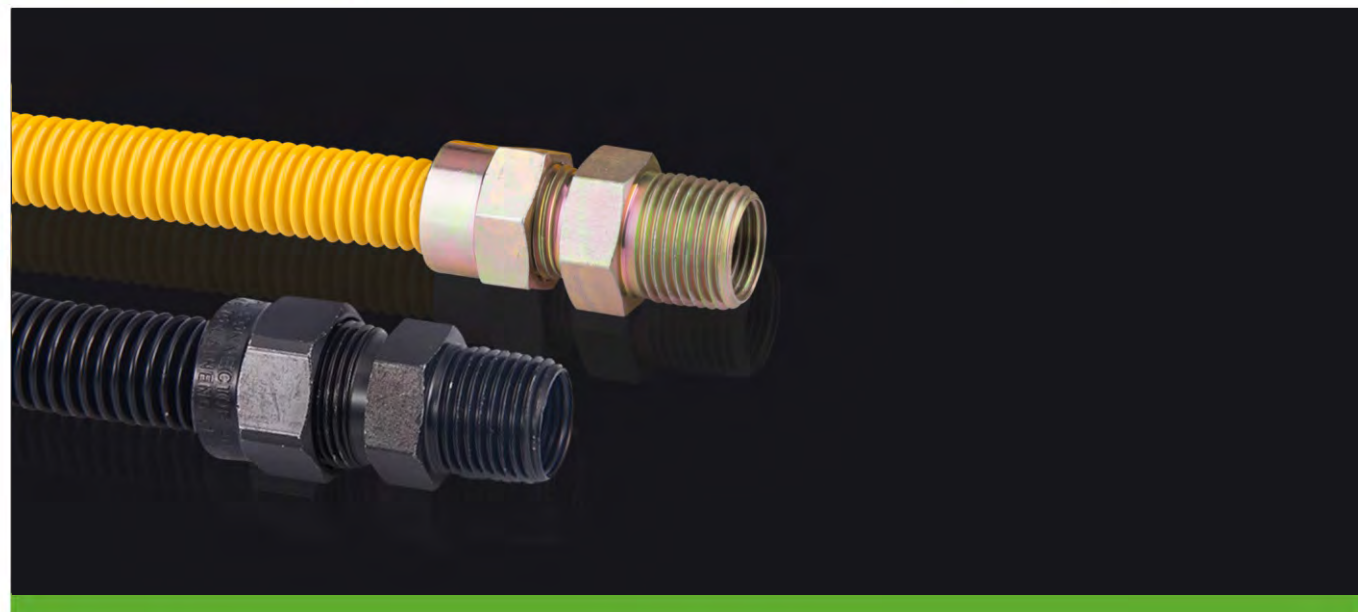

Technical Data

Operating temperature: -40°C~65°C / -40°F~150°F

Maximum pressure: ≤1/2PSI

Durability at high temperature test:

Withstands a temperature of 427°C / 800°F

Medium: LP gas, Natural gas

Certificate Standard:


ANSI Z21.24/CSA6.10, ANSI Z21.75/CSA6.27

Specification

ID	Connction
1/4" ID (3/8"OD)	3/8"FIP、3/8"MIP、1/2"FIP、1/2"MIP
3/8" ID (1/2"OD)	3/8"FIP、3/8"MIP、1/2"FIP、1/2"MIP、3/4"FIP、3/4"MIP
1/2"ID (5/8"OD)	1/2"FIP、1/2"MIP、3/4"FIP、3/4"MIP
3/4"ID (1"OD)	3/4"FIP、3/4"MIP、1"FIP、1"MIP

Applications

Dryer, boiler, fireplace, space heater, tankless water heater, manufactured home, oven, BBQ grill.

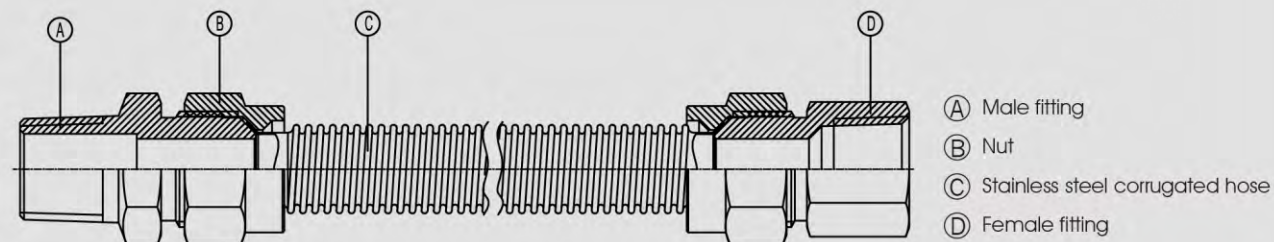

- (A) Male fitting
- (B) Nut
- (C) Stainless steel corrugated hose
- (D) Female fitting

Technical Data

Working pressure : <16Bar / 230PSI

Working temperature : <80°C / 180°F

Specification


Suitable medium: natural gas, artificial gas, mixed gas, LPG, air intermixture

Connection specification : M18 X 1.5-F1/2

Length : 20", 40"

Applications

Hoses which connect gas source and gas appliance.

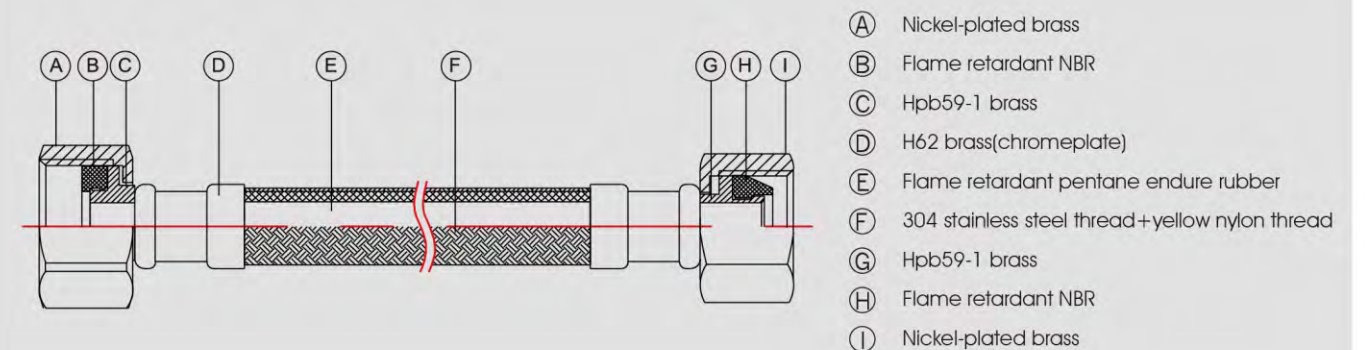

- (A) Nickel-plated brass
- (B) Flame retardant NBR
- (C) Hpb59-1 brass
- (D) H62 brass(chromeplate)
- (E) Flame retardant pentane endure rubber
- (F) 304 stainless steel thread+yellow nylon thread
- (G) Hpb59-1 brass
- (H) Flame retardant NBR
- (I) Nickel-plated brass





ANGLE VALVE

Elaborate technics ensure exterior dignity and elegance.
Advanced technology is just the assurance of excellent performance.
Apart from the exterior expression the simple style extends into function.



Technical Data


Work pressure: 10Bar / 150PSI
Maximum temperature : 90°C / 194°F

Specification

G1/2" x G3/4"
G1/2" x G1/2"
G1/2" x G3/8"

Applications

Drinking and washing water system.

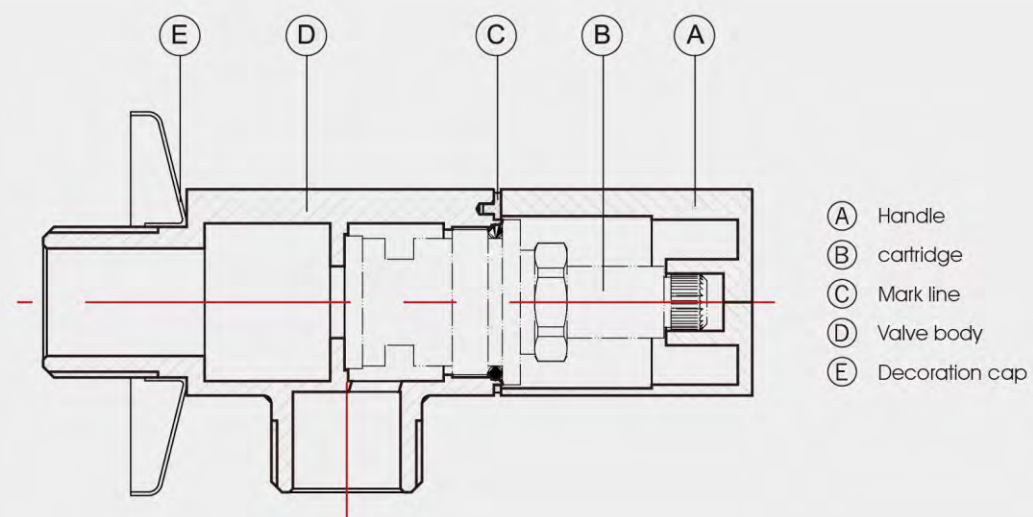

AP001

Specification:
G1/2" x 1/2", G1/2" x 3/8",
G1/2" x 3/4"



AP002

Specification:
G1/2" x 1/2", G1/2" x 3/8",
G1/2" x 3/4"



AP003

Specification:
G1/2" x 1/2", G1/2" x 3/8",
G1/2" x 3/4"



AP004

Specification:
G1/2" x 1/2", G1/2" x 3/8",
G1/2" x 3/4"



AP005

Specification:
G1/2" x 1/2", G1/2" x 3/8",
G1/2" x 3/4"



AP006

Specification:
G1/2" x 1/2", G1/2" x 3/8",
G1/2" x 3/4"



AP007

Specification:
G1/2" x 1/2", G1/2" x 3/8",
G1/2" x 3/4"

**AP008**

Specification:
G1/2" x 1/2", G1/2" x 3/8",
G1/2" x 3/4"

**AP009**

Specification:
G1/2" x 1/2", G1/2" x 3/8",
G1/2" x 3/4"

**AP010**

Specification:
G1/2" x 1/2", G1/2" x 3/8",
G1/2" x 3/4"

**AP011**

Specification:
G1/2" x 1/2", G1/2" x 3/8",
G1/2" x 3/4"

**AP012**

Specification:
G1/2" x 1/2", G1/2" x 3/8",
G1/2" x 3/4"

**AP013**

Specification:
G1/2" x 1/2", G1/2" x 3/8",
G1/2" x 3/4"

**AP018**

Specification:
G1/2" x 1/2", G1/2" x 3/8",
G1/2" x 3/4"

**AP026**

Specification:
G1/2" x G1/2" x G1/2"

**AP027**

Specification:
G1/2" x 1/2"

**AP029**

Specification:
G1/2" x 1/2", G1/2" x 3/8"

**AP033**

Specification:
G1/2" x 1/2", G1/2" x 3/8",
G1/2" x 3/4"



AP036

Specification:
G1/2" x 1/2", G1/2" x 3/8"

**AP038**

Specification:
G1/2" x G1/2" x G1/2"

**AP045**

Specification:
G1/2" x 1/2"

**AP063**

Specification:
G1/2" x 1/2"

**AP101**

Specification:
G1/2" x 1/2"

**AP102**

Specification:
G1/2" x G1/2" x G1/2"

**AP111**

Specification:
G1/2" x 1/2", G1/2" x G5/8"

**AP114**

Specification:
G1/2" x G1/2"

**AP116**

Specification:
G1/2" x 1/2", G1/2" x 3/8"
G1/2" x 3/4"

**AP117**

Specification:
G1/2" x 1/2"

**AP121**

Specification:
G1/2" x 1/2"

**AP122**

Specification:
G1/2" x 1/2"




AP059

M3/4*M3/4



AP104

M1/2*M1/2

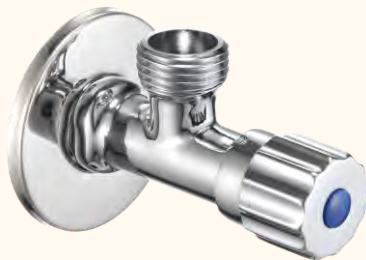

AP112

M1/2*M1/2



AP147

F1/2*M1/2



AP222

M1/2*M3/8, M1/2*M1/2,
M1/2*M3/4



AP228

M1/2*M1/2



AP230

M1/2*M1/2*M1/2



AP231

M1/2*M1/2



AP238

M1/2*M1/2



AP240

M1/2*M1/2



AP004

M1/2*M1/2



AP251

M1/2*M1/2*M1/2





Technical Data


Work pressure: 10 Bar / 150PSI
Maximum temperature : 90°C / 194°F

Specification

5/8" OD × 1/4" OD.Com	1/2" FIP × 1/4" OD.Com	1/2" SWEAT × 1/2" OD.Com
5/8" OD × 3/8" OD.Com	1/2" FIP × 3/8" OD.Com	1/2" SWEAT × 5/8" OD.Com
5/8" OD × 1/2" OD.Com	1/2" FIP × 1/2" OD.Com	1/2" PEX × 3/8" OD.Com
5/8" OD × 7/16" & 1/2" Slip-Joint	1/2" FIP × 7/16" & 1/2" Slip-Joint	1/2" PEX × 1/2" PEX
3/8" FIP × 3/8" OD.Com	1/2" SWEAT × 1/4" OD.Com	1/2" CPVC×3/8" OD.Com
3/8" FIP × 1/2" OD.Com	1/2" SWEAT × 3/8" OD.Com	1/2" CPVC×1/2" OD.Com

Applications

Control water flow to household plumbing fixtures.

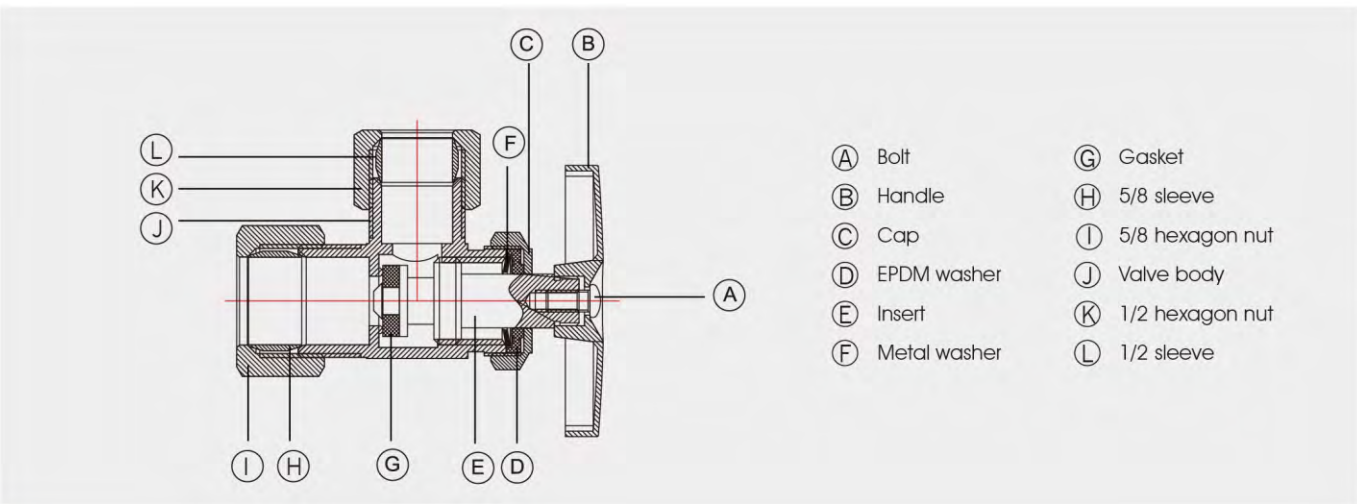

AP305

Specification:
All size for North America.



AP310

Specification:
All size for North America.



AP312

Specification:
All size for North America.



AP342

Specification:
All size for North America.



AP352

Specification:
All size for North America.



AP362


Specification:
All size for North America.



BIBCOCK

People oriented, healthy and environmental-friendly materials.
Natural and smooth line with attractive fashion style, it's the first choice of popular model.



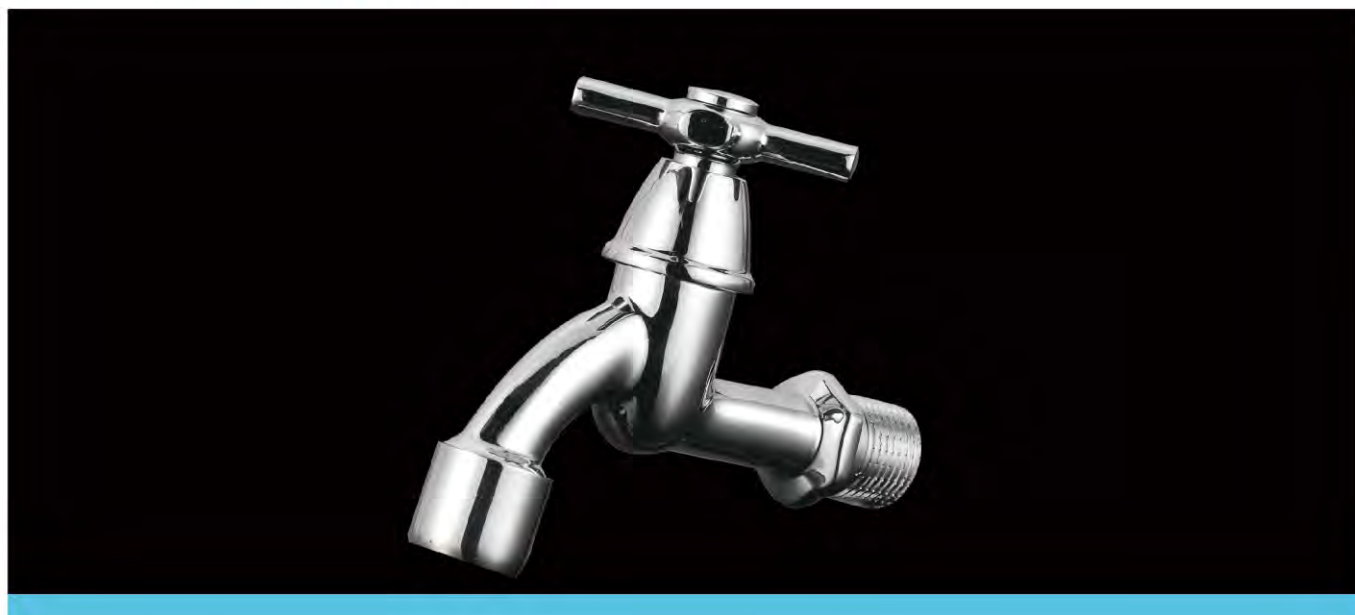

Technical Data


Work pressure: 10Bar
Maximum temperature: 90°C / 194°F

Specification

G1/2" x G1/2"

Applications

Drinking and washing water system.

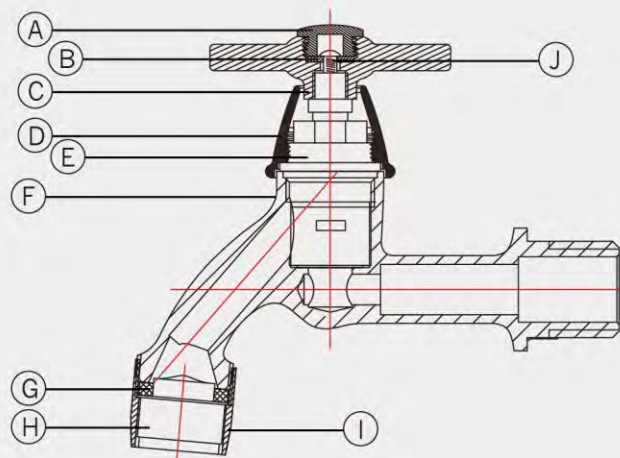

- Ⓐ Decoration buckle
- Ⓑ Spring gasket
- Ⓒ Cross handle wheel
- Ⓓ Decoration cover of handle
- Ⓔ Fast open insert
- Ⓕ Valve body
- Ⓖ Flat gasket
- Ⓗ Bubbler
- Ⓘ Brass sleeve of outlet
- ⓵ Screw fastener

AG001

Washing Machine Bibcock



AG002

Bibcock



AG003

Long Washing Machine Bibcock



AG004

Long Bibcock



AG005

Extended Bibcock



AG006

Extended Washing Machine Bibcock



AG011

Bibcock

**AG012**

Washing Machine Bibcock

**AG014**

Long Bibcock

**AG015**

Long Washing Machine Bibcock

**AG016**

Washing Machine Bibcock

**AG016-1**

Bibcock

**AG020**

Dual-use Bibcock

**AG020-6**

Dual-use Bibcock

**AG021**

Bibcock

**AG022**

Washing Machine Bibcock

**AG023**

Long Bibcock

**AG032**

Washing Machine Bibcock



AG033

G3/4 Feed Line Bibcock

**AG039**

Washing Machine Bibcock

**AG041****AG200**

Washing Machine Bibcock

**AG201**

Washing Machine Bibcock

**AG202**

Washing Machine Bibcock

**AG203**

Dual-use Bibcock

**AG205**

Washing Machine Bibcock

**AG206**

Bibcock

**AG207**

Bibcock

**AG208**

Long Bibcock

**AG212**

Bibcock



FLOOR DRAIN

In the competitive environment of manufacturing, we know that we must meet your specifications for cost and quality. Everything we make is engineered for efficient equipment utilization and quality checked to exacting standards. This commitment to quality parts manufactured to the highest standards in tolerance and finish, has earned us our reputation for excellence. Range of brass (alloy) and stainless steel floor drains with a variety of specifications. The product complies with the requirements of GB/T-27710.



CP001

Specification:
100.5*100.5
106*106



CP002

Specification:
100.5*100.5



CP003

Specification:
105*105



CP010

Specification:
100*100



CP014

Specification:
φ 80



CP015

Specification:
100*100



CP020

Specification:
φ 110



CP021

Specification:
100*100
120*120



CP050

Specification:
100*100



CP051

Specification:
φ 110



CP052

Specification:
120*120



CP053

Specification:
φ 120



CP105

Specification:
100*100

**CP214**

Specification:
120*120

**CP215**

Specification:
φ 100

**CP1201**

Specification:
100*100

**CP1202**

Specification:
100*100

**CP1203**

Specification:
100*100

**CP1204**

Specification:
100*100

**CP1205A**

Specification:
100*100

**CP1206A**

Specification:
100*100

**CP1206B**

Specification:
100*100

**CP2201A**

Specification:
100*100

**CP2201B**

Specification:
100*100



CP2201C

Specification:
100*100



CP004

Specification:
105*105



CP2202A

Specification:
100*100



CP2202C

Specification:
100*100



CP2204A

Specification:
100*100



CP2205A

Specification:
100*100



CP2205B

Specification:
100*100




CP2101A

Specification:
100*100



CP2102A

Specification:
100*100



CP2103A

Specification:
80*300



CP2104A

Specification:
80*300



CP2106A

Specification:
80*200





DRAINER

The Latest Technology

When it comes to technology, FANSKI has consistently led the industry. We understand the benefits of electronic commerce and are constantly striving to implement technology solutions that will enable us to serve you better. The product complies with the requirements of JCT 932 and other international standards required by the client.

CM1301A

Specification:
Φ 32mm

**CM1302A**

Specification:
Φ 32mm

**CM1303A**

Specification:
Φ 32mm

**CM1304A**

Specification:
Φ 32mm

**CM2301A**

Specification:
Φ 32mm

**CM2302A**

Specification:
Φ 32mm





SHOWER HEAD

Be inspired by our passion for water! Fanski does all it can to add beauty and sensuality to your encounters with water. After all, we know how nice it is to shower and bathe when you have a visually and physically flattering emotive design that is comfortable to hold and indulges the senses. "Made by Fanski" is synonymous with "Designed for Life". For almost many years now, we have been using the art of engineering and our eye for detail to develop innovative products, technologies and functions with a long lifetime. Even when great demand is placed on them. The product complies with the requirements of GB/T-23447 and other international standards required by the client.

DL1008A

Specification:
G1/2

**DL1011A**

Specification:
G1/2

**DL3011A**

Specification:
G1/2

**DL3012A**

Specification:
G1/2

**DF504**

Specification:
G1/2

**DF121**

Specification:
G1/2

