

THE BEST SOLUTION FOR YOUR BATHROOM

Linear Shower Drains




VILLOREN



VILLOREN



FORTE



▶ FORTE DIRECT SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.100P.20.01	20 CM	12
BFM.100P.30.01	30 CM	12
BFM.100P.40.01	40 CM	12
BFM.100P.50.01	50 CM	12
BFM.100P.60.01	60 CM	12
BFM.100P.70.01	70 CM	12
BFM.100P.80.01	80 CM	12



▶ FORTE ROTATION SHOWER DRAIN


CODE	SIZE	PCS IN
BFM.100Y.20.01	20 CM	12
BFM.100Y.30.01	30 CM	12
BFM.100Y.40.01	40 CM	12
BFM.100Y.50.01	50 CM	12
BFM.100Y.60.01	60 CM	12
BFM.100Y.70.01	70 CM	12
BFM.100Y.80.01	80 CM	12



▶ FORTE 100 DIRECT SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.100K.20.01	20 CM	12
BFM.100K.30.01	30 CM	12
BFM.100K.40.01	40 CM	12
BFM.100K.50.01	50 CM	12
BFM.100K.60.01	60 CM	12
BFM.100K.70.01	70 CM	12
BFM.100K.80.01	80 CM	12

FORTE SHOWER DRAIN

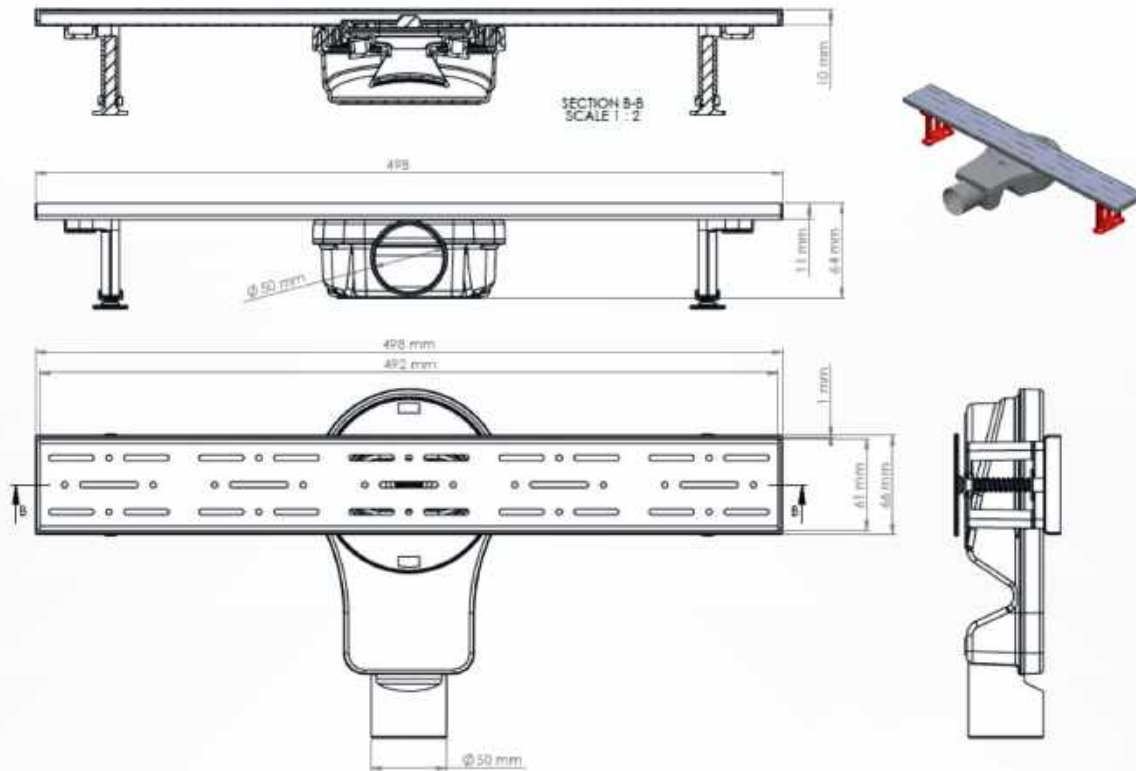

DN 50 Horizontal and vertical outlet - compatible with PVC pipe connections, blocking odor by water (285mg). The flow rate is 48 liters/min. Resistant against external chemical effects, operating temperature is between -30°C and $+75^{\circ}\text{C}$. The and grid is made of 304 grade stainless steel.

Advantages

It has a quality and stylish-looking with its 304 grade stainless steel grid. It can be easily applied on the floor. It prevents the bad smell coming from the waste water system with its two cleppers o'dor blocking and "S TYPE" outlet . It can be adjusted depending on the screed concrete with its adjustable height legs. High resistance against the organic and inorganic chemicals, resistant against most acidic and salty aqueous oxidation.

Areas of Usage

Common use of bathroom shower, hospital and hotel shower areas, locker-room shower areas etc.

Customized Production

Grid patterns can be chosen in gold, bronze or other optional colors in accordance with your desire.

Warning

It is not recommended to use high-density cleaners for a long-time.

* The referring size is 50 cm

ALFA



▶ ALFA DIRECT SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.101P.20.01	20 CM	12
BFM.101P.30.01	30 CM	12
BFM.101P.40.01	40 CM	12
BFM.101P.50.01	50 CM	12
BFM.101P.60.01	60 CM	12
BFM.101P.70.01	70 CM	12
BFM.101P.80.01	80 CM	12



▶ ALFA ROTATION SHOWER DRAIN


CODE	SIZE	PCS IN
BFM.101Y.20.E1	20 CM	12
BFM.101Y.30.E1	30 CM	12
BFM.101Y.40.E1	40 CM	12
BFM.101Y.50.E1	50 CM	12
BFM.101Y.60.E1	60 CM	12
BFM.101Y.70.E1	70 CM	12
BFM.101Y.80.E1	80 CM	12



▶ ALFA 100 DIRECT SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.101K.20.E1	20 CM	12
BFM.101K.30.E1	30 CM	12
BFM.101K.40.E1	40 CM	12
BFM.101K.50.E1	50 CM	12
BFM.101K.60.E1	60 CM	12
BFM.101K.70.E1	70 CM	12
BFM.101K.80.E1	80 CM	12

ALFA SHOWER SHOWER DRAIN

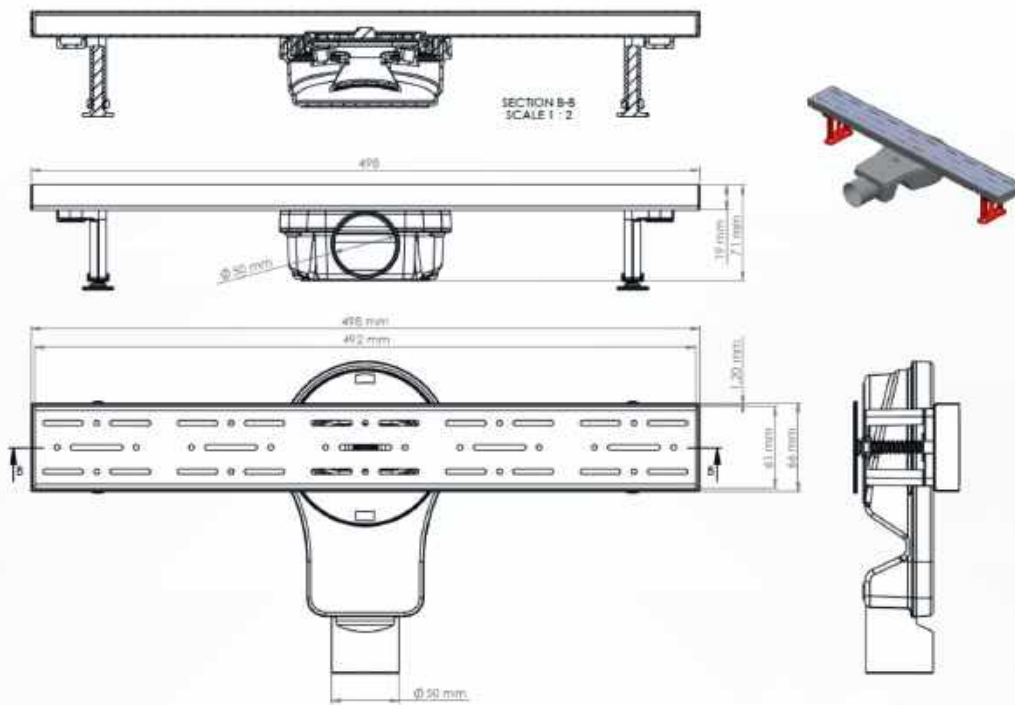

DN 50 Horizontal and vertical outlet - compatible with PVC pipe connections, blocking odor by water (285mg). The flow rate is 48 liters/min. Resistant against external chemical effects, operating temperature is between -30°C and $+75^{\circ}\text{C}$. The and grid is made of 304 grade stainless steel.

Advantages

It has a quality and stylish-looking with its 304 grade stainless steel grid. It can be easily applied on the floor. It prevents the bad smell coming from the waste water system with its two cleppers o'dor blocking and "S TYPE" outlet . It can be adjusted depending on the screed concrete with its adjustable height legs. High resistance against the organic and inorganic chemicals, resistant against most acidic and salty aqueous oxidation.

Areas of Usage

Common use of bathroom shower, hospital and hotel shower areas, locker-room shower areas etc.

Customized Production

Grid patterns can be chosen in gold, bronze or other optional colors in accordance with your desire.

Warning

It is not recommended to use high-density cleaners for a long-time.

* The referring size is 50 cm

GALA



► GALA DIRECT SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.102P.20.01	20 CM	12
BFM.102P.30.01	30 CM	12
BFM.102P.40.01	40 CM	12
BFM.102P.50.01	50 CM	12
BFM.102P.60.01	60 CM	12
BFM.102P.70.01	70 CM	12
BFM.102P.80.01	80 CM	12



► GALA ROTATION SHOWER DRAIN


CODE	SIZE	PCS IN
BFM.102Y.20.E1	20 CM	12
BFM.102Y.30.E1	30 CM	12
BFM.102Y.40.E1	40 CM	12
BFM.102Y.50.E1	50 CM	12
BFM.102Y.60.E1	60 CM	12
BFM.102Y.70.E1	70 CM	12
BFM.102Y.80.E1	80 CM	12



► GALA 100 DIRECT SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.102K.20.E1	20 CM	12
BFM.102K.30.E1	30 CM	12
BFM.102K.40.E1	40 CM	12
BFM.102K.50.E1	50 CM	12
BFM.102K.60.E1	60 CM	12
BFM.102K.70.E1	70 CM	12
BFM.102K.80.E1	80 CM	12

GALA SHOWER DRAIN

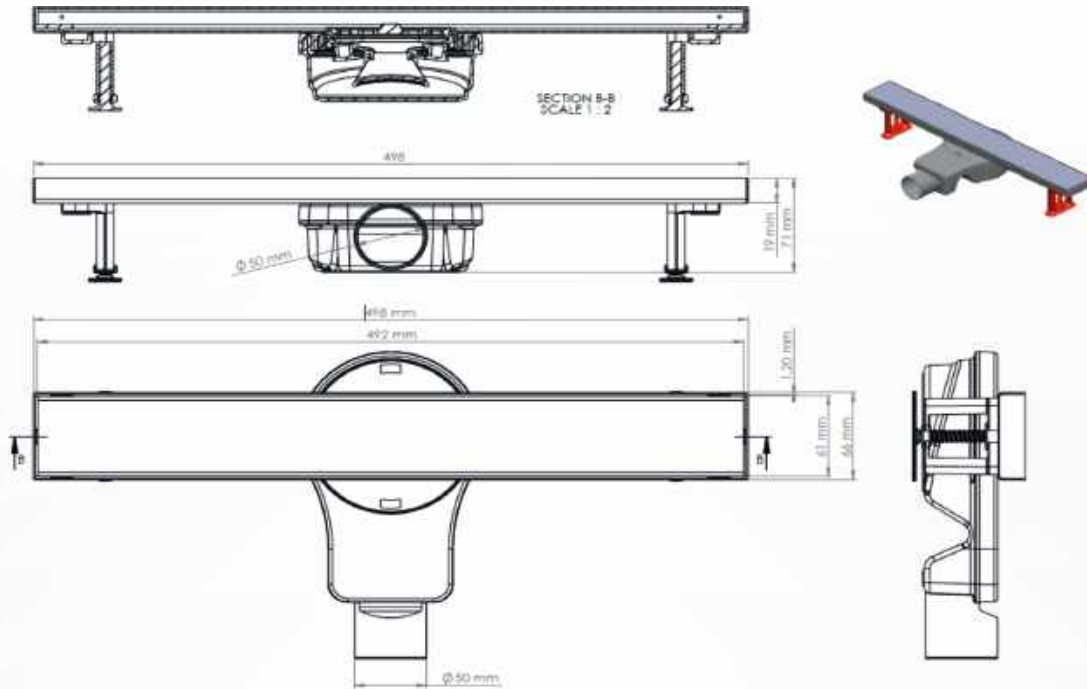

DN 50 Horizontal and vertical outlet - compatible with PVC pipe connections, blocking odor by water (285mg). The flow rate is 48 liters/min. Resistant against external chemical effects, operating temperature is between -30°C and +75°C. The and grid is made of 304 grade stainless steel.

Advantages

It has a quality and stylish-looking with its 304 grade stainless steel grid. It can be easily applied on the floor. It prevents the bad smell coming from the waste water system with its two cleppers o'dor blocking and "S TYPE" outlet . It can be adjusted depending on the screed concrete with its adjustable height legs. High resistance against the organic and inorganic chemicals, resistant against most acidic and salty aqueous oxidation.

Areas of Usage

Common use of bathroom shower, hospital and hotel shower areas, locker-room shower areas etc.

Customized Production

Grid patterns can be chosen in gold, bronze or other optional colors in accordance with your desire.

Warning

It is not recommended to use high-density cleaners for a long-time.

* The referring size is 50 cm

SINGLE LINE



▶ SINGLE LINE DIRECT SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.103P.30.01	30 CM	12
BFM.103P.40.01	40 CM	12
BFM.103P.50.01	50 CM	12
BFM.103P.60.01	60 CM	12


360°



▶ SINGLE LINE ROTATION SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.103Y.30.01	30 CM	12
BFM.103Y.40.01	40 CM	12
BFM.103Y.50.01	50 CM	12
BFM.103Y.60.01	60 CM	12

SINGLE LINE SHOWER DRAIN

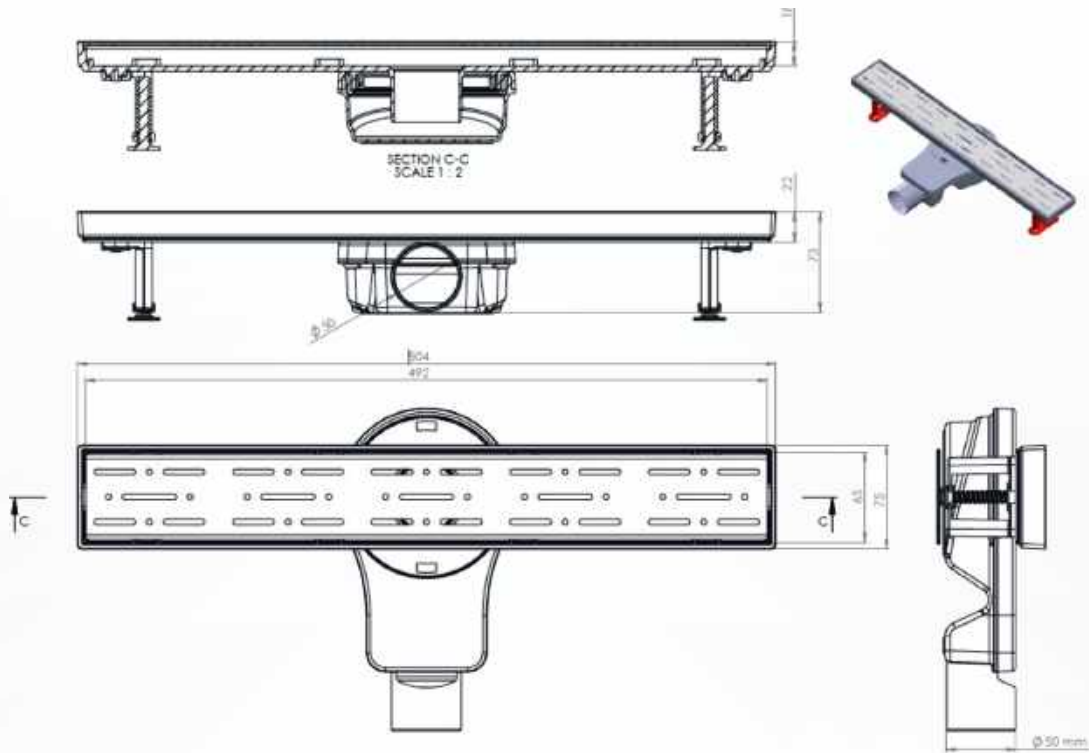

DN 50 Horizontal and vertical outlet - compatible with PVC pipe connections, blocking odor by water (285mg). The flow rate is 41 liters/min. Resistant against external chemical effects, operating temperature is between -30°C and $+75^{\circ}\text{C}$. The and grid is made of 304 grade stainless steel.

Advantages

It has a quality and stylish-looking with its 304 grade stainless steel grid. It can be easily applied on the floor. It prevents the bad smell coming from the waste water system with its two cleppers o'dor blocking and "S TYPE" outlet . It can be adjusted depending on the screed concrete with its adjustable height legs. High resistance against the organic and inorganic chemicals, resistant against most acidic and salty aqueous oxidation.

Areas of Usage

Common use of bathroom shower, hospital and hotel shower areas, locker-room shower areas etc.

Customized Production

Grid patterns can be chosen in gold, bronze or other optional colors in accordance with your desire.

Warning

It is not recommended to use high-density cleaners for a long-time.

* The referring size is 50 cm

LUNA



LUNA SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.115Y.30.01	30 CM	12
BFM.115Y.40.01	40 CM	12
BFM.115Y.50.01	50 CM	12
BFM.115Y.60.01	60 CM	12
BFM.115Y.80.01	80 CM	12

LUNA GALA SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.115D.30.01	30 CM	12
BFM.115D.40.01	40 CM	12
BFM.115D.50.01	50 CM	12
BFM.115D.60.01	60 CM	12
BFM.115D.80.01	80 CM	12


LUNA GALA FRAMED SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.115F.30.01	30 CM	12
BFM.115F.40.01	40 CM	12
BFM.115F.50.01	50 CM	12
BFM.115F.60.01	60 CM	12
BFM.115F.80.01	80 CM	12

LUNA FRAMED SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.115L.30.01	30 CM	12
BFM.115L.40.01	40 CM	12
BFM.115L.50.01	50 CM	12
BFM.115L.60.01	60 CM	12
BFM.115L.80.01	80 CM	12

LUNA SHOWER DRAIN

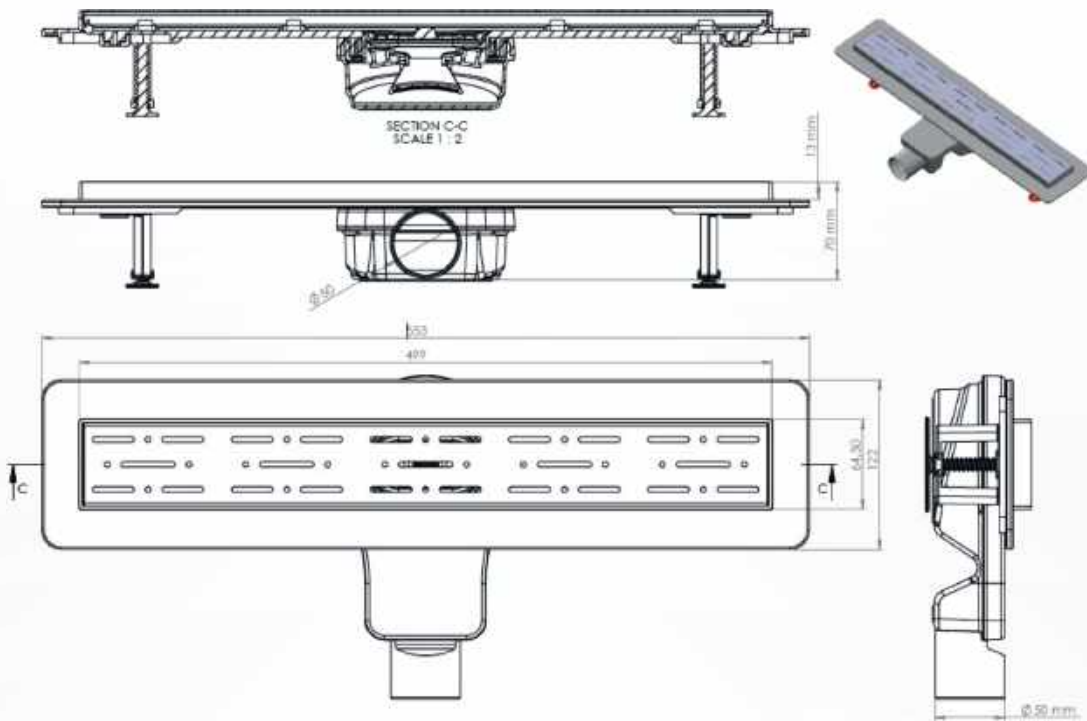

DN 50 Horizontal and vertical outlet - compatible with PVC pipe connections, blocking odor by water (285mg). The flow rate is 48 liters/min. Resistant against external chemical effects, operating temperature is between -30°C and $+75^{\circ}\text{C}$. The and grid is made of 304 grade stainless steel.

Advantages

It has a quality and stylish-looking with its 304 grade stainless steel grid. It can be easily applied on the floor. It prevents the bad smell coming from the waste water system with its two cleppers o'dor blocking and "S TYPE" outlet . It can be adjusted depending on the screed concrete with its adjustable height legs. High resistance against the organic and inorganic chemicals, resistant against most acidic and salty aqueous oxidation.

Areas of Usage

Common use of bathroom shower, hospital and hotel shower areas, locker-room shower areas etc.

Customized Production

Grid patterns can be chosen in gold, bronze or other optional colors in accordance with your desire.

Warning

It is not recommended to use high-density cleaners for a long-time.


* The referring size is 50 cm

MAXIMA



▶ MAXIMA SHOWER DRAIN


CODE	SIZE	PCS IN
BFM.117Y.30.01	30 CM	12
BFM.117Y.40.01	40 CM	12
BFM.117Y.50.01	50 CM	12
BFM.117Y.60.01	60 CM	12
BFM.117Y.80.01	80 CM	12

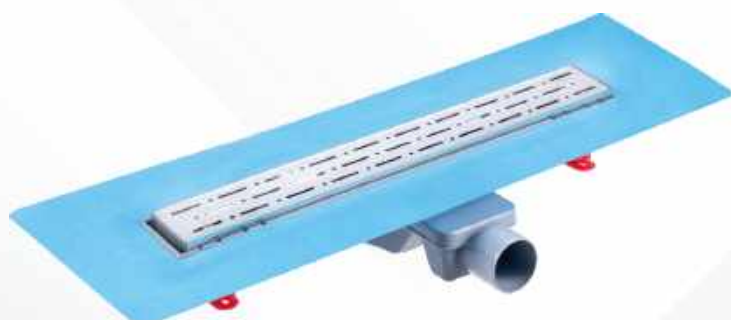

▶ MAXIMA SHOWER DRAIN WITH MAMBRANE

CODE	SIZE	PCS IN
BFM.117Y.30.0M	30 CM	12
BFM.117Y.40.0M	40 CM	12
BFM.117Y.50.0M	50 CM	12
BFM.117Y.60.0M	60 CM	12
BFM.117Y.80.0M	80 CM	12

MAXIMA SHOWER DRAIN

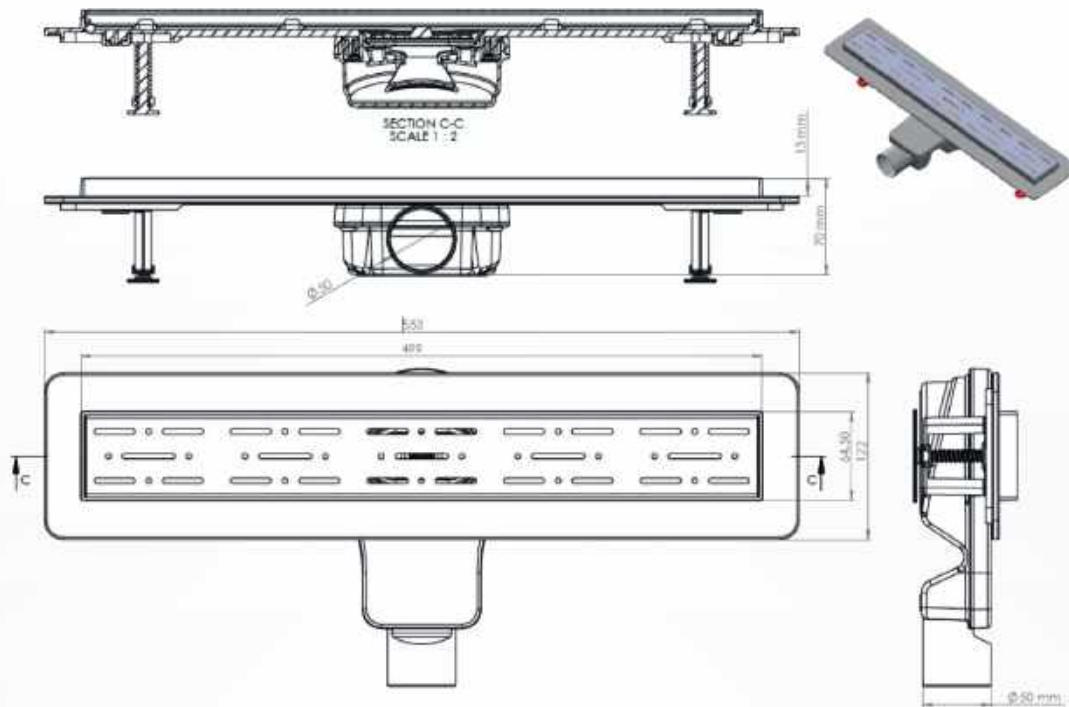

DN 50 Horizontal and vertical outlet - compatible with PVC pipe connections, blocking odor by water (285mg). The flow rate is 48 liters/min. Resistant against external chemical effects, operating temperature is between -30°C and $+75^{\circ}\text{C}$. The and grid is made of 304 grade stainless steel.

Advantages

It has a quality and stylish-looking with its 304 grade stainless steel grid. It can be easily applied on the floor. It prevents the bad smell coming from the waste water system with its two cleppers o'dor blocking and "S TYPE" outlet . It can be adjusted depending on the screed concrete with its adjustable height legs. High resistance against the organic and inorganic chemicals, resistant against most acidic and salty aqueous oxidation.

Areas of Usage

Common use of bathroom shower, hospital and hotel shower areas, locker-room shower areas etc.

Customized Production

Grid patterns can be chosen in gold, bronze or other optional colors in accordance with your desire.

Warning

It is not recommended to use high-density cleaners for a long-time.

* The referring size is 50 cm

MAXIMA N



MAXIMA N SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.104D.30.01	30 CM	12 PCS
BFM.104D.40.01	40 CM	12 PCS
BFM.104D.50.01	50 CM	12 PCS
BFM.104D.60.01	60 CM	12 PCS
BFM.104D.80.01	80 CM	12 PCS

MAXIMA N LINE SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.104S.30.01	30 CM	12 PCS
BFM.104S.40.01	40 CM	12 PCS
BFM.104S.50.01	50 CM	12 PCS
BFM.104S.60.01	60 CM	12 PCS
BFM.104S.80.01	80 CM	12 PCS

N LUX SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.119D.30.01	30 CM	12 PCS
BFM.119D.40.01	40 CM	12 PCS
BFM.119D.50.01	50 CM	12 PCS
BFM.119D.60.01	60 CM	12 PCS
BFM.119D.80.01	80 CM	12 PCS

N LUX LINE SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.119S.30.01	30 CM	12 PCS
BFM.119S.40.01	40 CM	12 PCS
BFM.119S.50.01	50 CM	12 PCS
BFM.119S.60.01	60 CM	12 PCS
BFM.119S.80.01	80 CM	12 PCS

QUATTRO



▶ QUATTRO SHOWER DRAIN


CODE	SIZE	PCS IN
BFM.118Y.30.01	30 CM	12
BFM.118Y.40.01	40 CM	12
BFM.118Y.50.01	50 CM	12
BFM.118Y.60.01	60 CM	12
BFM.118Y.80.01	80 CM	12



▶ QUATTRO GALA SHOWER DRAIN

CODE	SIZE	PCS IN
BFM.118Y.30.0D	30 CM	12
BFM.118Y.40.0D	40 CM	12
BFM.118Y.50.0D	50 CM	12
BFM.118Y.60.0D	60 CM	12
BFM.118Y.80.0D	80 CM	12

QUATTRO SHOWER DRAIN

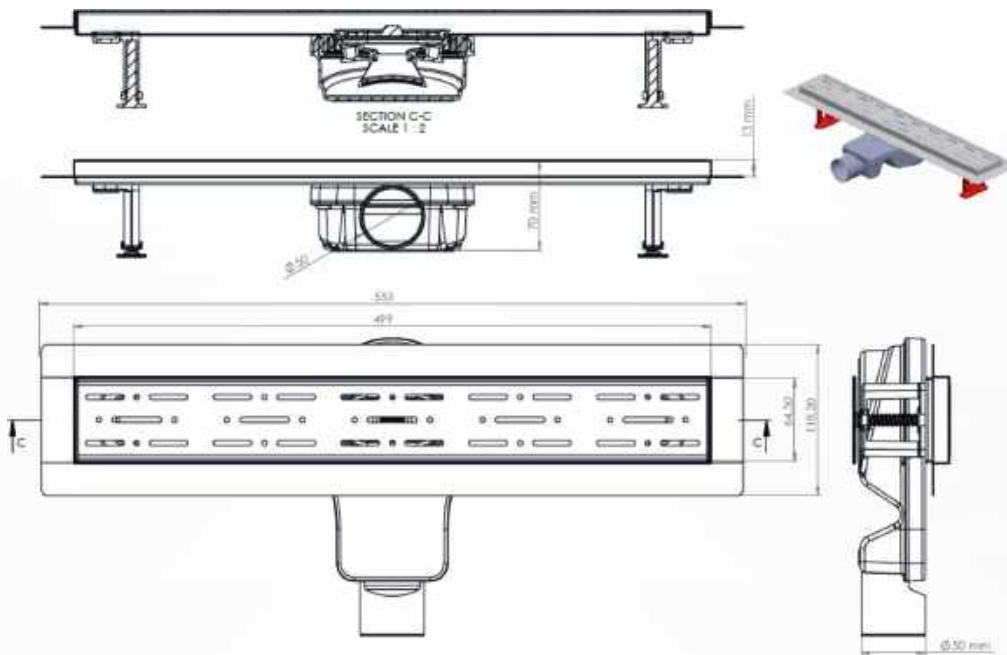

DN 50 Horizontal and vertical outlet - compatible with PVC pipe connections, blocking odor by water (285mg). The flow rate is 48 liters/min. Resistant against external chemical effects, operating temperature is between -30°C and $+75^{\circ}\text{C}$. The and grid is made of 304 grade stainless steel.

Advantages

It has a quality and stylish-looking with its 304 grade stainless steel grid. It can be easily applied on the floor., It prevents the bad smell coming from the waste water system with its two cleppers o'dor blocking and "S TYPE" outlet . It can be adjusted depending on the screed concrete with its adjustable height legs. High resistance against the organic and inorganic chemicals, resistant against most acidic and salty aqueous oxidation.

Areas of Usage

Common use of bathroom shower, hospital and hotel shower areas, locker-room shower areas etc.

Customized Production

Grid patterns can be chosen in gold, bronze or other optional colors in accordance with your desire

Warning

It is not recommended to use high-density cleaners for a long-time.

* The referring size is 50 cm

DRAIN

➤ 10*10 FULL SS DRAIN



CODE	SIZE	PCS IN
BFM.130P.1001	10*10	50

➤ 15*15 FULL SS DRAIN



CODE	SIZE	PCS IN
BFM.130P.1501	15*15	30

➤ 20*20 FULL SS DRAIN



CODE	SIZE	PCS IN
BFM.130P.2001	20*20	20

➤ 10*10 ROTATION



CODE	SIZE	PCS IN
BFM.130Y.1001	10*10	20

➤ 15*15 ROTATION



CODE	SIZE	PCS IN
BFM.130Y.1501	15*15	16

➤ 20*20 ROTATION



CODE	SIZE	PCS IN
BFM.130Y.2001	20*20	12

➤ 10*10 DRAIN DIRECT



CODE	SIZE	PCS IN
BFM.130K.1001	10*10	20

➤ 15*15 DRAIN DIRECT



CODE	SIZE	PCS IN
BFM.130K.1501	15*15	16

➤ 20*20 DRAIN DIRECT



CODE	SIZE	PCS IN
BFM.130K.2001	20*20	12


▶ 10*10 - 15*15 DRAIN



CODE	SIZE	PCS IN
BFM.132.1010.OS	10*10	24
BFM.132.1515.OS	15*15	24




CODE	SIZE	PCS IN
BFM.132.1010.YS	10*10	24
BFM.132.1515.YS	15*15	24

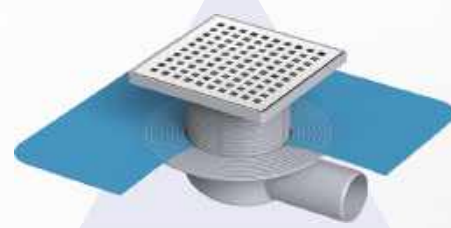

CODE	SIZE	PCS IN
BFM.132.1010.YSM	10*10	24
BFM.132.1515.YSM	15*15	24



CODE	SIZE	PCS IN
BFM.132.1010.AS	10*10	24
BFM.132.1515.AS	15*15	24

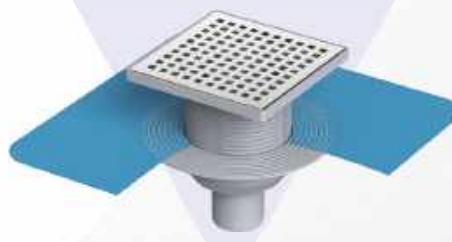

CODE	SIZE	PCS IN
BFM.132.1010.ASM	10*10	24
BFM.132.1515.ASM	15*15	24

QUARTS Toilet Seat Cover




TOILET SEAT COVER

► **BFM.TS.001**

10 PCS



PEARL Soft Close Toilet Seat Cover

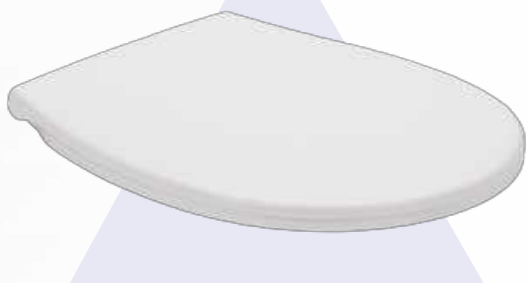


► **BFM.TS.002**

10 PCS




DIAMOND Soft Close Toilet Seat Cover

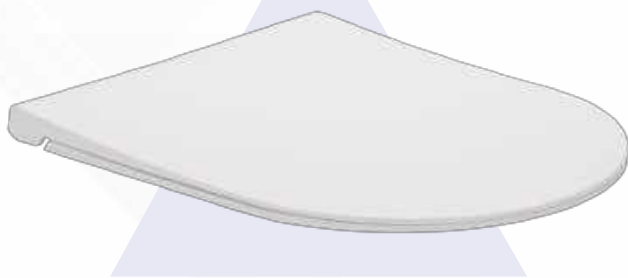

► **BFM.TS.003**

10 PCS




SAPHIRE Soft Close Toilet Seat Cover



► **BFM.TS.004**

10 PCS



DRAIN

▶ 10*10 - 15*15 DRAIN



CODE	SIZE	PCS IN
BFM.300.1007	LEAF HOLDER	24



CODE	SIZE	PCS IN
BFM.300.1010Y.S1	10*10	24



CODE	SIZE	PCS IN
BFM.300.1010A.S1	10*10	24



CODE	SIZE	PCS IN
BFM.300.1515Y.S1	15*15	24



CODE	SIZE	PCS IN
BFM.300.1515A.S1	15*15	24

CONCEALED SOAP FOAM DISPENSER



CODE	SIZE	PCS IN
BFM.SPS.001F	21 CM	20 PCS
BFM.SPS.001S	21 CM	20 PCS

DELUXE CONCEALED SOAP FOAM DISPENSER




CODE	SIZE	PCS IN
BFM.SPS.002F	21 CM	20 PCS
BFM.SPS.002S	21 CM	20 PCS

BLACK DELUXE CONCEALED SOAP FOAM DISPENSER



CODE	SIZE	PCS IN
BFM.SPS.001F	21 CM	20 PCS
BFM.SPS.001S	21 CM	20 PCS

PLASTIC DRAINAGE CHANNEL

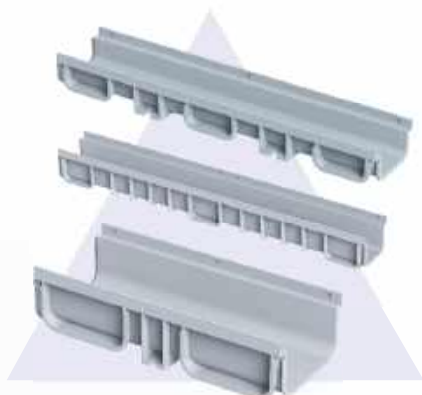


CODE	SIZE	PCS IN
BFM.4001.Y	100*500	12
BFM.4002.A	100*500	12
BFM.4003.Y	130*500	12
BFM.4004.A	130*500	12
BFM.4005.Y	130*1000	12
BFM.4006.A	130*1000	12
BFM.4007.Y	200*500	12
BFM.4008.Y	200*500	12

PLASTIC GRILL




CODE	SIZE	PCS IN
BFM.4009.I	100*500	12
BFM.4010.I	130*500	12
BFM.4010.IM	130*1000	12
BFM.4011.I	200*500	12

CAP WITH OUTLET

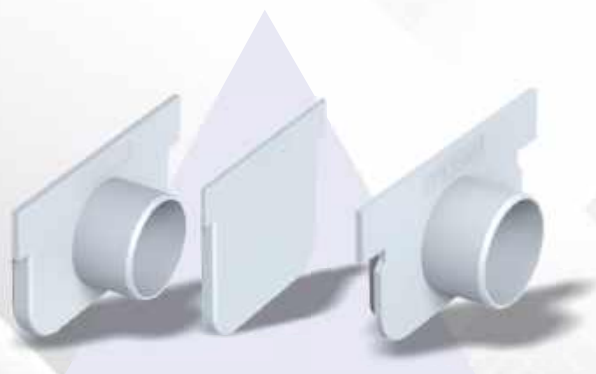


CODE	SIZE	PCS IN
BFM.4012.C	100*500	12
BFM.4013.C	130*500-130*1000	12
BFM.4014.C	130*500-130*1000	12
BFM.4015.C	200*500	12

BOX & COVER

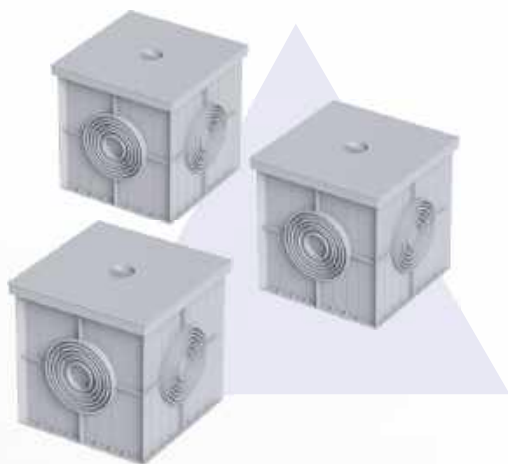

CODE	SIZE	PCS IN
BFM.300.1008	20*20	12
BFM.300.1009	30*30	12
BFM.300.1010	40*40	12
BFM.300.1011	50*50	12
BFM.300.1012	55*55	12

FRAME & COVER

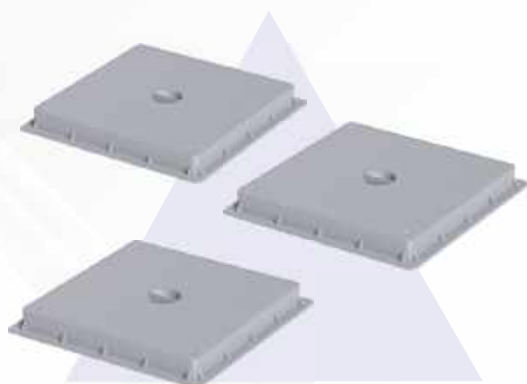

CODE	SIZE	PCS IN
BFM.300.1013	20*20	12
BFM.300.1014	30*30	12
BFM.300.1015	40*40	12
BFM.300.1016	50*50	12
BFM.300.1017	60*60	12


CHECK VALVE



CODE	SIZE	PCS IN
BFM.300.1018	110 Ø	12
BFM.300.1019	125 Ø	12
BFM.300.1020	160 Ø	12
BFM.300.1021	200 Ø	12

PARAPET

▶ PARAPET



CODE	SIZE	PCS IN
BFM.PP0.0070	70mm	30 PCS
BFM.PP0.0100	100mm	25 PCS

▶ PARAPET WITH LID



CODE	SIZE	PCS IN
BFM.PP1.0070	70mm	30 PCS
BFM.PP1.0100	100mm	25 PCS

▶ CORNER BALCONY SIPHON



CODE	SIZE	PCS IN
BFM.KB.0070	70mm	100 PCS
BFM.KS.0100	100mm	70 PCS



BFM TEKNİK YAPI MALZEMELERİ LTD. ŞTİ.

Hacımaşlı Mah. Haraççı Hadımköy Yolu Cad.

No: 145/1 Arnavutköy, İstanbul

info@villoren.com

www.villoren.com

