


GH16GJ

高腳
With Distributor
上封水
Side-Outlet Type

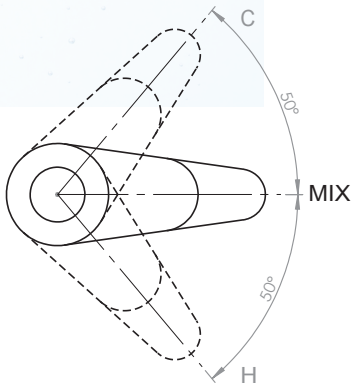

陶瓷片技術要求 Technical characteristics of the ceramic discs

材質 Material	AL ₂ O ₃ 92% ~ 96%
表面粗糙度 Surface roughness	Ra 0.1 ~ Ra 0.3 μm
硬度 Hardness	>1000 HV
平面度 Flatness	<0.6 μm

技術規格 Technical characteristics of the cartridge

最大開啟角度 Max. opening angle	22°
最大旋轉角度 Max. rotary angle	100°
螺帽扭矩 Recommended nut tightening torque	7 ~ 8 N.m
密封測試 / 耐壓測試 Water resistance pressure	350 ~ 500 psi
最高使用溫度 Max. temperature	90°C (194°F)
壽命測試 Endurance test	500,000 cycles (ASME A112.18.1) 70,000 cycles (EN817)

流量 Flow rate

水壓 Water pressure	熱水 Hot (L/min)	冷水 Cold (L/min)	混合水 Mixing (L/min)
1 bar	5.91	6.12	8.45
2 bar	8.98	9.32	12.54
3 bar	11.05	11.75	15.62