



HAIN-YO ENTERPRISES CO., LTD.

www.ceramiccartridge-tw.com

TEL: 886-4-7574837

E-mail: hainyo-3@hainyo.com.tw , hainyo@ms24.hinet.net


FAX: 886-4-7574817

No. 102, Tien-Tung Rd., Ho-Mei, Changhua, Taiwan, R.O.C.




Smart operation way | Dual control cartridge | Simple shape design


Diverter Pressure Balance Cartridge

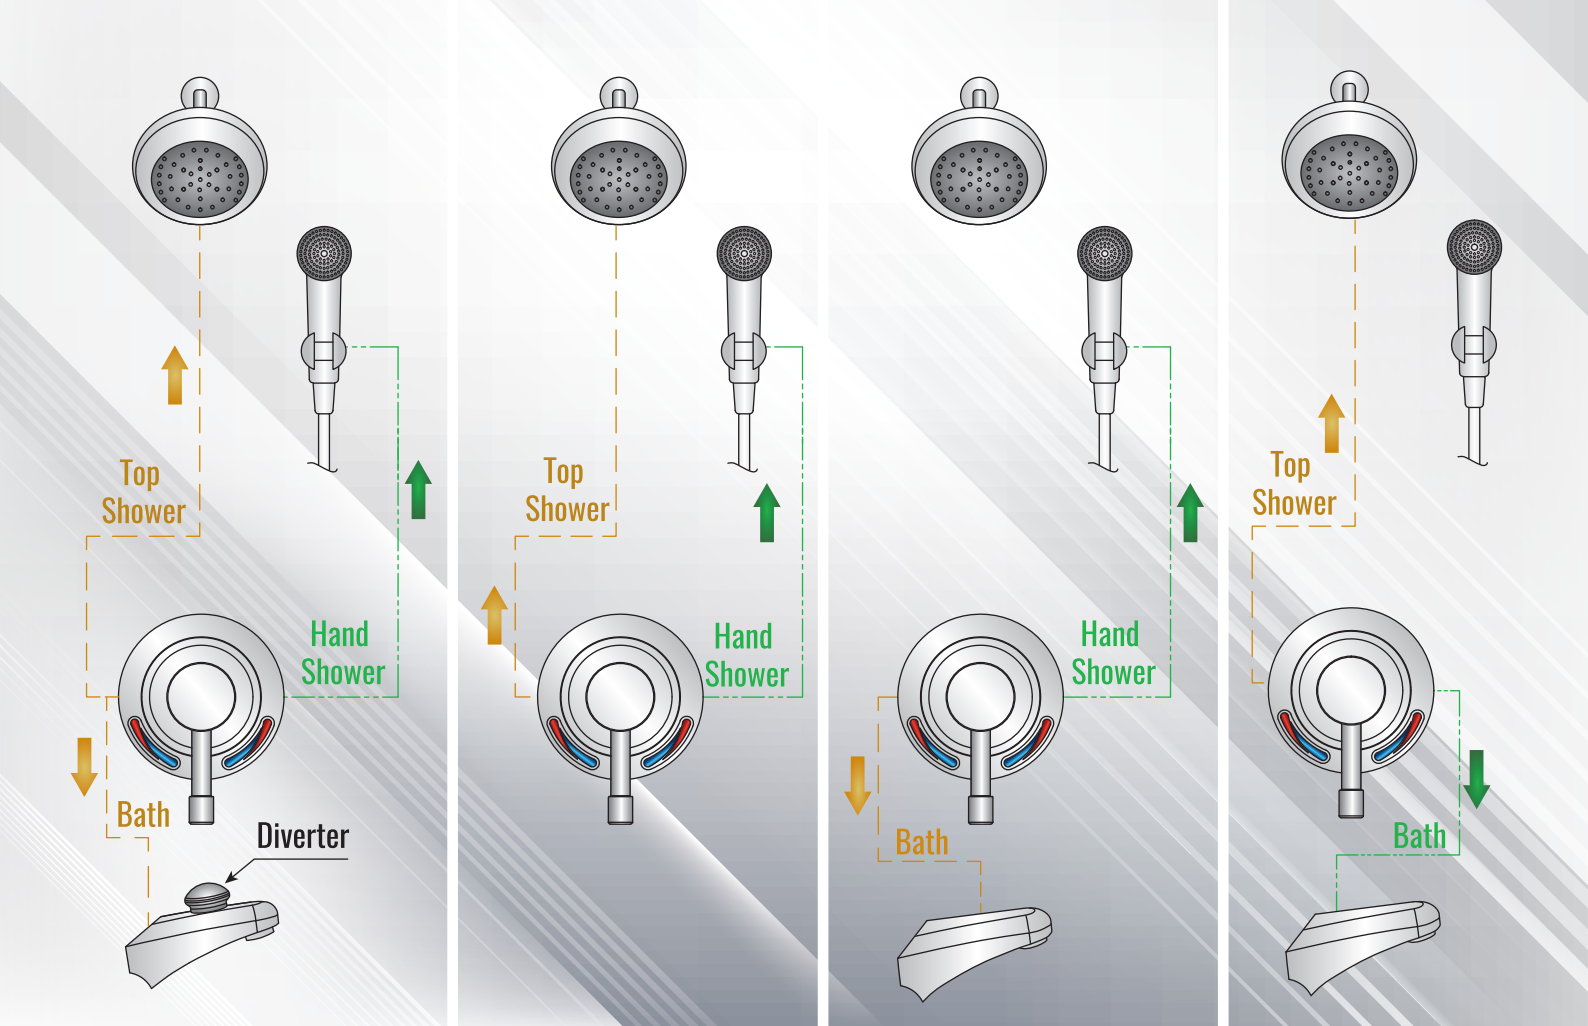

Normal

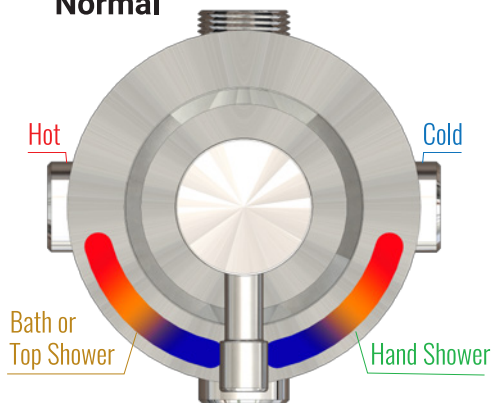

Back to Back

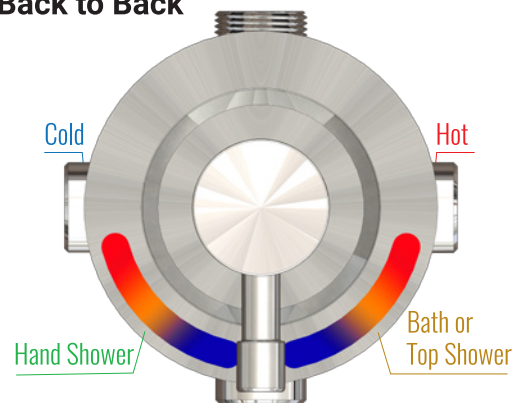

Diverter Pressure Balance Cartridge

Model No.

JL02BD

Material AL₂O₃ 92-96%

Surface Roughness Ra0.1~Ra0.3 μm

Hardness ≥1000 HV

Flatness <0.6 μm

Nut Lock Torque 10~12 N.m

Recommended Temp. 3.9 °C~82 °C
(39 °F~180°F)

Pressure Resistance (Max.) 500 PSI

Flow Rate (no resistance) 20.6 L/min
at 3 bar

