



FREE DISCHARGE SAFETY VALVES

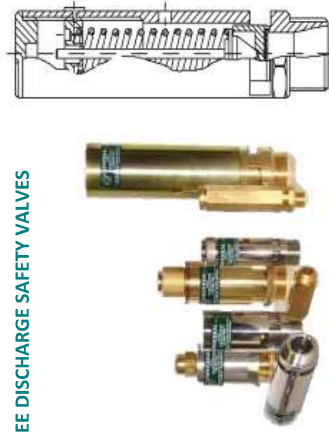

TYPE	FLOW DIAMETER mm.	CONNECTION	ADJUSTMENT RANGE bar	PN
R20	20	1"	0,4 - 6	6
R30	30	1 1/4" - 1 1/2"		
R40	38	1 1/2" - 2"		
S10	10,00	3/8 - 1/2	0,4 - 30	40
S15	14,20	1/2 - 3/4		
S20	19,20	1"		
S25	24,20	1" - 1 1/4 - 1 1/2		
S32	31,20	1 1/4 - 1 1/2 - 2"		
S40	38,00	1 1/2 - 2"	0,4 - 100	100
H10	10,00	3/8 - 1/2		
H15	14,20	3/4 - 1"		
HHP	4 + 10	1/4" - 1"	2,0 - 400	400

Safety valves made of brass, bronze and s.s. 316, with free discharge in the air from 1/4" up to 2" and set pressure from 0,4 up to 400 bar. They can be used in various production sectors: compressed air, technical gases, non hazardous fluids.

CONVEYED SAFETY VALVES

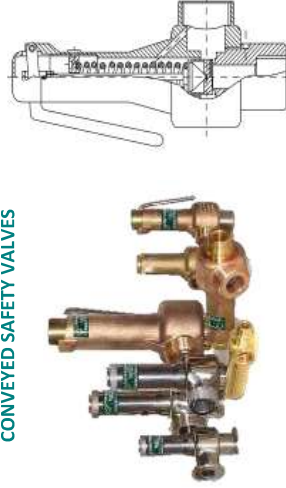

TYPE	FLOW DIAMETER mm.	CONNECTION IN	CONNECTION OUT	ADJUSTMENT RANGE bar	PN
S15C/CL	14,20	1/2 - 3/4	3/4 - 1"	0,4 - 30	40
S20C/CL	19,20	3/4 - 1"	1" - 1 1/2		
S25C/CL	24,20	1 1/4	1 1/2 - 2"		
S32C/CL	31,20	1 1/2	1 1/2 - 2"		
S40C/CL	38,00	2"	2" - 2 1/2	0,4 - 100	100
H10C/CL	10,00	1/2 - 3/4	3/4 - 1"		
H15C/CL	14,20	3/4 - 1"	1" - 1 1/2		
HHP C	4 + 10	1/4" - 1"	3/4" - 1 1/2	2,0 - 400	400

Safety valves made of brass, bronze and s.s. 316, with conveyed discharge from 1/4" up to 2" and set pressure from 0,4 up to 400 bar. Production sectors: compressed air, steam, technical gases, non-hazardous and hazardous fluids, chemical, pharmaceutical, food and water treatment industries.

FLANGED SAFETY VALVES



TYPE	FLOW DIAMETER mm.	CONNECTION DN	CONNECTION INLET ANSI	ADJUSTMENT RANGE bar
S15C/CL	14,20	DN15	1/2" - 3/4"	1/2" - 3/4"
		PN40	150RF	300 RF
S20C/CL	19,20	DN20	3/4" - 1"	3/4"
		PN40	150RF	300 RF
S25C/CL	24,20	DN25	1" - 1 1/4	1"
		PN40	150RF	300 RF
S32C/CL	31,20	DN32	1-1/4" - 1 1/2	1 1/4
		PN40	150RF	300 RF
S40C/CL	38,00	DN40	2"	1 1/2
		PN40	150RF	300 RF
H10C/CL	10	DN15	1/2" - 3/4"	1/2" - 3/4"
		PN40	150RF	300 RF
H15C/CL	14,20	DN15	3/4"	3/4"
		PN100	150RF	600 RF

Safety valves made of brass, bronze and s.s. 316, with flanged conveyed discharge, from 1/2" up to 2" and set pressure from 0,4 bar up to 100 bar. Production sectors: compressed air, steam, technical gases, non-hazardous and hazardous fluids, chemical, pharmaceutical, food and water treatment industries.

VALVE WITH PNEUMATIC ACTUATOR



Safety valves with conveyed discharge and pneumatic actuator, made of s.s. 316, and set pressure from 0,4 up to 12 bar. They can be used in various production sectors.

DOUBLE ACTION SAFETY VALVES VACUUM VALVES



TYPE	FLOW DIAMETER mm.	CONNECTION	ADJUSTMENT RANGE bar
DOUBLE ACTION SAFETY VALVES			
R40	38	1 1/2 - 2"	0,4 - 6
VACUUM VALVES			
V30	29	2"	0,05 - 0,8
V45	46	3"	0,05 - 0,8
V60	60	4"	0,05 - 0,8

Safety valves with double action made of brass, bronze and s.s. 316, with free discharge in the air, from 11/2" up to 2" and set pressure from 0,4 up to 6 bar. They can be used in various production sectors.
Vacuum valves made of s.s.316 from -0,05 to -0,8 bar.

INSTRUMENTS AND MANOMETERS



EXPORT / TRADING

