



SHENZHOU

Guangdong Shenzhou Gas Appliance Co.,Ltd,founded in 1984, is located in Shunde, the production center for home appliances in the world.

Shenzhou is a professional manufacture for gas appliance, covering an area of 100,000 square meters.

We have 62 professional engineers and more than 800 skillful employees.

The annual output is gas boiler 200,000 pieces,gas water heaters 600,000 pieces, gas stoves 300,000 pieces and range hoods 200,000 pieces.

Shenzhou is a famous brand with good reputation in China.

The first gas water heater of China was born in our factory in 1984.

We attended to draft our national standard of gas appliances.

Our factory is certificated by ISO9001,ISO14001,ERP etc.

Shenzhou has a strict Quality Control System,including incoming material inspection, online inspection and finished products inspection.

Learning,Service,Innovation is our mission.

In the future,we sincerely hope to make progress with global customers for mutual development and benefits.

Since 1984.....





Flue Type Gas Water Heater

Economical | Comfortable | ECO-friendly | Various capacities

Flue Type Gas Water Heater

Enjoy a comfortable bath as you wish

Creation unlimited
Since 1984...



Flue Type Series

- Low water pressure start-up
- Available in all different capacities
- LCD/LED temperature display optional
- Easy upgrade with PC sticker or decoration board



Multi Safety Protection



Heat Efficiency up to 88%



Temperature Digital Display



Easy Temperature Adjustment



Oxygen-free Copper/ Tin-coated
Copper Heat Exchanger

Appearance



Specifications

Capacity	6L/min	8L/min	10L/min	12L/min	14L/min	16L/min
Rated Heat Input (KW)	12	16	20	24	28	32
Hot Water Capacity (L/min, Δt=25K)	6	8	10	12	14	16
Rated Water Pressure	0.02-0.8MPa	0.02-0.8MPa	0.02-0.8MPa	0.02-0.8MPa	0.02-0.8MPa	0.02-0.8MPa
Product Dimension(mm)	440x300x136	520x320x162	550x330x189	610x350x189	650x400x189	700x440x189
Packing Dimension(mm)	515x340x205	600x370x230	640x385x250	700x400x248	740x455x250	790x505x255
N.W./G.W.(kg)	4.59/5.17	6.2/7.2	8.2/10	8.2/10	11.3/12.87	13.2/14.3
Q'20'/40'/40'HQ(unit)	920/1910/2060	570/1200/1400	480/980/1156	340/720/800	360/740/840	300/610/700

Flue Type Gas Water Heater

Enjoy a comfortable bath as you wish

Creation unlimited
Since 1984...



Flue Series With CE

- Low NOx Technology
- LCD/LED temperature display optional
- Mechanical control and simple operation
- 6L/10L/11L/14L multiple liters for different bathing needs



CE Certification



Automatic Pulse Ignition



Multi Safety Protection



High Energy Saving Performance



Oxygen-free Copper Heat Exchanger

Appearance



Specifications

Capacity	4.5L/min	6L/min	10L/min	11L/min	14L/min
Rated Heat Input (KW)	9	12	20	22	28
Hot Water Capacity (L/min, Δt=25K)	4.5	6	10	11	14
Rated Water Pressure	0.02-0.8MPa	0.02-0.8MPa	0.02-0.8MPa	0.02-0.8MPa	0.02-0.8MPa
Product Dimension(mm)	480x300x117	480x300x117	550x330x189	550x330x189	650x400x189
Packing Dimension(mm)	510x340x205	510x340x205	640x385x250	640x385x250	740x455x250
N.W./G.W.(kg)	4.59/5.17	4.59/5.17	8.2/10	8.2/10	11.3/12.87
Q'20'/40'/40'HQ(unit)	430/980/1150	430/980/1150	480/980/1156	480/980/1156	360/740/840

Flue Type Gas Water Heater

Enjoy a comfortable bath as you wish

Creation unlimited
Since 1984...



Electronic Flue Series

- Low NOx Technology
- Automatic error detection
- Constant Temperature hot water
- LCD/LED temperature display optional



CE Certification



Self-diagnosis System



Multi Safety Protection



Intelligent Thermostatic Control



Oxygen-free Copper Heat Exchanger

Appearance



Specifications

Capacity	10L/min	11L/min	14L/min
Rated Heat Input (KW)	20	24	28
Hot Water Capacity (L/min, Δt=25K)	10	12	14
Rated Water Pressure	0.01-0.8MPa	0.01-0.8MPa	0.01-0.8MPa
Product Dimension(mm)	550x330x189	550x330x189	650x400x189
Packing Dimension(mm)	640x385x250	640x385x250	740x455x250
N.W./G.W.(kg)	8.2/10	8.2/10	11.3/12.87
Q'20'/40'/40'HQ(unit)	480/980/1156	480/980/1156	360/740/840

Flue Type Gas Water Heater

Enjoy a comfortable bath as you wish

Creation unlimited
Since 1984...



Piezo Ignition Series

- No battery safe and reliable
- Available in different capacities
- Constant Temperature hot water
- Environment-friendly and energy-saving



Multi Safety Protection



Heat Efficiency up to 88%



Easy Temperature Adjustment



High Energy Saving Performance



Oxygen-free Copper/ Lead-dip
Copper Heat Exchanger

Appearance



Specifications

Capacity	8L/min	10L/min	11L/min	12L/min	14L/min
Rated Heat Input (KW)	16	20	22	24	28
Hot Water Capacity (L/min, Δt=25K)	8	10	11	12	14
Rated Water Pressure	0.02-0.8MPa	0.02-0.8MPa	0.02-0.8MPa	0.02-0.8MPa	0.02-0.8MPa
Product Dimension(mm)	520x320x162	550x330x189	550x330x189	610x350x162	650x400x189
Packing Dimension(mm)	600x370x230	640x385x248	640x385x248	700x400x248	740x455x248
N.W./G.W.(kg)	6.2/7.2	7.1/8.3	7.1/8.3	10.2/11.1	11.3/12.87
Q'20'/40'/40'HQ(unit)	570/1200/1400	480/980/1156	480/980/1156	430/980/1150	360/740/840

Flue Type Gas Water Heater

Enjoy a comfortable bath as you wish

Creation unlimited
Since 1984...



Portable Flue Series

- Outdoor Use
- Automatic pulse ignition
- LCD/LED temperature display optional
- Easy installation, use at anywhere, anytime as desired



Work Quietly



Multi Safety Protection



Heat Efficiency up to 88%



Easy Temperature Adjustment



Oxygen-free Copper/ Tin-coated
Copper Heat Exchanger

Appearance



Specifications

Capacity	5.5L/min
Rated Heat Input (KW)	11
Hot Water Capacity (L/min, Δt=25K)	5.5
Rated Water Pressure	0.02-0.8MPa
Product Dimension(mm)	440x300x136
Packing Dimension(mm)	510x340x205
N.W./G.W.(kg)	4.24/4.84
Q'20'/40'/40'HQ(unit)	940/1900/2180



Forced Exhaust Type Gas Water Heater

Advanced | High efficiency | ECO-friendly | Energy-saving | Reliable

Forced Exhaust Type Gas Water Heater

Enjoy a comfortable bath as you wish

Creation unlimited
Since 1984...



Forced Exhaust Type Series

- Automatic pulse ignition
- Customized design panel
- Low water pressure start-up
- LED/LCD temperature display



Multi Safety Protection



Heat Efficiency up to 88%



Easy Temperature Adjustment



High Energy Saving Performance



Oxygen-free Copper/ Tin-coated
Copper Heat Exchanger

Appearance



Specifications

Capacity	6L/min	10L/min	12L/min
Rated Heat Input (KW)	12	20	24
Hot Water Capacity (L/min, Δt=25K)	6	10	12
Rated Water Pressure	0.02-0.8MPa	0.02-0.8MPa	0.02-0.8MPa
Product Dimension(mm)	440x300x136	550x330x189	610x350x189
Packing Dimension(mm)	515x340x205	640x385x250	700x400x248
N.W./G.W.(kg)	4.59/5.17	8.2/10	8.2/10
Q'20'/40'/40'HQ(unit)	650/1400/1580	400/900/1080	380/850/930

Forced Exhaust Type Gas Water Heater

Enjoy a comfortable bath as you wish

Creation unlimited
Since 1984...



Forced Exhaust Type Series

- CE Certification
- Automatic pulse ignition
- Customized design panel
- LED/LCD temperature display



Multi Safety Protection



Heat Efficiency up to 88%



Easy Temperature Adjustment




High Energy Saving Performance



Oxygen-free Copper Heat Exchanger

Appearance

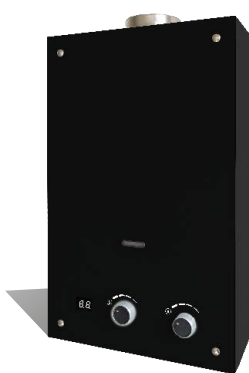

Specifications

Capacity	12L/min
Rated Heat Input (KW)	24
Hot Water Capacity (L/min, Δt=25K)	12
Rated Water Pressure	0.02-0.8MPa
Product Dimension(mm)	550x340x153
Packing Dimension(mm)	645x405x205
N.W./G.W.(kg)	9.46/10.47
Q'20'/40'/40'HQ(unit)	400/750/900

Forced Exhaust Type Gas Water Heater

Enjoy a comfortable bath as you wish

Creation unlimited
Since 1984...



Balanced Type Series

- Low NOx technology
- Automatic error detection
- Water flow sensor dynamic LED screen
- Segmental combustion by intelligent control



CE Certification



Low Water Pressure



Self-diagnosis System



Multi Safety Protection



Oxygen-free Copper Heat Exchanger

Appearance



Specifications

Capacity	10L/min	13L/min	16L/min
Rated Heat Input (KW)	18	26	29
Hot Water Capacity (L/min, Δt=25K)	10	13	16
Rated Water Pressure	0.01-0.8MPa	0.01-0.8MPa	0.01-0.8MPa
Product Dimension(mm)	515x328x150	560x350x162	560x350x162
Packing Dimension(mm)	632x383x208	675x410x225	675x410x225
N.W./G.W.(kg)	10.6/11.9	12.4/14	13.6/14.9
Q'20'/40'/40'HQ(unit)	390/830/950	340/720/800	340/720/800



Wall Mounted Gas Boiler

Safe | Comfortable | ECO-friendly | Energy-saving | Reliable

Pre-mix Condensing Type Wall Mounted Gas Boiler

Creation unlimited
Since 1984...

Enjoy a comfortable bath as you wish



Product descriptions

- Variable speed blower for air-gas premix mixer
- Plate heat exchanger for DHW hot water
- Stainless steel spiral main exchanger
- Independent heating and domestic hot water system
- Closed water channel for heating system

Protection measures

- Anti-dry burn protection
- Anti-freeze protection when heating system below 7 °C
- Gas valve automatic shut down when burner flame out
- Flame out automatically when exhaust vent suffer high wind

Specifications

Model	LL1GBQ24	LL1GBQ28	LL1GBQ32
Rated Heat Input (KW)	24	28	32
Rated Heat Output (60/80°C) (KW)	22.8	26.6	30.4
Rated Heat Output (30/50°C) (KW)	23.8	27.8	31.7
Heating Reference area	≤160	≤200	≤250
Rated Water Production Capacity at Δt=25K	13	15.2	17.4
Gas Type	Nature Gas 12T		
Expansion tank volume	6L		
CH Temp Selection range	Heat sink 30-80(floor heating 30-60)		
Max. CH Water Temperature	80°C		
Hot Water Temperature Selection Range	30-60°C		
Product Dimension (mm)	740*410*285		
Package Dimension (mm)	818*585*380		
Q'20'/40'/40'HQ(unit)	170/345/380		

Gas Boiler

Enjoy a comfortable bath as you wish

Creation unlimited
Since 1984...



Gas Boiler

- Available in all different capacities
- High performance easy to operate
- Intelligent constant temperature technology
- Advanced combustion and heat-exchanging design



Work Quietly



Heat Efficiency up to 88%



Temperature Digital Display



Multiple Automatic Protections



Remote Control by Phone for Option

Appearance



Model	L1PB12	L1PB16	L1PB20	L1PB24	L1PB28	L1PB32	L1PB36	L1PB40
Gas Type/Pressure	Natural Gas / 2000Pa							
Rated Heat Input (KW)	12	16	20	24	28	32	36	40
Min./Max. Heat Input/Output	4.6/3.9	6/5.2	7.6/6.8	8.6/7.7	9.3/8.4	9.3/8.4	9.6/8.6	9.6/8.6
CH Rated Heat Output (KW)	10.6	14.2	18	21.6	25.2	28.8	32.4	36
Hot Water Capacity (L/min, Δt=25K)	6	8	10	12	14	16	18	20
Rated Thermal Efficiency	125W	125W	125W	125W	135W	135W	170W	170W
Expansion Tank Volume	5	5	5	5	6	6	8	8
Min./Max. CH Water Temperature	30-80°C	30-80°C	30-80°C	30-80°C	30-80°C	30-80°C	30-80°C	30-80°C
Heating Area Range	≤70	≤90	≤120	≤150	≤180	≤220	≤300	≤360
Min./Max. DHW Water Temperature	30-60°C	30-60°C	30-60°C	30-60°C	30-60°C	30-60°C	30-60°C	30-60°C
Product Dimension (mm)	660*370*240	660*370*240	660*370*240	660*370*240	710*420*240	740*410*310	740*510*325	740*510*325
Package Dimension (mm)	750*436*305	750*436*305	750*436*305	750*436*305	810*480*300	818*488*385	818*585*400	818*585*400
Q'20'/40'/40'HQ(unit)	300/585/700	300/585/700	300/585/700	300/585/700	220/500/590	186/390/445	150/315/360	150/315/360



SHENZHO

GUANGDONG SHENZHO GAS APPLIANCE CO.,LTD.

Address:

No.27-7, FuAn Industrial Zone, Jeliu Town, Shunde,
Foshan City, Guangdong, P.R. China

Tel:

0086-757-29899981

Fax:

0086-757-29899980

Zip Code:

528000

E-mail:

info@chinashenzhou.cn

Website:

<http://www.chinashenzhou.cn>

<http://www.shenzhouchina.en.alibaba.com>