



Max. working pressure/
Presiune max. de lucru 10 bar



Max. working temperature/
Temperatură max. de lucru 90 °C



Mounting kit included/
Kit montaj inclus: KT2



Factory pressure test/
Presiune de probă: 13 bar




Elements&collectors/
Elemente și colectori: Ø22+38 mm

NEW/NOU

Premier XL Space

Premier XL Space is a functional and stylish solution designed to add warmth and practicality in any bathroom. The durable stainless-steel construction and clean aesthetic make it an attractive option, with good output, complementing any range of interior design styles.

Premier XL Space reprezintă o soluție practică și elegantă, menită să aducă căldură și funcționalitate în orice baie. Construcția solidă din inox și designul curat îl fac o opțiune atrăgătoare, cu o eficiență termică ridicată, potrivindu-se oricărui stil de design interior.

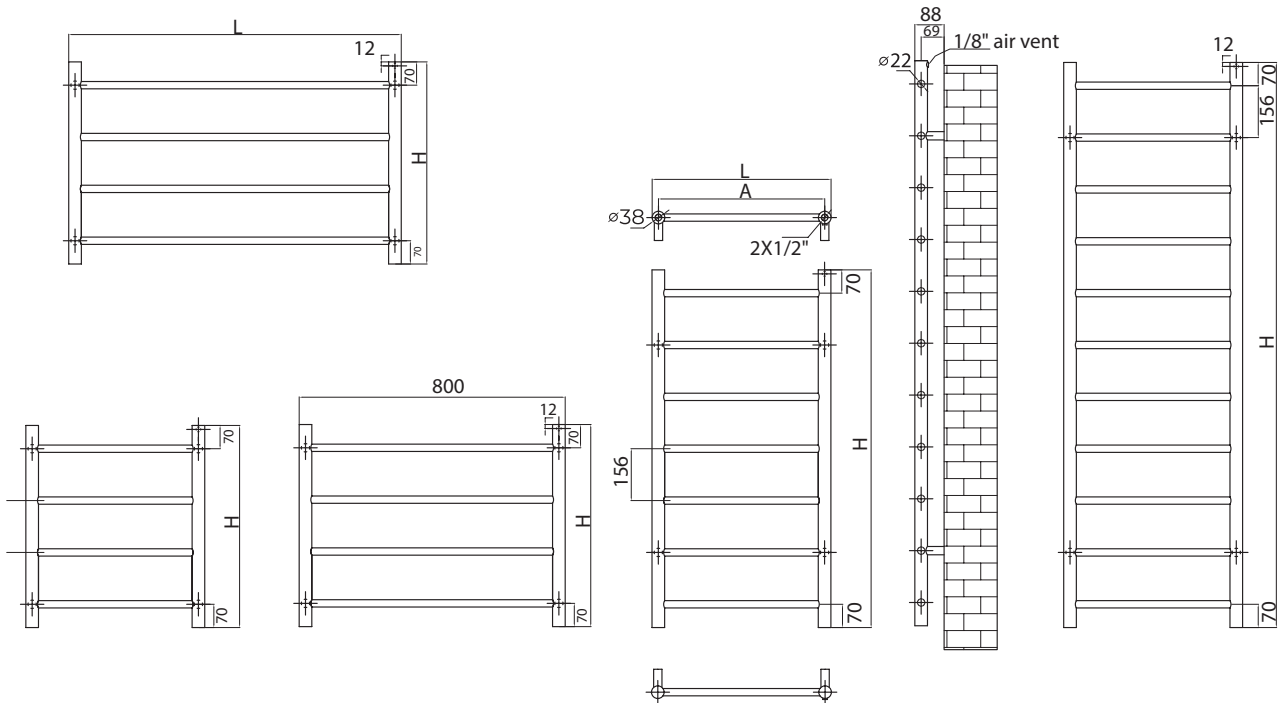

Hydraulic connections/
Conexiuni hidraulice

Code Cod	Finish Finisaj	Height Înălțime (H)	Length Lățime (L)	Centres Interax (A)	No el Nr ele- menți	Weight Greutate	Volume Volum	Output / Putere termică (watt)			
								Δt=30°C	Δt=50°C	Δt=60°C	electric
PREMBS053.8/060.8X	stainless steel/inox	mm	mm	mm	pcs	kg	l	W	W	W	W
PREMBS080/060.8X		608	538	500	4	3,158	1,61	55	105	131	300
PREMBS100/060.8X		608	800	762	4	3,952	1,99	69	132	165	300
PREMBS053.8/107.6X		608	1000	962	4	4,56	2,24	79	152	190	300
PREMBS053.8/170X		1076	538	500	7	5,56	2,83	96	185	231	500
PREMBS053.8/170X		1700	538	500	11	8,76	4,46	151	291	364	500

***** The mentioned code is for hydronic version./Codul menționat este pentru versiunea hidraulică.