



维格斯

WEGS (Shanghai) Fluid Technology Co., Ltd.

Add: No.39 North Huanqu Rd., Xinbang Industra Park,
Songjiang Dist., Shanghai 201605, P.R. China

Tel: +86 21 57891783 Fax: +86 21 57891782
Http://www.wegs.cn Service hotline:4000-990-700



www.wegs.cn



WeChat:wegs-cn



Super Stainless Steel Piping

Hydraulic Strengthen Double Fixed (Healthy Water Series)

源自德国 高端不锈钢管智造专家



WEGS (Shanghai) Fluid Technology Co., Ltd.

Add: No.39 North Huanqu Rd., Xinbang Industra Park,
Songjiang Dist., Shanghai 201605, P.R. China.

Tel: +86 21 57891783 / 57891790

Fax: +86 21 57891782


Http:// www.wegs.cn

Service Hotline:4000-990-700

WEGS (Shanghai) Fluid Technology Co., Ltd. is a comprehensive multi-series pipeline manufacturing supplier, registered capital of 101.55 million yuan, is making every effort to build intelligent, automation, information technology, intensive, large-scale manufacturing enterprises. The company continues to "research" to establish business, "wisdom" to win, to achieve the Shanghai as the headquarters of R & D management, Hubei Xianning for the manufacturing centre of the group's joint-stock company.

Since the establishment of the company in 2012, the company has been committed to the research and development, production and sales of entrapment type stainless steel, carbon steel piping and piping accessories, which has achieved significant use and good reputation among users in the industries of water supply, gas, fire fighting, heating, air pressure, and so on. As a national high-tech enterprise with the main products of stainless steel and carbon steel piping system with clamping connection, we have developed from university-industry-academia-research co-operation to the independent research and development of high-end equipments, from the automated production to the informatisation management, and from the professional pre-sales guidance to the high-quality after-sales service. Wegs has built 5 regions and 47 sales and service outlets in the country, and the company is making every effort to form a sales and service network within a diameter distance of 300KM.

QUALITY AND HEALTHY
品质 AND 健康

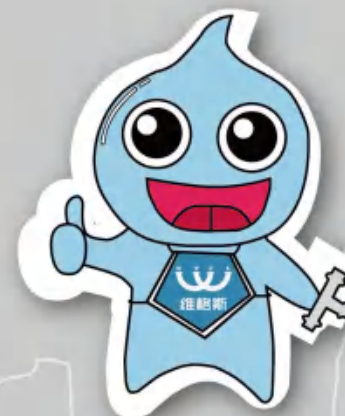



Let Everyone Drink Healthy Water

BUILDING WATER SUPPLY SYSTEM



LONG LIFE CYCLE



HEALTHY AND ENVIRONMENTALLY FRIENDLY



ELIMINATION OF LEAKAGE



NO SECONDARY MAINTENANCE



CONVENIENT INSTALLATION



After years of efforts and development, WEGS Group has passed a number of ISO management system certification, and obtained the "high-tech enterprises", "safety production standardisation of the third level enterprises", "special equipment manufacturing license (pressure) TS", "Shanghai domestic products related to drinking water health and safety products health permit approval", two-chemical fusion management system, measurement management system, Hubei Province small and medium-sized enterprises of science and technology, Hubei Province innovative small and medium-sized enterprises, Xianning City enterprise-school joint innovation centre (Hubei Institute of Science and Technology) identified a number of certifications, recognition and certificates; has won a number of ISO management system certification. We have been awarded the "2025 Fifth China Manufacturing Top Ten Quality Enterprises", "First Batch of Key Supporting Enterprises of G60 Science and Innovation Corridor in Songjiang District", "Specialised, New, Special and Fine" SMEs in Shanghai, "Shanghai Science and Technology-based Small and Medium-sized Enterprises", "Songjiang District Patent Pilot Enterprise"; was selected for CCTV Discovery Journey "Quality" programme, Shanghai Songjiang District key support enterprise list, through the Shanghai High-tech Achievement Transformation Project Identification, the sixth batch of Songjiang District key support enterprises in 2020 (two types of support) identification, 2022 Xianning City High-quality Development Prominent Units, 2022 Xianning City Manufacturing Industry Individual Champion Enterprises, the pilot demonstration enterprise of information technology and industrialisation fusion in Hubei Province, Xianning City, the fifth batch of "Nan'e Ying Talent More than 60 qualifications and honours issued by national, local and authoritative institutions, more than 50 intellectual property rights applied for, participation in the urban construction industry, including CJ/T 151-2016 "Thin-walled Stainless Steel Pipes", CJ/T 152-2016 "Thin-walled Stainless Steel Pipe Fittings with Pressure and Grooves", the urban construction industry standard CJ/T 466-2014 "Stainless Steel Pipes and Double-Compression Pipe Fittings for Gas Transmission", and more than 30 national and local standards in the field of water supply and gas.

WEGS adheres to the quality concept of "good quality pipe, drinking health", focuses on technology research and development, focuses on product quality, focuses on the transformation of results, and constantly applies and passes on the spirit of "striving for excellence, quality first" and solid technical experience to research and develop, manufacture and export products. We have been applying and inheriting the spirit of "excellence, quality first" and solid technical experience to research, develop and manufacture piping solutions for water supply, gas and fire fighting systems in China. Following the trend of the times, holding the market opportunity, WEGS based on China's economic centre - Shanghai and the charm of the southern gate of Hubei - Xianning, take advantage of the geographical advantage, to point to lead the line, line to lead the face, with a perfect sales and service network to serve all over the country. With one heart to build a dream, "Wei" line to the future! Insight into the changes of the times, with the world's power, as always, go all out, for the enterprise, for the industry, for the user, for the community to contribute to the new power!

SHANGHAI R&D & MANUFACTURING HEADQUARTERS



HUBEI XIANNING MANUFACTURING BASE





— Bundesrepublik Deutschland —

Urkunde

über die Eintragung der
Marke Nr. 30 2019 111 354

Az.: 30 2019 111 354.3 / 06

WECS

InhaberInhaberin
Wegs (Shanghai) Fluid Technology Co., Ltd., Shanghai, CN

Tag der Anmeldung:
30.08.2019

Tag der Eintragung:
06.09.2019

Die Präsidentin des Deutschen Patent- und Markenamtes

Rudolf-Schäffer

Rudolf-Schäffer
München, 06.09.2019



Den aktuellen Rechtsstand und Schutzzumfang nach dem Verzeichnis der Waren und Dienstleistungen
entnehmen Sie bitte dem DPMAregister unter www.dpma.de.



中国合格评定国家认可委员会 实验室认可证书

(注册号: CNAS L17849)

兹证明:

维格斯(上海)流体技术有限公司检测中心

(法人: 维格斯(上海)流体技术有限公司)

上海市松江区新浜都市工业园区周家巷路51号, 201605

符合 ISO/IEC 17025:2017《检测和校准实验室能力的通用要求》
(CNAS-CL01《检测和校准实验室能力认可准则》)的要求, 具备承担本
证书附件所列服务能力, 予以认可。

获认可的能力范围见标有相同认可注册号的证书附件, 证书附件是
本证书组成部分。

生效日期: 2023-02-24

截止日期: 2029-02-23



中国合格评定国家认可委员会授权人 **张朝华**

中国合格评定国家认可委员会(CNAS)经国家认证认可监督管理委员会(CNCA)授权, 负责实施合格评定国家认可制度。
CNAS是国际实验室认可合作组织(ILAC)和亚太认可合作组织(APAC)的互认协议成员。
本证书的有效性可登录www.cnas.org.cn获认可的机构名录查询。



To learn more about Wiggs Labs, please visit www.wegs.cn



Laboratory

1. Spectrometric Analyzer
2. Pressure Test
3. Drawing Test
4. Bending Test
5. Negative Pressure Test
6. Vibration Test

Key Technology



Gas Protection
Welding Process



Pickling Passivation
Process



High Temperature Solid
Solution Process



Internal high pressure forming





PRODUCT
KEY
PROCESS



GAS PROTECTION WELDING



PICKLING PASSIVATION





SOLID SOLUTION PROCESS



INTERNAL HIGH PRESSURE FORMING



AIRTIGHT TEST




FULLY AUTOMATIC HYDRAULIC PRESS



PRODUCT KEY PROCESS

PRODUCT KEY PROCESS

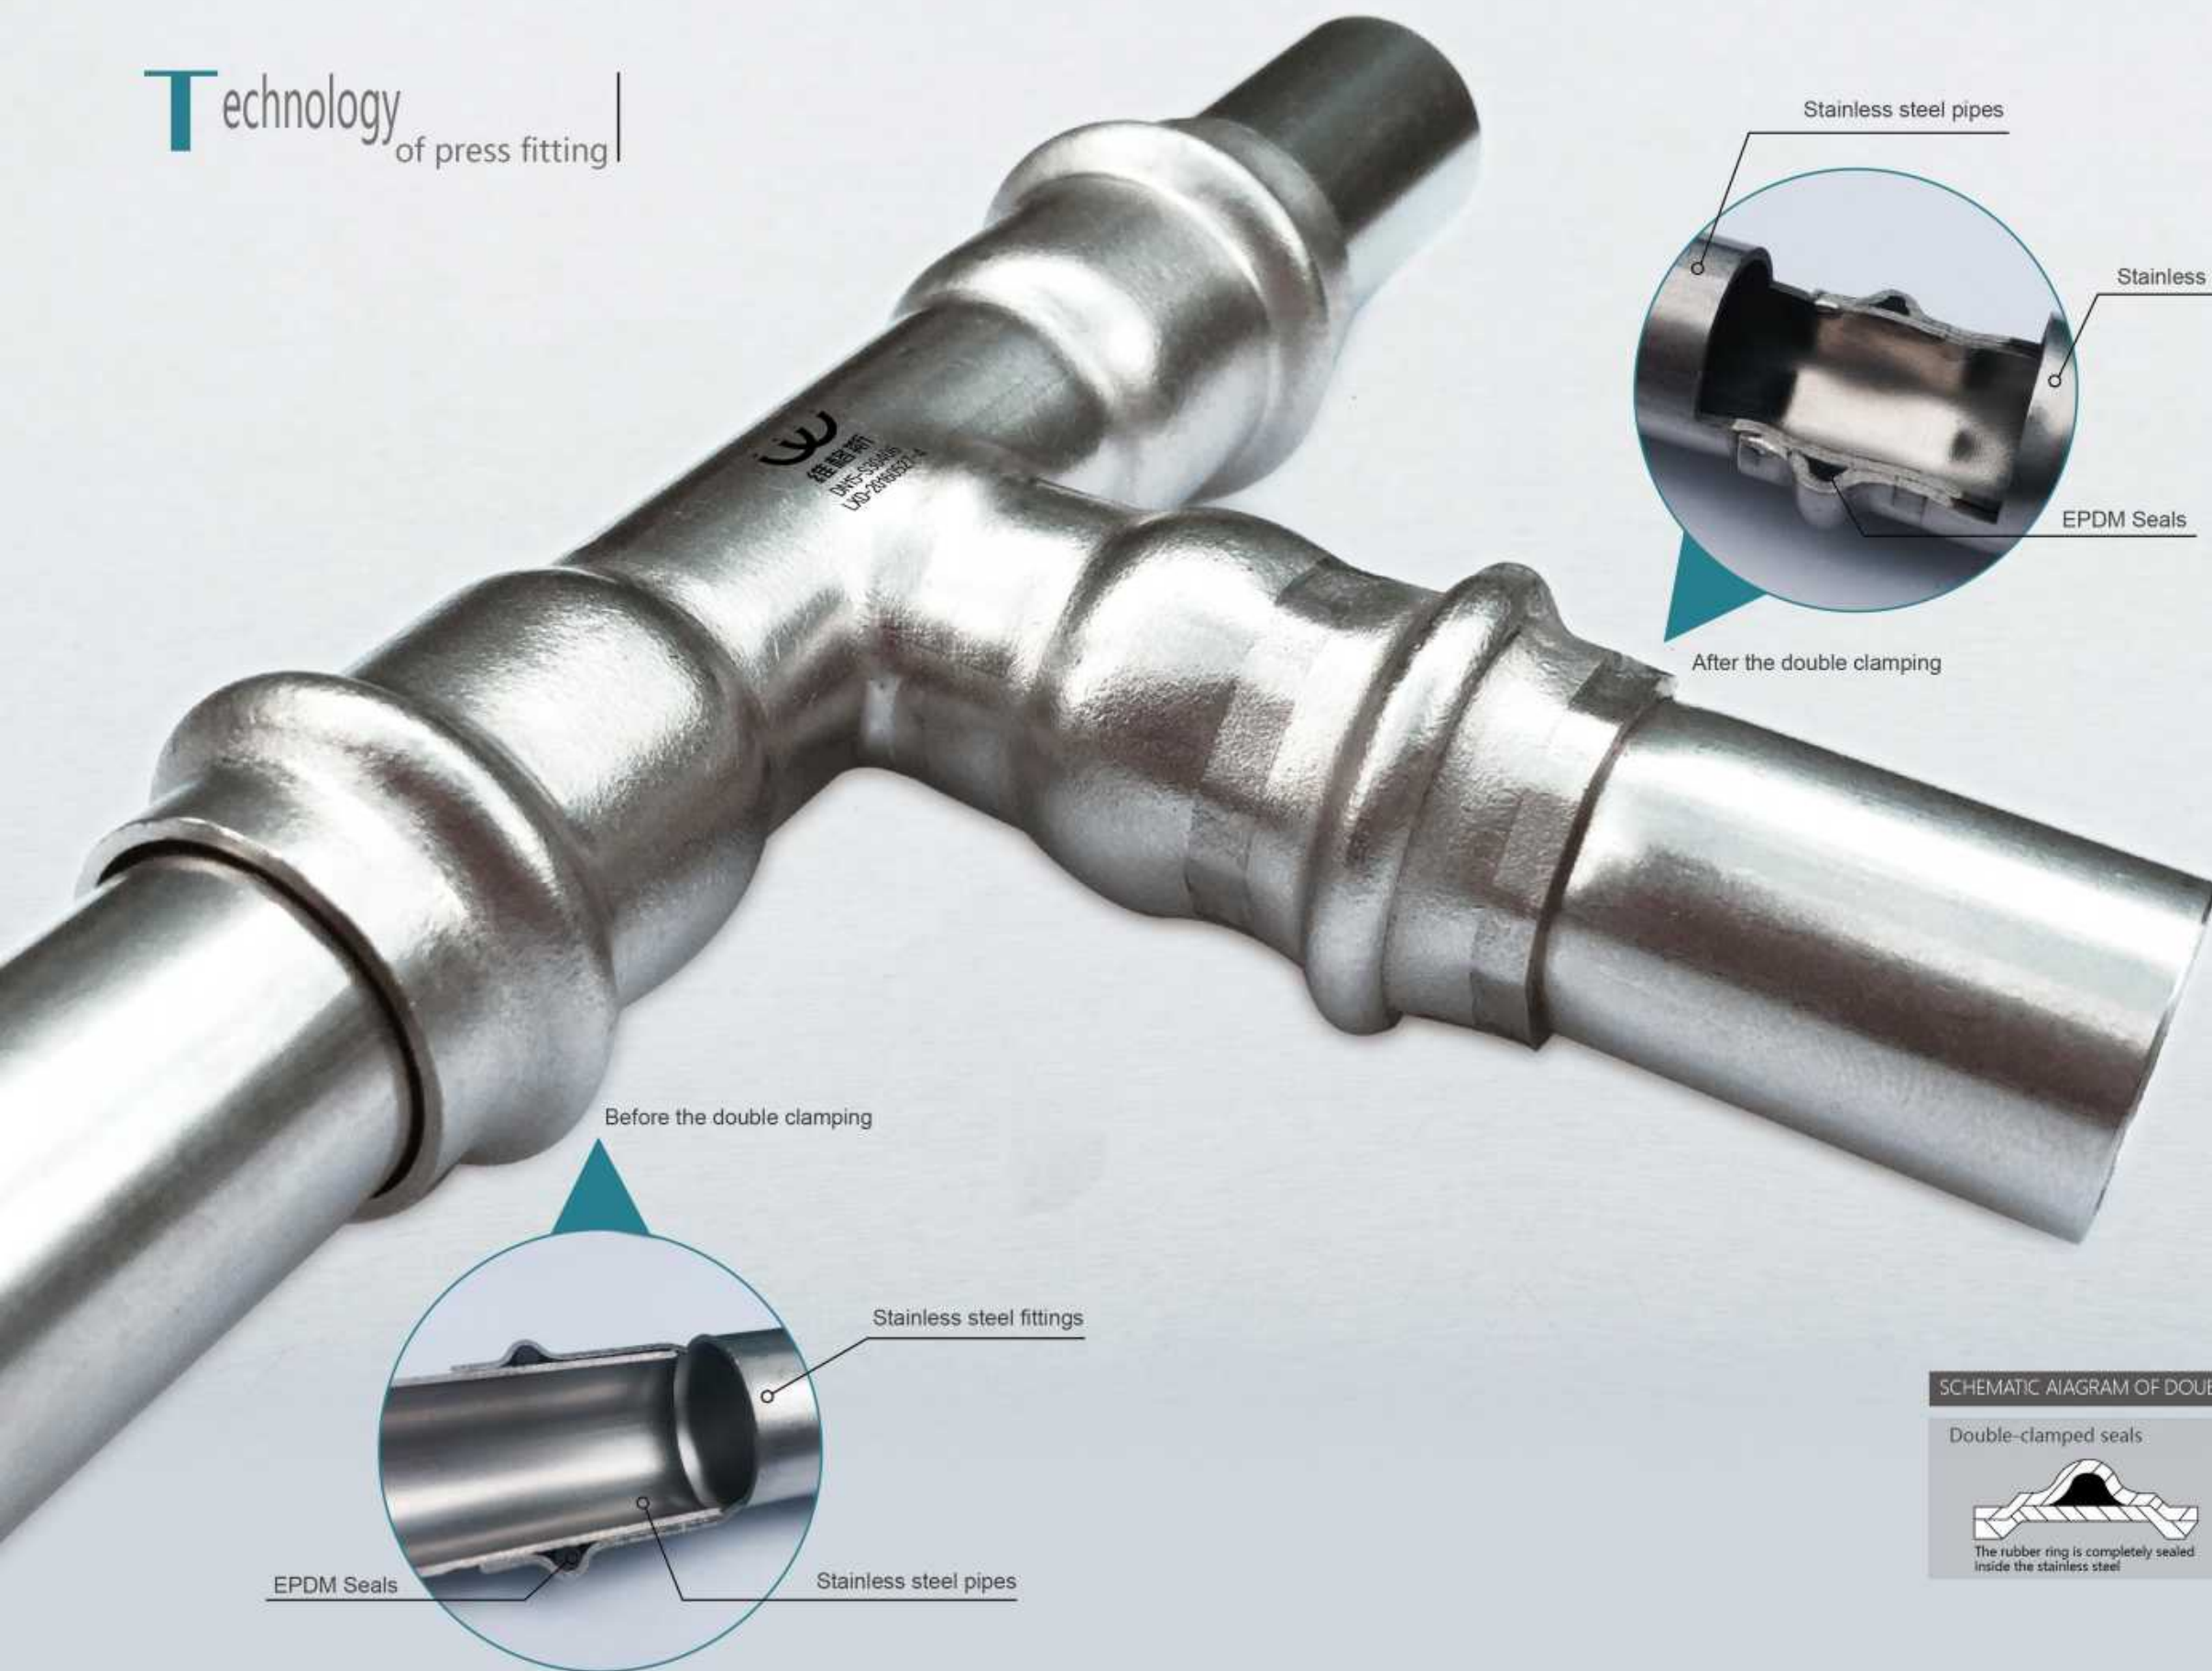

DOUBLE-CLAMPED ADVANTAGE


Five main features

1. Section crimped to hexagonal or polygonal shape for improved rotational resistance;
2. Double-sided simultaneous pressing, double guarantee of pull-out resistance;
3. Fitting guide section in front of the seal to avoid scratching of the seal by the pipe;
4. The sealing ring is completely sealed, avoiding the sealing ring being exposed, effectively improving the sealing ring's service life;
5. Strong bending resistance can eliminate external destructive forces in the guiding section at the front end of the fitting seal, reducing external damage and avoiding leakage due to construction, vibration and other external forces





SCHEMATIC DIAGRAM OF DOUBLE-CLAMPED SEAL STRUCTURE

Double-clamped seals



Flexural resistance



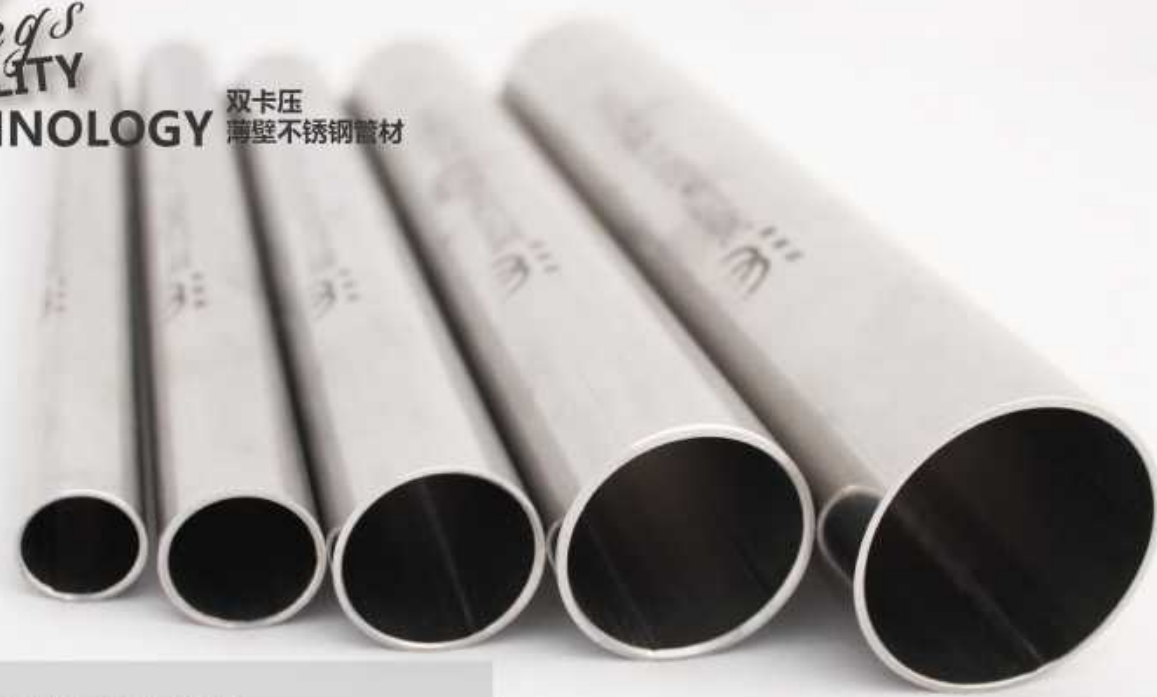

STAINLESS STEEL

Stainless steel pipe

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10	15	0.8
E-DN15	18	1.0
E-DN20	22	1.2
E-DN25	28	1.2
E-DN32	35	1.5
E-DN40	42	1.5
E-DN50	54	1.5
DN65	76.1	2.0
DN80	88.9	2.0
E-DN100	108	2.0



STAINLESS STEEL

Stainless steel pipe wrapped plastic for cold-water

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10	15	0.8
E-DN15	18	1.0
E-DN20	22	1.2
E-DN25	28	1.2
E-DN32	35	1.5
E-DN40	42	1.5
E-DN50	54	1.5



Stainless steel pipe wrapped plastic for hot-water

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10	15	0.8
E-DN15	18	1.0
E-DN20	22	1.2
E-DN25	28	1.2
E-DN32	35	1.5
E-DN40	42	1.5
E-DN50	54	1.5



STAINLESS STEEL

Coupling CS

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10	15	1.5
E-DN15	18	1.5
E-DN20	22	1.5
E-DN25	28	1.5
E-DN32	35	1.5
E-DN40	42	1.5
E-DN50	54	1.5
DN65	76.1	2.0
DN80	88.9	2.0
E-DN100	108	2.0



STAINLESS STEEL

Reducer CR

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN15×10	18×15	1.5×1.5
E-DN20×10	22×15	1.5×1.5
E-DN20×15	22×18	1.5×1.5
E-DN25×10	28×15	1.5×1.5
E-DN25×15	28×18	1.5×1.5
E-DN25×20	28×22	1.5×1.5
E-DN32×15	35×18	1.5×1.5
E-DN32×20	35×22	1.5×1.5
E-DN32×25	35×28	1.5×1.5
E-DN40×15	42×18	1.5×1.5
E-DN40×20	42×22	1.5×1.5
E-DN40×25	42×28	1.5×1.5
E-DN40×32	42×35	1.5×1.5
E-DN50×15	54×18	1.5×1.5
E-DN50×20	54×22	1.5×1.5
E-DN50×25	54×28	1.5×1.5
E-DN50×32	54×35	1.5×1.5
E-DN50×40	54×42	1.5×1.5
E-DN65×50	76.1×54	2.0×1.5
E-DN80×50	88.9×54	2.0×1.5
DN80×65	88.9×76.1	2.0×2.0
E-DN100×50	108×54	2.0×1.5
E-DN100×65	108×76.1	2.0×2.0
E-DN100×80	108×88.9	2.0×2.0



STAINLESS STEEL

Sliding coupling KC

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10	15	1.5
E-DN15	18	1.5
E-DN20	22	1.5
E-DN25	28	1.5
E-DN32	35	1.5
E-DN40	42	1.5
E-DN50	54	1.5
DN65	76.1	2.0
DN80	88.9	2.0
E-DN100	108	2.0



STAINLESS STEEL

Male adapter ETC

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10×½	15×½	1.5
E-DN15×½	18×½	1.5
E-DN15×¾	18×¾	1.5
E-DN20×½	22×½	1.5
E-DN20×¾	22×¾	1.5
E-DN20×1	22×1	1.5
E-DN25×¾	28×¾	1.5
E-DN25×1	28×1	1.5
E-DN32×1	35×1	1.5
E-DN32×1¼	35×1¼	1.5
E-DN40×1½	42×1½	1.5
E-DN50×2	54×2	1.5



Female adapter ITC

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10×½	15×½	1.5
E-DN10×¾	15×¾	1.5
E-DN15×½	18×½	1.5
E-DN15×¾	18×¾	1.5
E-DN20×½	22×½	1.5
E-DN20×¾	22×¾	1.5
E-DN25×½	28×½	1.5
E-DN25×¾	28×¾	1.5
E-DN25×1	28×1	1.5
E-DN32×1¼	35×1¼	1.5
E-DN40×1½	42×1½	1.5
E-DN50×2	54×2	1.5



Valve Connector adapter with union nut ZL

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10×½	15×½	1.5
E-DN15×½	18×½	1.5
E-DN15×¾	18×¾	1.5
E-DN20×½	22×½	1.5
E-DN20×¾	22×¾	1.5
E-DN25×1	28×1	1.5
E-DN32×1¼	35×1¼	1.5
E-DN40×1½	42×1½	1.5
E-DN50×2	54×2	1.5





STAINLESS STEEL

STAINLESS STEEL

Female angle adapter IT90E

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10×½	15×½	1.5
E-DN15×½	18×½	1.5
E-DN15×¾	18×¾	1.5
E-DN20×¾	22×¾	1.5
E-DN25×1	28×1	1.5
E-DN32×1¼	35×1¼	1.5
E-DN40×1½	42×1½	1.5
E-DN50×2	54×2	1.5



Male angle adapter

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10×½	15×½	1.5
E-DN15×½	18×½	1.5
E-DN15×¾	18×¾	1.5
E-DN20×¾	22×¾	1.5
E-DN25×1	28×1	1.5
E-DN32×1¼	35×1¼	1.5
E-DN40×1½	42×1½	1.5
E-DN50×2	54×2	1.5



STAINLESS STEEL

90° Elbow 90EA

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10	15	1.5
E-DN15	18	1.5
E-DN20	22	1.5
E-DN25	28	1.5
E-DN32	35	1.5
E-DN40	42	1.5
E-DN50	54	1.5
DN65	76.1	2.0
DN80	88.9	2.0
E-DN100	108	2.0



90° Elbow with one plain end 90EB

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10	15	1.5
E-DN15	18	1.5
E-DN20	22	1.5
E-DN25	28	1.5
E-DN32	35	1.5
E-DN40	42	1.5
E-DN50	54	1.5
DN65	76.1	2.0
DN80	88.9	2.0
E-DN100	108	2.0



Female angle adapter(short) IT90E1


Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10×½	15×½	1.5
E-DN15×½	18×½	1.5
E-DN15×¾	18×¾	1.5
E-DN20×¾	22×¾	1.5
E-DN25×½	28×½	1.5
E-DN25×¾	28×¾	1.5
E-DN25×1	28×1	1.5



STAINLESS STEEL

45° Elbow 45EA

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10	15	1.5
E-DN15	18	1.5
E-DN20	22	1.5
E-DN25	28	1.5
E-DN32	35	1.5
E-DN40	42	1.5
E-DN50	54	1.5
DN65	76.1	2.0
DN80	88.9	2.0
E-DN100	108	2.0

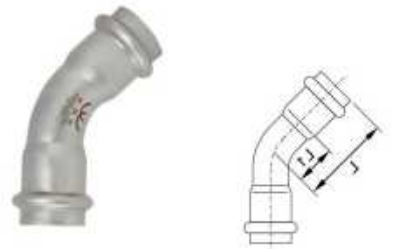

45° Elbow with one plain end 45EB

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10	15	1.5
E-DN15	18	1.5
E-DN20	22	1.5
E-DN25	28	1.5
E-DN32	35	1.5
E-DN40	42	1.5
E-DN50	54	1.5
DN65	76.1	2.0
DN80	88.9	2.0
E-DN100	108	2.0



Reducing 90° Elbow R90E

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN20×15	22×18	1.5×1.5
E-DN25×15	28×18	1.5×1.5
E-DN25×20	28×22	1.5×1.5



STAINLESS STEEL

Branch tee male outlet ETT

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10×½	15×½	1.5
E-DN15×½	18×½	1.5
E-DN20×½	22×½	1.5
E-DN20×¾	22×¾	1.5
E-DN25×½	28×½	1.5
E-DN25×¾	28×¾	1.5
E-DN25×1	28×1	1.5
E-DN32×½	35×½	1.5
E-DN32×¾	35×¾	1.5
E-DN32×1¼	35×1¼	1.5
E-DN40×½	42×½	1.5
E-DN40×¾	42×¾	1.5
E-DN40×1¼	42×1¼	1.5
E-DN40×1½	42×1½	1.5
E-DN50×½	54×½	1.5
E-DN50×¾	54×¾	1.5
E-DN50×2	54×2	1.5



STAINLESS STEEL

Reducing tee TR


Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN15×10	18×15	1.5×1.5
E-DN20×10	22×15	1.5×1.5
E-DN20×15	22×18	1.5×1.5
E-DN25×10	28×15	1.5×1.5
E-DN25×15	28×18	1.5×1.5
E-DN25×20	28×22	1.5×1.5
E-DN32×10	35×15	1.5×1.5
E-DN32×15	35×18	1.5×1.5
E-DN32×20	35×22	1.5×1.5
E-DN32×25	35×28	1.5×1.5
E-DN40×15	42×18	1.5×1.5
E-DN40×20	42×22	1.5×1.5
E-DN40×25	42×28	1.5×1.5
E-DN40×32	42×35	1.5×1.5
E-DN50×20	54×22	1.5×1.5
E-DN50×25	54×28	1.5×1.5
E-DN50×32	54×35	1.5×1.5
E-DN50×40	54×42	1.5×1.5
E-DN65×20	76.1×22	2.0×1.5
E-DN65×25	76.1×28	2.0×1.5
E-DN65×32	76.1×35	2.0×1.5
E-DN65×40	76.1×42	2.0×1.5
E-DN65×50	76.1×54	2.0×1.5
E-DN80×20	88.9×22	2.0×1.5
E-DN80×25	88.9×28	2.0×1.5
E-DN80×32	88.9×35	2.0×1.5
E-DN80×40	88.9×42	2.0×1.5
E-DN80×50	88.9×54	2.0×1.5
DN80×65	88.9×76.1	2.0×2.0
E-DN100×20	108×22	2.0×2.0
E-DN100×25	108×28	2.0×2.0
E-DN100×32	108×35	2.0×2.0
E-DN100×40	108×42	2.0×2.0
E-DN100×50	108×54	2.0×2.0
E-DN100×65	108×76.1	2.0×2.0
E-DN100×80	108×88.9	2.0×2.0



STAINLESS STEEL

Branch tee female outlet ITT

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10×½	15×½	1.5
E-DN15×½	18×½	1.5
E-DN15×¾	18×¾	1.5
E-DN20×½	22×½	1.5
E-DN20×¾	22×¾	1.5
E-DN25×½	28×½	1.5
E-DN25×¾	28×¾	1.5
E-DN25×1	28×1	1.5
E-DN32×½	35×½	1.5
E-DN32×¾	35×¾	1.5
E-DN32×1¼	35×1¼	1.5
E-DN40×½	42×½	1.5
E-DN40×¾	42×¾	1.5
E-DN40×1¼	42×1¼	1.5
E-DN40×1½	42×1½	1.5
E-DN50×½	54×½	1.5
E-DN50×¾	54×¾	1.5
E-DN50×2	54×2	1.5

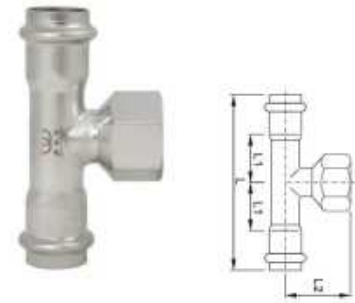

Equal tee TS

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10	15	1.5
E-DN15	18	1.5
E-DN20	22	1.5
E-DN25	28	1.5
E-DN32	35	1.5
E-DN40	42	1.5
E-DN50	54	1.5
DN65	76.1	2.0
DN80	88.9	2.0
E-DN100	108	2.0



STAINLESS STEEL

Stainless steel pipe

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
DN125	133.0	2.0
DN125	133.0	2.5
DN150	159.0	2.5
DN150	159.0	3.0
DN200	219.0	3.0
DN200	219.0	4.0
DN250	273.0	3.0
DN250	273.0	4.0
DN300	325.0	3.0
DN300	325.0	4.0



Reducer with grooved GCR

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
DN150×125	159.0×133.0	—
DN200×125	219.0×133.0	—
DN200×150	219.0×159.0	—
DN250×125	273.0×133.0	—
DN250×150	273.0×159.0	—
DN250×200	273.0×219.0	—
DN300×125	325.0×133.0	—
DN300×150	325.0×159.0	—
DN300×200	325.0×219.0	—
DN300×250	325.0×273.0	—



Reducing tee with grooved GTR

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
DN150×125	159.0×133.0	—
DN200×125	219.0×133.0	—
DN200×150	219.0×159.0	—
DN250×125	273.0×133.0	—
DN250×150	273.0×159.0	—
DN250×200	273.0×219.0	—
DN300×125	325.0×133.0	—
DN300×150	325.0×159.0	—
DN300×200	325.0×219.0	—
DN300×250	325.0×273.0	—



STAINLESS STEEL

Equal tee with grooved GTS

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
DN125	133.0	—
DN150	159.0	—
DN200	219.0	—
DN250	273.0	—
DN300	325.0	—



Branch tee press outlet with grooved GKTR

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
DN125×65	133.0×76.1	—
DN125×80	133.0×88.9	—
E-DN125×100	133.0×108	—
DN150×65	159.0×76.1	—
DN150×80	159.0×88.9	—
E-DN150×100	159.0×108	—
DN200×65	219.0×76.1	—
DN200×80	219.0×88.9	—
E-DN200×100	219.0×108	—
DN250×65	273.0×76.1	—
DN250×80	273.0×88.9	—
E-DN250×100	273.0×108	—
E-DN300×100	325.0×108	—



45°Elbow with grooved G45EA

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
DN125	133.0	—
DN150	159.0	—
DN200	219.0	—
DN250	273.0	—
DN300	325.0	—



STAINLESS STEEL

90°Elbow with grooved G90EA

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
DN125	133.0	—
DN150	159.0	—
DN200	219.0	—
DN250	273.0	—
DN300	325.0	—



Reducer with press and grooved GKCR

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
DN125×65	133.0×76.1	—
DN125×80	133.0×88.9	—
E-DN125×100	133.0×108	—
DN150×65	159.0×76.1	—
DN150×80	159.0×88.9	—
E-DN150×100	159.0×108	—
DN200×65	219.0×76.1	—
DN200×80	219.0×88.9	—
E-DN200×100	219.0×108	—
DN250×65	273.0×76.1	—
DN250×80	273.0×88.9	—
E-DN250×100	273.0×108	—
E-DN300×100	325.0×108	—



Flange adapter with grooved GFG1

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
DN125	133.0	—
DN150	159.0	—
DN200	219.0	—
DN250	273.0	—
DN300	325.0	—



STAINLESS STEEL

STAINLESS STEEL

CAP

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10	15	1.5
E-DN15	18	1.5
E-DN20	22	1.5
E-DN25	28	1.5
E-DN32	35	1.5
E-DN40	42	1.5
E-DN50	54	1.5
DN65	76.1	2.0
DN80	88.9	2.0
E-DN100	108	2.0




Straight pipe union HJG

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN15	18	1.5
E-DN20	22	1.5
E-DN25	28	1.5



Flange adapter FG

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN15	18	1.5
E-DN20	22	1.5
E-DN25	28	1.5
E-DN32	35	1.5
E-DN40	42	1.5
E-DN50	54	1.5
DN65	76.1	2.0
DN80	88.9	2.0
E-DN100	108	2.0



STAINLESS STEEL

Compensator with flange

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
DN32	—	—
DN40	—	—
DN50	—	—
DN65	—	—
DN80	—	—
DN100	—	—
DN125	—	—
DN150	—	—
DN200	—	—



Planar flange

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN15	—	—
E-DN20	—	—
E-DN25	—	—
E-DN32	—	—
E-DN40	—	—
E-DN50	—	—
DN65	—	—
DN80	—	—
E-DN100	—	—



Special fitting B

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN10	15	1.5
E-DN15	18	1.5
E-DN20	22	1.5
E-DN25	28	1.5



STAINLESS STEEL

Support with wxpansion bolt

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
E-DN15	—	—
E-DN20	—	—
E-DN25	—	—
E-DN32	—	—
E-DN40	—	—
E-DN50	—	—
DN65	—	—
DN80	—	—
E-DN100	—	—



Clamp KG

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
DN125	—	—
DN150	—	—
DN200	—	—
DN250	—	—
DN300	—	—



Double male

Nominal Diameter	Outer Diameter mm	Wall Thickness mm
DN 15 × ½	16.0 × ½	—
DN 20 × ¾	20.0 × ¾	—
DN25 × 1	25.4 × 1	—
DN32 × 1- ¼	32.0 × 1- ¼	—
DN40 × 1- ½	40.0 × 1- ½	—
DN50 × 2	50.8 × 2	—



| Sealing material




O-ring gasket

No	Sealing material	Color	Temperature range
1	CIIR	black	-20°C~110°C
2	EPDM	black	-15°C~110°C
3	FKM	green	-30°C~200°C
4	NBR	yellow	-20°C~110°C

Product

installation

NOTICE

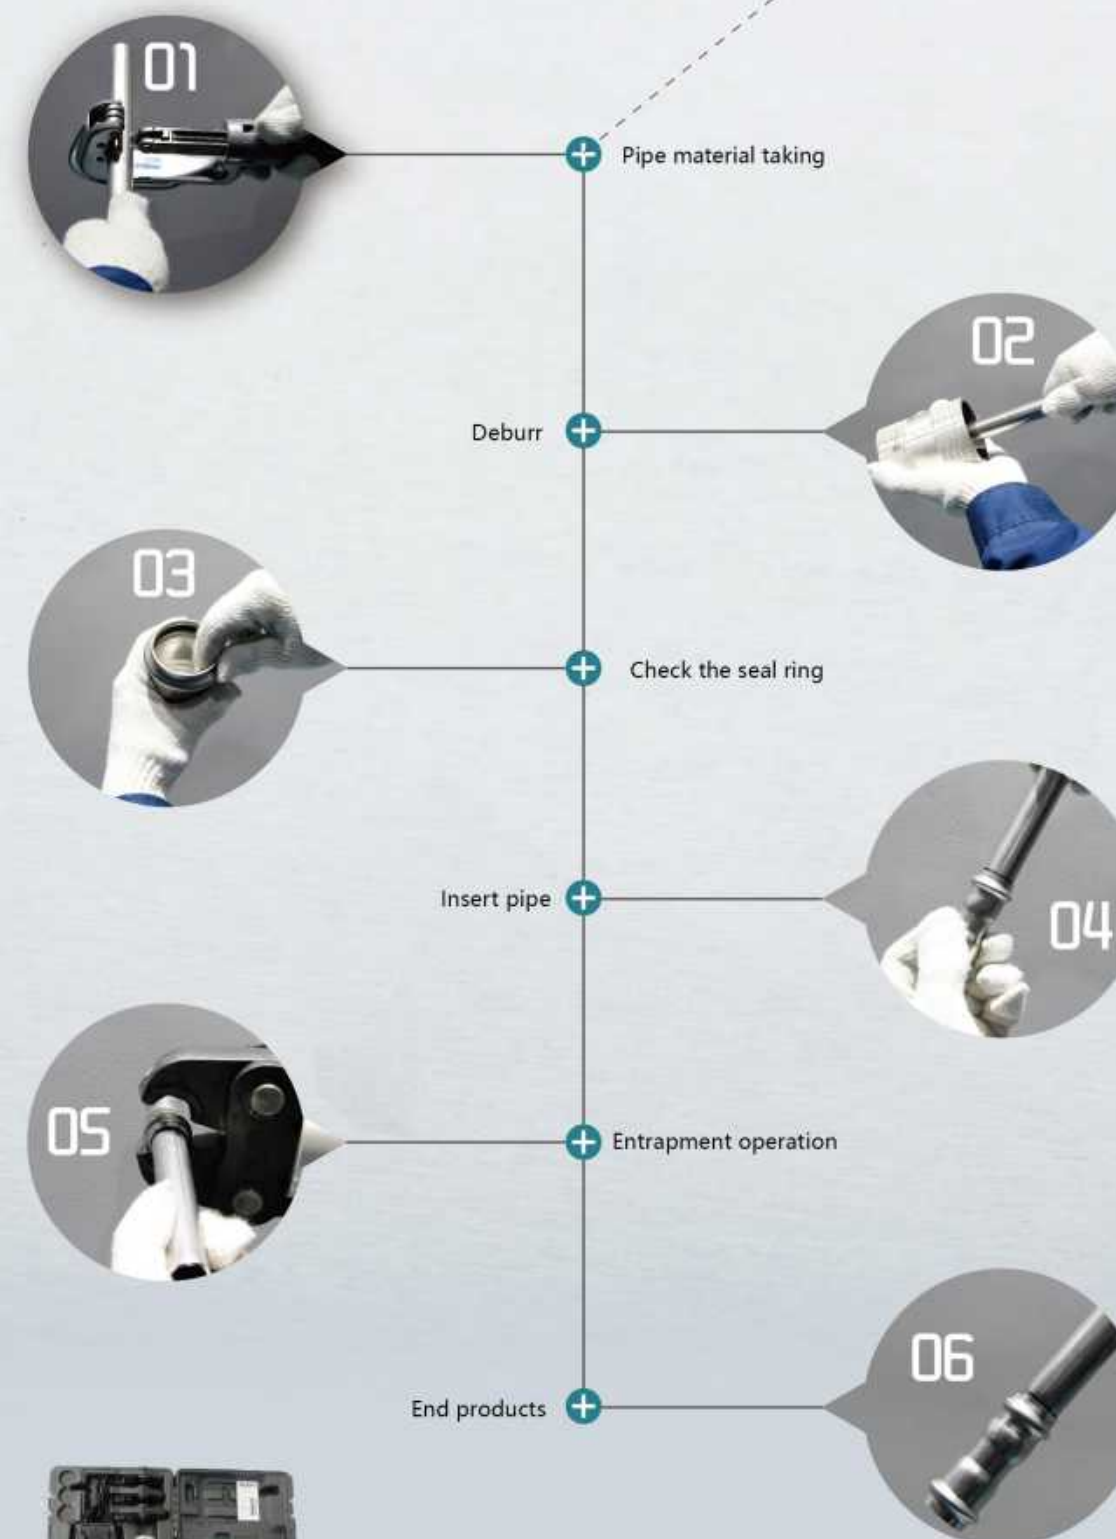

Tool

Design and installation standards(DN125-DN300)

- ◎ CJ/T 156-2001 《沟槽式管接头》
- ◎ CECS 151-2003 《沟槽式连接管道工程技术规程》
- ◎ GB/T 12771-2008 《流体输送用不锈钢焊接钢管》

Product implementation standard(DN15-ND100)

- ◎ GB/T19228.1-2011 《不锈钢卡压式管件组件 第1部分：卡压式管件》
- ◎ GB/T19228.2-2011 《不锈钢卡压式管件组件 第2部分：连接用薄壁不锈钢管》
- ◎ GB/T19228.3-2012 《不锈钢卡压式管件组件 第3部分：O型橡胶密封圈》
- ◎ CECS153: 2003 《建筑给水薄壁不锈钢管道工程技术规程》
- ◎ 10S407-2 《建筑给水薄壁不锈钢管道安装》

WEGS Participate in writing

- ◎ CJ/T 466-2014
- ◎ CJ/T 151-2016
- ◎ CJ/T 152-2016
- ◎ CJ/T 502-2016
- ◎ CECS153-2003
- ◎ Secondary water supply
engineering design manual



STRICT IMPLEMENTATION OF NATIONAL STANDARDS

