




ZHEJIANG MINGSHI XINGXIN HVAC TECHNOLOGY CO., LTD.  
No.16 Xianguang Rd, Diankou Town, Zhuji City, Zhejiang Province, China, 311835  
Tel: +86 (575) 8900 7713 Fax: +86 (575) 8900 6964 Email: info@ms-piping.com  
www.ms-piping.com



## MINGSHI CYLINDER

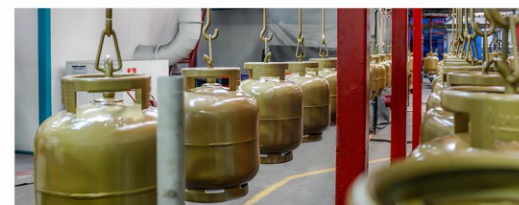

## SERIES PRODUCTS



DECADES OF QUALITY  
INNOVATION  
AND SERVICE



[www.ms-piping.com](http://www.ms-piping.com)

# Index

COMPANY INTRODUCTION

1

PRODUCTION PLANT

3

QC INSPECTION

5

CERTIFICATES

7

LPG CYLINDER

9

CYLINDER VALVE

LPG CYLINDER VALVES 13

CNG CYLINDER VALVES 18

OXYGEN CYLINDER VALVES 21

REFRIGERANTS CYLINDER VALVES 24

LPG ACCESSORIES

27

# Company Introduction


Create a new standard of living

## **ZHEJIANG MINGSHI HVAC TECHNOLOGY CO., LTD.**

a leading global company specialized in manufacturing steel LPG cylinders and brass cylinders valves, has been offering customized solutions since 2009.

Over the years MINGSHI has become a reputable and reliable brand in HVAC & LPG fields for all global energy companies around the world. Mingshi always carries the consciousness of maintaining high standards in terms of manufacturing, quality and services.

Given our desire to export and diversification of products, we are able to manufacture our pressurised vessels according to various international manufacturing codes and standards.

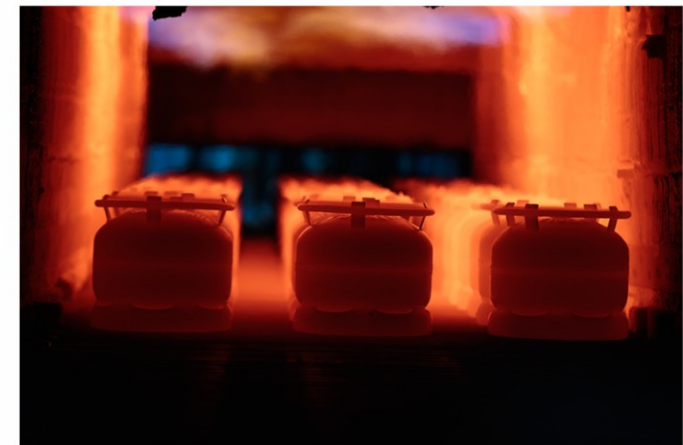



# Production Plant







# QC Inspection

MINGSHI believes that a constant renovation and development on every single operation is essential to maintain presence in global markets. In this sense guidelines of ISO 9001 - Quality Management System which consist of ISO 14001 - Environmental Management Systems and OHSAS 18001 - Occupational Health and Safety Management (OHS) has been implemented and strictly followed for continuous improvement of effectiveness of its processes to better satisfy the needs of customers, suppliers, business partners and employees.

LPG applications have no room for leaks. That's why Mingshi designs and manufactures with 100% of testing on the products. We invest in technology and training to deliver flow control products designed to reduce maintenance and replacement costs, and ensure an efficient, safe work flow.

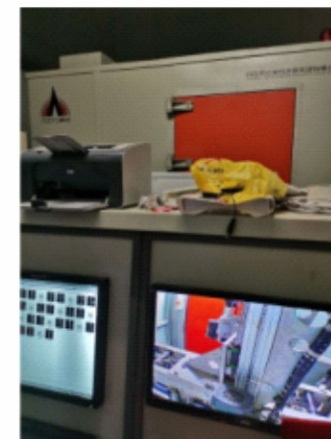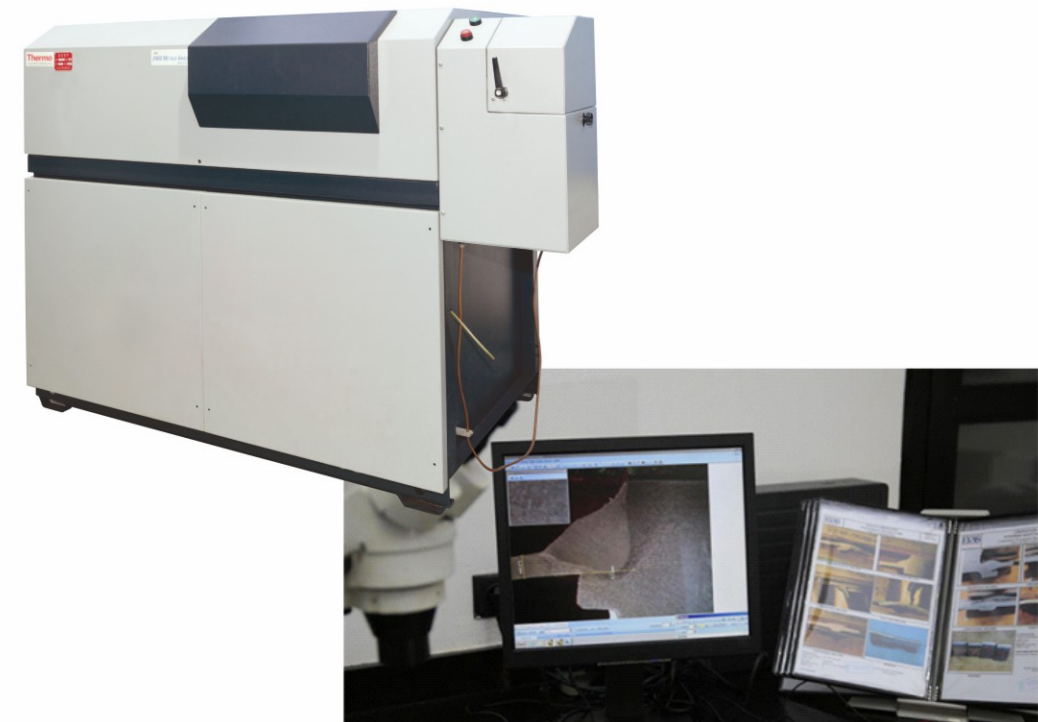





# Certificates





## LPG CYLINDER

MINGSHI designs, manufactures and delivers lightweight steel cylinders with or without a protective casing, or a plastic handle or simply a steel cylinder, FROM 6L up to 36L.


3KG-I		STEEL MATERIAL	HP295
		Ambient Temperature	-40~60°C
		Outer Diameter	197mm
		Water Capacity	6.0L
		Nominal Working Pressure	2.1Mpa
		Hydraulic Test Pressure	3.2Mpa
		Total Height	260mm


3KG-II		STEEL MATERIAL	HP295
		Ambient Temperature	-40~60°C
		Outer Diameter	228mm
		Water Capacity	7.1L
		Nominal Working Pressure	2.1Mpa
		Hydraulic Test Pressure	3.2Mpa
		Total Height	294mm


5KG-II		STEEL MATERIAL	HP295
		Ambient Temperature	-40~60°C
		Outer Diameter	244mm
		Water Capacity	12L
		Nominal Working Pressure	2.1Mpa
		Hydraulic Test Pressure	3.2Mpa
		Total Height	427mm


5KG-II		STEEL MATERIAL	HP295
		Ambient Temperature	-40~60°C
		Outer Diameter	230mm
		Water Capacity	11L
		Nominal Working Pressure	2.1Mpa
		Hydraulic Test Pressure	3.2Mpa
		Total Height	406mm





5KG-III		STEEL MATERIAL	Hp295
		Ambient Temperature	-40~60°C
		Outer Diameter	230mm
		Water Capacity	11L
		Nominal Working Pressure	2.1Mpa
		Hydraulic Test Pressure	3.2Mpa
		Total Height	348mm

6KG		STEEL MATERIAL	Hp295
		Ambient Temperature	-40~60°C
		Outer Diameter	299mm
		Water Capacity	12.9L
		Nominal Working Pressure	2.1Mpa
		Hydraulic Test Pressure	3.2Mpa
		Total Height	288mm

9KG		STEEL MATERIAL	Hp295
		Ambient Temperature	-40~60°C
		Outer Diameter	320mm
		Water Capacity	21.6L
		Nominal Working Pressure	2.1Mpa
		Hydraulic Test Pressure	3.2Mpa
		Total Height	501mm

12.5KG-I		STEEL MATERIAL	Hp295
		Ambient Temperature	-40~60°C
		Outer Diameter	300mm
		Water Capacity	26.2L
		Nominal Working Pressure	2.1Mpa
		Hydraulic Test Pressure	3.2Mpa
		Total Height	505mm

12.5KG-II		STEEL MATERIAL	Hp295
		Ambient Temperature	-40~60°C
		Outer Diameter	300mm
		Water Capacity	11L
		Nominal Working Pressure	26.2Mpa
		Hydraulic Test Pressure	3.2Mpa
		Total Height	597mm




15KG		STEEL MATERIAL	Hp295
		Ambient Temperature	-40~60°C
		Outer Diameter	300mm
		Water Capacity	35.5L
		Nominal Working Pressure	2.1Mpa
		Hydraulic Test Pressure	3.2Mpa
		Total Height	685mm

CYLINDER VALVE

For one decade, we have been manufacturing the cylinder valves to the highest standards of precision and durability,our valves have stood the test of time. We support our distributors and OEMs with top quality materials, training, inventory and technical support around the world.

LPG Cylinder Valve Series

Mingshi “YSF/YSQ/YJF” Series LPG Cylinder Valves are suitable for switching gas flow on the cylinders whose operating medium is Liquefied Petroleum Gas (LPG) with operating pressure ≤ 2.5MPa and environmental temperature of -40℃ to 60℃.

 YSQ-4 LPG Cylinder valve	PRODUCT TYPE	YSQ-4
	Gas Service	Liquefied Petroleum Gas
	Working Pressure	1.7MPa
	Orifice Diameter	≥ø7mm
	Body Material	Brass
	Inlet Thread	3/4 -14NGT
		Optional PZ27.8/W28.8/25E
	Outlet Thread	CGA510
	Pressure of Safety Device	2.80~3.12MPa(5m3/min)
	Surface Treatment	Shot Blasting or Pickling
	Working Temperature	-40℃~+60℃
	Design Weight (g/pcs)	360
 YSQ-6 LPG Cylinder valve	PRODUCT TYPE	YSQ-6
	Gas Service	Liquefied Petroleum Gas
	Working Pressure	1.7MPa
	Orifice Diameter	≥ø7mm
	Body Material	Brass
	Inlet Thread	3/4 -14NGT
	Outlet Thread	CGA510
	Pressure of Safety Device	2.86~3.12MPa (10m3/min)
	Surface Treatment	Shot Blasting or Pickling
	Working Temperature	-40℃~+60℃
	Design Weight (g/pcs)	370
 YSQ-1E LPG Cylinder valve	PRODUCT TYPE	YSQ-1E
	Gas Service	Liquefied Petroleum Gas
	Working Pressure	2.5MPa
	Orifice Diameter	≥ø7mm
	Body Material	Brass
	Inlet Thread	PZ27.8/W28.8/25E
		(Optional PZ19.2/W19.8/17E)
	Outlet Thread	W21.8×1/14-LH
	Surface Treatment	Shot Blasting or Pickling
	Working Temperature	-40℃~+60℃
	Design Weight (g/pcs)	245



**YSQ-8**  
LPG Cylinder valve

PRODUCT TYPE	YSQ-8
Gas Service	Liquefied Petroleum Gas
Working Pressure	2.5MPa
Orifice Diameter	≥ø7mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	W21.8×1/14-LH
Pressure of Safety Device	2.86~3.12MPa
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+60℃
Design Weight (g/pcs)	310



**YSQ-8A**  
LPG Cylinder valve

PRODUCT TYPE	YSQ-8A
Gas Service	Liquefied Petroleum Gas
Working Pressure	2.5MPa
Orifice Diameter	≥ø7mm
Body Material	Brass
Inlet Thread	PZ19.2/W19.8/17E
Outlet Thread	W21.8×1/14-LH
Pressure of Safety Device	2.86~3.12MPa
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+60℃
Design Weight (g/pcs)	245



**YSF-4D**  
LPG Cylinder valve

PRODUCT TYPE	YSF-4D
Gas Service	Liquefied Petroleum Gas
Working Pressure	1.7MPa
Orifice Diameter	≥ø6.5mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E (Optional 3/4NGT, 1×BS341)
Outlet Thread	Ø20mm (optional Ø21mm, Ø22mm)
Pressure of Safety Device	2.8~3.1MPa
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+60℃
Design Weight (g/pcs)	220



**YSF-4E**  
LPG Cylinder valve

PRODUCT TYPE	YSF-4E
Gas Service	Liquefied Petroleum Gas
Working Pressure	1.7MPa
Orifice Diameter	≥ø6.5mm
Body Material	Brass
Inlet Thread	3/4NGT
Outlet Thread	Ø27m
Pressure of Safety Device	2.8~3.1MPa
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+60℃
Design Weight (g/pcs)	240



**YSF-4H**  
LPG Cylinder valve

PRODUCT TYPE	YSF-4H
Gas Service	Liquefied Petroleum Gas
Working Pressure	1.7MPa
Orifice Diameter	≥ø6.5mm
Body Material	Brass
Inlet Thread	3/4NGT
Outlet Thread	Ø19m
Pressure of Safety Device	2.86~3.12MPa
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+60℃
Design Weight (g/pcs)	220



**YSF-8A**  
LPG Cylinder valve

PRODUCT TYPE	YSF-8A
Gas Service	Liquefied Petroleum Gas
Working Pressure	1.7MPa
Orifice Diameter	≥ø6mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E (Optional 3/4NGT, 1×BS341)
Outlet Thread	Ø20mm (optional Ø21mm, Ø22mm)
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+60℃
Design Weight (g/pcs)	220





**YSQ-1D**  
LPG Cylinder valve

PRODUCT TYPE	YSF-1D
Gas Service	Liquefied Petroleum Gas
Working Pressure	2.7MPa
Orifice Diameter	≥ø2.5mm
Body Material	Brass
Inlet Thread	1/2-14NGT
Outlet Thread	G3/8
Surface Treatment	Shot Blasting or Pickling
Safety Device	Manual Relief Device
Working Temperature	-40℃~+60℃
Design Weight (g/pcs)	200



**YSF-4T**  
LPG Cylinder valve

PRODUCT TYPE	YSF-4T
Gas Service	Liquefied Petroleum Gas
Working Pressure	1.8MPa
Orifice Diameter	≥ø8mm
Body Material	Brass
Inlet Thread	M22×1.25
Outlet Thread	M16×1.5
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+60℃
Design Weight (g/pcs)	52

## CNG Cylinder Valve Series for Vehicles

Mingshi “CTF” Series Compressed Natural Gas Cylinder Valves for Vehicles are suitable for switching gas flow on the cylinders whose operating medium is Compressed Natural Gas (CNG) with the operating pressure ≤ 20MPa.



**CTF-1**  
CNG Cylinder Valve for Vehicle

PRODUCT TYPE	CTF-1
Gas Service	Compressed Nature Gas for Vehicle
Working Pressure	20MPa
Orifice Diameter	≥ø5mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E (Optional 1×1/8UNF; 1×BS341; 3/4NGT)
Outlet Internal Thread	1/4NPT (Optional M12×1)
Outlet External Thread	G1/2
Pressure of Safety Device/ Temperature of Safety Device	30~33MPa/ 110℃±5℃
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+85℃
Design Weight (g/pcs)	580
Optional	With Excess flow Limiter



**QF-5T**  
CNG Cylinder Valve for Vehicle

PRODUCT TYPE	QF-5T
Gas Service	Compressed Nature Gas for Vehicle
Working Pressure	20MPa
Orifice Diameter	≥ø4mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	W21.8×1/14-LH
Pressure of Safety Device/ Temperature of Safety Device	30~33MPa/ 110℃±5℃
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+85℃
Design Weight (g/pcs)	560
Optional	With Excess flow Limiter





**CTF-X1**  
CNG Cylinder Valve for Vehicle

PRODUCT TYPE	CTF-X1
Gas Service	Compressed Nature Gas for Vehicle
Working Pressure	20MPa
Orifice Diameter	≥ø7mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E (Optional 1×1/8UNF; 1×BS341; 3/4NGT)
Outlet Internal Thread	M12×1 (Optional 1/4NPT)
Outlet External Thread	G1/2
Pressure of Safety Device/ Temperature of Safety Device	30~33MPa/ 110℃±5℃
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+85℃
Design Weight (g/pcs)	485
Optional	With Excess Flow Limiter



**New QF-T3H**  
CNG Filling Valve for Vehicle

PRODUCT TYPE	QF-T3H
Gas Service	Compressed Nature Gas for Vehicle
Working Pressure	20MPa
Orifice Diameter	≥ø5mm
Body Material	Brass
Inlet Connetion	Ø12mm
Outlet Connection	2-Ø6mm
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+85℃
Design Weight (g/pcs)	360



**CTF-3**  
CNG Cylinder Valve for Vehicle

PRODUCT TYPE	CTF-3
Gas Service	Compressed Nature Gas for Vehicle
Working Pressure	20MPa
Orifice Diameter	≥ø7mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E (Optional 1×1/8UNF; 1×BS341; 3/4NGT)
Outlet Internal Thread	M12×1 (Optional 1/4NPT)
Pressure of Safety Device/ Temperature of Safety Device	30+3MPa/ 110℃±5℃
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+85℃
Design Weight (g/pcs)	425
Optional	With Excess Flow Limiter



**QF-8T**  
CNG Cylinder Valve for Vehicle

PRODUCT TYPE	QF-8T
Gas Service	Compressed Nature Gas for Vehicle
Working Pressure	20MPa
Orifice Diameter	≥ø5mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E (Optional 1×1/8UNF; 1×BS341; 3/4NGT)
Outlet Internal Thread	M12×1 (Optional 1/4NPT)
Outlet External Connection With Venting system	Smooth Ø30mm
Pressure of Safety Device/ Temperature of Safety Device	30+3MPa/ 110℃±5℃
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+85℃
Design Weight (g/pcs)	660
Optional	With Excess Flow Limiter

## Industrial Gas Cylinder Valve Series

Mingshi “QF” Series Oxygen Cylinder Valves are suitable for switching gas flow on the cylinders whose operating mediums are oxygen, nitrogen, air and other high-purity gases with the operating pressure  $\leq 15\text{MPa}$  to 30MPa.



**QF-2**  
Oxygen Cylinder Valve

PRODUCT TYPE	QF-2
Gas Service	Oxygen, Air, Nitrogen
Working Pressure	15MPa
Orifice Diameter	ø4mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	G5/8
Pressure of Safety Device	20.25~22.5MPa
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+60℃
Design Weight (g/pcs)	580



**QF-2A**  
Carbon Dioxide Cylinder Valve

PRODUCT TYPE	QF-2A
Gas Service	Carbon Dioxide
Working Pressure	15MPa
Orifice Diameter	$\geq \phi 7\text{mm}$
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	G5/8
Pressure of Safety Device	20.25~22.5MPa
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+60℃
Design Weight (g/pcs)	540



**QF-2C**  
Oxygen Cylinder Valve

PRODUCT TYPE	QF-2C
Gas Service	Oxygen, Air, Nitrogen
Working Pressure	15MPa
Orifice Diameter	ø4mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	G5/8
Pressure of Safety Device	Without
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+60℃
Design Weight (g/pcs)	520



**QF-2D**  
Oxygen Cylinder Valve

PRODUCT TYPE	QF-2D
Gas Service	Oxygen, Air, Nitrogen
Working Pressure	15MPa
Orifice Diameter	ø4mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	G5/8
Pressure of Safety Device	20.25~22.5MPa
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+60℃
Design Weight (g/pcs)	410



**QF-5D**  
Oxygen Cylinder Valve

PRODUCT TYPE	QF-5D
Gas Service	Oxygen, Air, Nitrogen
Working Pressure	20MPa
Orifice Diameter	ø4mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	G5/8
Pressure of Safety Device	27~30MPa
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+60℃
Design Weight (g/pcs)	410



**QF-2G1**  
Oxygen Cylinder Valve

PRODUCT TYPE	QF-2G1
Gas Service	Oxygen, Air, Nitrogen
Working Pressure	15MPa
Orifice Diameter	ø4mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	G5/8(Internal Thread)
Pressure of Safety Device	20.25~22.5MPa
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+60℃
Design Weight (g/pcs)	610





**QF-8A**  
Oxygen Cylinder Valve

PRODUCT TYPE	QF-8A
Gas Service	Oxygen, Air, Nitrogen
Working Pressure	15MPa
Orifice Diameter	ø4mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	W21.8-14
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+60℃
Design Weight (g/pcs)	490



**PX-32**  
Argon Cylinder Valve

PRODUCT TYPE	PX-32
Gas Service	Argon
Working Pressure	15MPa
Orifice Diameter	ø4mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	G5/8
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+60℃
Design Weight (g/pcs)	430



**QF-13**  
Propane Cylinder Valve

PRODUCT TYPE	QF-13
Gas Service	Propane
Working Pressure	2MPa
Orifice Diameter	≥ø6mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	G3/4
Pressure of Safety Device	Without
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+120℃
Design Weight (g/pcs)	500

## Refrigerants Cylinder Valves

Mingshi “QF” Series Refrigerants Cylinder Valves are suitable for switch control the flow of refrigerants including R410,R406, R134a, R404, R507, R22, R12 and their mixed medium, whose nominal working pressure is < 3.2 MPa, and the environment temperature is -20℃ to +65℃.



**QF-13**  
Refrigerant Cylinder Valve

PRODUCT TYPE	QF-13
Gas Service	Refrigerant
Working Pressure	2MPa
Orifice Diameter	≥ø6mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	G3/4
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+120℃
Design Weight (g/pcs)	500



**QF-13B**  
Refrigerant Cylinder Valve

PRODUCT TYPE	QF-13B
Gas Service	Refrigerant
Working Pressure	3.2MPa
Orifice Diameter	Ø4mm/ ø6mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	W26-16/W20-14
Temperature of Safety Device	100℃±5℃
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-20℃~+65℃
Design Weight (g/pcs)	900



**QF-13E**  
Refrigerant Cylinder Valve

PRODUCT TYPE	QF-13E
Gas Service	Refrigerant
Working Pressure	3.2MPa
Orifice Diameter	ø5mm
Body Material	Brass
Inlet Thread	PZ19.2/W19.8/17E
Outlet Thread	7/16-20UNF
Pressure of Safety Device	3.9~4.5MPa
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-20℃~+65℃
Design Weight (g/pcs)	212



**QF-13Y**  
Refrigerant Cylinder Valve

PRODUCT TYPE	QF-13Y
Gas Service	Refrigerant
Working Pressure	3.2MPa
Orifice Diameter	Ø4mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	7/16-20UNF
Pressure of Safety Device	3.9~4.5MPa
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-20℃~+65℃
Design Weight (g/pcs)	388



**QF-13YA**  
Refrigerant Cylinder Valve

PRODUCT TYPE	QF-13YA
Gas Service	Refrigerant
Working Pressure	3.2MPa
Orifice Diameter	Ø4mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	7/16-20UNF
Pressure of Safety Device	3.9~4.5MPa
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-20℃~+65℃
Design Weight (g/pcs)	410



**QF-13YB**  
Refrigerant Cylinder Valve

PRODUCT TYPE	QF-13YB
Gas Service	Refrigerant
Working Pressure	3.2MPa
Orifice Diameter	Ø4mm
Body Material	Brass
Inlet Thread	3/4-14NPT
Outlet Thread	7/16-20UNF
Pressure of Safety Device	3.9~4.5MPa
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-20℃~+65℃
Design Weight (g/pcs)	390



**QF-13YK**  
Refrigerant Cylinder Valve

PRODUCT TYPE	QF-13YK
Gas Service	Refrigerant
Working Pressure	3.2MPa
Orifice Diameter	Ø4mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	7/16-20UNF
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-20℃~+65℃
Design Weight (g/pcs)	380



**QF-310**  
Refrigerant Cylinder Valve

PRODUCT TYPE	QF-310
Gas Service	Refrigerant
Working Pressure	3.2MPa
Orifice Diameter	Ø8mm
Body Material	Brass
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	G3/4
Pressure of Safety Device	3.9~4.5MPa
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-20℃~+65℃
Design Weight (g/pcs)	405



**QF-13C**  
Refrigerant Cylinder Valve

PRODUCT TYPE	QF-13C
Gas Service	Refrigerant
Working Pressure	3.2MPa
Orifice Diameter	Ø8mm
Body Material	Brass
Inlet Thread	3/4NGT
Outlet Thread	CGA660
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-20℃~+65℃
Design Weight (g/pcs)	460




**QF-10**  
Liquid Chlorine Cylinder Valve


PRODUCT TYPE	QF-10
Gas Service	Liquid Chlorine
Working Pressure	2MPa
Orifice Diameter	≥ø6mm
Body Material	ZcuAL10-Fe3
Inlet Thread	PZ27.8/W28.8/25E
Outlet Thread	G3/4
Surface Treatment	Shot Blasting or Pickling
Working Temperature	-40℃~+120℃
Design Weight (g/pcs)	500





LPG ACCESSORIES

Mingshi builds products that last. The durable materials, proven designs and rigorous testing, all add up to products designed for years of operations under required conditions, with high quality and reliability.


	Material	Stainless Steel
	Plate	1.0mm / 0.8mm
	Valve	Brass / Zinc Alloy
	Pole	Short / Long
	Moq	5,000 Pieces
	Packing	20pcs In One Carton Box
Gas Camping Burner		

	Material	Stainless Steel
	Top Burner	75grams
	Valve	Brass / Zinc Alloy
	Pole	Short / Long
	Moq	10,000 Pieces
	Packing	Each Set In One Color Box, 100 Pcs In One Carton
Single Burner And Valve		


	Application	Home Cook Or Camping
	Gas Type	Lpg, Propane Lpg Gas, Butane Gas
	Burner Surface Material	Cold Rolled Stainless Steel, Chrome Plated
	Burner Diameter	65mm, 85mm, 105mm
	Head Thickness	0.8 / 1.0 / 1.2 Mm
	Valve Connector	M16x1.5 / Oem
	Weight	130~200 G
	Valve Material	Brass Or Zinc Alloy Body
	Moq	5000 Pcs
Gas Stove/Gas Burner		

	Application	Hiking, Outdoor Survival, Home
	Material	Cold Rolled Steel
	Color	Sliver
	Surface Treatment	Chromeplated
	Burner Material	Cast Iron
	Bracket	1.5mm-2.0mm, Stainless Steel
	Plate Diameter	215mm
	Buner Diameter	85mm
	Weight	630-650g
	Moq	5000 Pcs


Gas Stove/Gas Burner

	Application	Hiking, Outdoor Survival, Home Cooking,bbq
	Material	Cast Iron
	Color	Sliver
	Buner Diameter	85mm,105mm
	Weight	75g,85g,95g
	Valve	Outlet Hole Size: 0.25mm,0.3mm,0.35mm,0.4mm
		Outlet External Thread:12.0*0.75
		Inlet External Thread:16*1.5
		Length: 65mm Short Control, 100mm Long Control, 110mm X-long Control;
		Brass Or Iron Material,
	Moq	3000 Pcs


Single Burner

	Application	Home Cook Or Camping
	Burner Surface Material	Cold Rolled Stainless Steel, Chrome Plated
	Buner Diameter	65mm, 85mm, 105mm
	Head Thickness	0.8 / 1.0 / 1.2 Mm
	Weight	130~200 G
	Valve	Handle: Long Or Short
		Valve Connector: M16x1.5 / Oem
		Valve Material:brass Or Zinc Alloy Body
	Moq	5000 Pcs

Gas Burner with F7 Zinc Alloy Valve

	Type	1.1 Kg Iron Seater
	Material	Steel Iron
	Weight	0.86/ 1.0 / 1.1 Kgs
	Application	For 6/10/12.5kg Cylinder
	Moq	5,000 Pieces
	Packing	10pcs In One Ctn
	Note	Can Package With Burner Valve

6kg Black Iron Seater

	Type	0.55 Kg Iron Seater
	Material	Steel Iron
	Weight	0.55 Kgs
	Application	For 3 / 5kg Cylinder
	Moq	5,000 Pieces
	Packing	20pcs In One Ctn
	Note	Can Package With Burner Valve

3kg Black Iron Seate

	Application	Home Cook Or Camping For 6kg Cylinders
	Burner Surface Material	Cast Iron
	Weight	2.0/2.3kgs
	MOQ	2000 Pcs

Gas Iron Sitter

	Inlet	20/ 22/ 27 mm
	Outlet	8 Mm
	Material	Zinc Alloy
	Weight	240 Grams
	N.w. /g.w.	12 Kgs / 13 Kgs
	Packing	In Color Box, 50 Pcs / Ctn

Regulator -27 mm

	Inlet	12 X 0.75
	Outlet	8 mm
	Material	Zinc Alloy
	Weight	190 Grams
	N.w. /g.w.	9.5 Kgs / 10.5 Kgs
	Packing	In Color Box, 50 Pcs / Ctn

Camping Regulator

	Inlet Diameter (mm)	22
	Outlet Diameter (mm)	8
	Packaging Size(cm)	40x39x21.5
	Weight(g)	256
	Fuel	LPG
	Inlet Pressure(bar)	0.3-7.5
	Outlet Pressure(mbar)	30
	Capacity(kg/h)	1.5

Gas regulator

	Inlet Diameter (mm)	20
	Outlet Diameter (mm)	8
	Weight(g)	265
	Fuel	LPG
	Inlet Pressure(bar)	0.3-7.5
	Outlet Pressure(mbar)	30
	Capacity(kg/h)	1.5

Gas Regulator with Child Lock

	Inlet Diameter (mm)	20
	Outlet Diameter (mm)	8
	Packaging Size(cm)	40x39x21.5
	Weight(g)	256
	Fuel	LPG
	Inlet Pressure(bar)	0.3-7.5
	Outlet Pressure(mbar)	30
	Capacity(kg/h)	1.5

Gas Regulator

	Inlet Diameter (mm)	20, 22, 27
	Outlet Diameter (mm)	8, 10
	Weight(g)	250 G
	Fuel	LPG
	Inlet Pressure(bar)	Max 0.7 Mpa ( Max 7 Bar )
	Outlet Pressure(mbar)	30 Mbar
	Capacity(kg/h)	2 , (0.6m <sup>3</sup> /hour )

Gas Regulator



Pvc Lpg Gas Hose Pipe

Id	8.0/ 8.5 / 9.0 / 9.5 Mm
Od	14.0/ 14.5 /15.0 /15.5 Mm
Thickness	2.5/2.75/3.0 Mm
Length	50 Or 100 M / Roll
Color	Orange / Customer Made
Moq	5,000 Pieces
Packing	Each Roll With Pe Film



Hose

Specification:	1/4" ,5/16" ,3/8"
Thickness	2.5mm,3mm,3.5mm
Length	50m, 100m
Color	Black Or Others
MOQ (mts)	5000
Working Pressure:	20bar



Hose

Specification:	1/4" ,5/16" ,3/8"
Thickness	2.5mm,3mm,3.5mm,4mm
Length	50m, 100m
Color	Blue Or Others
MOQ (mts)	5000
Working Pressure:	15bar