



SHANGHAI OFFICE :

SHANGHAI MEBO INDUSTRY CO.,LTD.

AD: Room 1025,Building 4,Green Jade International Plaza,Fengxian District, Shanghai, China,201415

Tel: +86 21 5755 5386

+86 21 6755 0371

Fax: +86 21 6755 0373

E-mail:Iris:sale06@sh-mebo.com

Grace:sale03@sh-mebo.com

Julie:sale04@sh-mebo.com

Cloris:sale02@sh-mebo.com

Lisa:lisa@sh-mebo.com

www.sh-mebo.com

<https://sh-mebo.en.alibaba.com/>

JIANGSU FACTORY :

MEBO (YANCHENG) BATHROOM FURNITURE CO.,LTD.

AD: No.6 Lvliao Industry Park,Funing City,Jiangsu,China


Tel: +86 0515-89714386

FAX:+86 0515-89714386

MEBO

2025 LED MIRROR

MEBO 麦宝浴柜
MEBO BATHROOM FURNITURE



2025 LED MIRROR

BRAND INTRODUCTION

MEBO Factory is located in Funing Filter Material Industrial Park, Yancheng, Jiangsu, is an integrated industry and trade enterprise integrating independent design, product research and development, manufacturing and sales. It specializes in the production of LED luminous mirrors, stainless steel rimmed mirrors, intelligent mirrors, aluminum alloy products, stainless steel products and others, and has superior and complete production equipment including large-scale laser cutting machines, CNC router-machines, CNC recessing machines, CNC cutting machines, CNC slitting machines and special-shaped edge grinding machines. It boasts solid scientific research strength and strong technical support capabilities, professional design and R&D teams and sales teams and advanced and complete production equipment.

Our company is started in 2012 and has 8 years of foreign trade export experience. The products are exported to countries worldwide, especially in Europe, America and Southeast Asia. The products have obtained CE, SAA, GS, ETL, UL, CCC and other certifications and passed RoHS and IP66 waterproofing. Based on the principle of high quality and integrity first, our company has won the praise of crowds of customers with the premium products. We will stick to serving customers in line with the principle of producing products seriously with integrity and guaranteeing high quality.



Spectral Testing



Finished product inspection



Salt Spray Test



Scratch



Edging




Irregular Edge Grinding



Aluminum Cutting



Aluminum Processing

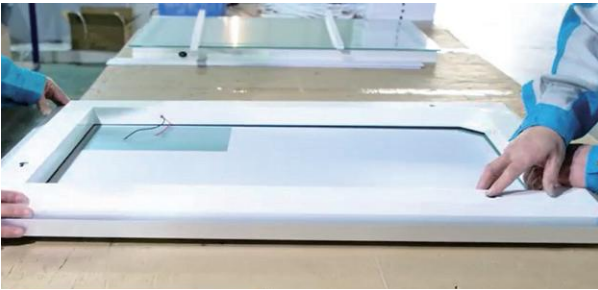


Install



MB-A17 Series

Specification			
Item No	MB-A17-700900	MB-A17-7001000	MB-A17-7001200
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	700*900	700*1000	700*1200
	Light Guide	Light Guide	Light Guide

Dimension Drawing

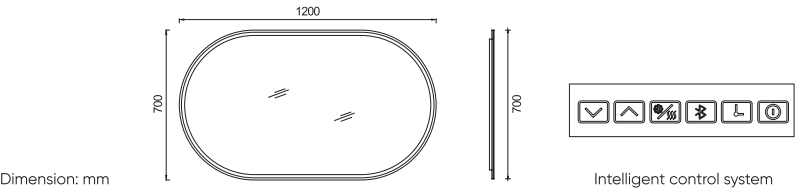

Optional functions:

- Touch switch
- Body sensor switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Physical button switch
- Shaver socket with USB


Electrical certification



MB-A01 Series

Specification			
Item No	MB-A01-915610	MB-A01-915915	MB-A01-9151220
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	915(36")*610(24")	915(36")*915(36")	1220(48")*915(36")
Material	Light Guide	Light Guide	Light Guide

Dimension Drawing

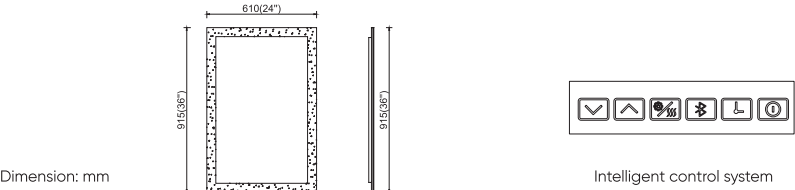

Optional functions:

- Touch switch
- Body sensor switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier

Electrical certification






MB-A02 Series

Specification			
Item No	MB-A02-915610	MB-A02-915915	MB-A02-9151220
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	915(36")*610(24")	915(36")*915(36")	1220(48")*915(36")
Material	Light Guide	Light Guide	Light Guide

Dimension Drawing

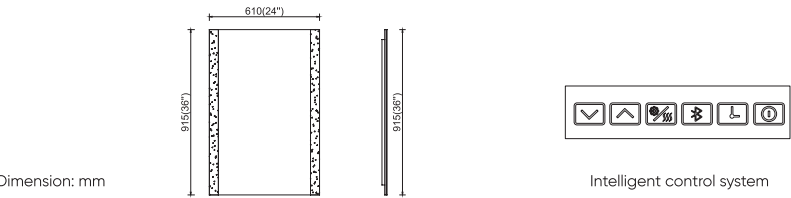

Optional functions:

-
-
-
-
-
-
-
-
-


Electrical certification



MB-B11 Series

Specification		
Item No	MB-B11-915610	MB-B11-9151220
CCT	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80
IP rate	IP20	IP20
Dimension	915(36")*610(24")	915(36")*1220(48")

Dimension Drawing

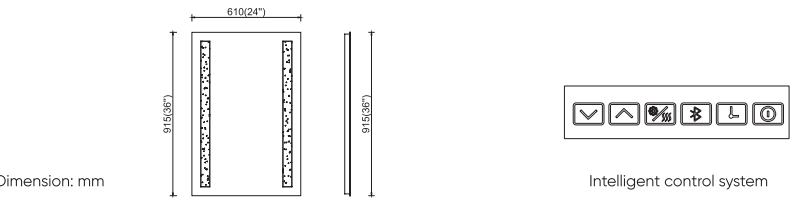

Optional functions:

-
-
-
-
-
-
-
-
-
-
-


Electrical certification



MB-B02 Series

Specification		
Item No	MB-B02-915610	MB-B02-9151220
CCT	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80
IP rate	IP20	IP20
Dimension	915(36")*610(24")	915(36")*1220(48")

Dimension Drawing

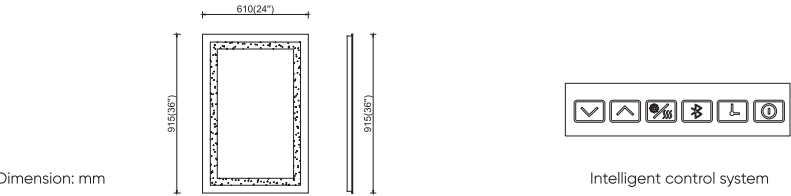

Optional functions:

-
-
-
-
-
-
-
-
-
-
-


Electrical certification



MB-A03 Series

Specification			
Item No	MB-A03-700500	MB-A03-600800	MB-A03-6001000
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	700*500	600*800	600*1000
Material	Light Guide	Light Guide	Light Guide

Dimension Drawing

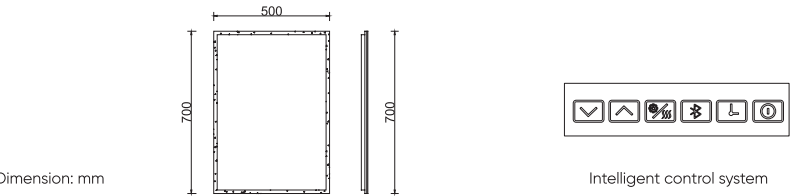

Optional functions:

-
-
-
-
-
-
-
-
-

Electrical certification






MB-A04 Series

Specification		
Item No	MB-A04-550800	MB-A04-5501000
CCT	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80
IP rate	IP20	IP20
Dimension	550*800	550*1000
Material	Light Guide	Light Guide

Dimension Drawing

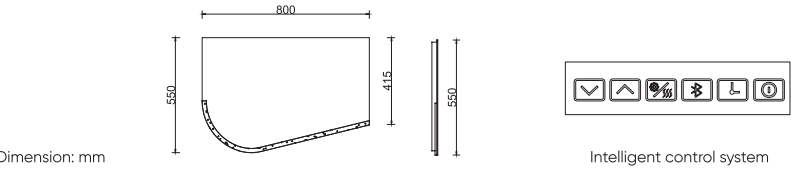

Optional functions:

-
-
-
-
-
-
-
-
-


Electrical certification



MB-A06 Series

Specification		
Item No	MB-A06-500700	MB-A06-500800
CCT	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80
IP rate	IP20	IP20
Dimension	700*500	800*500
Material	Light Guide	Light Guide

Dimension Drawing

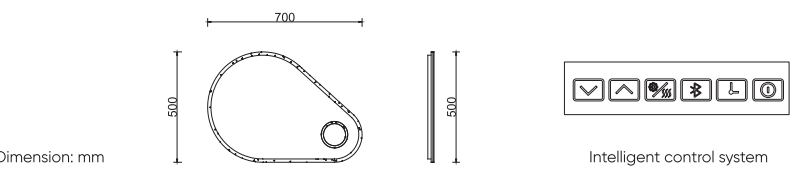

Optional functions:

-
-
-
-
-
-
-
-
-


Electrical certification



MB-A05 Series

Specification		
Item No	MB-A05-900500	MB-A05-1000600
CCT	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80
IP rate	IP20	IP20
Dimension	900*500	1000*600
Material	Light Guide	Light Guide

Dimension Drawing

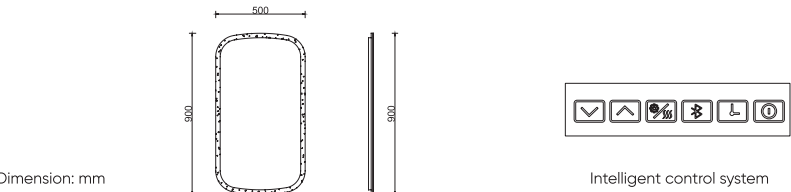

Optional functions:

-
-
-
-
-
-
-
-
-


Electrical certification



MB-A07 Series

Specification			
Item No	MB-A07-700500	MB-A07-600800	MB-A07-6001000
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	700*500	600*800	600*1000
Material	Light Guide	Light Guide	Light Guide

Dimension Drawing

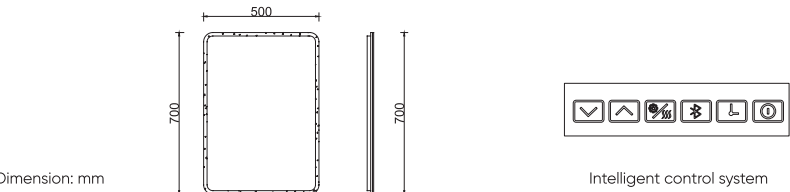

Optional functions:

-
-
-
-
-
-
-
-
-

Electrical certification






MB-A08 Series

Specification

Item No	MB-A08-Φ600	MB-A08-Φ800
CCT	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80
IP rate	IP20	IP20
Dimension	600*600	800*800
Material	Light Guide	Light Guide

Dimension Drawing

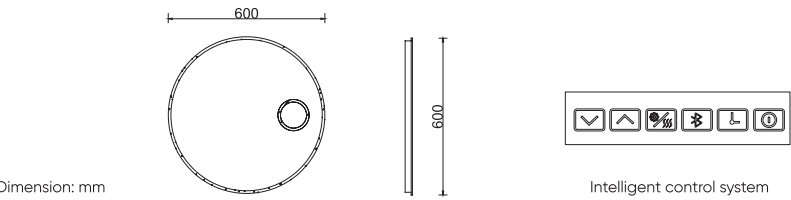

Optional functions:

-
-
-
-
-
-
-
-
-

Electrical certification




MB-A10 Series

Specification

Item No	MB-A10-700500	MB-A10-800600
CCT	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80
IP rate	IP20	IP20
Dimension	700*500	800*600
Material	Light Guide	Light Guide

Dimension Drawing

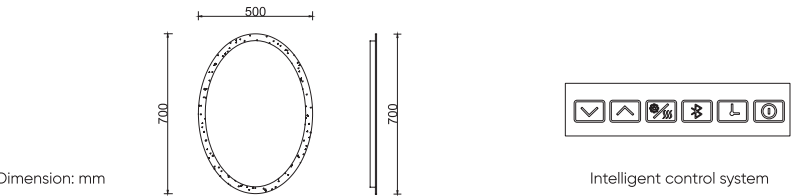

Optional functions:

-
-
-
-
-
-
-
-
-

Electrical certification




MB-A12 Series

Specification

Item No	MB-A12-550800	MB-A12-5501000
CCT	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80
IP rate	IP20	IP20
Dimension	550*800	550*1000
Material	Light Guide	Light Guide

Dimension Drawing

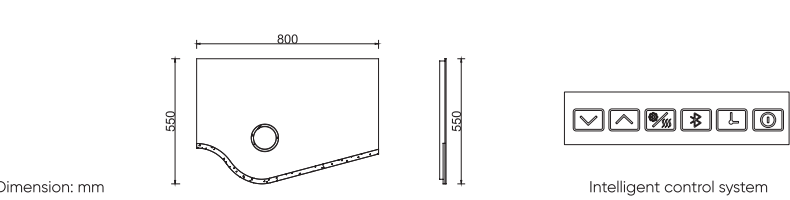

Optional functions:

-
-
-
-
-
-
-
-
-

Electrical certification




MB-A13 Series

Specification

Item No	MB-A13-600800	MB-A13-6001000	MB-A13-6001200
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	600*800	600*1000	600*1200
Material	Light Guide	Light Guide	Light Guide

Dimension Drawing

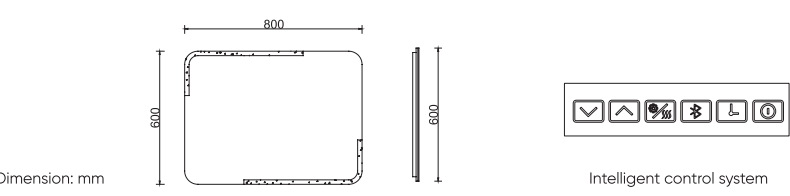

Optional functions:

-
-
-
-
-
-
-
-
-


Electrical certification





MB-A14 Series

Specification		
Item No	MB-A14-600800	MB-A14-6001000
CCT	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80
IP rate	IP20	IP20
Dimension	600*800	600*1000
Material	Light Guide	Light Guide

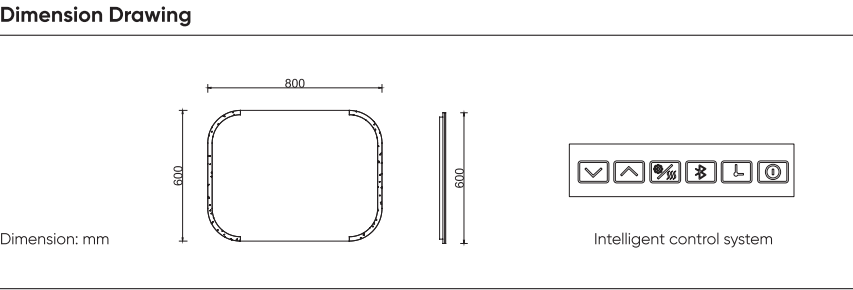

Optional functions:




Electrical certification



MB-A15 Series

Specification			
Item No	MB-A15-700500	MB-A15-730530	MB-A15-600800
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	700*500	730*530	600*800
Material	Light Guide	Light Guide	Light Guide

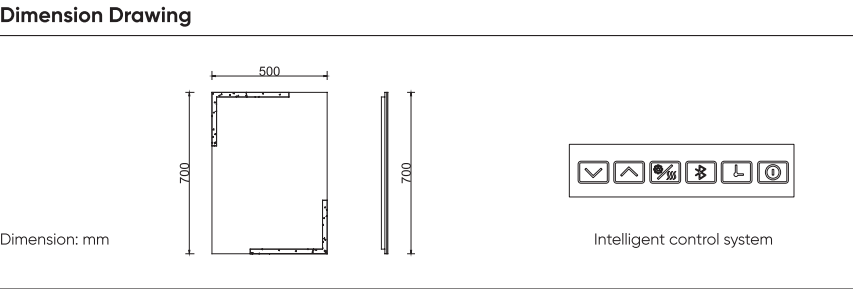

Optional functions:




Electrical certification



MB-A16 Series

Specification		
Item No	MB-A16-Φ800	MB-A16-Φ900
CCT	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80
IP rate	IP20	IP20
Dimension	800*800	900*900
Material	Light Guide	Light Guide

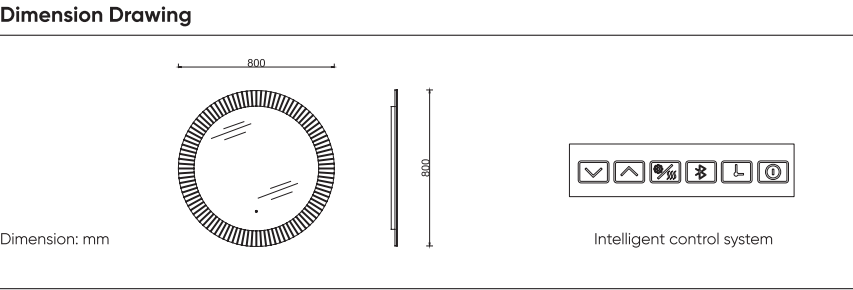

Optional functions:




Electrical certification



MB-B01 Series

Specification		
Item No	MB-B01-700500	MB-B01-800600
CCT	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80
IP rate	IP20	IP20
Dimension	700*500	800*600

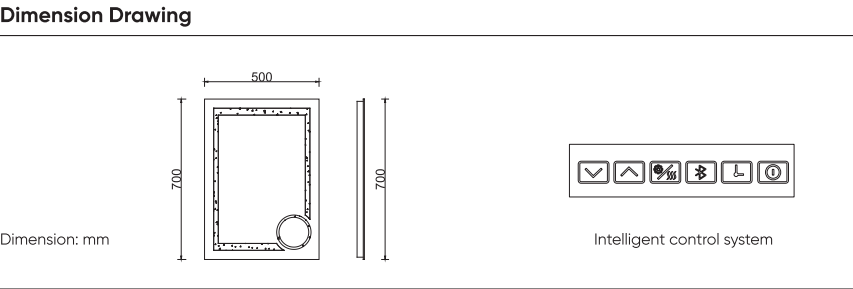

Optional functions:



Electrical certification






MB-B03 Series

Specification		
Item No	MB-B03-700500	MB-B03-800600
CCT	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	IP20	IP20
IP rate	> 80	> 80
Dimension	700*500	800*600

Dimension Drawing

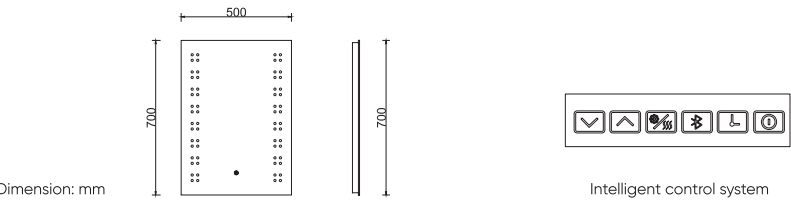

Optional functions:

-
-
-
-
-
-
-
-
-
-
-


Electrical certification



MB-B04 Series

Specification		
Item No	MB-B04-700500	MB-B04-800600
CCT	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80
IP rate	IP20	IP20
Dimension	700*500	800*600

Dimension Drawing

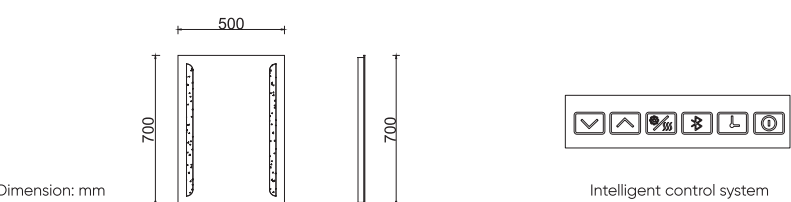

Optional functions:

-
-
-
-
-
-
-
-
-
-
-


Electrical certification



MB-B05 Series

Specification			
Item No	MB-B05-700500	MB-B05-800600	MB-B05-900700
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	700*500	800*600	900*700

Dimension Drawing

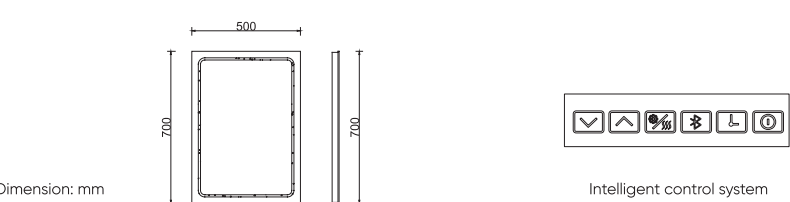

Optional functions:

-
-
-
-
-
-
-
-
-
-
-


Electrical certification



MB-B06 Series

Specification		
Item No	MB-B06-700500	MB-B06-800600
CCT	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80
IP rate	IP20	IP20
Dimension	700*500	800*600

Dimension Drawing

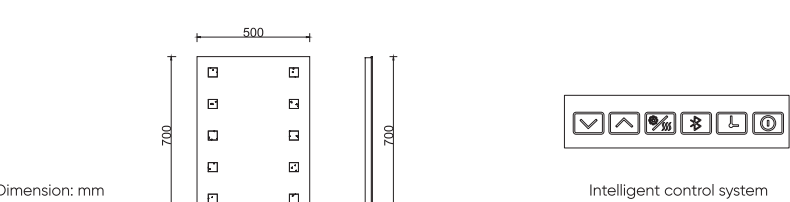

Optional functions:

-
-
-
-
-
-
-
-
-
-
-

Electrical certification






MB-B07 Series

Specification			
Item No	MB-B07-500700	MB-B07-600800	MB-B07-700900
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	500*700	600*800	700*900

Dimension Drawing

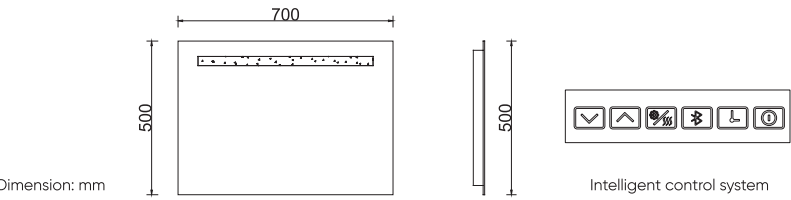

Optional functions:

-
-
-
-
-
-
-
-
-
-
-


Electrical certification



MB-B09 Series

Specification			
Item No	MB-B09-500700	MB-B09-600800	MB-B09-700900
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	500*700	600*800	700*900

Dimension Drawing

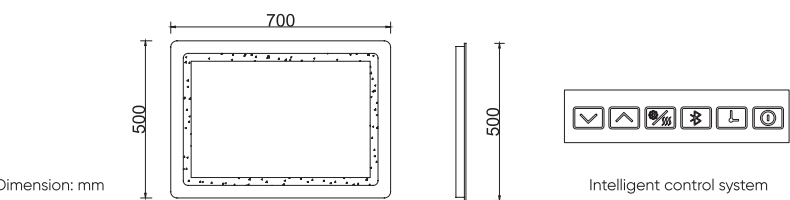

Optional functions:

-
-
-
-
-
-
-
-
-
-
-


Electrical certification



MB-B08 Series

Specification			
Item No	MB-B08-500700	MB-B08-600800	MB-B08-700900
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	500*700	600*800	700*900

Dimension Drawing

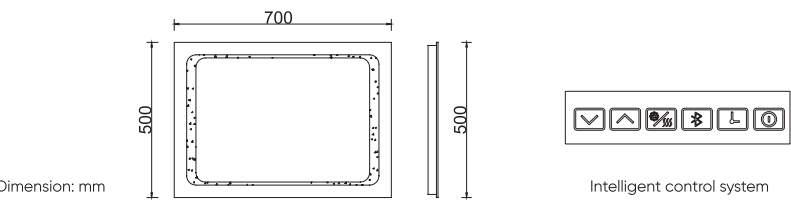

Optional functions:

-
-
-
-
-
-
-
-
-
-
-


Electrical certification



MB-B10 Series

Specification		
Item No	MB-B10-500700	MB-B10-600800
CCT	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80
IP rate	IP20	IP20
Dimension	500*700	600*800

Dimension Drawing

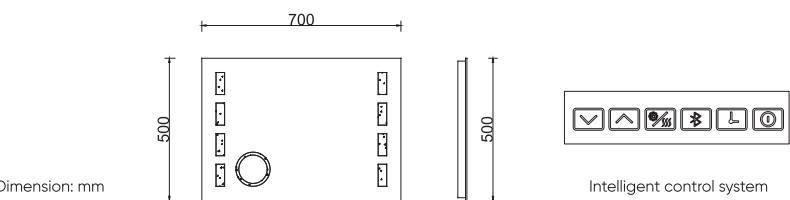

Optional functions:

-
-
-
-
-
-
-
-
-
-
-

Electrical certification






MB-B12 Series

Specification			
Item No	MB-B12-Φ600	MB-B12-Φ800	MB-B12-Φ1000
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	600*600	800*800	1000*1000

Dimension Drawing

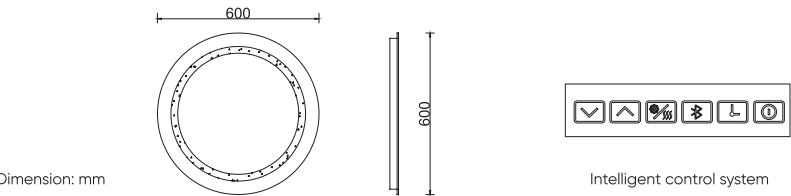

Optional functions:

- Touch switch
- Body sensor switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Physical button switch
- Shaver socket with USB


Electrical certification



MB-E01 Series

Specification		
Item No	MB-E01-Φ800	MB-E01-Φ1000
CCT	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80
IP rate	IP20	IP20
Dimension	800*800	1000*1000
Material	Stainless steel frame	Stainless steel frame

Dimension Drawing

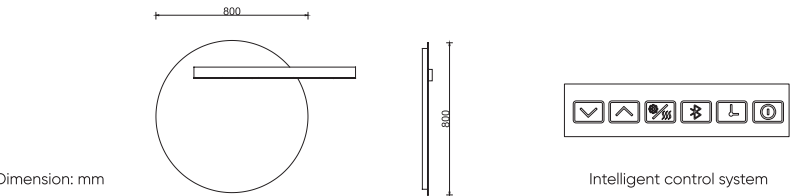

Optional functions:

- Touch switch
- Body sensor switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier


Electrical certification



MB-B13 Series

Specification			
Item No	MB-B13-Φ600	MB-B13-Φ800	MB-B13-Φ1000
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	600*600	800*800	1000*1000

Dimension Drawing

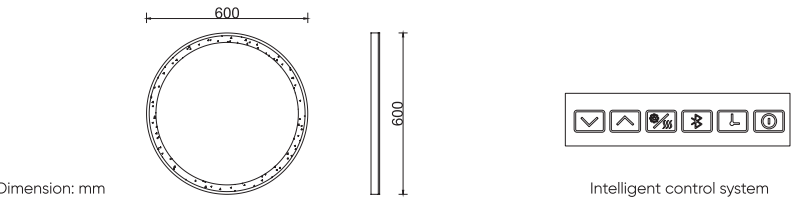

Optional functions:

- Touch switch
- Body sensor switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Physical button switch
- Shaver socket with USB


Electrical certification



MB-E02 Series

Specification	
Item No	MB-E02-1180780
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	1180*780

Dimension Drawing

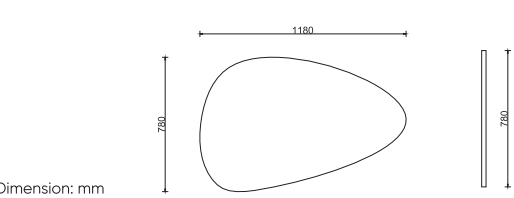

Optional functions:

- Touch switch
- Body sensor switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier

Electrical certification





Matte black



Gun Gray



Golden



Brushed Nickel




Chrome



MB-C26 Series

Specification			
Item No	MB-C26-Φ700	MB-C26-Φ800	MB-C26-Φ1000
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	700*700	800*800	1000*1000
Material	Aluminum frame	Aluminum frame	Aluminum frame

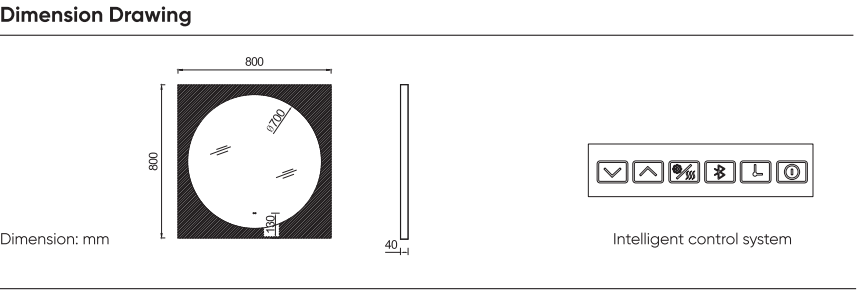

Optional functions:


- Touch switch
- Body sensor switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier

Electrical certification



MB-C02 Series

Specification			
Item No	MB-C02-500700	MB-C02-600800	MB-C02-900700
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	500*700	600*800	900*700
Material	Aluminum frame	Aluminum frame	Aluminum frame

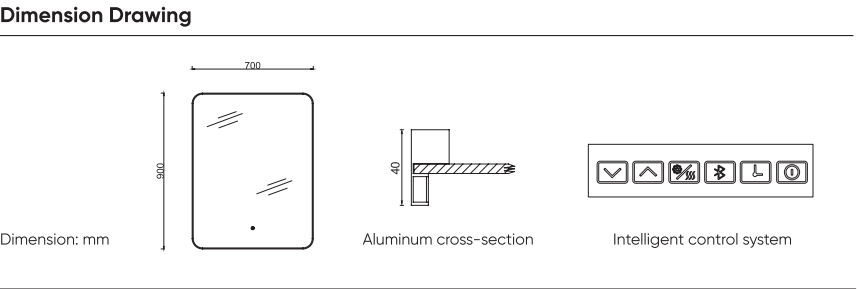

Optional functions:

- Touch switch
- Body sensor switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier

Electrical certification






MB-C06 Series

Specification

Item No	MB-C06-800450	MB-C06-900500	MB-C06-1000500
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	800*450	900*500	1000*500
Material	Aluminum frame	Aluminum frame	Aluminum frame

Dimension Drawing

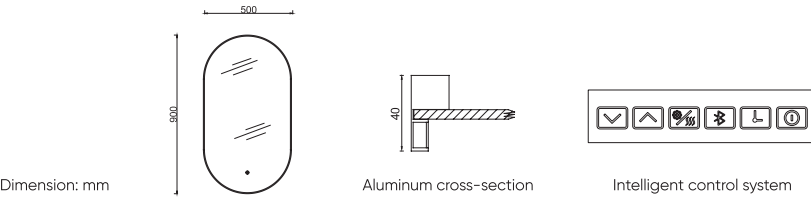

Optional functions:



Electrical certification




MB-C07 Series

Specification

Item No	MB-C07-500700	MB-C07-600800	MB-C07-7001000
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	500*700	600*800	700*1000
Material	Aluminum frame	Aluminum frame	Aluminum frame

Dimension Drawing

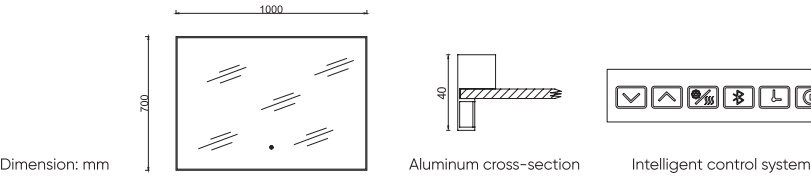

Optional functions:



Electrical certification




MB-C08 Series

Specification

Item No	MB-C08-φ700	MB-C08-φ800	MB-C08-φ1000
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	700*700	800*800	1000*1000
Material	Aluminum frame	Aluminum frame	Aluminum frame

Dimension Drawing

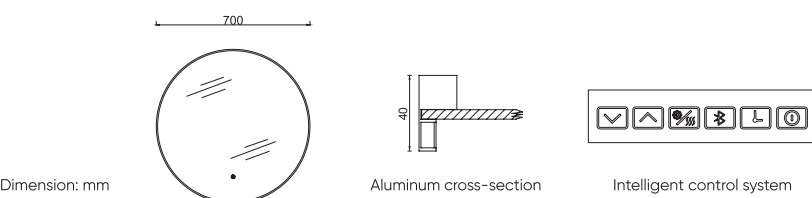

Optional functions:



Electrical certification




MB-C09 Series

Specification

Item No	MB-C09-800450	MB-C09-900500	MB-C09-1000500
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	800*450	900*500	1000*500
Material	Aluminum frame	Aluminum frame	Aluminum frame

Dimension Drawing

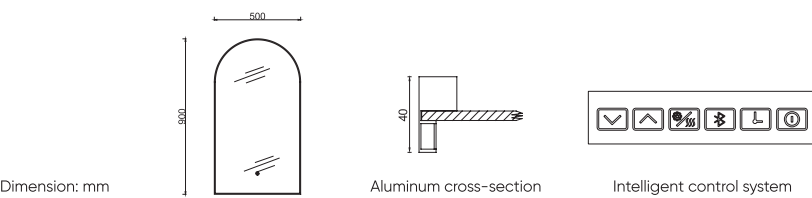

Optional functions:




Electrical certification





MB-C01 Series

Specification			
Item No	MB-C01-Φ760	MB-C01-Φ860	MB-C01-Φ960
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	760*760	860*860	960*960
Material	Aluminum frame	Aluminum frame	Aluminum frame

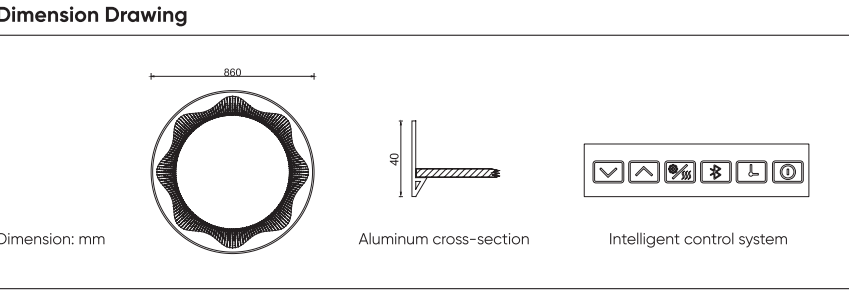

Optional functions:


-
-
-
-
-
-
-
-
-

Electrical certification



MB-C10 Series

Specification			
Item No	MB-C10-Φ700	MB-C10-Φ800	MB-C10-Φ1000
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	700*700	800*800	1000*1000
Material	Aluminum frame	Aluminum frame	Aluminum frame

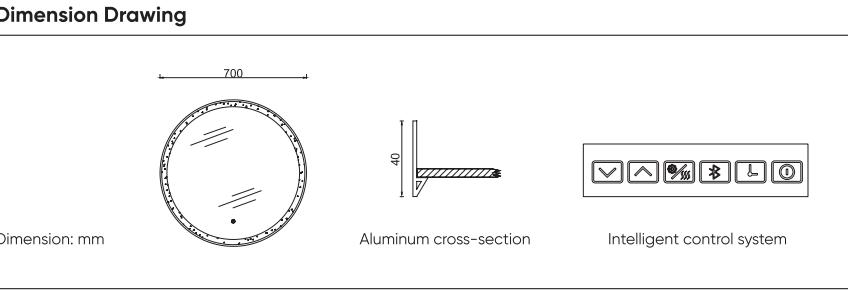

Optional functions:


-
-
-
-
-
-
-
-
-

Electrical certification



MB-C05 Series

Specification			
Item No	MB-C05-Φ600	MB-C05-Φ800	MB-C05-Φ1000
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	600*600	800*800	1000*1000
Material	Aluminum frame	Aluminum frame	Aluminum frame

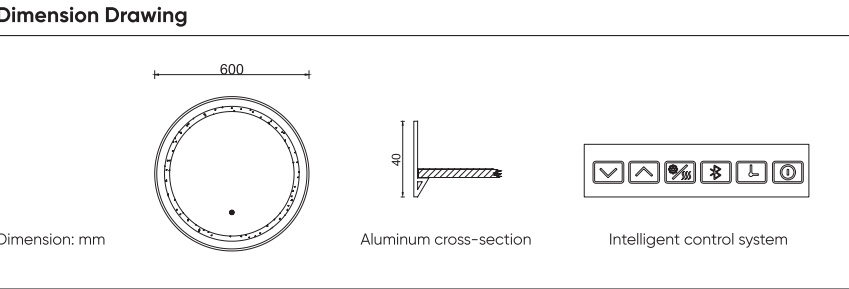

Optional functions:


-
-
-
-
-
-
-
-
-

Electrical certification



MB-C11 Series

Specification			
Item No	MB-C11-500700	MB-C11-600800	MB-C11-7001000
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	500*700	600*800	700*1000
Material	Aluminum frame	Aluminum frame	Aluminum frame

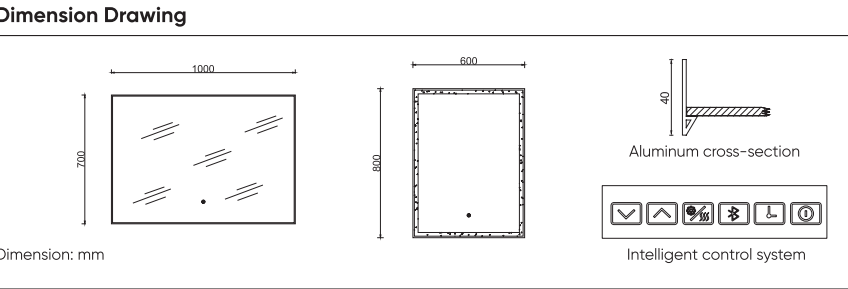

Optional functions:

-
-
-
-
-
-
-
-
-


Electrical certification





MB-C12 Series

Specification			
Item No	MB-C12-700500	MB-C12-800600	MB-C12-900700
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	700*500	800*600	900*700
Material	Aluminum frame	Aluminum frame	Aluminum frame

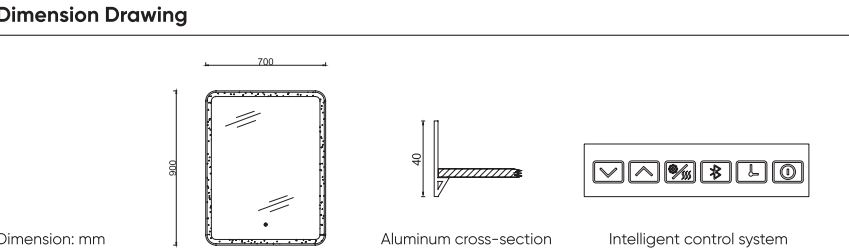

Optional functions:


-
-
-
-
-
-
-
-
-

Electrical certification



MB-C14 Series

Specification			
Item No	MB-C14-800450	MB-C14-900500	MB-C14-1000500
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	800*450	900*500	1000*500
Material	Aluminum frame	Aluminum frame	Aluminum frame

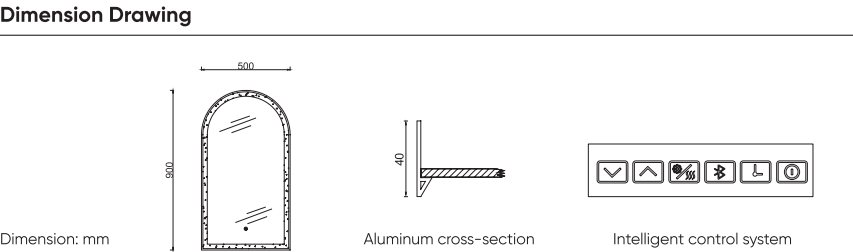

Optional functions:


-
-
-
-
-
-
-
-
-

Electrical certification



MB-C13 Series

Specification			
Item No	MB-C13-800450	MB-C13-900500	MB-C13-1000500
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	800*450	900*500	1000*500
Material	Aluminum frame	Aluminum frame	Aluminum frame

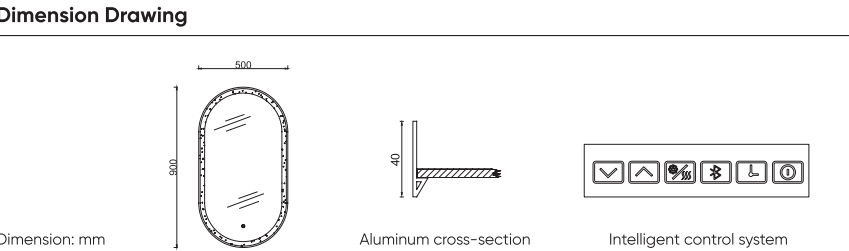

Optional functions:


-
-
-
-
-
-
-
-
-

Electrical certification



MB-C15 Series

Specification			
Item No	MB-C15-800450	MB-C15-900500	MB-C15-1000500
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	800*450	900*500	1000*500
Material	Aluminum frame	Aluminum frame	Aluminum frame

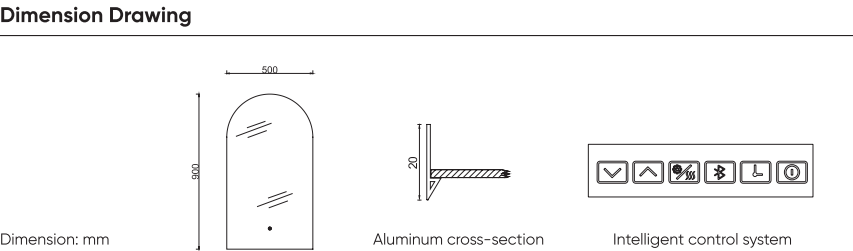

Optional functions:

-
-
-
-
-
-
-
-
-

Electrical certification






MB-C16 Series

Specification

Item No	MB-C16-500700	MB-C16-600800	MB-C16-7001000
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	500*700	600*800	700*1000
Material	Aluminum frame	Aluminum frame	Aluminum frame

Dimension Drawing

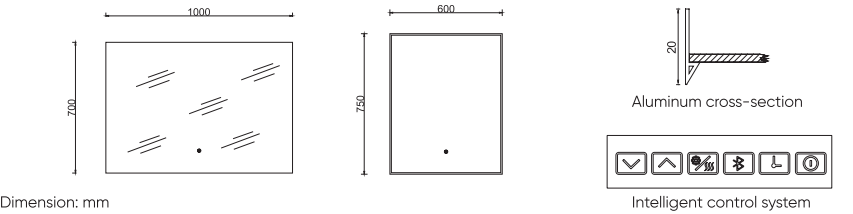

Optional functions:



Electrical certification




MB-C17 Series

Specification

Item No	MB-C17-700500	MB-C17-800600	MB-C17-900700
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	700*500	800*600	900*700
Material	Aluminum frame	Aluminum frame	Aluminum frame

Dimension Drawing

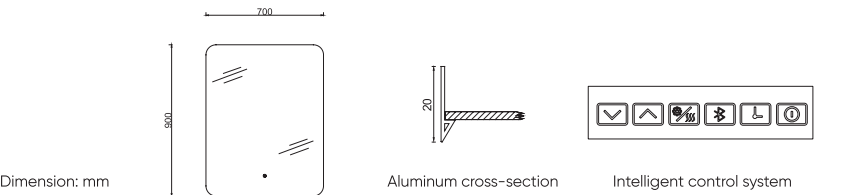

Optional functions:



Electrical certification




MB-C18 Series

Specification

Item No	MB-C18-Φ600	MB-C18-Φ700	MB-C18-Φ800
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	600*600	700*700	800*800
Material	Aluminum frame	Aluminum frame	Aluminum frame

Dimension Drawing

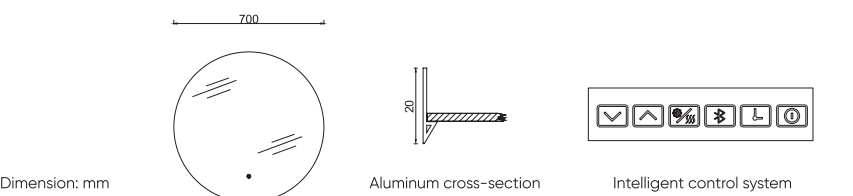

Optional functions:



Electrical certification




MB-C19 Series

Specification

Item No	MB-C19-800450	MB-C19-900500	MB-C19-1000500
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	800*450	900*500	1000*500
Material	Aluminum frame	Aluminum frame	Aluminum frame

Dimension Drawing

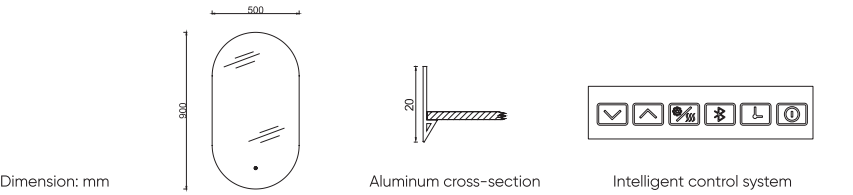

Optional functions:



Electrical certification






MB-C20 Series

Specification

Item No	MB-C20-500700	MB-C20-600800	MB-C20-7001000
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	500*700	600*800	700*1000
Material	Aluminum frame	Aluminum frame	Aluminum frame

Dimension Drawing

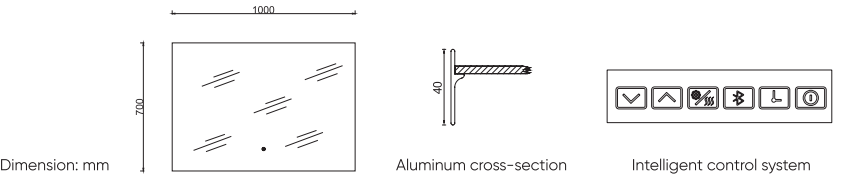

Optional functions:

-
-
-
-
-
-
-
-
-

Electrical certification




MB-C21 Series

Specification

Item No	MB-C21-800450	MB-C21-900500	MB-C21-1000500
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	800*450	900*500	1000*500
Material	Aluminum frame	Aluminum frame	Aluminum frame

Dimension Drawing

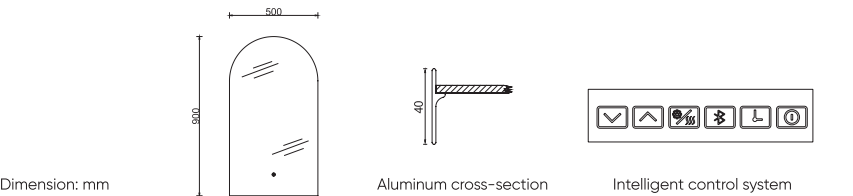

Optional functions:

-
-
-
-
-
-
-
-
-

Electrical certification




MB-C22 Series

Specification

Item No	MB-C22-800450	MB-C22-900500	MB-C22-1000500
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	800*450	900*500	1000*500
Material	Aluminum frame	Aluminum frame	Aluminum frame

Dimension Drawing

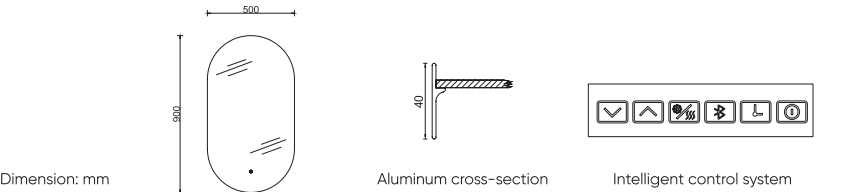

Optional functions:

-
-
-
-
-
-
-
-
-

Electrical certification




MB-C23 Series

Specification

Item No	MB-C23-φ600	MB-C23-φ700	MB-C23-φ800
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	600*600	700*700	800*800
Material	Aluminum frame	Aluminum frame	Aluminum frame

Dimension Drawing

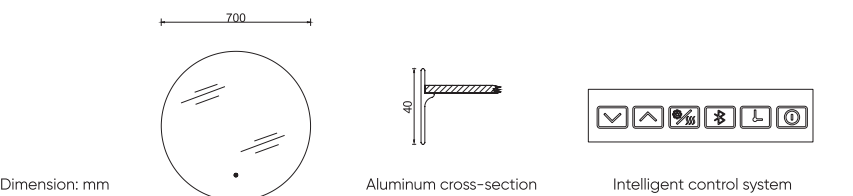

Optional functions:

-
-
-
-
-
-
-
-
-


Electrical certification





MB-C24 Series

Specification			
Item No	MB-C24-700500	MB-C24-800600	MB-C24-900700
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	700*500	800*600	900*700
Material	Aluminum frame	Aluminum frame	Aluminum frame

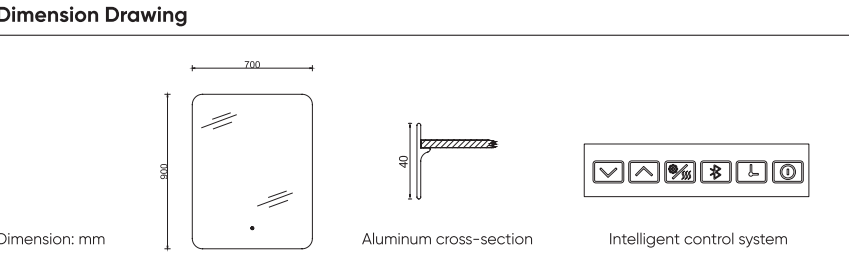

Optional functions:




Electrical certification



MB-D01 Series

Specification	
Item No	MB-D01-900500
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	900*500
Material	Stainless steel frame

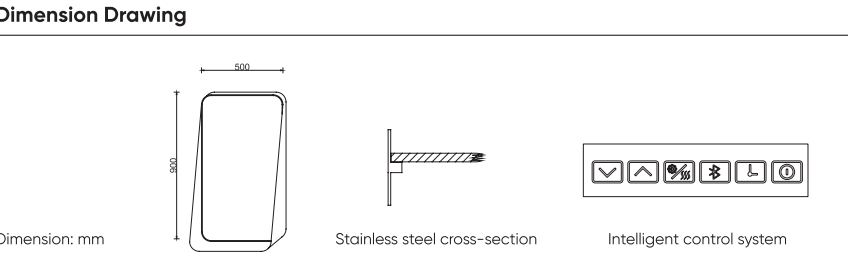

Optional functions:




Electrical certification



MB-C25 Series

Specification			
Item No	MB-C25-700500	MB-C25-800600	MB-C25-900700
CCT	3000K-6000K	3000K-6000K	3000K-6000K
Voltage	AC 110-130V/220-240V	AC 110-130V/220-240V	AC 110-130V/220-240V
CRI	> 80	> 80	> 80
IP rate	IP20	IP20	IP20
Dimension	700*500	800*600	900*700
Material	Aluminum frame	Aluminum frame	Aluminum frame

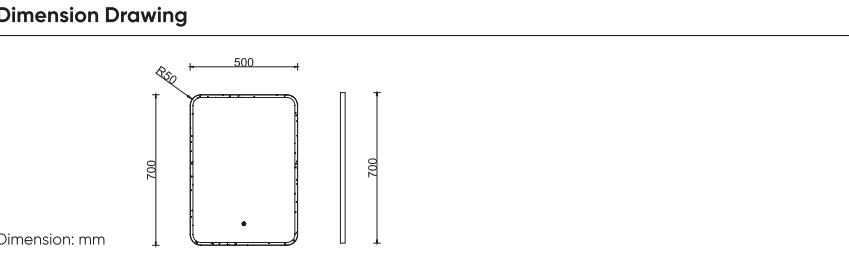

Optional functions:




Electrical certification



MB-D02 Series

Specification	
Item No	MB-D02-1200500
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	1200*500
Material	Stainless steel frame

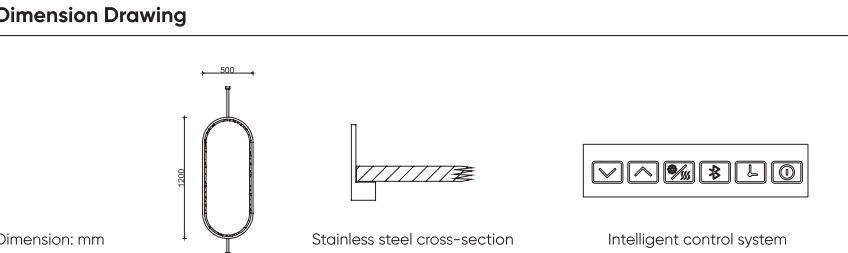

Optional functions:




Electrical certification





MB-D03 Series

Specification	
Item No	MB-D03-1000600
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	1000*600
Material	Stainless steel frame

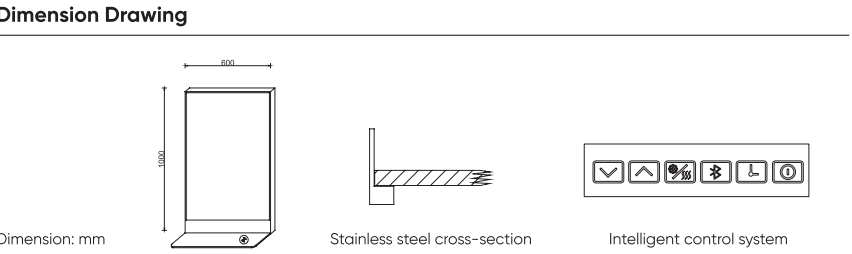

Optional functions:


-
-
-
-
-
-
-
-
-

Electrical certification



MB-D05 Series

Specification	
Item No	MB-D05-900460
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	900*460
Material	Stainless steel frame

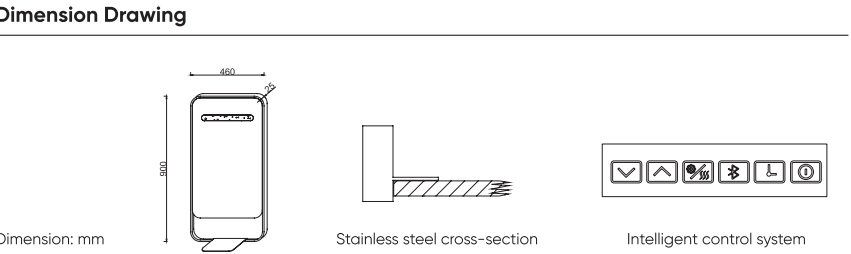

Optional functions:


-
-
-
-
-
-
-
-
-

Electrical certification



MB-D04 Series

Specification	
Item No	MB-D04-1070600
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	1070*600
Material	Stainless steel frame

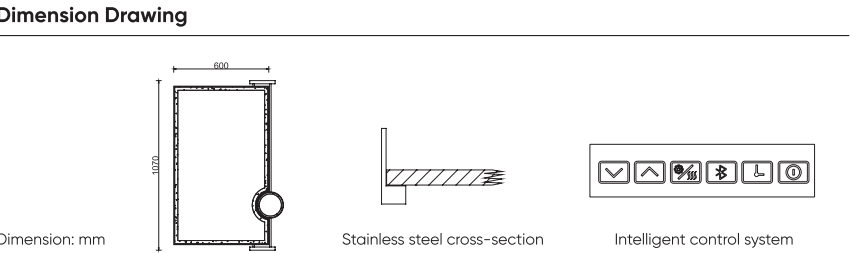

Optional functions:


-
-
-
-
-
-
-
-
-

Electrical certification



MB-D06 Series

Specification	
Item No	MB-D06-1200500
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	1200*500
Material	Stainless steel frame

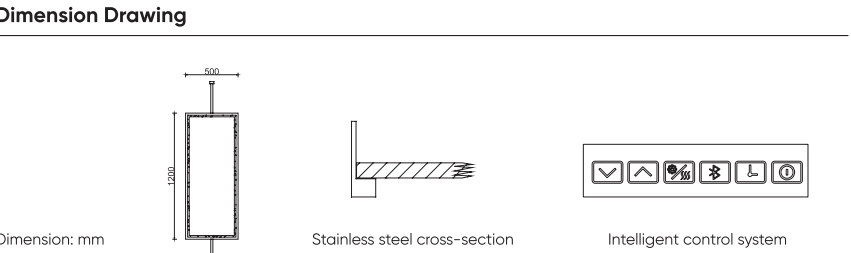

Optional functions:

-
-
-
-
-
-
-
-
-

Electrical certification






LED MIRROR CABINET

MB-E01 Series

Specification

Item No	MB-E01-700500
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*500
Material	Aluminum frame

Dimension Drawing

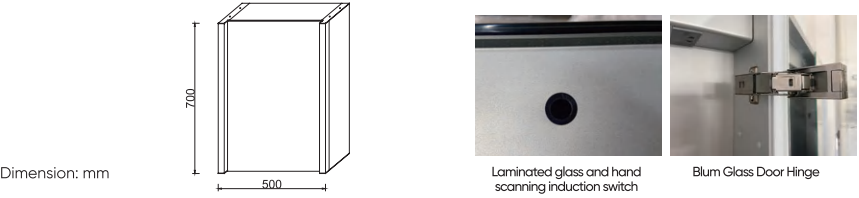

Optional functions:

- Hand scanning induction switch
- Three color light
- Stepless dimming
- Shaver socket with USB

Electrical certification




MB-E01 Series

Specification

Item No	MB-E01-700800
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*800
Material	Aluminum frame

Dimension Drawing

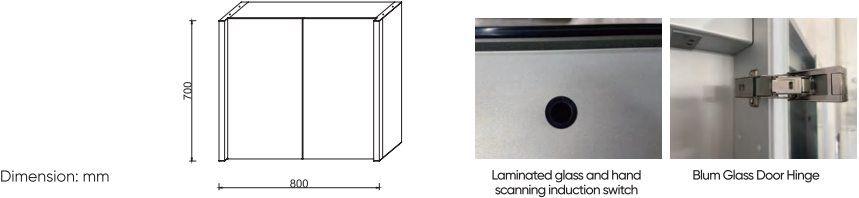

Optional functions:

- Hand scanning induction switch
- Three color light
- Stepless dimming
- Shaver socket with USB

Electrical certification





MB-E01 Series

Specification	
Item No	MB-E01-7001200
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*1200
Material	Aluminum frame

Dimension Drawing

Dimension: mm

Optional functions:

- Hand scanning induction switch
- Three color light
- Stepless dimming
- Shaver socket with USB

Electrical certification



MB-E06 Series

Specification	
Item No	MB-E06-700800
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*800
Material	Aluminum frame

Dimension Drawing

Dimension: mm

Optional functions:

- Hand scanning induction switch
- Three color light
- Stepless dimming
- Shaver socket with USB

Electrical certification



MB-E06 Series

Specification	
Item No	MB-E06-700500
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*500
Material	Aluminum frame

Dimension Drawing

Dimension: mm

Optional functions:

- Hand scanning induction switch
- Three color light
- Stepless dimming
- Shaver socket with USB

Electrical certification



MB-E06 Series

Specification	
Item No	MB-E06-7001200
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*1200
Material	Aluminum frame

Dimension Drawing

Dimension: mm

Optional functions:

- Hand scanning induction switch
- Three color light
- Stepless dimming
- Shaver socket with USB

Electrical certification





MB-E07 Series

Specification	
Item No	MB-E07-700500
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*500
Material	Aluminum frame

Dimension Drawing

Dimension: mm

Laminated glass and hand scanning induction switch

Blum Glass Door Hinge

Optional functions:

- Hand scanning induction switch
- Three color light
- Stepless dimming
- Shaver socket with USB

Electrical certification



MB-E07 Series

Specification	
Item No	MB-E07-7001200
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*1200
Material	Aluminum frame

Dimension Drawing

Dimension: mm

Laminated glass and hand scanning induction switch

Blum Glass Door Hinge

Optional functions:

- Hand scanning induction switch
- Three color light
- Stepless dimming
- Shaver socket with USB

Electrical certification



MB-E07 Series

Specification	
Item No	MB-E07-700800
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*800
Material	Aluminum frame

Dimension Drawing

Dimension: mm


Laminated glass and hand scanning induction switch

Blum Glass Door Hinge

Optional functions:

- Hand scanning induction switch
- Three color light
- Stepless dimming
- Shaver socket with USB

Electrical certification

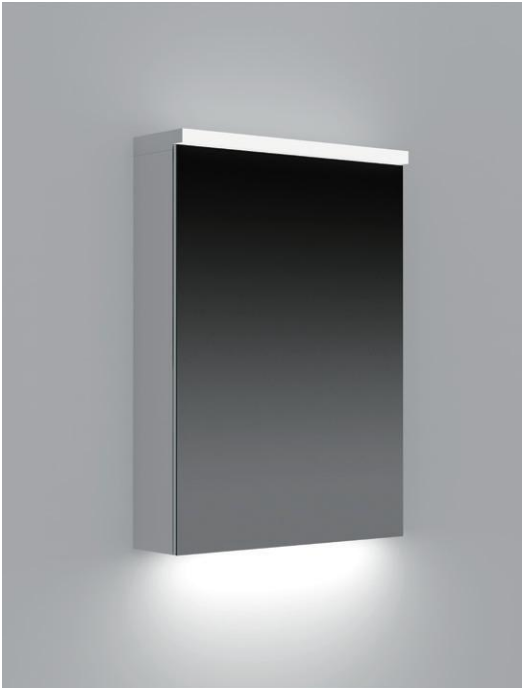

MB-E10 Series

Specification	
Item No	MB-E10-700500
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*500
Material	Aluminum frame

Dimension Drawing

Dimension: mm

Laminated glass and hand scanning induction switch

Blum Glass Door Hinge

Optional functions:

- Hand scanning induction switch
- Three color light
- Stepless dimming
- Shaver socket with USB

Electrical certification






MB-E10 Series

Specification

Item No	MB-E10-700800
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*800
Material	Aluminum frame

Dimension Drawing

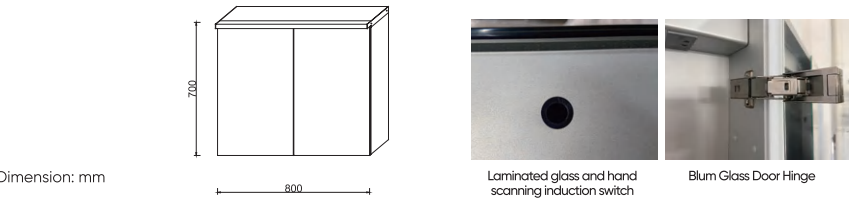

Optional functions:

- Hand scanning induction switch
- Three color light
- Stepless dimming
- Shaver socket with USB

Electrical certification




MB-E02 Series

Specification

Item No	MB-E02-700500
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*500
Material	Aluminum frame

Dimension Drawing

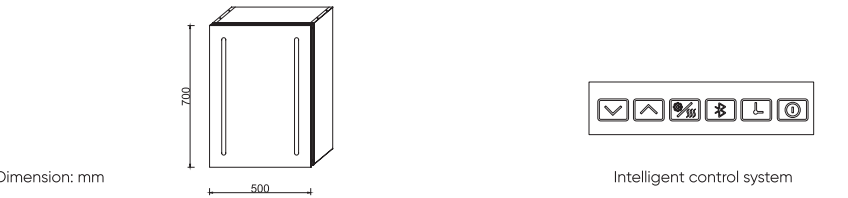

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification




MB-E10 Series

Specification

Item No	MB-E10-7001200
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*1200
Material	Aluminum frame

Dimension Drawing

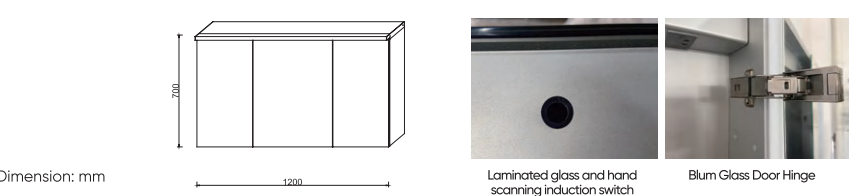

Optional functions:

- Hand scanning induction switch
- Three color light
- Stepless dimming
- Shaver socket with USB

Electrical certification




MB-E02 Series

Specification

Item No	MB-E02-700800
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*800
Material	Aluminum frame

Dimension Drawing

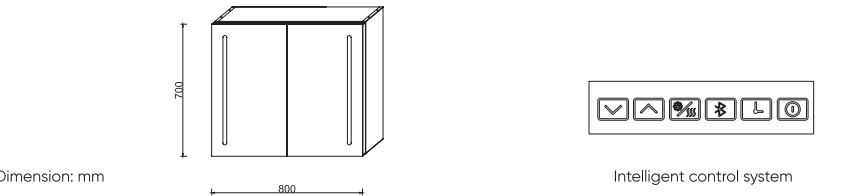

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB


Electrical certification





MB-E02 Series

Specification	
Item No	MB-E02-7001200
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*1200
Material	Aluminum frame

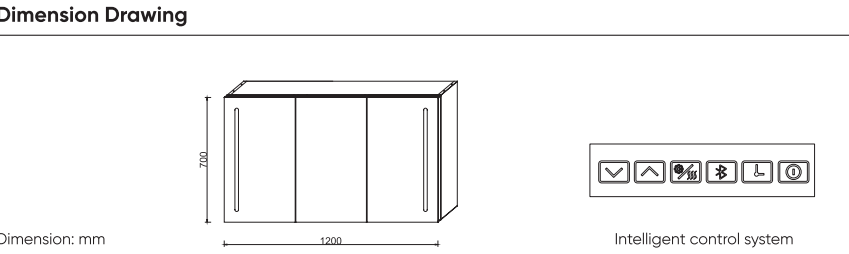

Optional functions:


-
-
-
-
-
-
-
-
-
-

Electrical certification



MB-E03 Series

Specification	
Item No	MB-E03-700800
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*800
Material	Aluminum frame

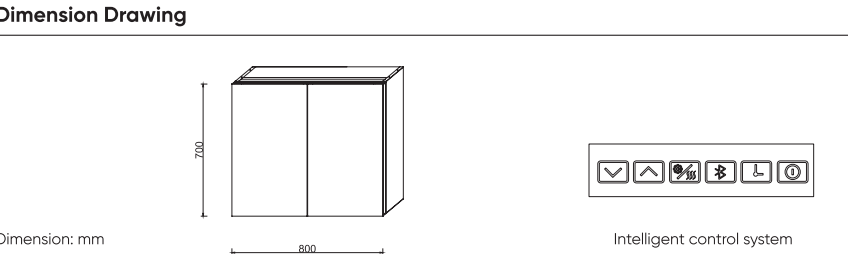

Optional functions:


-
-
-
-
-
-
-
-
-
-

Electrical certification



MB-E03 Series

Specification	
Item No	MB-E03-700500
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*500
Material	Aluminum frame

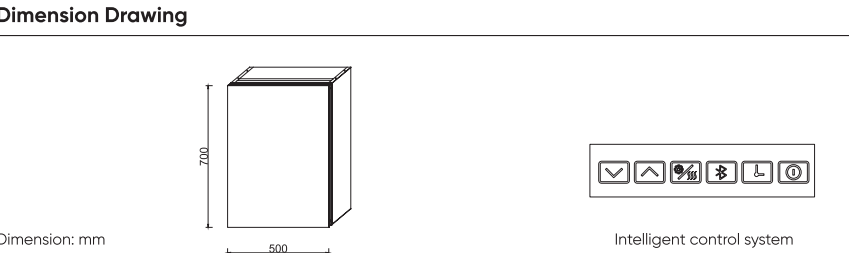

Optional functions:


-
-
-
-
-
-
-
-
-
-

Electrical certification



MB-E03 Series

Specification	
Item No	MB-E03-7001200
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*1200
Material	Aluminum frame

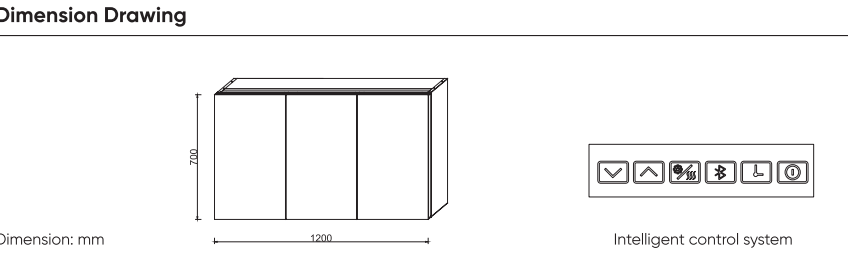

Optional functions:

-
-
-
-
-
-
-
-
-
-

Electrical certification






MB-E04 Series

Specification

Item No	MB-E04-700500
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*500
Material	Aluminum frame

Dimension Drawing

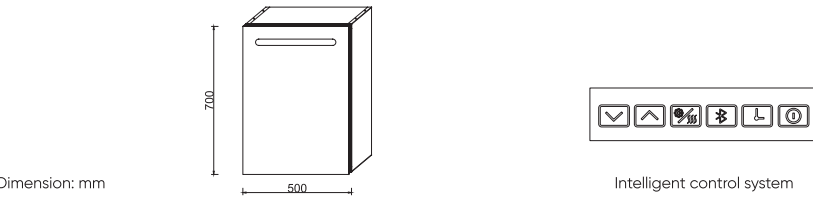

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification




MB-E04 Series

Specification

Item No	MB-E04-7001200
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*1200
Material	Aluminum frame

Dimension Drawing

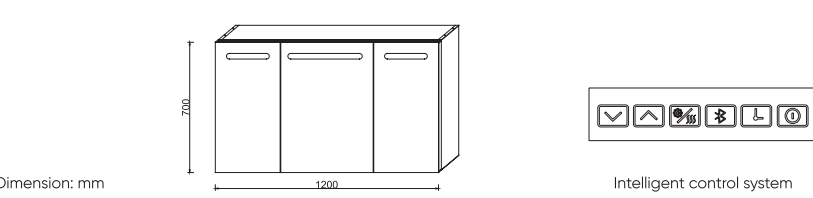

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification




MB-E04 Series

Specification

Item No	MB-E04-700800
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*800
Material	Aluminum frame

Dimension Drawing

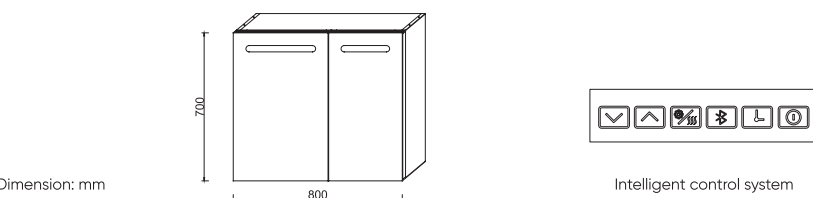

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification




MB-E05 Series

Specification

Item No	MB-E05-700500
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*500
Material	Aluminum frame

Dimension Drawing

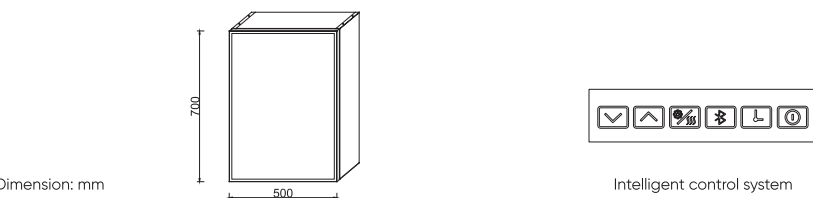

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification






MB-E05 Series

Specification

Item No	MB-E05-700800
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*800
Material	Aluminum frame

Dimension Drawing

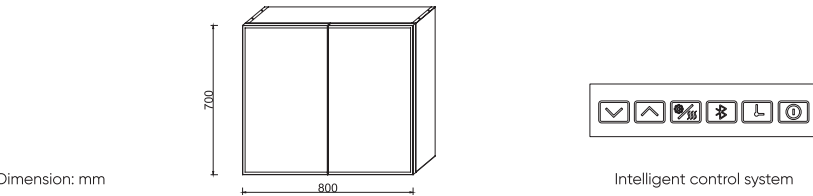

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification




MB-E08 Series

Specification

Item No	MB-E08-700500
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*500
Material	Aluminum frame


Dimension Drawing

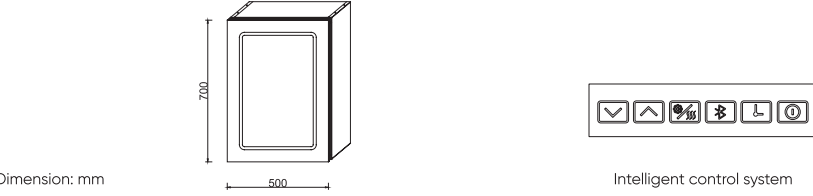

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification

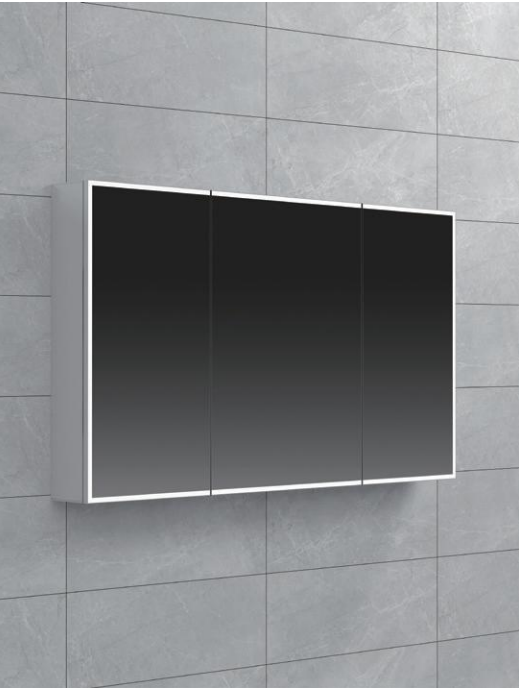


MB-E05 Series

Specification

Item No	MB-E05-7001200
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*1200
Material	Aluminum frame

Dimension Drawing

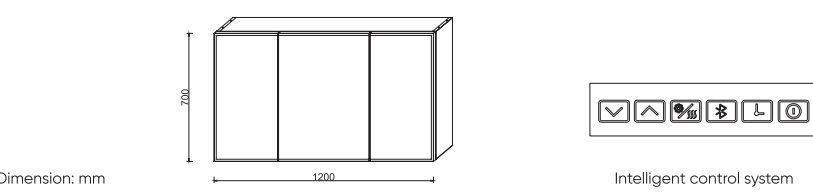

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification




MB-E08 Series

Specification

Item No	MB-E08-700800
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*800
Material	Aluminum frame

Dimension Drawing

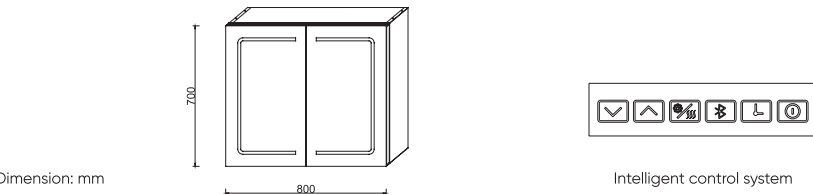

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification






MB-E08 Series

Specification

Item No	MB-E08-7001200
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*1200
Material	Aluminum frame

Dimension Drawing

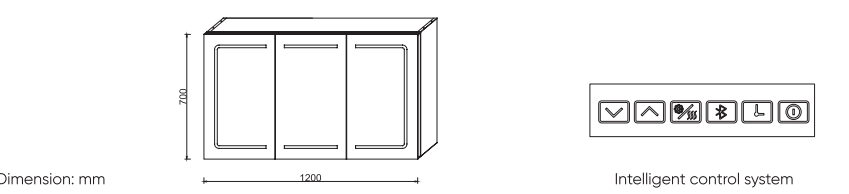

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification




MB-E09 Series

Specification

Item No	MB-E09-700800
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*800
Material	Aluminum frame

Dimension Drawing

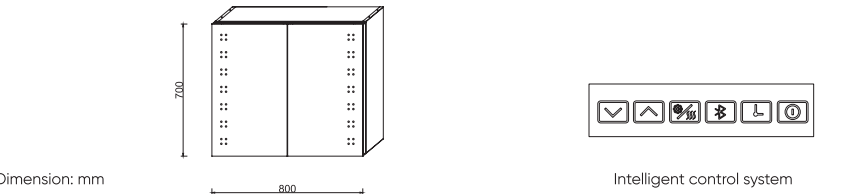

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification




MB-E09 Series

Specification

Item No	MB-E09-700500
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*500
Material	Aluminum frame

Dimension Drawing

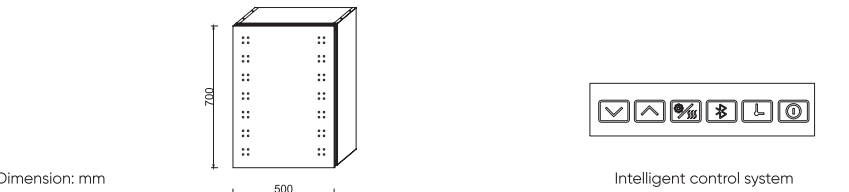

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification




MB-E09 Series

Specification

Item No	MB-E09-7001000
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*1000
Material	Aluminum frame

Dimension Drawing

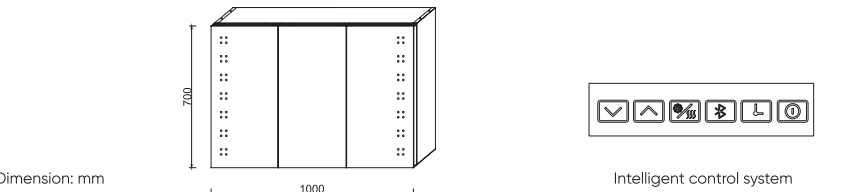

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification






MB-E11 Series

Specification

Item No	MB-E11-900800
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	900*800
Material	Aluminum frame

Dimension Drawing

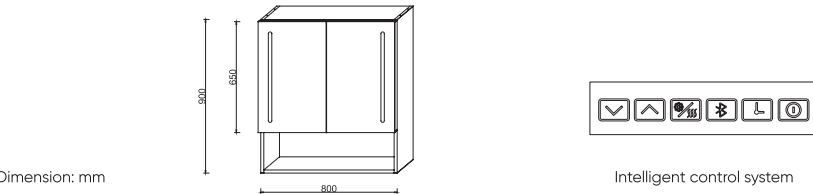

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification




MB-E12 Series

Specification

Item No	MB-E12-900450
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	900*450
Material	Aluminum frame

Dimension Drawing

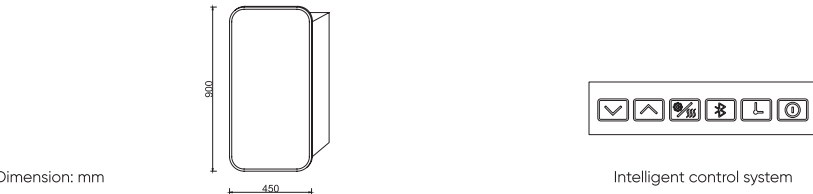

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification




MB-E11 Series

Specification

Item No	MB-E11-9001200
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	900*1200
Material	Aluminum frame

Dimension Drawing

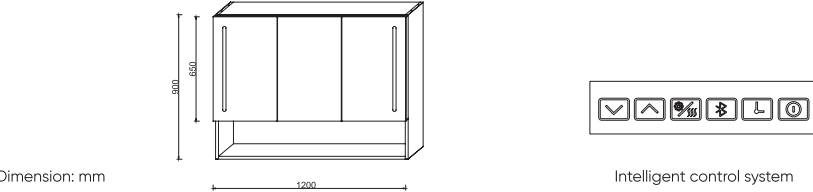

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification




MB-E13 Series

Specification

Item No	MB-E13-Φ700
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*700
Material	Aluminum frame

Dimension Drawing

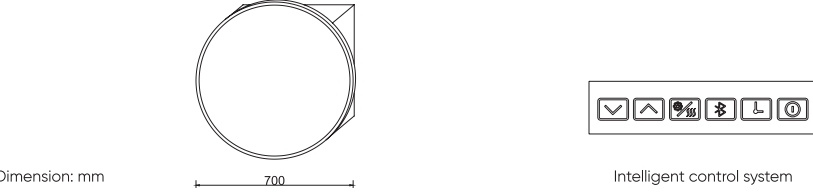

Optional functions:

- Hand scanning induction switch
- Touch switch
- Defog
- Time display
- Temperature display
- Three color light
- Stepless dimming
- Bluetooth stereo
- Magnifier
- Shaver socket with USB

Electrical certification






MB-E14 Series

Specification

Item No	MB-E14-1000500
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	1000*500
Material	Aluminum frame

Dimension Drawing

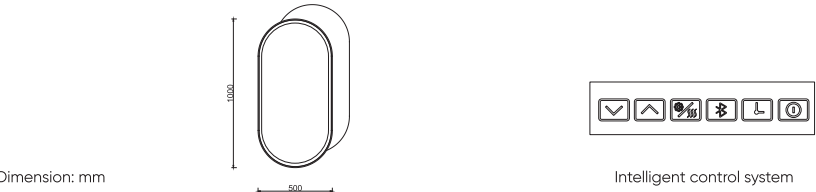

Optional functions:

-
-
-
-
-
-
-
-
-
-

Electrical certification




MB-E16 Series

Specification

Item No	MB-E16-700500
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*500
Material	Aluminum frame

Dimension Drawing

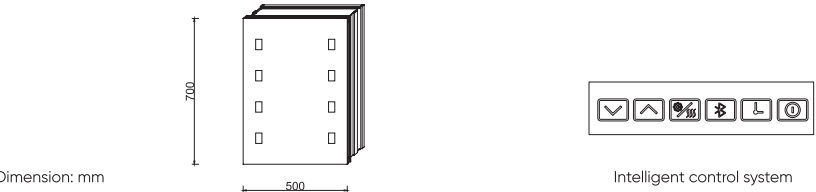

Optional functions:

-
-
-
-
-
-
-
-
-
-

Electrical certification




MB-E15 Series

Specification

Item No	MB-E15-870920
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	870*920
Material	Aluminum frame

Dimension Drawing

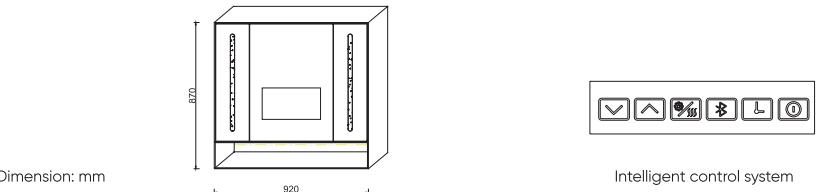

Optional functions:

-
-
-
-
-
-
-
-
-
-

Electrical certification




MB-E16 Series

Specification

Item No	MB-E16-700900
CCT	3000K-6000K
Voltage	AC 110-130V/220-240V
CRI	> 80
IP rate	IP20
Dimension	700*900
Material	Aluminum frame

Dimension Drawing

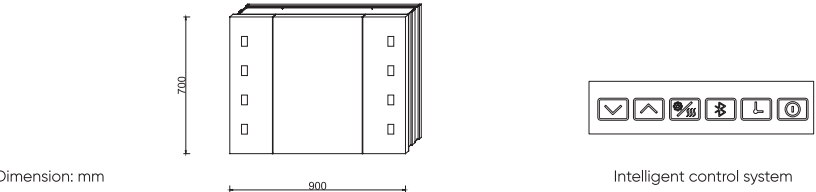

Optional functions:

-
-
-
-
-
-
-
-
-
-

Electrical certification

