★ China Best Quality Cistern Manufacture

★ China Professional Tank Fittings Manufacture

Ultra Quiet Technology
AG Air Gap Inlet valve
Achieve NF class 1 standard

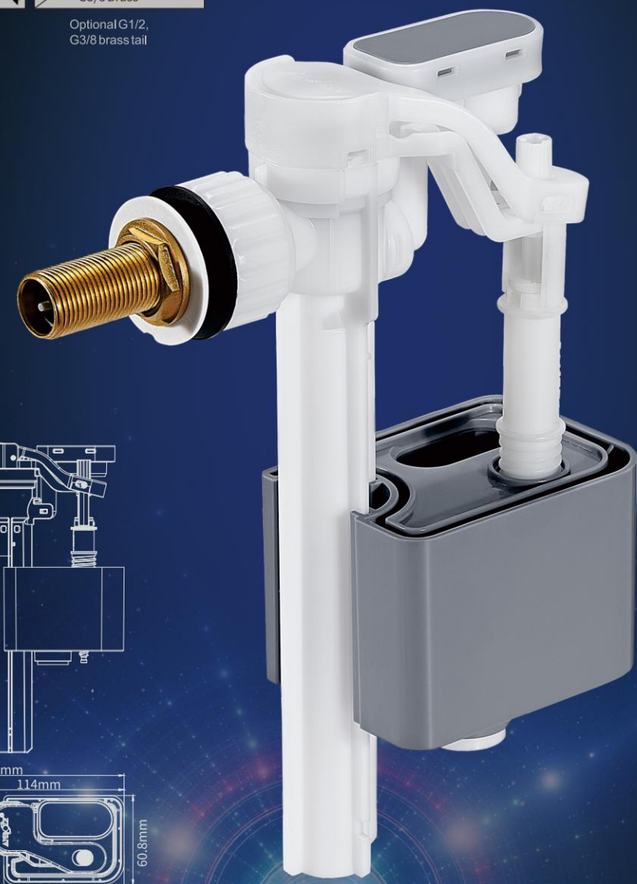

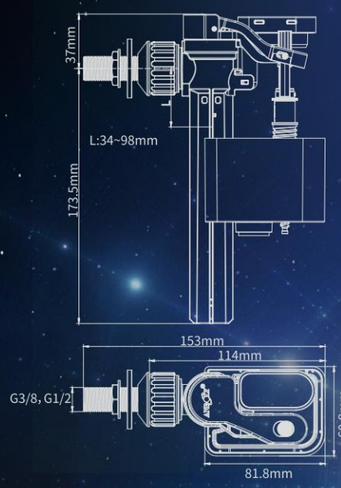

Model No:ABL-2053

2145

Ultra Quiet Technology

AG Air Gap Inlet valve

Achieve NF class 1 standard

NEW

Installation height :

G1/2 Low : 239 mm

G1/2 Medium : 285mm

G1/2 High : 335 mm

The Air Gap Distance achieve 28mm

POM G1/2 shank in option

Brass G1/2 shank in option

Installation height :

G3/8 Low : 285 mm

G3/8 Medium : 310 mm

The Air Gap Distance achieve 28mm

POM G3/8 shank in option

Brass G3/8 shank in option

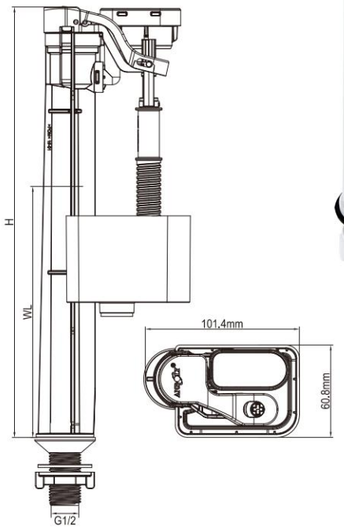

Restrict filter

Model No:ABL-2145 Bottom feed inlet

2053

Ultra Quiet Technology

AG Air Gap Inlet valve

Achieve NF class 1 standard

NEW

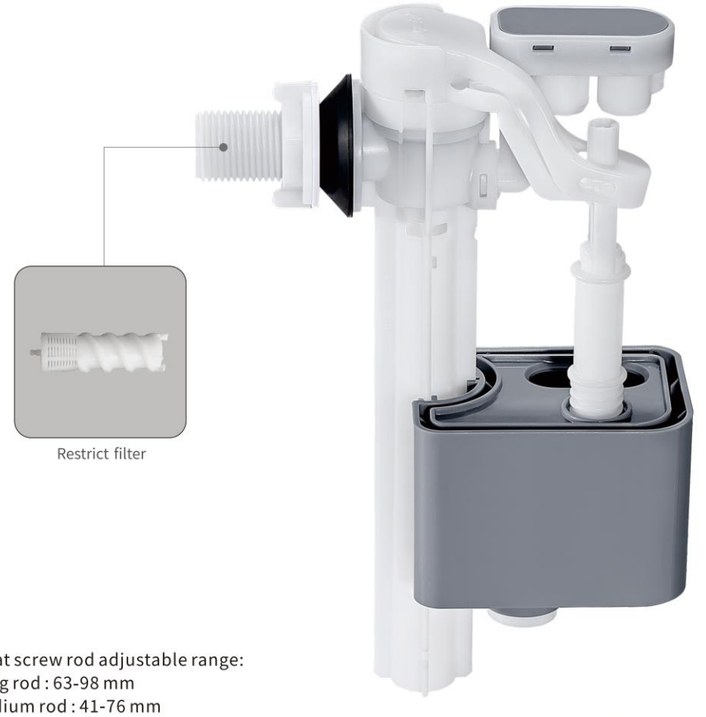

Restrict filter

The Air Gap Distance achieve 28mm

POM G1/2 shank in option

POM G3/8 shank in option

Model No:ABL-2053 Side feed inlet

Float screw rod adjustable range:

Long rod : 63-98 mm

Medium rod : 41-76 mm

Short rod : 34-67 mm

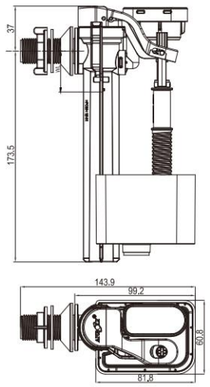

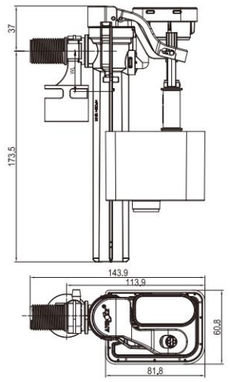

The Air Gap Distance achieve 28mm

POM G1/2 shank in option

Model No:ABL-2053 Back feed inlet

Exquisite design, ultra quiet
National standard test <=39dB,
achieve EN14124 class 1.

Patented

2188

Patent design ,direct discharging
& self–cleaning technology

Direct discharging
self-cleaning

High CL line design

Vortex decondemination

360°protection design

Delay re-fill function

Telescopic inlet tube

Pure POM ejection, good endurance

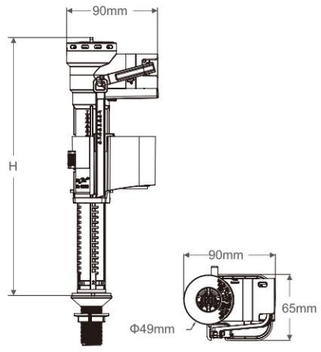

Adoptable height:
2188(H): 273~340mm
2188(M): 225~290mm
2188(L): 192~260mm



Variable add water rate in
differnt color plug



Optional G1/2,
G15/16 POM tail

Optional G1/2,
G3/8 brass tail

2028

Rotation screw ajustable floating cup to ajust woking line

Instant stop design , small occupy good for narrow cisern

The needle valve design uses the original needle valve with hydraulic pressure difference to ensure the water level is stable under different water pressures, and has the functions of silence, pressure resistance and anti-siphon

lock pin open to address floating level

Telescope tube design

Pure POM ejection ,good endurance

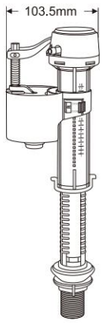

Adoptable height:
2028(H): 261-372mm
2028(M): 203-303mm
2028(L): 202-277mm



Optional G1/2, G15/16 POM tail

Optional G1/2, G3/8 brass tail

T-valve connector



Variable add water rate in differnt color plug

2018

Rotation screw ajustable floating cup to ajust woking line

Instant stop design, small occupy good for narrow cisern

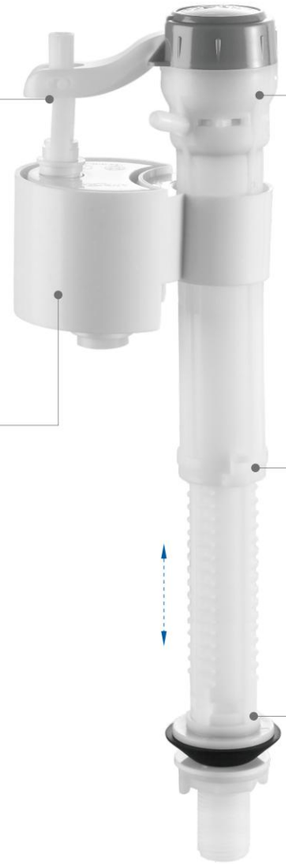

The needle valve design uses the original needle valve with hydraulic pressure difference to ensure the water level is stable under different water pressures, and has the functions of silence, pressure resistance and anti-siphon

Telescope tube design

Pure POM ejection ,good endurance

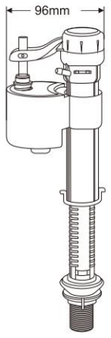

Adoptable height:
2018(H): 270-360mm
2018(M): 205-295mm
2018(L): 195-265mm



Optional G1/2, G15/16 POM tail

Optional G1/2, G3/8 brass tail

T-valve connector



Variable add water rate in differnt color plug

Rotation screw longer 15mm or 32mm in option

Rotation screw longer 15mm or 32mm in option

2888

Rotation screw ajustable floating cup to ajust woking line

Instant stop design , small occupy good for narrow cisern

The needle valve design uses the original needle valve with hydraulic pressure difference to ensure the water level is stable under different water pressures, and has the functions of silence, pressure resistance and anti-siphon

lock pin open to address floating level

Telescope tube design

Pure POM ejection ,good endurance

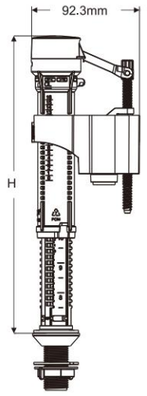



Variable add water rate in differnt color plug



Optional G1/2, G15/16 POM tail

Optional G1/2, G3/8 brass tail

Adoptable height:
2888(H): 255-345mm
2888(M): 206-296mm
2888(L): 195-265mm

2888Y

Rotation screw ajustable floating cup to ajust woking line

Instant stop design , small occupy good for narrow cisern

The needle valve design uses the original needle valve with hydraulic pressure difference to ensure the water level is stable under different water pressures, and has the functions of silence, pressure resistance and anti-siphon

lock pin open to address floating level

Telescope tube design

Pure POM ejection ,good endurance

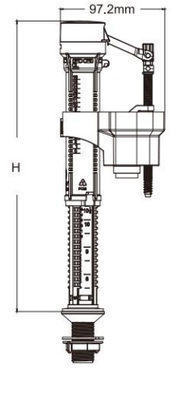



Variable add water rate in differnt color plug



Optional G1/2, G15/16 POM tail

Optional G1/2, G3/8 brass tail

Adoptable height:
2888Y(H): 255-345mm
2888Y(M): 206-296mm
2888Y(L): 195-265mm

TANK FITTINGS

FLUSH VALVE

1308



1308A W/T balance floating

1308B W/o balance floating

1308C W/T balance floating

1308D W/o balance floating

Overflowing tube cap, refill water ratio adjustable

Φ3.2mm ball chain

circle chain

one-piece

two piece

3009

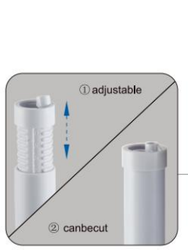

Telescope OFT / fixed height
OFT optional

Big water adjustable scale

Small water adjustable scale



Innovative 12° slop at outfall

Flush rate 2.4L/S

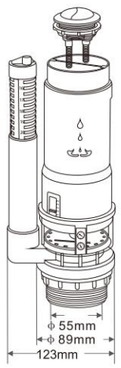

One-piece base

Two-piece base

Overflowing tube cap,
refill water ratio adjustable

Adaptor height：
3009(H)：305mm
3009(M)：255mm
3009(L)：205mm

3009S

Telescope OFT / fixed height
OFT optional

Big water adjustable scale

Single Flush





Endurable silicone seal,
long cycle test approval

Flush rate 2.4L/S

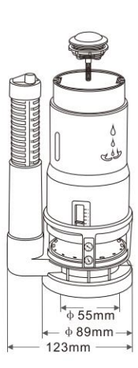



One-piece base



Two-piece base

Overflowing tube cap,
refill water ratio adjustable

Adaptor height：
3009S(H)：305mm
3009S(M)：255mm
3009S(L)：205mm

2008

Telescope OFT / fixed height
OFT optional

Overflow height as per request cut to size

Big water adjustable scale

Big water
Small water



Small water adjustable scale

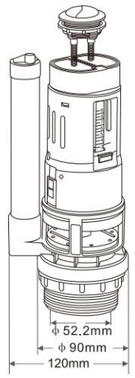

Adaptor height:
2008(H): 305mm
2008(M): 255mm
2008(L): 205mm

One-piece base

Two-piece base

Overflowing tube cap,
refill water ratio adjustable

2008S

Telescope OFT / fixed height
OFT optional

Endurable silicone seal ,
long cycle test approval

Single Flush

Big water adjustable scale

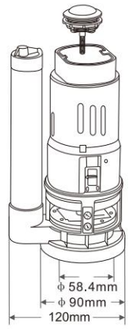

Adaptor height:
2008S(H): 305mm
2008S(M): 255mm
2008S(L): 205mm

One-piece base

Two-piece base

Overflowing tube cap,
refill water ratio adjustable

4009

Small water adjustment scale

3inch flush base ,strong flush power



Big water adjustment scale

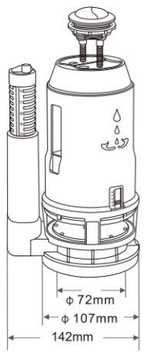

Adaptor height:
4009(M): 270mm
4009(L): 220mm

Telescope OFT / fixed height OFT optional

One-piece base

Two-piece base

4009S

Big water adjustment scale

Endurable silicone seal , long cycle test approval



3inch flush base ,strong flush power

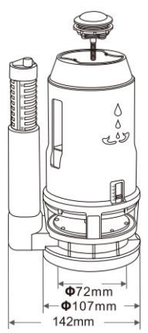

Adaptor height:
4009S(M): 270mm
4009S(L): 220mm

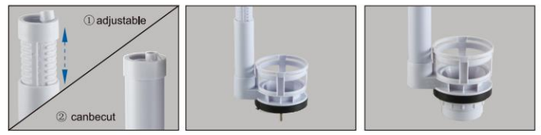

Telescope OFT / fixed height OFT optional

One-piece base

Two-piece base

4005

Telescope OFT / fixed height
OFT optional

Small water adjustment scale

Big water adjustment scale

4005(H) 4005(L)

Flush rate 5.0L/s

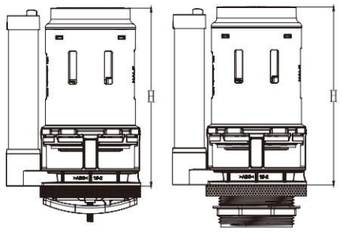

One-piece base | Two-piece base | Overflowing tube cap, refill water ratio adjustable

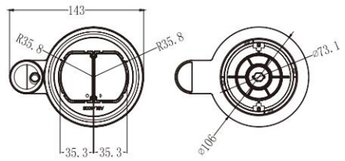

Adaptor height:
4005(H): 260mm
4005(L): 200mm

4005S

Telescope OFT / fixed height
OFT optional

Big water adjustment scale

4005S(H) 4005S(L)

Flush rate 5.0L/s

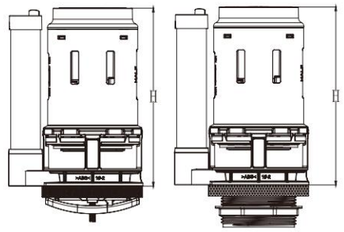

One-piece base | Two-piece base | Overflowing tube cap, refill water ratio adjustable

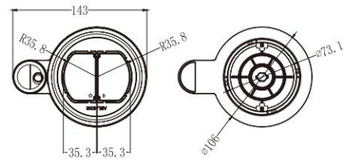

Adaptor height:
4005S(H): 260mm
4005S(L): 200mm

4088

Central lift , Permanent 12N

Flush rate 5.0L/s

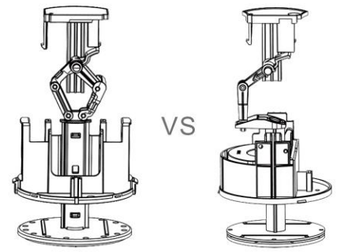

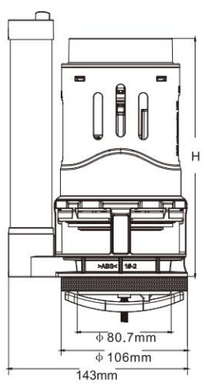

Adaptor height:
4088(M): 250mm
4088(L): 190mm

4088S

Central lift , Permanent 12N

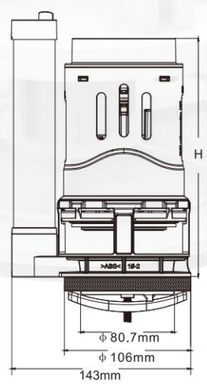

Adaptor height:
4088S(M): 250mm
4088S(L): 190mm

4489

Adapt for low cistern



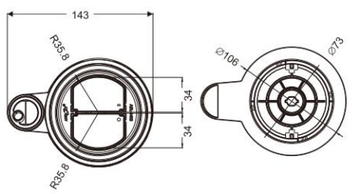

Adaptor height:
4489: 160mm

4489S

Adapt for low cistern



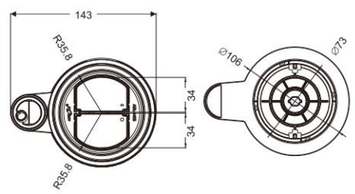

Adaptor height:
4489S: 160mm

5055

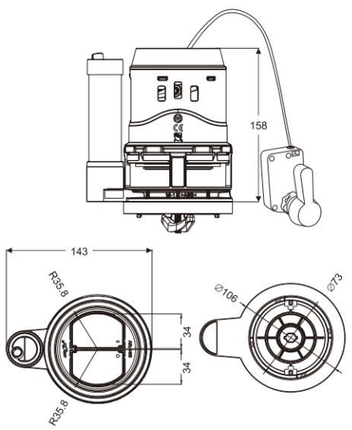

Adaptor height:
5055：152mm

5048

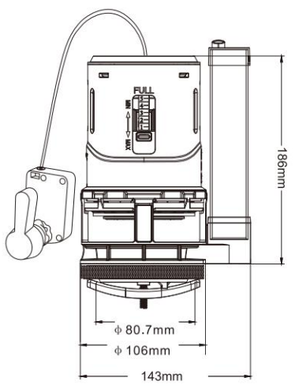

Adaptor height:
5048：175mm

5008

Telescope OFT / fixed height
OFT optional

Big water adjustment scale

Small water adjustment scale

Button or lever optional

1002 Lever

1008 Button

1006 Button

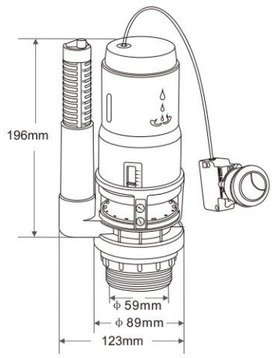

Adaptor height:
5008：196mm

One-piece base

Two-piece base

Overflowing tube cap,
refill water ratio adjustable

Flush Kit Set

Inlet Valve 2188 + Flush Valve 4005 + Push Button 2049
+ Plastic bolt + Foam gasket

Inlet Valve 2188 + Flush Valve 4088 + Push Button 2047

Inlet Valve 2188 + Flush Valve 4489 + Push Button 2047

Inlet valve 2053 + Dual flush cable valve 5008 +
Plastic bolt + Foam gasket

Inlet valve 2145 + Dual flush valve 3009 +
Chrome push botton 2038 + Plastic bolt + Foam gasket

Inlet Valve 2888 + Flush Valve 2008 + Push Button 2038
+ Plastic bolt + Foam gasket

2098
ABS body
Chrome finish
Dimension : 72x32mm

2098B
ABS body
Chrome finish
Dimension : 72x32mm

2088
ABS body
Chrome finish
Dimension : 46x46mm

2088B
ABS body
Chrome finish
Dimension : 46x46mm



2010

ABS body
Chrome finish
Dimension : ⌀ 58mm

2010B

ABS body
Chrome finish
Dimension : ⌀ 58mm

2030

ABS body
Chrome finish
Dimension : ⌀ 58mm

2049

ABS body
Chrome finish
Dimension : ⌀ 48mm

2049B

ABS body
Chrome finish
Dimension : ⌀ 48mm

1045

ABS body
Chrome finish
Dimension : ⌀ 48mm

1047

ABS body
Chrome finish
Dimension : ⌀ 48mm

1046B(G)

ABS body
Chrome finish
Dimension : ⌀ 48mm

* Support customized logo and color

2038

ABS body
Chrome finish
Dimension:∅38mm

2020

ABS body
Chrome finish
Dimension : 58x36mm

2020B

ABS body
Chrome finish
Dimension : 58x36mm

2040

ABS body
Chrome finish
Dimension : 58x36mm

2040B

ABS body
Chrome finish
Dimension : 58x36mm

2042

ABS body
Chrome finish
Dimension : 65x35mm

2042B

ABS body
Chrome finish
Dimension : 65x35mm

2068

ABS body
Chrome finish
Dimension : 100x30mm

2068B

ABS body
Chrome finish
Dimension : 100x30mm

3002R

ABS body
Chrome finish
Dimension : 68x36mm

1088

ABS body
Chrome finish
Dimension : 75x30mm

2099

ABS body
Chrome finish
Dimension : 72x32mm



2016

ABS body
Chrome finish
Dimension : 75x30mm

2017

ABS body
Chrome finish
Dimension : 75x30mm

2019

ABS body
Chrome finish
Dimension : 75x30mm



1089

AABS body
Chrome finish
Dimension : 75x30mm

2010 (Flush Push Button)
ABS body
Chrome finish
Dimension : ∅58mm

1048
ABS body
Chrome finish
Dimension :∅48mm

2047
ABS body
Chrome finish
Dimension :∅48mm

2069
AABS body
Chrome finish
Dimension : 100x30mm

1006 (Button)
ABS body
Chrome finish
Dimension : 20x20mm

20602
Znic alloy chrome finish
w/t brass rod
dimension: 20x20mm

10101
Znic alloy chrome finish
w/t plastic rod
dimension: 20x20mm

20102
Znic alloy chrome finish
w/t brass rod
dimension: 20x20mm

30102

Znic alloy chrome finish
w/t iron color plated rod
dimension: 20x20mm

40101

Znic alloy chrome finish
w/t aluminum rod
dimension: 20x20mm

20201

Znic alloy chrome finish
w/t brass rod
dimension: 20x20mm 20x20mm

50201

Znic alloy chrome finish
w/t stainless rod
dimension: 20x20mm

20203

Znic alloy chrome finish
w/t brass rod
dimension: 20x20mm

50203

Znic alloy chrome finish
w/t stainless rod
dimension: 20x20mm

20202

Znic alloy chrome finish
w/t brass rod
dimension: 20x20mm

50202

Znic alloy chrome finish
w/t stainless rod
dimension: 20x20mm

20404

Znic alloy chrome finish
w/t brass rod
dimension: 20x20mm

50404

Znic alloy chrome finish
w/t stainless rod
dimension: 20x20mm

10301

Znic alloy chrome finish
w/t plastic rod
dimension: 20x20mm

30103

Znic alloy chrome finish
w/t stainless rod
dimension: 20x20mm

Accessroies

F-330
15/16 conversion 1/8, luxury direct link filters

F-609
Plug

F-007（Size:L、S)
Optional plugs （refill water ratio adjustable，fit for different toilet water seal required.）

F-603
Overflowing tube cap, refill water ratio adjustable

F-928(Size:L、S)
Overflowing tube cap

F-602(Size:L、S)
Overflowing tube cap

F-315-1
(G15/16 into G15/16)

F-315-2
(G1/2 into G1/2)

F-315-2
(G1/2 into G1/2)

F508-1 (POM)

F508-2 (Brass)

F508-3 (SUS304)

F-335
Additional overflowing tube

F-336

A001
∅85*∅55*30mm

A002
∅85*∅60*11.8mm

A003
∅92*∅68*10.5mm

A005
∅92*∅68*13.5mm

A006
∅94*∅55*30mm

A007
∅107*∅77*15mm

A009
∅86*∅55*19.5mm

A010
∅105*∅73*30mm

A011
∅93*∅52*25mm

A012
∅85.5*∅53*29mm

A013
∅87*∅61*17mm

A014
∅86*∅52*30mm