



COMBI/HU/HS/HC/HD SERIES

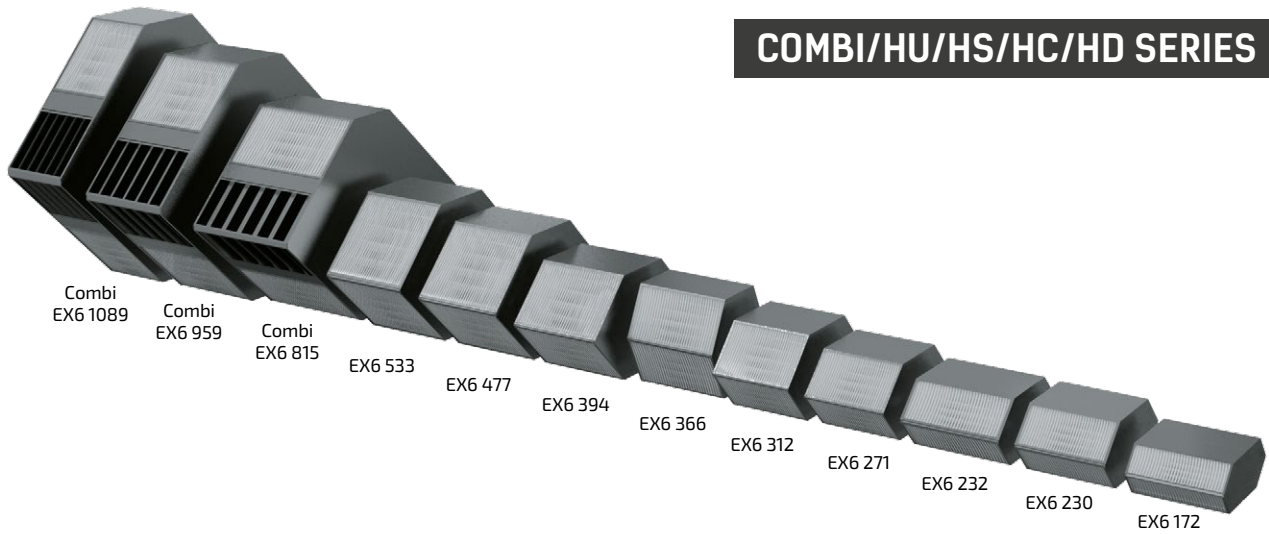

COMBI/HU/HS/HC/HD SIZES

Name	Geometry [mm]			Casing modification	Plate material
	A	B	h		
...-EX6 172	172	397	100-600	1/1.1/3/3.1	PS
...-EX6 230	230	455	100-600	1/1.1/2/2.1/3/3.1	PS
...-EX6 232	232	461	100-600	1/1.1/2/2.1/3/3.1	PS
...-EX6 366	366	366	100-600	2/2.1	PS
...-EX6 271	271	496	100-600	1/1.1/3/3.1	PS
...-EX6 312	312	537	100-600	1/1.1/3/3.1	PS
...-EX6 394	394	619	100-600	3	PS
...-EX6 477	477	700	100-600	3	PS
...-EX6 533	533	758	100-600	3	PS
Combi ...- EX6 815	815	1040	100-600	3	PS
Combi ...- EX6 959	959	1182	100-600	3	PS
Combi ...- EX6 1089	1089	1314	100-600	3	PS

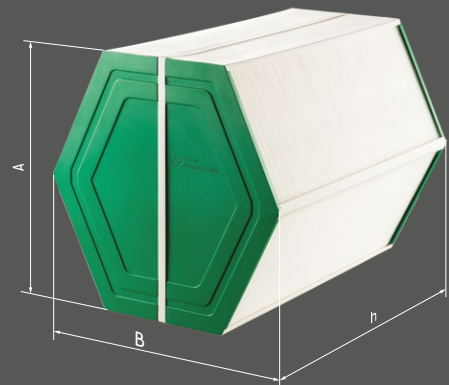

DESIGNATION KEY

COMBI/HU/HS/HC/HD-EX6 - 366 / 100...600 - 2

Casing modification:

- 1 – aluzinc
- 1.1 – aluzinc + T-profile
- 2 – plastic
- 2.1 – plastic + T-profile
- 3 – aluminium
- 3.1 – aluminium + T-profile

Depth [mm]

Height [mm]

Commercial group

ADVANTAGES



Top efficiency



Great balance efficiency – pressure drop



Wide range of sizes



100% high quality



Simple to install and maintain



Competitive prices and production times