

**JOLLIFT 1330 N**

3000 kg max capacity 6600 lb

96 mm minimum height 3.77"

1300 mm lifting height 51.18"

**JOLLIFT 1335 N**

3500 kg max capacity 7717 lb

105 mm minimum height 4.13"


1300 mm lifting height 51.18"

**JOLLIFT MASTER 35 N**

3500 kg max capacity 7717 lb

105 mm minimum height 4.13"

1640 mm lifting height 64.56"

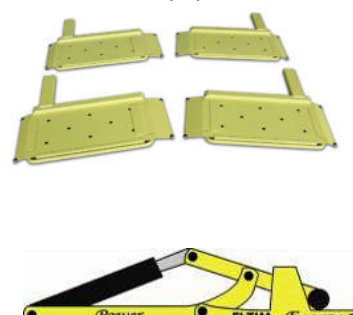**Main Features****Lifting by rubber blocks and wheels free or by wheel lifting supports****"ST" Equipment****"4P" Equipment**

Reduced minimum height (96 mm / 3.77" on JOLLIFT 1330 N) thanks to the POWER FI.TIM ENERGY patent



3 types of control unit available:


EH = electrohydraulic

PH = pneumo-hydraulic

PE = pneumo-electrohydraulic



The telescopic lifting arms are inside the footprint area of the vehicle that has been raised, for the safety of people working near the vehicle

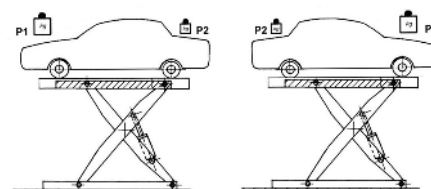

Reversible load, the heaviest side of the vehicle (motor side) on both sides of the lift

**Safety devices**


Safety device operating during lowering  
Acoustic signal operating during lowering



Mechanical safety catch



Emergency stop button with lock against non-authorized use



Outer and inner wheel stops on the wheel lifting supports

## Main optional accessories

"ST" Option



"4P" Option




4P – wheel lifting supports with crossbars available as an option on all floor-mounted models; driving over the lift becomes faster and the vehicle structure does not flex



AUT - Automatic device for opening and closing the lifting arms on JO1335 N - JOMASTER35 N models



JO RUB 70 high / adjustable pads



JO B90 13 pads remain fastened to the lifting arm



## ■ JOLLIFT 1330 N

3000 kg max capacity 6600 lb

96 mm minimum height 3.77"

1300 mm lifting height 51.18"  
(to the top of rubber pads)

### ST Version

With automatic lifting arm rotation locking and unlocking  
(EN 1493:2022 Standard)




**EH**  
Electrohydraulic  
Control Unit



**PH**  
Pneumohydraulic  
Control Unit



**PE**  
Pneumo-electrohydraulic  
Control Unit

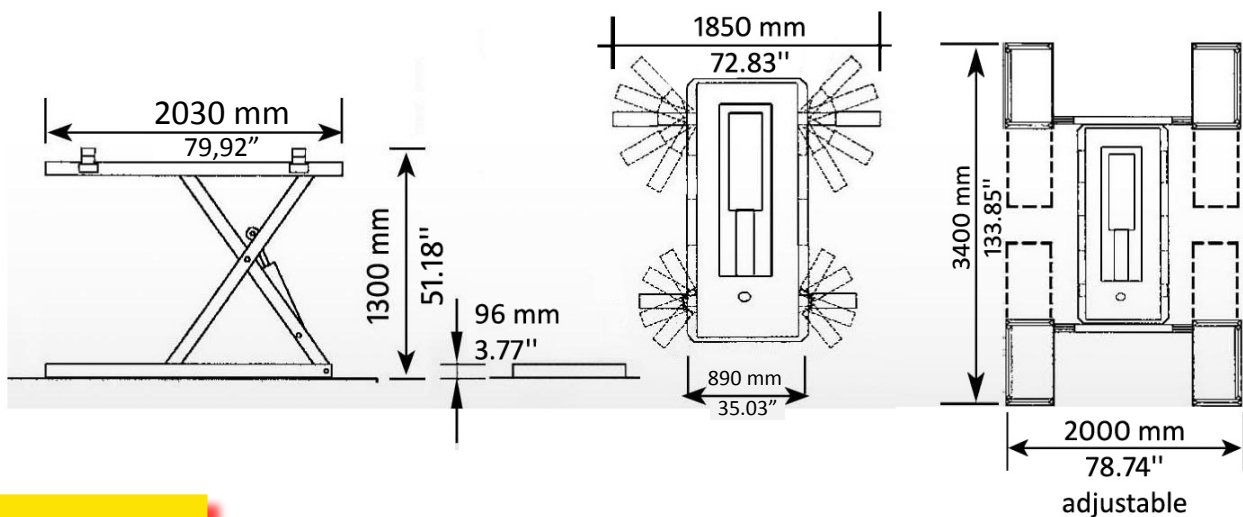

### ■ JOLLIFT 1335 N


3500 kg max capacity 7717 lb  
 105 mm minimum height 4.13"  
 1300 mm lifting height 51.18"  
 (to the top of rubber pads)

#### ST Version

With automatic lifting arm rotation locking and unlocking  
 (EN 1493:2022 Standard)




**EH**  
Electrohydraulic  
Control Unit

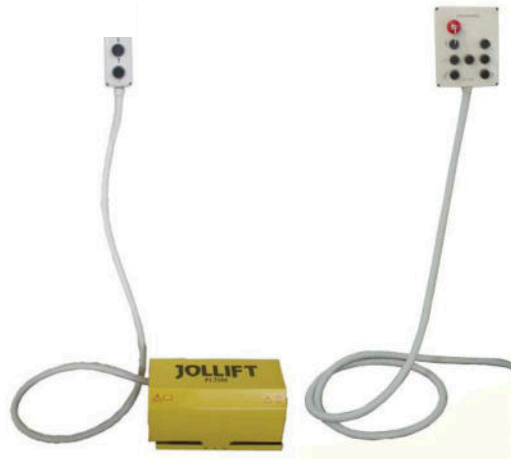

**PH**  
Pneumohydraulic  
Control Unit



**PE**  
Pneumo-electrohydraulic  
Control Unit

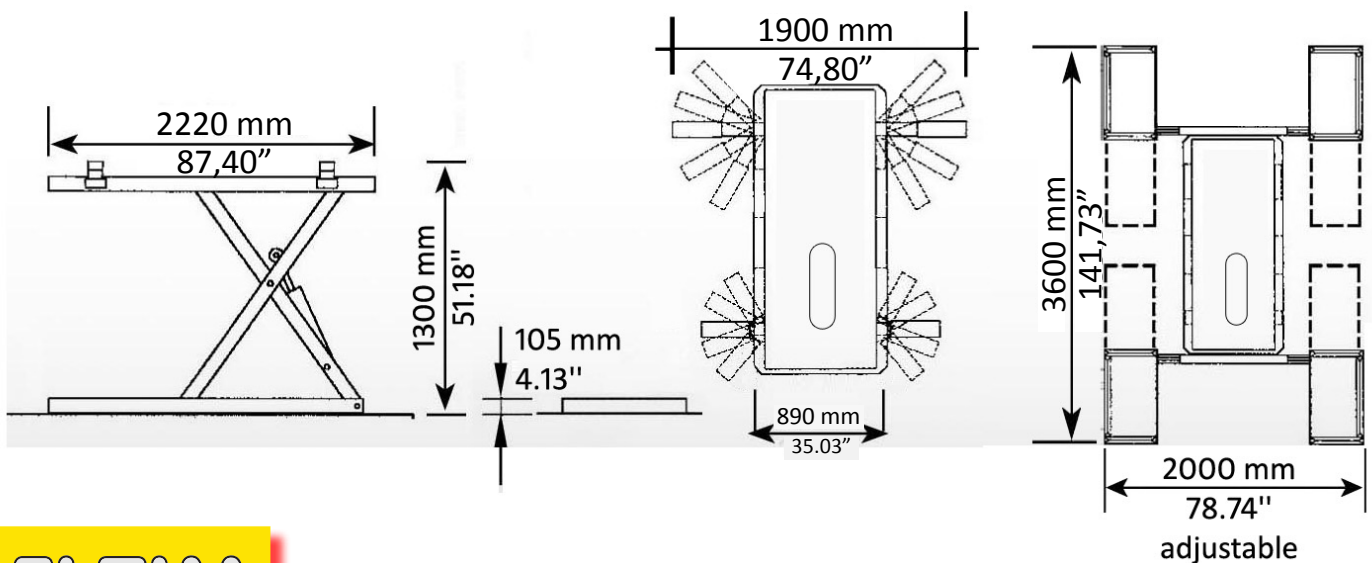



## ■ JOLIFT MASTER 35 N

3500 kg max capacity 7717 lb  
 105 mm minimum height 4.13"  
 1640 mm lifting height 64.56"  
 (to the top of rubber pads)

### ST Version


With automatic lifting arm rotation locking and unlocking  
 (EN 1493:2022 Standard)



**EH**  
Electrohydraulic  
Control Unit



**PE**  
Pneumo-Electrohydraulic  
Control Unit

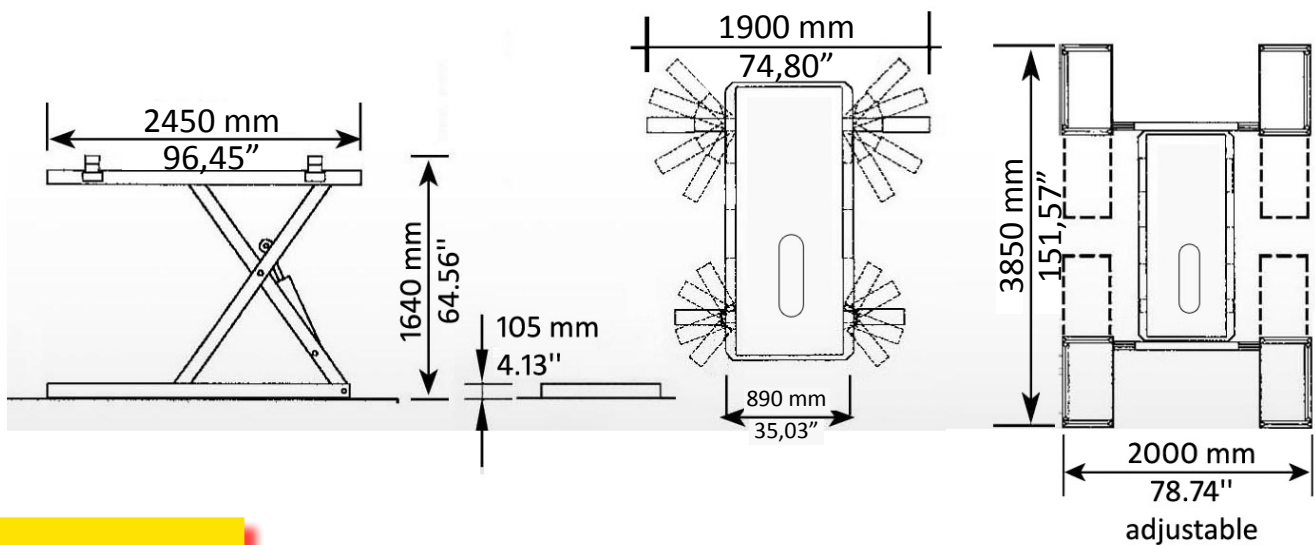

**JOLIFT 1330 BENCH N**

3000 kg maximum capacity 6600 lb

98 mm minimum height 3.85"

1300 mm lifting height 51.18"

**JOLIFT 1335 BENCH N**

3500 kg maximum capacity 7717 lb

105 mm minimum height 4.13"

1300 mm lifting height 51.18"

**JOLIFT MASTER BENCH 35 N**

3500 kg maximum capacity 7717 lb



105 mm minimum height 4.13"

1640 mm lifting height 64.57"

**Main features****Lifting by rubber blocks and wheels free or by wheel lifting supports**

Reduced length of the upper platform for full access of the lower, front and back side of the vehicle

Reduced minimum height (98 mm / 3.85" on JOLIFT 1330 BENCH N) thanks to the POWER FI.TIM ENERGY patent

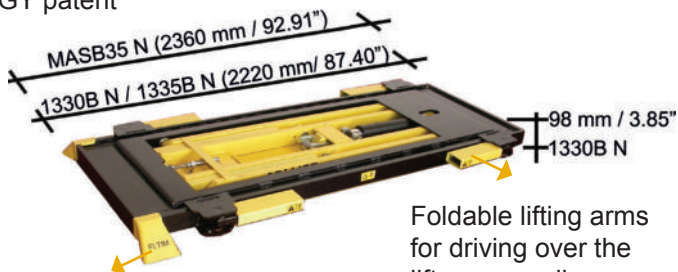

Tyre guards


Foldable lifting arms for driving over the lift more easily



PH  
Pneumohydraulic version  
(only 11330 BENCH COMBI PH N)



EH  
Electrohydraulic version  
- 400 V 3phase (standard)  
- 230 V 3phase or 1phase (on request)

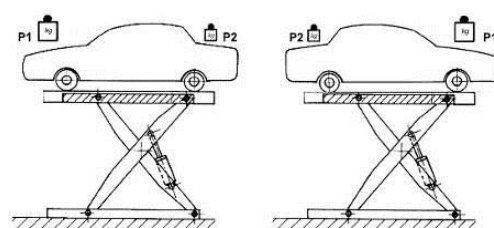

Reversible load, the heaviest side of the vehicle (motor side) on both sides of the bench



3 traction arm models available that can be mounted on any point of the lifting platform

SC19 ES

FL08 ES



2 clamp models available that can be mounted comfortably when the vehicle has already been raised as they are independent from the lifting arms; FL08 clamps allow to raise the vehicle off the platform of the lift

## Safety devices




Mechanical safety catch



Emergency stop button with lock against non-authorized use

Safety device operating during lowering  
Acoustic signal operating during lowering

The telescopic lifting arms are inside the footprint area of the vehicle that has been raised, for the safety of people working near the vehicle



Outer and inner wheel stops on the wheel lifting supports

## Main optional accessories



RC remote control



4P - wheel lifting supports with crossbars available as an option on all floor-mounted models; driving over the lift becomes faster and the vehicle structure does not flex



JO B90 13 pads remain fastened to the lifting arm







JO RUB 70 high / adjustable pads










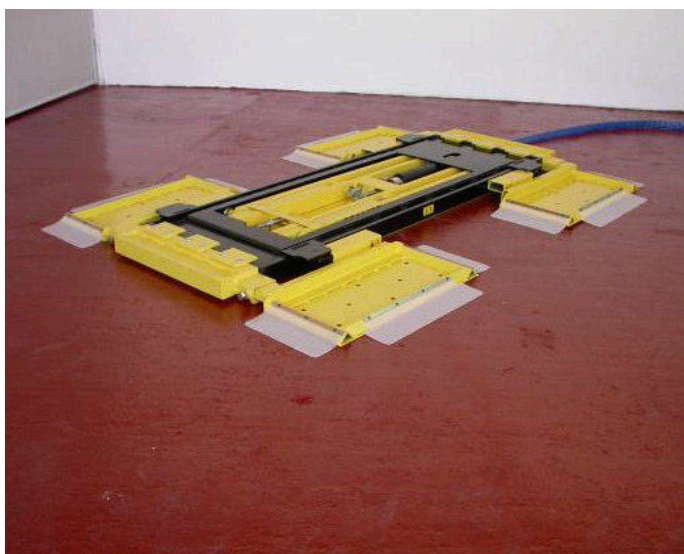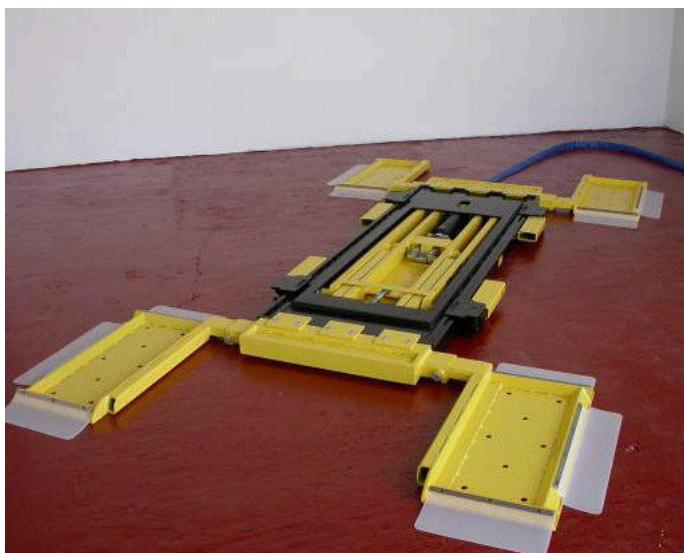

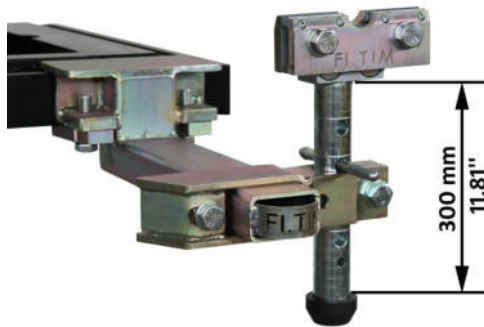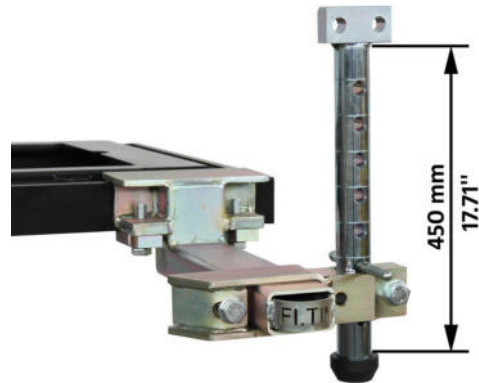**FL08 ES**

**ST 450 (optional accessory)**  
For measuring systems

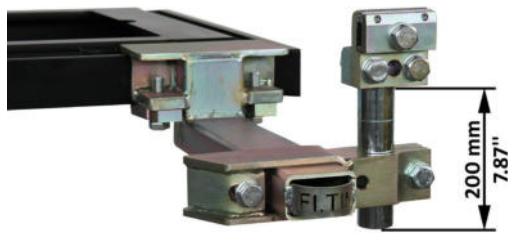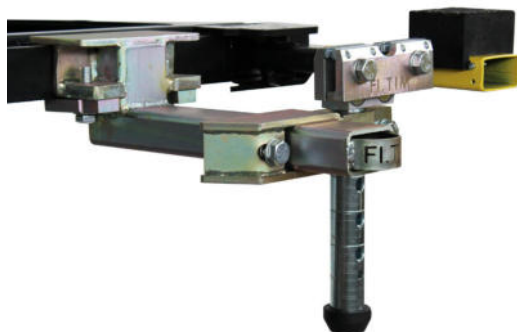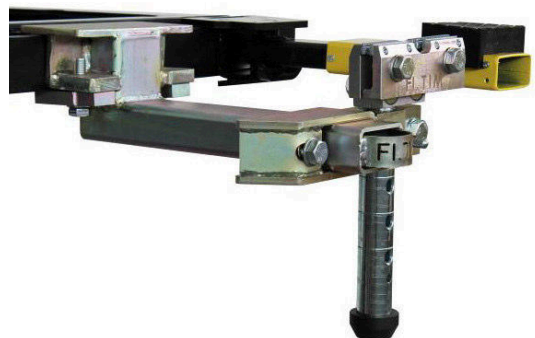**SC19 ES****WITH HIGH RUBBER BLOCK****WITH LOW RUBBER BLOCK**

Protection sheath for hydraulic hose


Safety cable

Protection cover for traction arm cylinder

### BT 1ROTEL

Single horizontal rotation telescopic traction arm

Oil pressure gauge

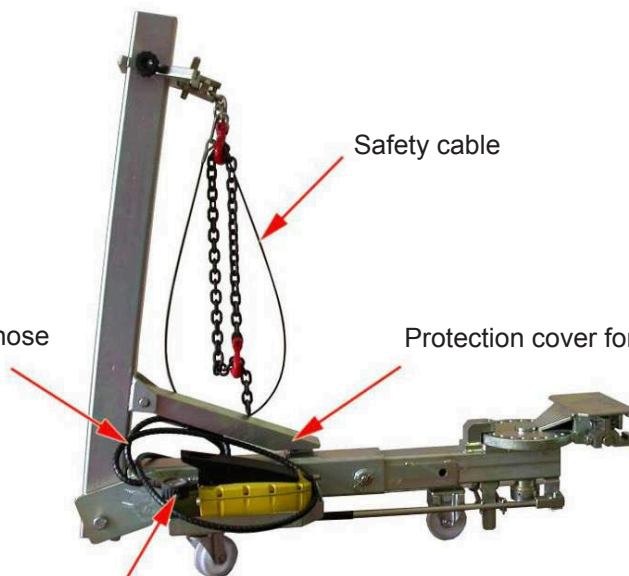

### BT 2RO

Double horizontal rotation traction arm



### BT 2ROCOM

Double horizontal rotation traction arm COMPACT



### BT 2RO10TON

Double horizontal rotation traction arm with 10t cylinder power



### BT 2RO 10TON COM

Double horizontal rotation traction arm with 10t cylinder power COMPACT



### A 106




Roller for downward pulling (optional accessory for BT 1ROTEL traction arm)



### A 107

Vertical extension (optional accessory for BT 1ROTEL – BT 2RO – BT 2ROCOM traction arms)

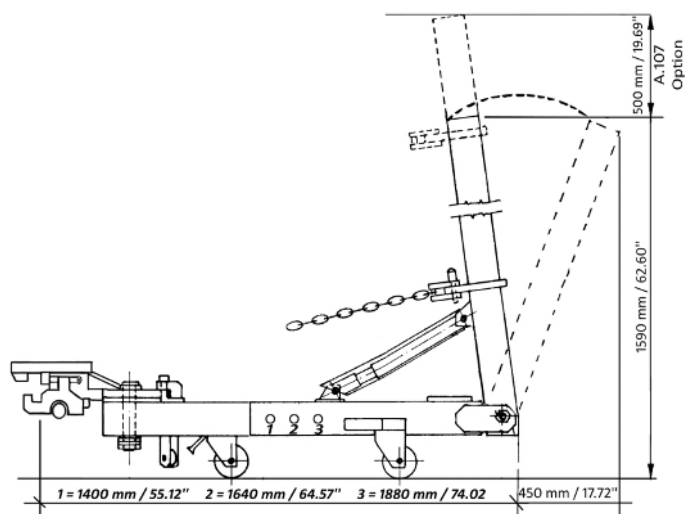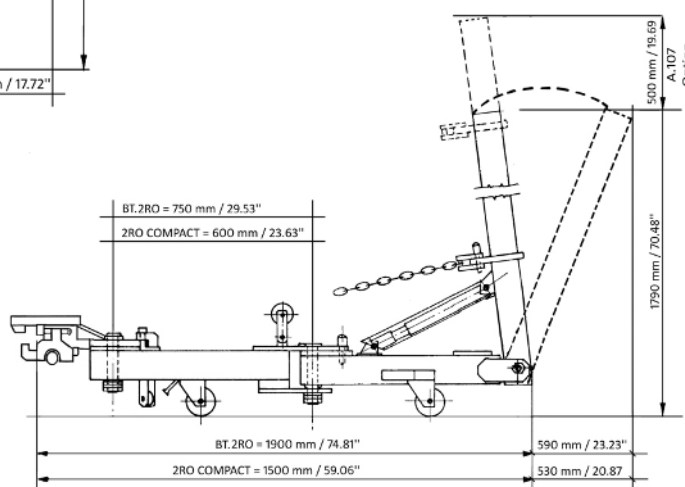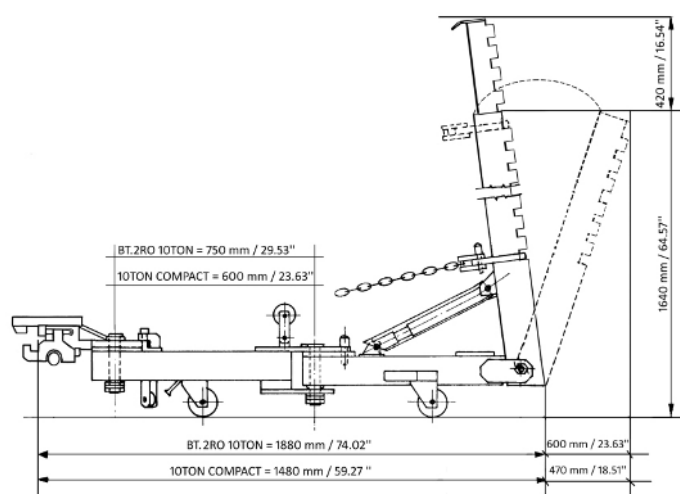

**BT 1ROTEL****BT 2RO  
BT 2ROCOM****BT 2RO10TON  
BT 2RO10TONCOM**

## JOLLIFF 1330 BENCH N

3000 kg max capacity 6600 lb  
 98 mm minimum height 3.85'  
 1300 mm lifting height 51.18"  
 (to the top of rubber pads)

With lifting arm rotation locking and unlocking  
 (EN 1493:2022 Standard)



1330B N 1ROTELSC19



"COMBI PH"  
 Pneumohydraulic  
 version



"EH"  
 Electrohydraulic  
 version



"RC" push button panel  
 (optional accessory)



BT 1ROTEL



BT 2RO






BT 2RO10TON



SC19 ES




FL08 ES

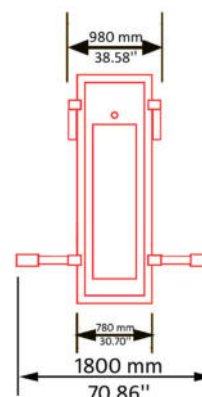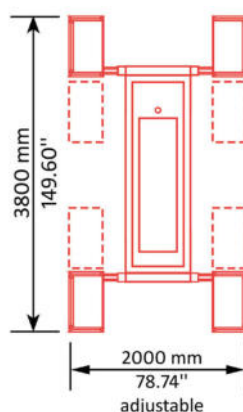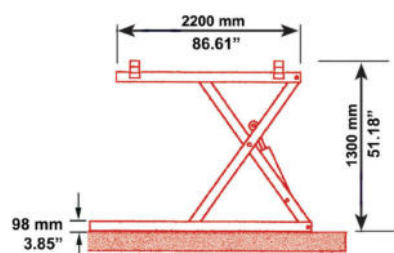

## ■ JOLIFT 1335 BENCH N

3500 kg max capacity 7717 lb  
 105 mm minimum height 4.13"  
 1300 mm lifting height 51.18"  
 (to the top of rubber pads)

With lifting arm rotation locking and unlocking  
 (EN 1493:2022 Standard)

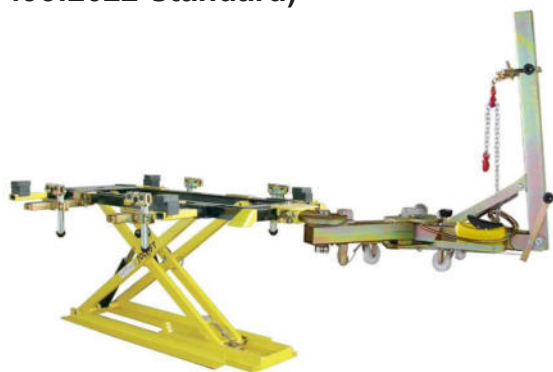

1335B N 2ROFL08



"EH"  
 Electrohydraulic  
 version



"RC" push button panel  
 (optional accessory)



BT 1ROTEL



BT 2RO






BT 2RO10TON



SC19 ES



FL08 ES

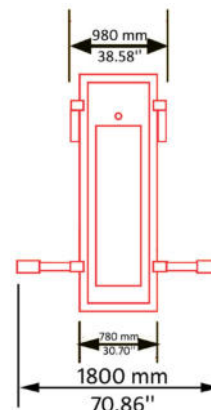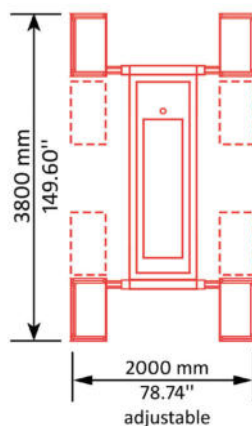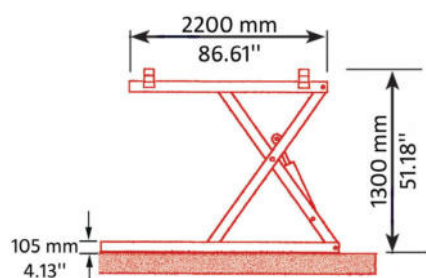



## JOLIFT MASTER BENCH 35 N

3500 kg max capacity 7717 lb  
 105 mm minimum height 4.13"  
 1640 mm lifting height 64.57"  
 (to the top of rubber pads)

With lifting arm rotation locking and unlocking  
 (EN 1493:2022 Standard)



MASB35 N 10TONFL08



"EH"  
Electrohydraulic  
version



"RC" push button panel  
(optional accessory)



BT 1ROTEL



BT 2RO






BT 2RO10TON



SC19 ES



FL08 ES

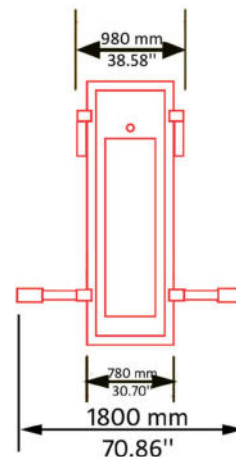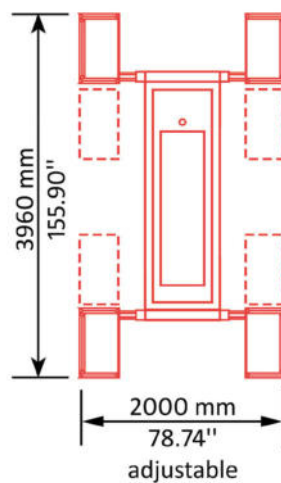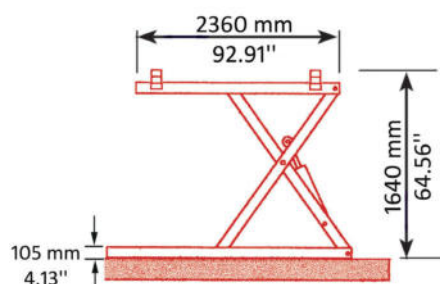


# *pullinglift*

THE EVOLUTION OF SMART REPAIR




**PULLINGLIFT 4P SM**  
for lifting by the wheels or  
with rubber pads  
(3000 kg / 6600 lb capacity when lifting  
with rubber pads)

## EQUIPMENT

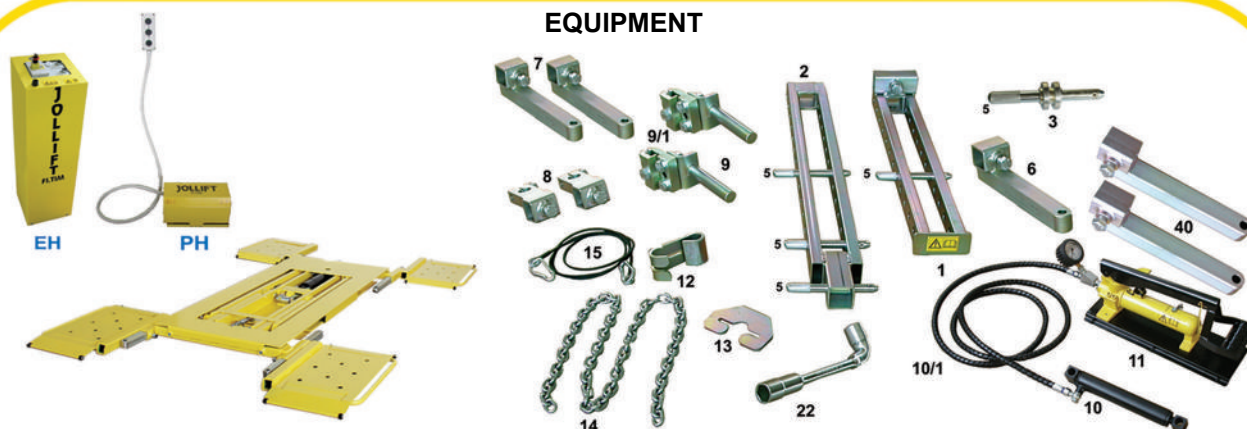


## OPTIONS

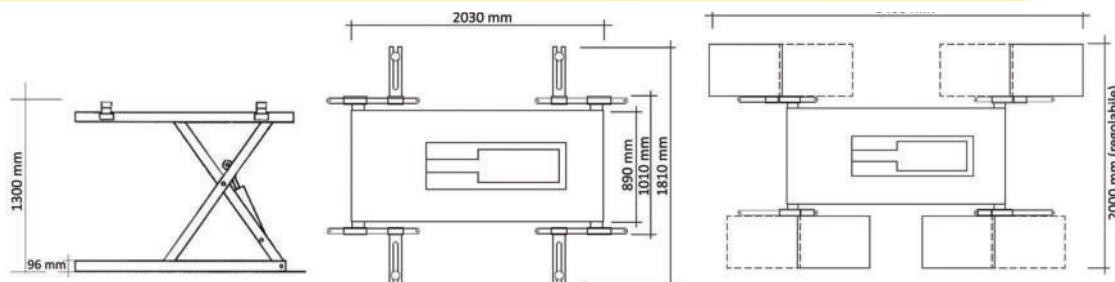



Patented

**JOLLYPULL is Smart Repair equipment which is mainly used with wheel lifting supports**

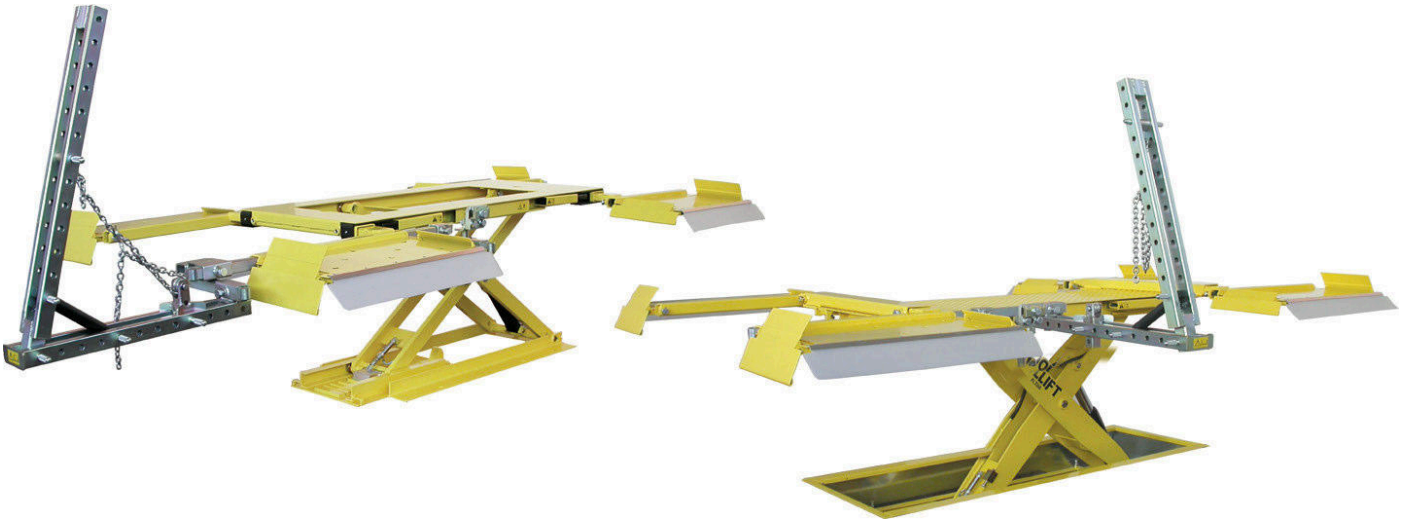

**Fast and comfortable, it works in conjunction with JOLLIFT lifts and benches  
Suitable for Smart Repair, with many different uses**



cylinder with return spring

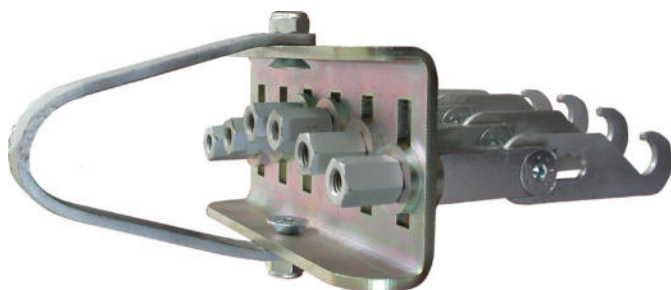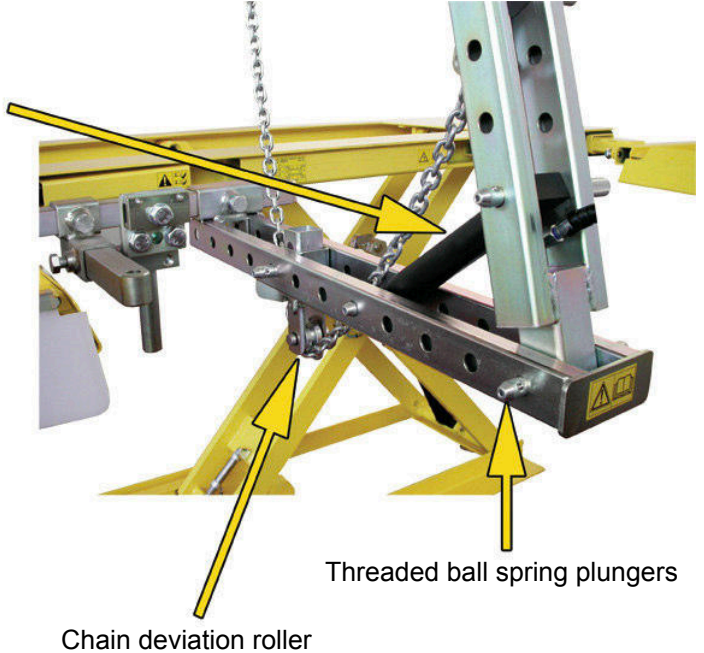


Multiple hook for pulling curvilinear and straight parts  
It fits well with curvilinear parts of cars like for instance fenders / wheelhouses and others



## Fast and comfortable assembling

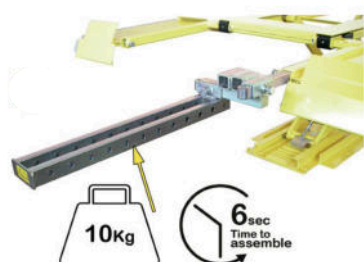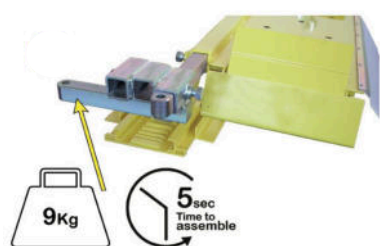

## JOLLYPULL assemblies

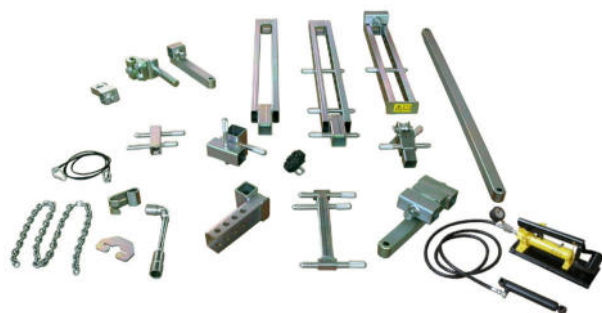


JOLLYPULL A assembly for wheel lifting supports




JOLLYPULL B.P. assembly for benches predisposed for pulling

# jollypull - A

For use with wheel lifting supports on JOLLIFT lifts and benches

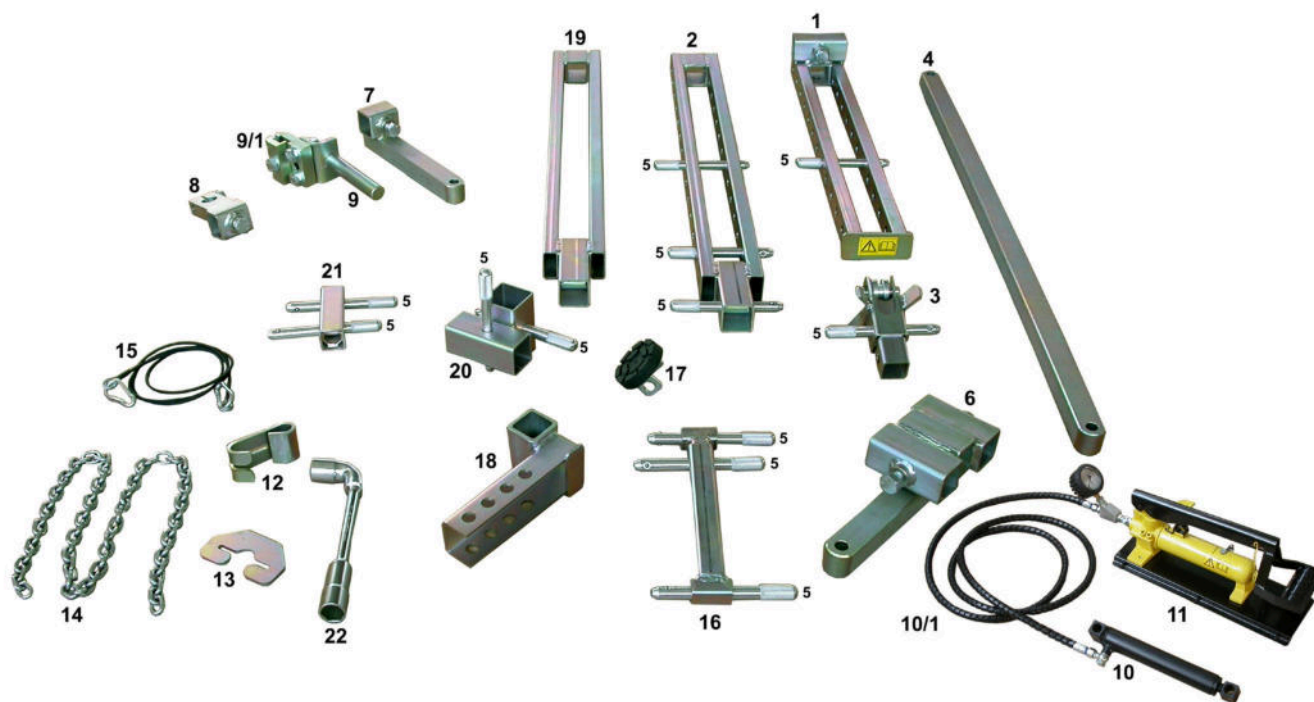

Horizontal part (1 pc)

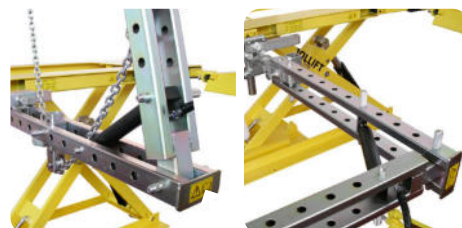

Vertical part (1 pc)



Telescopic chain deviation roller with pivot (1 pc)





Traction arm attachment support– double (1 pc)




Clamp bracket support (1 pc)



Clamp support (1 pc)

Shaft with clamp attachment (1 pc)  
SC19 clamp (1 pc)

Telescopic support with 3 pivots (1 pc)

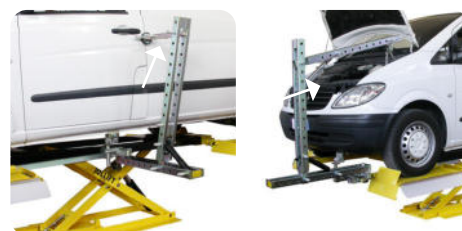Free-wheel rubber pad  
(1 pc)





Free-wheel lifting support (1 pc)



Vertical extension (1 pc)



90° vertical attachment with 1 pivot (1 pc)



Vertical extension support with 2 pivots (1 pc)



Cylinder with fitting (1 pc)

Hydraulic hose (1 pc)

Pump with fitting and pressure gauge (1 pc)

