





M7 POWER Battery & smart charger 18V 5Ah.....P.7 Power Tool packs M7P.8-9 Cordless impact wrenches 18V 5Ah......P.10-11 Cordless drill drivers 18V 5AhP.12 Cordless impact drivers 18V 5AhP.13 Cordless reciprocating saw 18V 5Ah......P.14 Cordless jig saw 18V 5Ah.....P.15 Cordless circular saw 18V 5Ah......P.15 Cordless oscillating multi-tool 18V 5AhP.16 Cordless rivet gun 8V 5Ah.....P.17 Cordless rotary hammer 18V 5AhP.17 Cordless angle grinder 18V 5Ah......P.18 Cordless orbital sander 18V 5Ah......P.19 Cordless grease gun 18V 5Ah.....P.19 Cordless pressure washer 18V 5Ah......P.20 Cordless heat gun 18V 5Ah.....P.21 Cordless LED floodlight 18V 5AhP.21 Cordless screwdriver drill, hammer drill & Impact Driver ... P.22 Cordless screwdriver 12V 2AhP.22 Electric grinder......P.22 BOOST Start Boosters P.24-25 Battery chargerP.26 Pneumatic straight die grinder...... P.34-35 Pneumatic angle grinder......P.35 Pneumatic angle grinders......P.36 Pneumatic air sanders and polishersP.39 Pneumatic riveters......P.41 Pneumatic needle scalersP.42 Pneumatic shears and saws......P.43 Air hammersP.44 Pneumatic blowgunsP.45 **AUTO** Automotive mechanics and maintenance......P.49 **GARAGE** Pneumatic systemsP.52

Cable reelsP.53Workshop organizationP.53ExtractorsP.54Impact socketP.54CouplingsP.55 to 58

It's **NEW!**







M7PACKV9 9



900 Nm / 18 V **DW404K DW404A**





1500Nm / 18V **DW406K DW406A**





270Nm / 18V **DS202K DS202A** 13







884 Nm **NC4670Q**





QEHSS3





M7S9509 53
















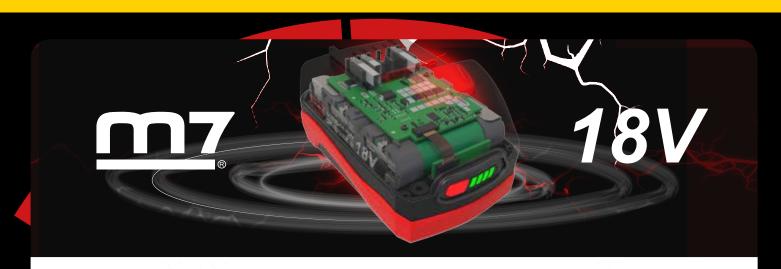





QUICK CHARGING TIME 50 MINUTES


A fully discharged battery will fully charge in 50 minutes at an ambient temperature between 0 ° C and 40 ° C.

18 V - 5Ah **DB1850P BATTERY**

113€



BATTERY CHARGE LEVEL LED **INDICATOR**




60% - 80% charged




40% - 59% charged



20% - 39% charged Less than 20% charged







- Charging faster than a standard battery.
- No memory effect
- Longer lifespan.
- No power loss.
- Lighter.



DC1840A SMART CHARGER

Compatible with DB1850P



TOO HIGH OR TOO LOW TEMPERATURE

Charge between 0°C and 40°C Red LED on Green LED off



DEFFECTIVE BATTERY OR CHARGER

Red LED flashing Green LED off


76€





BATTERY CHARGING

Fast charge (50 minutes) Red LED off Green LED flashing







- No friction between the carbon brushes and the manifold (no more sparks at the engine outlet).
- Reduces the heat produced increasing the motor's lifespan.
- No friction to preserve the energy produced by the engine.
- Longer battery life.
- · Less wear parts.



THE PACKS M7

5Ah / 18V


M7PACKV1

899€



AND 3/4"





- 1 1/2" compact impact wrench (DW401)
- 1 3/4" compact impact wrench + 1 case + 2 batteries + 1 charger (DW601A)



5Ah / 18V

M7PACKV2

559€

POWER TOOL PACK WITH 1/2" COMPACT IMPACT WRENCH AND ANGLE GRINDER

• 1 1/2" compact impact wrench + 1 case + 2 batteries + 1 charger (DW401A)

1/2"

AND 3/4"

• 1 angle grinder (DG585)



5Ah / 18V

M7PACKV4

978€



POWER TOOL PACK WITH 1/2" IMPACT WRENCH. 3/4" IMPACT WRENCH

- 1 1/2" impact wrench + 1 case + 2 batteries +1 charger (DW18502A)
- 1 3/4" impact wrench (DW601)



5Ah / 18V

M7PACKV3

1009€ □

POWER TOOL PACK WITH 1/2" COMPACT IMPACT WRENCH, 3/4" IMPACT WRENCH AND ANGLE GRINDER

- 1 1/2" compact impact wrench (DW401)
- 1 3/4" impact wrench + 1 case + 2 batteries + 1 charger (DW601A)
- 1 angle grinder (DG585)



5Ah / 18V

M7PACKV6

781€

POWER TOOL PACK WITH 1/2" IMPACT WRENCH, DRILL DRIVER AND ANGLE GRINDER

- 1 1/2" impact wrench + 1 case + 2 batteries + 1 charger (DW18502A)
- 1 drill driver (DD101)1 angle grinder (DG585)



5Ah / 18V 1/2"

M7PACKV7

751€



POWER TOOL PACK WITH 1/2" IMPACT WRENCH, DRILL DRIVER AND ANGLE GRINDER

- 1 1/2" compact impact wrench + 1 case + 2 batteries + 1 charger (DW401A)
 1 angle grinder (DG585)

- 1 drill driver (DD101)1 free M7 fabric tool box (BA80129)



5Ah / 18V

1/2"

1076€ □

M7PACKV8



HAMMER DRILL DRIVER, ANGLE GRINDER, FLOODLIGHT AND FRABRIC TOOL BOX

- 1 1/2" impact wrench + 1 case + 2 batteries + 1 charger (DW18502A)
- 1 hammer drill driver (DH101)
- 1 angle grinder (DG501)
- 1 worshop floodlight (DFL101)
- 1 battery (DB1850)
- 1 fabric tool box (BA80129)



5Ah / 18V

M7PACKV9

799€



POWER TOOL PACK WITH ROTARY HAMMER, HAMMER **DRILL DRIVER AND ANGLE GRINDER**

- 1 rotary hammer + 1 case + 2 batteries + 1 charger (DRH101A)
- 1 hammer drill driver (DH101)
- 1 angle grinder (DG501)









	Battery power	Square drive	Bolt size	Max. Torque	Free speed	Blows frequency	Weight
	7				₽	bpm	kg
DW401	5 Ah - 18 V	1/2"	M6-M16	813	0-1100 / 0-1600 / 0-2200	0-1500 / 0-2500 / 0-3000	1.48
DW404K	5 Ah - 18 V	1/2"	M6-M16	900	0-900 / 0-1400 / 0-1800 / 0-2200	0-1150 / 0-1700 / 0-2300 / 0-2500	1.16

*Loose-stop function: once the bolt/nut is loosened, the speed slows down and the rotation stops after about one second, to prevent the bolt from falling.



1220 Nm

CORDLESS IMPACT WRENCH



Electric brake Instant stop when the trigger is released.



DW1840 239€ Without charger nor battery. **DW18502A** 529€

↑ DW1840
 ↑ 2x DB1850P
 ↑





Smart stop function* when loosening



speeds clockwise rotation



Electric brake Instant stop when the trigger is released.





279€ **DW406K** Without charger nor battery. DW406





1900 Nm

CORDLESS IMPACT WRENCH



Reduced vibrations The Motor part is connected to the handle by anti-vibration silent blocks.



speeds clockwise rotation



Electric brake Instant stop when the trigger is released.





DW601

479€





DC1840A

Without charger nor battery.

769€ **DW601A**



	Battery power	Square drive	Bolt size	Max. Torque	Free speed	Blows frequency	Weight
	7				₽	bpm	kg
DW1840	5 Ah - 18 V	1/2"	M6-M24	1220	1900	2200	2.53
DW406K	5 Ah - 18 V	1/2"	M10-M25	1600	0-1400 / 0-1900 / 0-2400	0-1800 / 0-2200 / 0-2800	2.00
DW601	5 Ah - 18 V	3/4"	M10-M27	1900	0-900 / 0-1000 / 0-1800	0-1800 / 0-2000 / 0-2200	3.37





CORDLESS DRILL DRIVER



Impulse function ideal for drilling on a painted surface and to replace damaged screws.

release positions drilling position

speeds



Jacobs® metal chuck, self-tightening and self-locking.



Removable bit holder and belt hook 1 side handle.



90 Nm

CORDLESS HAMMER DRILL DRIVER

3 modes: Screwdriver / Drill / Hammer drill.



Impulse function ideal for drilling on a painted surface and to replace damaged screws.

release positions



speeds



Jacobs® metal chuck, self-tightening and self-locking.



Removable bit holder and belt hook. 1 side handle.



	Battery power	Drilling capacity	Chuck diameter	Blows frequency	Tightening control	Max. Torque	Free speed	Weight
								kg
	ź		<###> <###	bpm			₽	kg
DD101	5 Ah - 18 V	Wood : 60 Metal : 13	13		23+1	90	0 - 500 0 - 2000	1.37
DH101	5 Ah - 18 V	Wood : 60 Metal : 13	13	0 - 6500 0 - 24000	25	90	0 - 450 0 - 1750	1.45





	Battery power	Max. Torque	Chuck diameter	Bolt size	Blows frequency	Length	Free speed	Sound level	Vibration level	Weight
	7		Ħ		bpm	4 	Ω o	?)))	(((O)))	kg
DS201	5 Ah - 18 V	203	6	M12	0 - 1200 0 - 2350 0 - 3300		0 - 1100 0 - 1900 0 - 2800	-		1.28
DS202K	5 Ah - 18 V	270			0 - 4000	110	0 - 3200	68	1.5	1









229€

DRS101





Electric brake

quickly stops the blade rotation when the trigger is released.



THE PERKS:

- 1 HAND WORK
- COMPACT: 336MM (W/O BATTERY)
- LIGHT: 1,78KG

DRS102 Without charger nor battery. DRS102



Consumables not available

ACCESSORIES

QD9209

29€





VARIABLE PITCH SABER SAW BLADES - 5 PCS

Teeth per inch: 10/14 TPI.


Blades design to cut steel, metal and wood.


Cutting capacity for wood with nails, plywood, plastic tube, carbon: from 3.2 mm to 6.35 mm. Cutting capacity for other materials (excluding metal):

from 3.2 mm to 12.7 mm.

	Battery power	Cutting capacities	Stroke length	Strokes per minute	Length	Weight
	Ź	⊄	\Leftrightarrow	S.P.M	∢ 	(kg)
DRS101	5 Ah - 18 V	Wood : 200 Metal : 20	29	3100	410	2.7
DRS102	5 Ah - 18 V	Wood : 160 Metal : 16	25	3100	336	1.78

DJS101







DJS101



149€


Consumables not available



until 45°

	Battery power	Cutting Capacity	Stroke length	Strokes per minute	Length	Weight
	7	⊄	\Leftrightarrow	S.P.M	l + 	kg
DJS101	5 Ah - 18 V	Wood : 63.5 Aluminium : 9.53 Steel : 6.35	25.4	2200	226	2.7






3RUSHLESS

Motor



185 MM





Heavy duty, light and durable aluminum base. Ergonomic design with soft grip handles for comfort and control.







Consumables not available

	Battery power	Free speed	Shank Opening	Spindle size	Cutting Capacity 45°	Cutting Capacity 90°	Bevel Capacity	Stroke length	Length	Weight
	7	№	<u></u>		45°	90°		\Leftrightarrow	l ∗ L +l	kg
DCS101	5 Ah - 18 V	4500	185	20	46	60.5	0 - 56	25.4	330	3.63





- Useful for scraping silicone, tile joints, paint or adhesive.
- Suitable for sanding narrow spaces such corners.

Anti-Vibration System for a more comfortable work.

Fast blade replacement without tool. Oscilliation angle: 1.8° right & left.












	Battery power	Strokes per minute	Oscilliation angle	Length (without battery)	Sound level	Vibration level	Weight
	7		#	l + l	(((§	(((O)))	kg
DOM101	5 Ah - 18 V	11000/18000	1.8	320	80.6	1.9	1.04



QK131K3

12,10€ В

1 BI-METAL BLADE



QK131K4

11,20€ В

1 SHOVEL BLADE



QK131K5

13,50€ В

1 SANDING PAD



QK131K6

34€

1 SEMICIRCLE HSS BLADE

ACCESSORIES



QB9933V06K

10 SANDING PAPER #60

8,20€ В


QB9933V10K


8,20€



10 SANDING PAPER #100



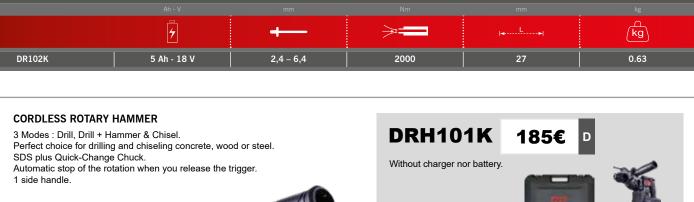

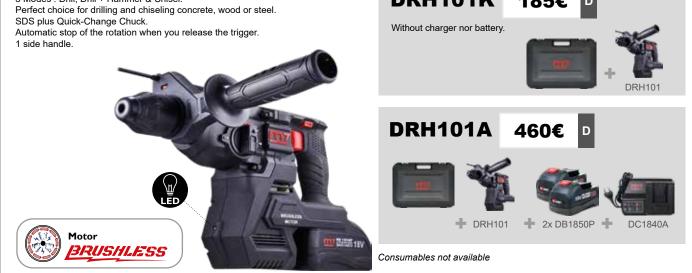

	Battery power	Vitesse de rotation	Blows frequency	Impact Energy	Chuck Type	Drilling capacity	Sound level	Vibration level	Weight
									kg
	7	№	bpm	(J)	√ ∭_ -	<u> </u>	? (((?	((O))	(kg)
DRH101K	5 Ah - 18 V	1150	5100	2.6	SDS plus	Wood : 30 mm Steel : 13 mm Concrete : 26 mm	94.3	12.7	2.4








	Battery power	Disc diameter	Thread	Free speed	Length	Weight
		mm		R.P.M		kg
	7	\bigcirc	Ħ	₽	4 	kg
DG585	5 Ah - 18 V	125	M14	8000	285	1.46
DG501	5 Ah - 18 V	125	M14 x P2.0	8000	320	1.48

CORDLESS ORBITAL SANDER & GREASE GUN 18V 5AH

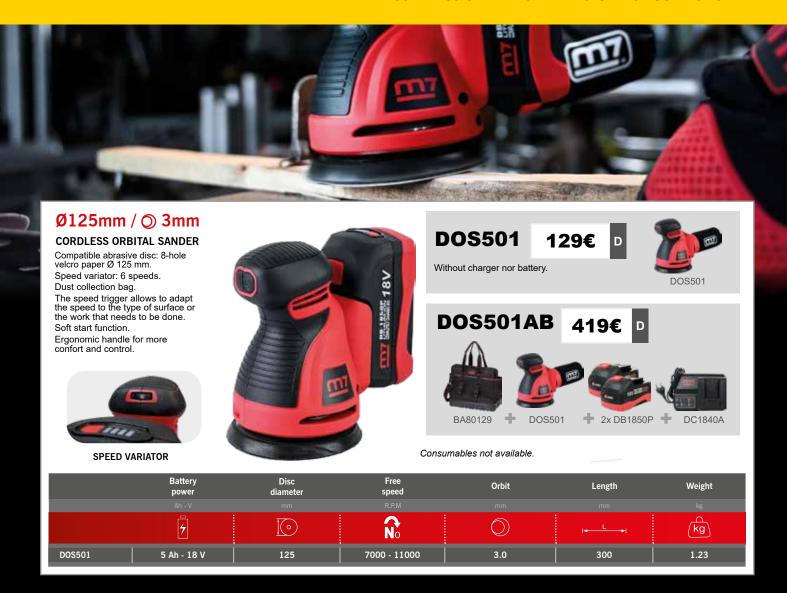



CORDLESS GREASE GUN

Compatible with standard 400g grease cartridge: DIN1284 & Lube-Shuttle.

Overpressure protection included.

LCD screen to control battery level.

Provided with 1 meter flexible hose & 73 cm strap.

Consumables not available.







	Battery power	Length (without battery)	Air pressure	Max. output flow	Cartridge capacity	Weight
						kg
	7			■Þ∜	Ξ	kg
DGG102K	5 Ah - 18 V	395	482	94,6	400	2.4





CORDLESS PRESSURE WASHER

Water gun utilizes a three-piston pump with super silent anti-vibration technology to clean both quietly yet thoroughly. Metal Pump with no possible leak of water and oil

Dual trigger system with double click power control to operate at low or high power



Accessories include:



1 high precision 4-in-1 multi pattern nozzle (rotating turbo nozzle, 20°fixed nozzle, 60°fixed nozzle, 0°pencil jet)



1 foaming nozzle to apply detergent



1 quick-connect 4M water inlet hose for drawing fresh water from any source (a bucket, a pool, a can, a pond etc.)



2 lances of 28,5 cm each or 57 cm total length

	Battery power	Air Flow	Air Pressure	Length	Hose length	Weight
						kg
	7	=			().	kg
DPW101	5 Ah - 18 V	2.8	25	876	4	1.72

CORDLESS HEAT GUN

60 seconds up to max. temperature.

Stable temperature (overheat prevention).

Quick release collar to safely and easily remove nozzle accessories.


Lock-off feature prevents accidental start up ensuring safety to the user.

Including 3 nozzles (reflector nozzle, flat nozzle and reduction nozzle) .

Application: Shrinking, Bending tube, Removing Stickers and more...












HEAT GUN NOZZLES - 3 PCS

1 reflector nozzle, 1 flat nozzle and 1 reduction nozzle

Material: Aluminium.





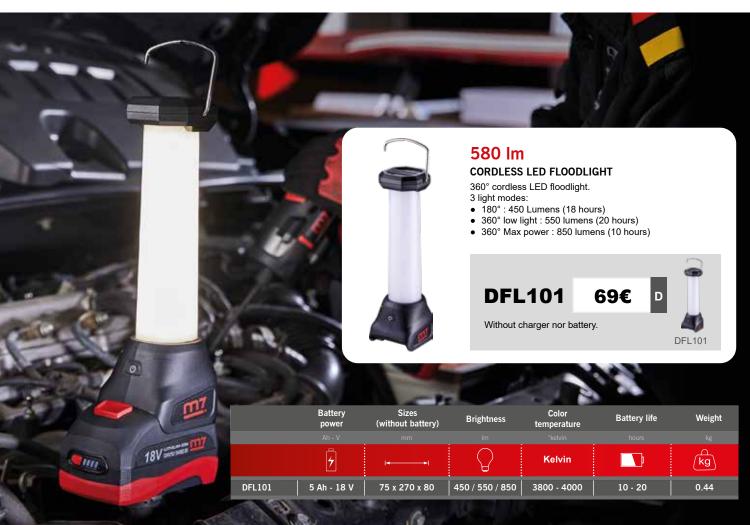







109€ **DD18132A**

CORDLESS SCREWDRIVER DRILL

- 2 Li-Ion 1.3Ah 20V batteries
- 1 charger included

13mm ROHM chuck (self-tightening and self-locking). 23 release positions.



67Nm / 1.3Ah **DH18132A** 114€

D

CORDLESS HAMMER DRILL

- 2 Li-Ion 1.3Ah 20V batteries
- 1 charger included

13mm ROHM chuck (self-tightening and self-locking). 24 release positions.

	Battery power	Chuck diameter	Max. Torque	Free speed	Length	Weight
						kg
	7	<=====================================		Ω o	4 	(kg)
DD18132A	1.3Ah - 20V	13	52	Low 0~350 / High 0~1300	230	2.5
DH18132A	1.3Ah - 20V	13	67	Low 0~350 / High 0~1300	270	2.5





2Ah / 1 kg **DS10202** 179€

CORDLESS IMPACT DRIVER

Quick charge takes 30 minutes. 2 batteries + 1 charger included. LED to light up the work area.



2Ah DB1020

10.8V/20V, 2AH BATTERY Suitable for DS10202

> 55€ D



DC10A **BATTERY CHARGER** For Battery DB1020

40€

D

	Battery power	Chuck size	Bolt size	Max. Torque	Free speed	Blows frequency	Weight
							kg
	7	\			N ₀	bpm	kg
D\$10202	2Ah - 10.8V/12V	1/4"	M4 - M12	100	0 - 2200	0 - 3000	1.0

ELECTRIC GRINDER

Bore



Ø230mm / 2100W

ELE

	92103		90€	D
Disc	diameter	Power	Free speed	Cable





Cable length 40 cm

12V - 25Ah ST3100

359€

Cable length 114 cm

12V - 25Ah

ST3100L

380€

START BOOSTER

Designed for professional interventions and repairs. High-performance, pure lead AGM battery.

Colored LEDs indicating the booster's charge level.

Protection against voltage surges.

Integrated safety fuse.

Insulated, brass-made, curved, durable and resistant pliers. ABS housing, lightweight and impact resistant.

- 1 self-regulating automatic charger (220 V) supplied.
- Number of batteries: 1
- Fuse on the positive clamp: 500A

1 YEAR WARRANTY!



12/24V - 2x25Ah

ST6200

834€

START BOOSTER

High-performance, pure lead AGM battery. Designed for professional interventions and

Perfect to start trucks, agricultural machinery, public works mac.hinery, which require very high starting power in the event of battery failure

Digital voltmeter indicating the booster's charge level.

Protection against voltage surges. Large insulated, brass-made, durable and resistant pliers.

ABS housing, lightweight and impact resistant.

Integrated safety fuse.

12 V / 24 V / OFF switch.

Reverse polarity alarm.

- 1 self-regulating automatic charger (220 V) supplied
- Number of batteries: 2
- Fuse on the positive clamp: 500A





REVERSE **POLARITY ALARM**



DIGITAL VOLTMETER

12/24V - 2x33Ah

ST6400

1429€

START BOOSTER

High-performance, pure lead AGM battery.

Designed for professional interventions and repairs. Perfect to start trucks, agricultural machinery, public works machinery, which require very high starting power in the event of battery failure.

Digital voltmeter indicating the booster's charge level. Protection against voltage surges

Large insulated, brass-made, durable and resistant

ABS housing, lightweight and impact resistant. Integrated safety fuse.

12 V / 24 V / OFF switch.

Reverse polarity alarm.

- 1 self-regulating automatic charger supplied
- Number of batteries: 2
- Fuse on the positive clamp: 500A



1 YEAR WARRANTY!



REVERSE POLARITY ALARM



DIGITAL



TELESCOPIC HANDI F



WHEELS

					100	VOLTMETE	R	
	Voltage (DC)	Cable length	Clamps length	Cable section	Cranking amps	Peak amps	Dimensions	Weight
								kg
	f	<	L	_	,	,	l 4 -l	kg
ST3100	12V - 25Ah	40	175	25	1200	3100	260 x 120 x 330	10.93
ST3100L	12V - 25Ah	114	175	25	1200	3100	260 x 120 x 330	11.26
ST6200	12/24V - 2x25Ah	145	200	50	2400 / 1200	6200 / 3100	310 x 210 x 440	23.5
ST6400	12/24V - 2x33Ah	182	150	50	2540 / 1270	6400 / 3200	360 x 160 x 420	39

12V - 22Ah

ST950

389€

START BOOSTER

Solid electrolyte lead-acid battery (AGM), watertight, in compliance with I.A.T.A safety standards.

Built-in short-circuit fuse in the red clamp protects the booster battery and the vehicle.

Extremely supple start cables of optimum length.

Digital rectangular back-lit voltmeter shows the charge level at a glance.

Completely insulated brass clip and super flexible multicore copper cables.

Protection against power surges.

ON/OFF button.

Can be stored and used in all positions.

- Crocodile clip length: 165mm.
- Clip opening: 30mm.
- Negative polarity indicator.
- 12V and 20V outlet.







 Voltmeter on a LCD backlit screen



12V STC1800

1060€ □



START BOOSTER WITH A SUPER-CAPACITOR

Meets IATA safety standards.

Entirely insulated brass clips.

160 cm ultra-supple starter cables, made from multi-strand copper.

Negative polarity indicator.

Built-in short-circuit fuse in the red clamp protects the booster battery and the vehicle.

SUPERCAPACITOR ADVANTAGES:

The booster recharges automatically in a few seconds, as soon as the vehicle has been jump

Does not contain a battery. This eliminates not only the problem of recharging between 2 jump starts but also problems related to low temperatures. Reliable and durable.

Light.



1 YEAR

SUPERCAPACITOR BATTERY-LESS TECHNOLOGY

> Back to back jump starts without stopping! > Ideal for breakdown recovery



 Voltmeter on a LCD backlit screen

	Voltage (DC)	Cable length	Clamps length	Cable section	Cranking amps	Peak amps	Dimensions	Weight
		cm	mm	mm²	A	A	mm	kg
	<i>\$</i>	<	K	_	4	\$		kg
ST950	12V - 22Ah	93	170	25	950	2500	335 x 163 x 415	11.5
STC1800	12V	160	170	25	1800	9000	335 x 163 x 415	9.8



12V - 18000mAh ST450

158€

MULTIFUNCTION MINI BOOSTER

Crocodile clips for vehicle starting (car, motorbike, small boat, etc.)

The ST450 can start a vehicle up to 30 times. It depends on the vehicle's engine.

Intelligent battery clamp: low voltage protection, reverse polarity protection, short circuit protection, reverse charging protection, automatic power shut off.

Powerbank function: charges all of your portable devices (smartphone, laptop PC, tablet, camera, portable games console, etc.).

3-mode LED torch : continuous, flashing and SOS.

LCD display indicates the charge level.

2 USB ports (5V) for charging 2 devices simultaneously.

Protective storage case.

Build-in Type-C fast charge.

A full charge will take between 3-5 hours.

Can be charged from the mains or the cigarette lighter.

	Voltage (DC)	Peak amps	Dimensions	Size	Weight
	,	4	4	←─────────	(kg)
ST450	12V - 18000mAh	450	900	191x83x34	1.3





BATTERY CHARGER

6/12 V - 4A

BC1204



BATTERY CHARGER

Electronic, digital, multi-stage charging and maintenance charger. Battery type selection: Lead (Wet, Gel, Efb, Agm) /Lithium (LiFePO4). Protection against polarity reversal and short circuits.

Digital backlit display.

Fixing hook

Ergonomic Design.



12 V - 8A **BC1208**

115€

BATTERY CHARGER

Electronic, digital, multi-stage charging and maintenance charger. Battery type selection: Lead (Wet, Gel, Efb, Agm) /Lithium (LiFePO4). Charge recovery function.

13,8V - 5A Power function.

Protection against polarity reversal and short circuits.


Digital backlit display.

Fixing hook.

Ergonomic Design.



	Voltage (DC)	Power supply voltage	Frequency	Rated current	Charging and testing stages	Charge capacity	Maintenance capacity	IP degree of protection	Size	Weight
	V - mAh	V	Hz	A		Ah				Kg
	f	•	4	•		•	f	IP.	4	kg
BC1204	6 / 12 V	220 - 240	50 - 60	1 - 4	8	4 - 80	4 - 120	IP65	190 x 80 x 50	0.75
BC1208	12 V	220 - 240	50 - 60	2 - 8	9	5 - 160	5 - 250	IP65	230 x 100 x 65	1

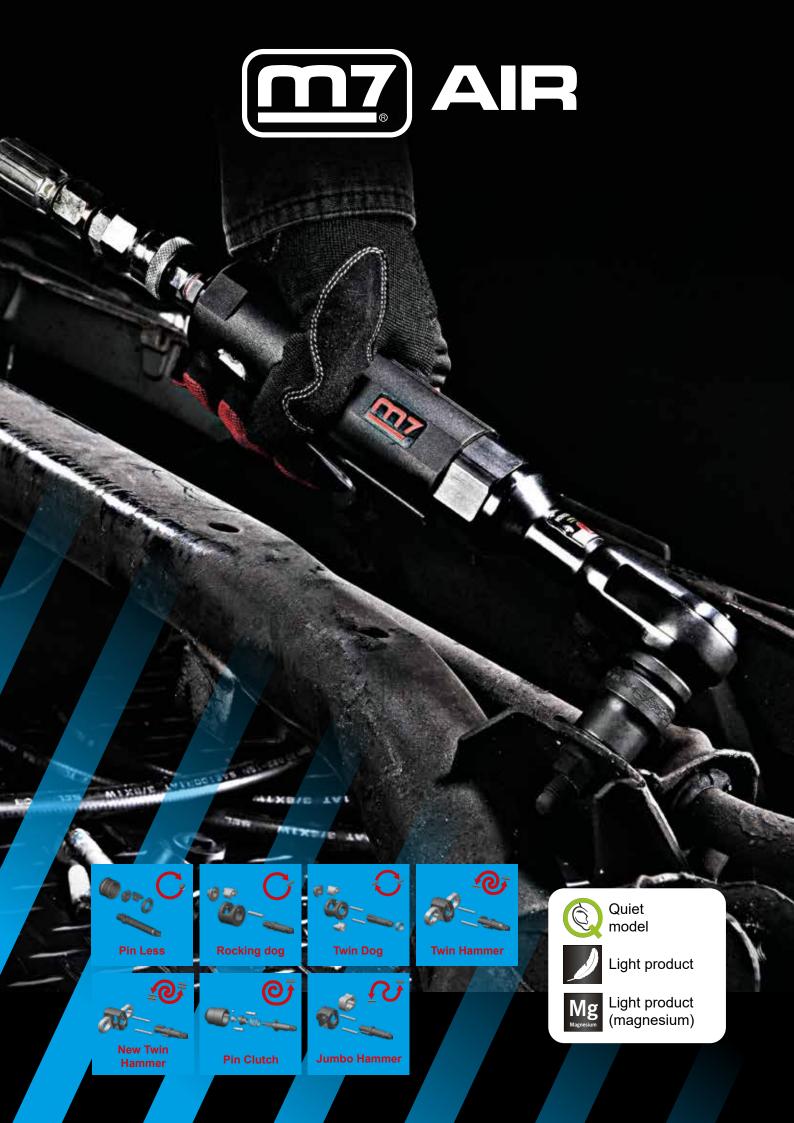





NC3410

116€

"BUTTERFLY" **IMPACT WRENCH**











В





NC4650MA

IMPACT WRENCH SET WITH **MINI SOCKETS - 8 PCS**

- 1x1/2" impact wrench (NC4650)
- 6 mini hex sockets: 13, 17, 19, 21, 22, 24mm
- 1 1/4" male thread coupling





METRIC IMPACT SOCKET SET WITH

ACCESSORIES - 11 PCS

• 1 1/2" impact wrench (NC4650) • 7 standard hex impact sockets: 13, 17, 19, 21, 22, 24, 27 mm

NC4650KIT

- 1 125mm extension bar
- 1 1/4" oiler
- 1 1/4" male thread coupling



	Square drive	Bolt size	Torque range	Max. torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm	Nm	Nm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s²
					№	□□Þ₹	2 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	l l	kg		□ ■■ <u>*</u>	? (((?	(((O)))
NC3410	3/8"	10	7-68	102	10 000	71	6.3	159	0.8	1/4"	3/8"	92.1	3.6
NC3210	3/8"	13	136-407	474	10 000	113	6.3	142	1.5	1/4"	3/8"	92.1	3.6
NC4630	1/2"	16	271-475	610	9 000	124	6.3	97.7	1.5	1/4"	3/8"	96.0	2.8
NC4232QA	1/2"	16	136-542	746	10 000	113	6.3	120	1.38	1/4"	3/8"	83.0	3.7
NC4130	1/2"	16	244-542	813	9 000	127	6.3	142	1.61	1/4"	3/8"	93.0	1.2
NC4236A	1/2"	25	271-949	1356	7 500	155	6.3	171	2.62	1/4"	3/8"	87.0	4.5
NC4650	1/2"	16	244-542	900	9 000	123	6.3	104	1.4	1/4"	3/8"	95.0	2.4



542 Nm

NC4238A

102€

В **IMPACT WRENCH**

1627 Nm

246€

IMPACT WRENCH

7 spring-loaded blades

NC4255QKIT

1 1/2" impact wrench (NC4255QA)

• 7 standard hex impact sockets: 13, 17, 19, 21, 22, 24, 27 mm

ACCESSORIES - 11 PCS

• 1 125 mm extension bar

• 1 1/4" male thread coupling

• 1 1/4" oiler

METRIC IMPACT SOCKET SET WITH

COMPOSITE

Twin Hammer

NC4255QA





NC4670Q

198€ В

IMPACT WRENCH







COMPACT **IMPACT WRENCH**



88_{mm}



NC498MA

IMPACT WRENCH **SET WITH MINI SOCKETS - 8 PCS**

В

- 1 1/2" impact wrench (NC498)
- 6 mini hex sockets: 13, 17, 19, 21, 22, 24 mm
- 1 1/4" male thread coupling









NC4233QKIT

METRIC IMPACT SOCKET SET WITH

ACCESSORIES - 11 PCS

- 1 1/2" impact wrench (NC4233A)
- 7 standard hex impact sockets: 13, 17, 19, 21, 22, 24, 27 mm
- 1 125 mm extension bar
- 1 1/4" oiler
- 1 1/4" male thread coupling





○ ** 1627 Nm





169€



COMPOSITE IMPACT WRENCH



348€



NC4299QMB IMPACT WRENCH AND SOCKET SET - 13PCS

- 1 1/2" impact wrench (NC4299Q)
- 1 impact socket set: 10, 11, 13, 17, 19, 22, 24, 27, 29, 30, 32

• 1 1/4" male thread coupling



	Square drive	Bolt size	Torque range	Max. torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm	Nm	Nm	R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s²
					₽	□□₽₹		l -l	kg		□ ■■ <u>†</u>	?)))	(((O)))
NC4238A	1/2"	16	150-300	542	7 000	119	6.3	184	2.7	1/4"	3/8"	92.1	3.7
NC4670Q	1/2"	16	150-500	884	9 000	147	6.3	105	1.1	1/4"	3/8"	85.0	3.3
NC4255QA	1/2"	25	271-1085	1627	8 500	136	6.3	179	1.7	1/4"	3/8"	85.0	4.7
NC4233A	1/2"	19	271-678	1152	9 000	132	6.3	190	2.10	1/4"	3/8"	85.0	3.8
NC498	1/2"	16	108-405	542	6500	119	6.3	88	1.37	1/4"	3/8"	85.0	2.0
NC4299Q	1/2"	M19	204-680	1088	8 500	113	6.3	194	2.1	1/4"	3/8"	85.0	3.2







New Twin Hammer

1627 Nm

NC6236

369€

COMPACT **IMPACT WRENCH**





1627 Nm

NC6256Q

334€

COMPACT IMPACT WRENCH





Twin Hammer

1966 Nm

NC6201

509€

COMPOSITE IMPACT WRENCH





2034 Nm

NC6266

619€

COMPOSITE IMPACT WRENCH

6 spring-loaded blades





849€

NC6218 IMPACT WRENCH

SPRING-LOADED BLADES





The springs reduce the passage of impurities that could block the rotation of the rotor blades

- >>> Optimal performance, even with low pressure.
- >>> Reduced air consumption.
- >>> Increased service life and performance.





☆ 3390 Nm NC8332 **IMPACT** WRENCH NC8332 NC83326 Short anvil version: 372.6 mm Long anvil version: 525 mm 979€ 999€ В В

Long anvil version: 408 mm

856€

В

TIP: DON'T FORGET TO OIL YOUR IMPACT WRENCH REGULARLY, OR USE A M7



NC8343

IMPACT WRENCH

NC8343

Short anvil version: 381 mm

406€

В

NC83438

Long anvil version: 590 mm

406€ В



Short anvil version: 256 mm

В

919€

OILER

								SIE		RINE	445	1	
	Square drive	Bolt size	Torque range	Max. torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Inch	mm	Nm		R.P.M	L/min	bar	mm	kg	Inch	Inch	dBA	m/s²
					№	□ ₽ {		l 4 	kg		□	<i>}</i>)))	(((O)))
NC6201	3/4"	30	271-2034	1966	5700	181	6.3	222	3.2	3/8"	1/2"	88	5.9
NC6218	3/4"	27	271-1898	2034	6 000	182	6.3	320	5.7	1/2"	1/2"	106.0	3.3
NC6236	3/4"	25	271-1220	1627	7 500	155	6.3	171	2.68	1/4"	1/2"	87.0	4.5
NC6255Q	3/4"	25	271-1491	1762	8 500	136	6.3	198	1.9	1/4"	3/8"	85.0	4.7
NC6256Q	3/4"	23	203-1220	1627	7 000	144	6.3	145	1.9	3/8"	1/2"	85.0	2.8
NC6266	3/4"	25	271-1760	2034	6 000	169	6.3	205	2.95	3/8"	1/2"	88.0	5.9
NC8266P	1"	35	271-2710	3118	4500	254	6.3	256	5.90	1/2"	1/2"	92.0	6.1
NC8266P6	1"	35	271-2710	3118	4500	254	6.3	408	6.30	1/2"	1/2"	92.0	6.1
NC8266S	1"	35	272-2448	3118	4500	212	6.3	430	6.0	1/2"	1/2"	92.0	6.1
NC8266S6	1"	35	272-2448	3118	4500	212	6.3	580	7.2	1/2"	1/2"	92.0	6.1
NC8332	1"	33	271-2710	3390	4000	226.5	6.3	372.6	9.4	1/2"	3/8"	103	8.2
NC83326	1"	33	271-2710	3390	4000	226.5	6.3	525	10.6	1/2"	3/8"	103	8.2
NC8343	1"	33	271-2170	2441	3 900	325	6.3	381	12.56	1/2"	1/2"	103	6.3
NC83438	1"	33	271-2170	2441	3 900	325	6.3	590	13.9	1/2"	1/2"	103	6.3







PNEUMATIC RATCHET













"NO REACTION" PNEUMATIC RATCHET



PNEUMATIC RATCHET



PNEUMATIC RATCHET



PNEUMATIC RATCHET



	Square drive	Torque range	Max torque	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
				№	□□Þ≑		l < 	kg		<u>▼</u>	? (((((O))
NE251	1/4"	6.7-20	30	350	84.96	6.3	125	0.5	1/4"	3/8"	89	4.4
NE351	3/8"	6.7-20	30	350	84.96	6.3	125	0.5	1/4"	3/8"	89	4.4
NE2905	1/4"	7-20	30	300	85	6.3	290	0.84	1/4"	3/8"	89	4.4
NE261	1/4"	13.5-47	50	230	130	6.3	160	0.5	1/4"	3/8"	88	3
NE361	3/8"	13.5-47	50	230	130	6.3	160	0.5	1/4"	3/8"	88	3
NE3803	3/8"	6.8~20.4	47.6	300	102	6.3	220	0.63	1/4"	3/8"	92.0	3.2
NE421	1/2"	13.5-47	68	160	113.28	6.3	265	1.04	1/4"	3/8"	92.8	4.6
NE4305	1/2"	20-75	95	160	67.0	6.3	390	1.63	1/4"	3/8"	82	1.2
NE432MA	1/2"	13.5-61	81	160	113.28	6.3	265	1.22	1/4"	3/8"	89.8	5.2
NE4808	1/2"	13.5-54	109	150	113	6.3	300	1.26	1/4"	3/8"	95	3.6
NE4815A	1/2"	54.4-163	204	170	136	6.3	313	1.54	1/4"	3/8"	93	2.5
NE483	1/2"	13.5-61	135	250	141	6.3	277	1.28	1/4"	3/8"	85	2.5
NE4901	1/2"	13.5-54	68	1100	85	6.3	159	0.67	1/4"	3/8"	89	2.2
NE499	1/2"	68-203	339	7 500	69.4	6.3	340	1.83	1/4"	3/8"	93	9.9













83€

QA111A STRAIGHT DIE GRINDER В







• Grindstones on a 3 mm stem: W145, W153, W163, W170, W176



GRINDSTONES FOR DIE GRINDER

Grindstones on a 6 mm stem: W220, W187, A22, A12, A5



6mm QB92005 128€

CARBIDE CT BURR SET -5 PIECES

Cylindrical shaft: Ø 6 mm. Burr: Ø 10 mm.

	Collet size	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
											m/s²
	◯	Ω o	□■⊧		< 	hp	kg		□ <u>□</u>	? >>))	(((O)))
QA141L	6	24 000	396	6.3	170	0.4	0.6	1/4"	3/8"	75	2.5
QA163L	6	16 000	141	6.3	350	0.9	1.31	1/4"	3/8"	75	2.8
QA111A	6 & 3	25 000	283	6.3	155	0.3	0.38	1/4"	3/8"	81.5	1.8
QA211A	6 & 3	20 000	283	6.3	190	0.9	0.65	1/4"	3/8"	75.7	0.8
QA311A	6 & 3	25 000	283	6.3	190	0.3	0.48	1/4"	3/8"	81.5	1.8
QA313A	6 & 3	25 000	283	6.3	235	0.3	0.58	1/4"	3/8"	81.5	1.8
QA315	6 & 3	25 000	283	6.3	280	0.3	0.63	1/4"	3/8"	81.5	1.8



158€

LONG ANGLE GRINDER



	Collet size	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	→ I i i i i i i i i i i i i i	№	□ ⊧ {		4 	hp	kg		□ <u></u>	<i>?</i>)))	((O))
QA611A	6 & 3	19 000	283	6.3	160	0.3	0.51	1/4"	3/8"	74.4	1.7
QA6205	6	14 500	99.1	6.3	308	0.5	0.95	1/4"	3/8"		
QA688A	6 & 3	20 000	283	6.3	178	0.3	0.65	1/4"	3/8"	80	1.1
QA101	6 & 3	25 000	178	6.3	119	0.3	0.32	1/4"	3/8"	80	1.4
QA601	6 & 3	22 000	283	6.3	120	0.3	0.44	1/4"	3/8"	84	1.1

PNEUMATIC MICRO DIE GRINDERS



	Collet size	Free speed	Blows frequency	Air consumption	Air pressure	Length	Hose length	Net weight	Air inlet	Air hose	Sound level	Vibration level
		№	bpm	■₽		l l		kg		□ <u></u>	<i>}</i> >>)	(((O))
QA412	3	60 000	-	76	6.3	170	1 500	0.24	1/4"	3/8"	70	0.5
QA421	3	60 000		76	6.3	150	1 500	0.22	1/4"	3/8"	70	0.5
QA432	3	70 000		29	6.3	137	1 425	0.20	1/4"	3/8"	70	0.5
QA511	-	-	13 000	29	6.3	140	1 420	0.23	1/4"	3/8"	78	0.6





★★ Ø125mm

QB7115M

303€

ANGLE GRINDER WITH LEVER TYPE **THROTTLE**



★★ Ø125mm

QB105

238€

ANGLE GRINDER WITH **ROLL TYPE THROTTLE**



★‡ Ø125mm

QB125

229€

TYPE THROTTLE

ANGLE GRINDER **COMPOSITE WITH LEVER**



🙏 Ø125mm

QB135X

190€

ANGLE GRINDER WITH LEVER TYPE **THROTTLE**





Disc-lock button. Adjustable side exhaust to send air in the desired direction.

ACCESSORIES

125mm **QB905**

3,60€

125MM (5") GRINDING DISC

For QB105 / QB115 / QB125 / QB7115

Bore: 22mm; Thickness: 6mm 167g

180mm **QB907**

2€



180MM (7") GRINDING DISC

For QB107 / QB117

Bore: 22mm; Thickness: 6mm

344g

Consumables not available

	Disc diameter	Bore	Thread	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
													m/s²
		Œ		№	□ •‡		l 4 	hp	kg		□ <u></u>	?)))	(((0)))
QB105	125 (5")	22	3/8"-24	11 000	170	6.3	226	0.78	1.81	1/4"	3/8"	87.1	1.2
QB125	125 (5")	22	5/8"-11	11 000	170	6.3	230	0.8	1.78	1/4"	3/8"	87	1.2
QB135X	125 (5")	22	M14*P2.0	11 000	170	6.3	230	0.78	1.81	1/4"	3/8"	87.8	1.2
QB7115M	125 (5")	22	M14*P2.0	11 000	119	6.3	232	1.3	1.80	1/4"	3/8"	90	1.2

PNEUMATIC ANGLE GRINDERS



★★ Ø75mm

QC213

95€

★★ Ø75mm

QC253

134€

GRINDER

ACCESSORIES

Bore: 10mm - Thickness: 1.5mm - 10g

75MM (3") CUT-OFF WHEEL For QC213 / QC253

100MM (5") CUT-OFF WHEEL For QB105 / QB115 / QB125 / QB7115

Bore: 22mm - Thickness: 6mm - 36g

75mm QB913

2,10€





100mm

QB914

3,50€

В



GRINDER

Consumables not available

Consumation not available												
	Disc diameter	Thread	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
												m/s²
	<u></u>		№	□ ⊨ {		l ∢ L + l	hp	kg		<u>↓</u>	<i>}</i>)))	(((O)))
QC213	75 (3")	10	20 000	283	6.3	200	0.9	0.86	1/4"	3/8"	80.2	10.8
QC253	75 (3")	-	24 000	113	6.3	203	0.6	0.8	1/4"	3/8"	91.0	1.2



163€

BELT SANDER

QB312

296€ **BELT SANDER**



ACCESSORIES

QB91108 10 SANDING

BELTS

For QB311 10 x 330 mm 80 g

12€

QB91110 10 SANDING

BELTS

For QB311 10 x 330 mm 100 g

12€

QB91106

QB910610 10 SANDING

BELTS For QB325 6 x 330 mm 100 g

11,50€ В

QB910606

10 SANDING **BELTS** For QB325

6 x 330 mm 60 g 12,30€ 🖪 10 SANDING BELTS For QB325 10 x 330 mm 60 g

12,30€ В

QB912010 10 SANDING

BELTS For QB325 20 x 330 mm 100 g

14,80€ 🖪

QB91208 10 SANDING

BELTS For QB312

BELTS

For QB325

20 x 520 mm 80 g

15,60€ В

QB912006 QB912008

QB91210

20 x 520 mm 100 g

15,20€ В

10 SANDING

For QB312

BELTS

10 SANDING BELTS 10 SANDING

For QB325 20 x 330 mm 60 g 20 x 330 mm 80 g

BELTS

20,10€ 🖪 15,60€ 🖪

QB910608 QB91206 10 SANDING

10 SANDING BELTS

For QB325 6 x 330 mm 80 g

12€ В For QB325 20 x 520 mm 60 g

21€ В

	Belt size	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
										m/s²
		№	□□⊧ {		l ∢ L →l	kg		<u>▼</u>	?)))	(((O)))
QB311	10x330	16 000	226	6.3	290	0.8	1/4"	3/8"	89.7	0.5
QB312	20x520	16 000	254	6.3	360	1.2	1/4"	3/8"	91.8	0.4
QB325N	6x330 - 10x330 - 20x330 - 20x520	16 000	113	6.3	320	2.1	1/4"	3/8"	90.0	1.0

Consumables not available 5-IN-1 SET



🗱 NE0405KIT

PNEUMATIC TOOL SET - 5 PCS

Quick-head-change system



20000 R.P.M **QA9120** STRAIGHT DIE

GRINDER

Ø 6 & 3 MM



14000 R.P.M

QB9903 STRAIGHT DIE GRINDER 1/2" AIR RATCHET Ø 75 MM

81 Nm **NE9004**

WRENCH

kg 4,30 kg

415€

2500 R.P.M

QE2132 STRAIGHT DRILL Ø 10 MM (3/8")



QA9620 90° angle grinder Ø 6 & 3 MM

		Max. torque	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Sound level	Vibration level
			№	□□Þ∜		l 4 	hp	kg		? (((?	(((O)))
NE9004	1/2"	81	150	141	6.3	287		1.48	1/4"	82	5.2
QE2132	10mm (3/8")		2500	141	6.3	248		1.1	1/4"	82	1.5
QA9120	6 & 3mm		20 000	141	6.3	202	0.5	0.73	1/4"	82	3.5
QB9903	75mm (3")		14 000	141	6.3	211	0.5	0.9	1/4"	82	3.5
QA9620	6 & 3mm		14 000	141	6.3	208	0.5	0.9	1/4"	82	3.5





★★ Ø152mm [©]5mm

QB45602

236€

VACUUM RANDOM ORBITAL SANDER

★ Ø152mm \bigcirc 5mm

QB54602

190€

VACUUM RANDOM ORBITAL

<u>★</u>★ Ø152mm [○]5mm

QB47602

254€

VACUUM RANDOM ORBITAL SANDER

With central vacuum and suction hose.

ACCESSORIES



QB9327

26€

SANDING DISC FOR Ø152 MM (6") ORBITAL SANDER

15 holes

LIMITED QUANTITY!



QB48111

189€

AIR JITTERBUG SANDER

Consumabl	les not avai	lable			sucti	on hose.							
	Disc diameter	Number of holes	Orbit	Free speed	Air	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	mm (Inch)	-	mm	R.P.M	L/min	bar	mm	HP	kg	Inch	Inch	dBA	m/s²
	<u></u>		\bigcirc	№	■₽ŧ		l ∢ 	hp	kg		□	<i>}</i>)))	(((O)))
QB45602	152 (6")	15	5	10 000	109	6.3	193	0.24	0.84	1/4"	3/8"	81.6	7.1
QB54602	152 (6")	6	5	10 000	85	6.3	210	0.24	0.78	1/4"	3/8"	81.6	7.1
QB47602	152 (6")	6	5	10 000	109	6.3	193	0.24	1.13	1/4"	3/8"	80.1	7.1
QB48111	100x110	-		11 000	198	90	130	0.28	0.91	1/4"	-	83	1.5





★★ Ø76mm **QP123** 174€

MINI POLISHER

ALSO AVAILABLE IN SET



X QP123AQP04

402€



POLYCARBONATE HEADLIGHT RENOVATION FOAM SET WITH **SANDER AND POLISHER - 8 PCS**

- 1 mini sander (QP113)
- 1 mini polisher (QP123)
- 2 1/4" male thread coupling
- 1 hard polishing pad (QB9403)
- 1 medium polishing pad (QB9413)
- 2 tightening spanners

2,33 kg





★ Ø30mm ★★ ② 3mm

QP111

148€ В

MINI ANGLE CANDED

ACCESSORIES QB9403

8,70€



POLISHER PAD Hard/rough 3" (75mm) For QP113

QB9413 8,70€ 🖪

POLISHER PAD Medium 3" (75mm) For QP123



QB9303 12,70€ В SANDING PAD (MALE)

Velcro pad (3" - 75mm) For QP113 & QP123

QB9323F 19,70€ 🖪



SANDING PAD (FEMALE) Velcro pad (3" - 75mm) For QP113 & QP123

SANDER													
	Thread	Disc diameter	Orbit	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
		<u></u>	0	№	■₽₹		4 	hp	kg		□	? ((((((O)))
QP113	5/16"-24	76 (3")	2.5	15 000	99	6.3	127	0.4	0.72	1/4"	3/8"	74	0.3
QP123	7/16"-20	76 (3")		2 100	99	6.3	135	0.4	0.77	1/4"	3/8"	74	0.3
QP111	M10xP1.5	26 (1")	3	8 000	152	6.3	160	0.3	0.55	1/4"	3/8"	89	0.3



QP215 115€

3-DISC REVOLVER GRINDER





	Thread	Disc diameter	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
		<u></u>	№	 Þ 	(T)	l √ L	hp	kg		<u></u> -□	?)))	(((O)))
QP215	7/16"-20	75-113-125	16000	184	6.3	160	0.8	1.20	1/4"	3/8"	60	1.8
QP317	5/8"-11	178	2500	169	6.3	406	1	2.04	1/4"	3/8"	84	2.0

PNEUMATIC SCREWDRIVERS







The positive clutch allows an effective transfer of torque, a reduced response time and continuous operation.

	Hex drive	Torque range	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	 	•	No	□□Þ∜		l + 	(kg)		<u>▼</u>	? >>))	(((O)))
RA101A	1/4" (6.35)	5-12	9 000	170	6.3	166	0.6	1/4"	3/8"	85.7	2.2
RA301	1/4" (6.35)	5-13.5	1 800	170	6.3	190	1.1	1/4"	3/8"	95.3	4.2
RA302	1/4" (6.35)	5-16.3	800	170	6.3	226	1.3	1/4"	3/8"	96.5	2.2
RA402	1/4" (6.35)	6-19	2200	111	6.3	180	1.1	1/4"	3/8"	91	2.3















ACCESSORIES



QEHSS2510

11,30€



(g) 288 g

DRILL BIT SET - 10 PCS. Manufactured from high hardness HSS for easier and faster drilling.

• Drill bits: 1.5 to 5.5 mm (+ 0.5 mm)

It's NEW!



QEHSS3

98€

В

FLUTE HSS STEP DRILL SET - 3 PCS.

Drill sizes: 4-12 mm, 4-20 mm and 4-30 mm. The 3 flutes guarantee a clean and vibrationfree cut. Ideal for soft materials such as plastics or light alloys. Cutting forces distributed over 3 edges, allowing a greater advance. The chamfer facilitates removal in the case of through holes.

MINI TOOLS



QE924

В 126€

MINI STRAIGHT DRILL



150€

В

MINI 90° ANGLED DRILL

	Chuck diameter	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air inlet	Air hose	Sound level	Vibration level
	<u>₹</u>	№	□ □⊧≑		∢ 	hp	kg		<u></u>	<i>}</i> ((((((O)))
QE331	10 (3/8")	1 800	184	6.3	203	0.65	1.1	1/4"	3/8"	96.5	0.3
QE332	10 (3/8")	2 200	184	6.3	190	0.60	1	1/4"	3/8"	96.5	0.3
QE341	13 (1/2")	800	184	6.3	230	0.65	1.8	1/4"	3/8"	96.5	0.1
QE633	10 (3/8")	1600	85	6.3	209	0.50	1.1	1/4"	3/8"	72	2.5
QE532	10 (3/8")	2800	135	6.3	243	0.70	1.23	1/4"	3/8"	90	2.0
QE432	10 (3/8")	2200	135	6.3	226	0.70	1.18	1/4"	3/8"	90.0	3.0
QE924	6	6500	229	6.3	146	0.3	0.55	1/4"	3/8"	77	1.2
QE624	6	5000	220	6.3	143	0.3	0.67	1/4"	3/8"	82	1.2





RIVETER

Hydropneumatic system

☆ PA203N 239€ В **RIVETER** Hydropneumatic system Alloy steel jaws.
Cylinder and piston with chrome finish to limit friction and allow rivets to be released quickly.
360° use.
Designed for intensive use.

	Capacity	Stroke length	Traction	Air consumption	Air pressure	Net weight	Air inlet	Air hose	Sound level	Vibration level
										m/s²
	+		>===	□ ⊧≑		kg		□ <u></u>	? (((((O))
PA201	2.4~6.4	14	1603	2.32	6.3	1.8	1/4"	3/8"	79.7	0.5
PA301	2.4~4.8	16	1045	1.48	6.3	1.5	1/4"	3/8"	79.7	0.3
PA203N	3.2 ~6.4	16	1200	1.48	6.3	1.5	1/4"	3/8"	79.7	0.5

SPECIFICATIONS

RIVETER

Hydropneumatic system

RIVETER	MA	MATERIAL			RIVE	T DIAMETER	(ØMM)		
RÉFÉRENCE M7	RIVET	MANDRIN		(2.5) 2.4	(3.0) 3.2	4.0	(5.0) 4.8	6.4	8.0
PA201	aluminum aluminum steel stainless stainless	aluminum steel steel steel stainless							
PA203N	aluminum aluminum steel stainless stainless	-11							
PA301	aluminum aluminum steel stainless stainless	aluminum steel steel steel steel stainless							







PB1305 Capacity M3, M4, M5

486€

PB1308 Capacity M6, M8

485€



PB1310 Capacity M8, M10

485€



	Capacity	Minimum force	Stroke length	Traction	Air consumption	Air pressure	Free speed	Dimensions	Net weight	Air inlet	Air hose	Sound level	Vibration level
													m/s²
	+		+	>===	■Þŧ		R ₀	l <	kg		□	?)))	(((O)))
PB2402	Steel M4~M10 Stainless M4~M8	-	9	1650	1.5	6.3			1.55	1/4"	3/8"	82	0.8
PB1305	M3 - M4 - M5		-		7.8	6.3	1 200		1.1	1/4"	3/8"	86	1.6
PB1308	M6 - M8				7.8	6.3	600		1.3	1/4"	3/8"	86	1.6
PB1310	M8 - M10				7.8	6.3	400		1.3	1/4"	3/8"	86	1.6
PB9006	M3 - M4 - M5 - M6	15		-			1 000	59x172	0.28	-			

PNEUMATIC NEEDLE SCALERS





146€

NEEDLE SCALER

12 needles.

For hard to reach areas.



NEEDLE SCALER

19 needles. Pistol style. Designed to withstand intense use. Light and easy to use.

ACCESSORIES 19,20€ В

SN288 SPARE NEEDLES For SN1288

For SN2110



В

	Needle diameter	Number of needles	Stroke length	Blows per minute	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	•——		\leftrightarrow	bpm	□₽₹		l 4 	(kg)		□	? (((((O))
SN2110	3x180	19	33	3 700	424	6.3	330	2.8	1/4"	3/8"	97	9.7
SN1288	3x125	12	32	5 500	84.96	6.3	290	1.3	1/4"	3/8"	91	7.6





STRAIGHT SHEAR

QG103

NIBBLER


Reinforced punch for increased operating life. Die adapted for round cuts. \varnothing 4.5mm.



	Cutting capacity	Cut length	Strokes per minute	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
											m/s²
	⊄	\Rightarrow	S.P.M	□■⊭		- L -	kg		<u>↓</u>	?)))	(((O)))
QD321		14.5	11000	113	6.3	230	0.6	1/4"	3/8"	83	2.0
QD221	1.6	10	5000	113	6.3	250	0.8	1/4"	3/8"	81.9	4.1
QG102	Stainless : 1 Steel : 1.2 Aluminium : 1.6		2600	170	6.3	254	1	1/4"	3/8"	85.8	2.4
QG103	Steel : 1.2 Aluminium : 1.6		2 600	85	6.3	193	1	1/4"	3/8"	88	1.6

LUBRICATION













QUICK RELEASE STRAIGHT CHIPPER 1 chisel included











128€



☆ ● SC0206R

ACCESSORIES SC4101 6,50€ в FLAT CHISEL For 10 mm round shanks SC4201 7€ В FLAT CHISEL For 10.2 mm hex shanks SC4202 (В SHEET METAL CUTTER For 10.2 mm hex shanks SC4203 В PUNCH CHISEL For 10.2 mm hex shanks 7€ В SC4204 SPOT WELD CHISEL For 10.2 mm hex shanks 7,80€в SC4205 2 EDGE SHEET METAL CUTTER For 10.2 mm hex shanks SC415MA **SET OF ROUND** CHISELS For 10 mm round shanks SC425 SET OF HEX CHISELS For 10.2 mm hex shanks SC435 (**SET OF 5 RIVET** CHISFLS For 10 mm round shanks


	Type of fitting	Shank diameter	Stroke length	Blows frequency	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
												m/s²
	••=	<u></u> → +	\leftrightarrow	bpm	□ ⊧ {		4 	kg		□	?)))	(((O)))
SC221C	•	10	67	3200	113	6.3	175	1.7	1/4"	3/8"	98	12.3
SC342	•	10	92	2200	113	6.3	228	2	1/4"	3/8"	94.7	10.6
SC211C	•	10.2	67	3200	113	6.3	175	1.7	1/4"	3/8"	98	12.3
SC371C	•	10.2	62.5	3000	180	6.3	180	1.7	1/4"	3/8"	95	8.8
SN1032		13	33	4000	120	6.3	290	1.33	1/4"	3/8"	91	14.5











	Nozzle length	Working pressure	Max. pressure Air		sumption	Net weight	Air inlet	Air hose	Sound level
	4 	Working	<u>√MAX</u>	□ - 1/4"	□	kg		□	? (((?
JC202	176 - 300	6.2-8.5	11.7		144	0.22	1/4"	3/8"	75
JC602	50.8	6.2-8.3	15.6	13.0	15.0	0.60	1/4"	3/8"	90
JC405	125	5.3-8.5	10.6	368	425	0.11	1/4"	3/8"	90
JC410	250	5.3-8.5	10.6	368	425	0.12	1/4"	3/8"	90
JC412	300	5.3-8.5	10.6	368	425	0.13	1/4"	3/8"	90
JC424	600	5.3-8.5	10.6	368	425	0.14	1/4"	3/8"	90
JC435	875	5.3-8.5	10.6	368	425	0.25	1/4"	3/8"	90
JC641	1000	5.3-8.5	10.6	368	425	0.34	1/4"	3/8"	90
JC680	2000	5.3-8.5	10.6	368	425	0.64	1/4"	3/8"	90







159€

PNEUMATIC OSCILLATING KNIFE

Blade can be mounted in 12 different ways depending user's needs. Reduced vibrations.

Curved blade included QK2030P

ACCESSORIES



QK3018 U-BLADE

30€



QK3036 U-BLADE



QK2063P U-BLADE

30€ В

В



90mm **QK2090P** U-BLADE

38€



CURVED BLADE

13,40€ В

16.30 x 8mm **QK1008** STRAIGHT BLADE

18,40€ В



32€

QK1057 STRAIGHT BLADE

18,50€ В

	Strokes per minute	Air consumption	Air pressure	Net weight	Air inlet	Air hose	Sound level	Vibration level
								m/s²
	S.P.M	□Ę	(T)	kg		□	? (((((O))
QK111	20 000	170	6.3	1.1	1/4"	10	75	3.9



245€

В

PNEUMATIC SCRUBBER

Can be used to remove rust, oxide, tags, stickers, etc. without heat up damaging the paint. Durable, easy to use and does not get hot during operation



ALSO AVAILABLE IN HARDCASE



PNEUMATIC SCRUBBER SET WITH ACCESSORIES - 6 PCS.

- Pneumatic buffer (QB802) Rubber brush
- Scouring wheel
- Straight metal brush
- Hooked metal brush
- 1/4" male thread coupling



	Free speed	Air consumption	Air pressure	Length	Motor	Net weight	Air hose	Sound level	Vibration level
									m/s²
	№	□ •≑		<	hp	kg	□ <u></u>	% (((%	((O))
QB802	3600	300	6.3	200	0.7	1.2	3/8"	86	0.3

ACCESSORIES



QB9401

47€



QB9411

33€



QB9412

32€ В



QB9414

RUBBER BRUSH

19€



QB9415

23€

SCOURING WHEEL

SQ0104

98€

BRAKE CALIPER WIND BACK KIT - 4 PCS

- Pneumatic caliper wind back tool
 Adaptor for SAAB HONDA ALFA ROMEO AUDI VW LANCIA
- 3/8" #5 adaptor
- 1/4" Male thread coupling



ALSO AVAILABLE IN HARDCASE



PNEUMATIC BRAKE CALIPER WIND **BACK KIT - 17 PCS**

- 1 pneumatic wind back tool
- 16 adaptors for disc brakes (right and left gage)



SR2001KIT

76€

- 1 1.5m long Air Hose (M5*0.45)
- 1 glazen reservoir van 22 cm³
- 1 50 c.c. Glass Jar
- 1 Airbrush
- 1 Wall bracket
- 1 2c.c. Cup
- 1 adapter M5*0.45 male to 1/4" female
- 1 Spanner
- 1 8c.c Cup

AIR BRUSH KIT

Dual action trigger to control the paint flow. Wall bracket included, allowing you to store the airbrush when it is at rest. Air volume adjustment button. Lightweight and ergonomic body, ideal for one-handed use. Ultra-fine 0.3mm nozzle for high

	Nozzle diameter	Capacity	Air hose
	Ø		□ <u></u>
SR2001KIT	0.3	2 - 8	1/4"





NC0208M


224€



(kg) 1.75 kg

PRE-CALIBRATED IMPACT WRENCH FOR **GLOW PLUGS - 9PCS**

- 1 impact wrench
- 5 1/4" deep sockets: 8, 9, 10, 11, 12 mm
- 1 50mm extension bar
- 1 1/4" 37mm joint
- 1 1/4" male thread coupling





Progressive trigger, automatic decompression in the stop position. For a simple and precise application of numerous cartridge products: glue, silicon



AIR CAULKING GUN

Progressive trigger, automatic decompression in the stop position. For a simple and precise application of numerous cartridge products: glue, silicon etc.

	Square drive	Max. torque	Reservoir capacity	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
			三	Ω o	□₽ŧ		l 4 	€kg		□	<i>?</i> })))	(((O)))
NC2710	1/4"	10 - 40		11 000	150	6.3	136	0.8	1/4"	3/8"	91.0	3.4
SK1010			300		113	3.4 ~ 4.8	305	1.1	1/4"	3/8"		
SK1131			300 - 600		113		609.6	1.21	1/4"	3/8"		





CLEANING GUN

Rotating metal nozzle. Equipped with a valve for cleaning and drying. Ideal for removing stains from fabric or carpets, removing grease from bodywork and for cleaning engine blocks, radiators and oil stains.



SM0502

FLUID EXTRACTOR 2L

Pneumatic version

For brake fluid. Delivered with a 1L bottle equiped with a locking clamp to easily fill the tank with brake fluid. New safety design: when the tank is full, the air inlet mechanism automatically shuts down. Delivered with 1 main hose (1.30m) + 1 spiral brake hose (1.20m) + 1 secondary hose (1.12m).

A Do not use with flammable liquids.

9L **SM0901**

274€

FLUID EXTRACTOR 9L

Pneumatic or manual version

For engine oil pans, transmission oil, coolant, power steering fluid, brake fluid, etc. Works with or without air compressor thanks to the integrated manual pump. New safety design: when the tank is full, the air inlet mechanism automatically shuts down. Delivered with 1 main hose (1.30m) + 1 spiral brake hose (1.20m) + 1 secondary hose (1.12m).

Do not use with flammable liquids.

	Reservoir capacity	Free speed	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level
		№	□□Þ≑		4 	kg		□ <u></u>	?)))
SX2101	1 L	5 500	56.6	6.3	210x110	0.78	1/4"	3/8"	85
SM0502	2 L		-	-	350	2.5		-	-
SM0901	9 L	-		-	640	4.7		-	-

SX4101

78€



PNEUMATIC SAND BLASTER (0.6 L)

Cylindrical nozzle.

Carbon steel S45C nozzle.

- Particle Size Mesh (#) Max.: 80
- Particle Size Micron (µm) Max.: 177
- Particle Size (mm) Max.: 0.177



Ø25-110mm QM1125



PNEUMATIC BELLOWS SPREADER

For easy fitting of CVJ boots.

Do not use with a pressure exceeding 8.6 bars.





78€



AIR WONDER GUN KIT - 8 PCS

Used for cleaning or vacuuming dust, wood chips, filings, broken glass, etc. Double function: vacuum and blow gun

- 1 Gun
- 1 Vacuum tip
- 1 Thin tip
- 1 Flexible nylon brush tip
- 1 Fixed extension
- 1 Flexible extension
- 1 Textile vacuum bag
- 1 Clip
- 1 Male thread

	Joint diameter	Reservoir capacity	Air consumption	Air pressure	Length	Net weight	Air inlet	Air hose	Sound level	Vibration level
	Ø		■Þ∜		l ∢ 	kg		□ <u></u>	? ())	((O))
SX4101	-	0.6	226.5	6.3	197	0.36	1/4"	3/8"	82.0	
QM1125	25-110		-	6.3-8.6	442	3.25	1/4"	3/8"	-	-
WG202N	-		3.36	6.3	145	0.6	1/4"	3/8"	92	7.5





OR

OILER

Air inlet: 1/4". Max. oil content: 8cc. Connect directly to the hose for automatic lubrication.

SW12A

1/4" - 100g version

7,20€



SW13A 3/8" - 130g version

7,50€

SGU202 12,10€ B

LUBRICATING OIL CAN FOR PNEUMATIC TOOLS

Low pouring point (antifreeze). Contains extreme-pressure and anti-wear additives. Good protection against corrosion. Optimised demulsification (fast separation in case of pollution by water condensation). Viscosity level at 40°C: 22.



SG101


24€

LUBRICATION KIT

Injection into lubrication inlet. Working temperature: -20°C to 180°C. Saves on maintenance costs. Stops corrosion of parts. Improves performance. Prolongs tool-life.



LUBRICATOR AND REGULATOR FILTERS

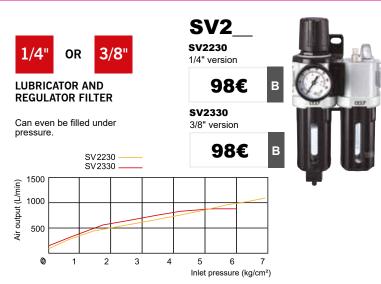

SV2431 1/2"

LUBRICATOR AND REGULATOR FILTER

4000

3000


2000

1000


Air output (L/min)

Can even be filled under pressure.

SV 2431



	Max input pressure	Output adjustable air pressure	Air flow	Threads (inlet/outlet)	Temperature range	Filtration	Condensate tank capacity	Oil tank capacity	Weight
			影		Working		Ē	Ō	kg
SV2230	15	4.8 - 9.6	1100	1/4"	5~60°	5	15	50	0.7
SV2330	15	4.8 - 9.6	1100	3/8"	5~60°	5	15	60	0.7
SV2431	20	4.8 - 9.6	3400	1/2"	5~60°	40	15	80	1.5

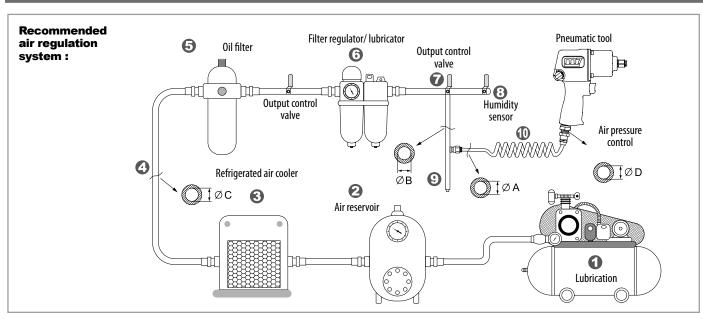


M7 GARAGE







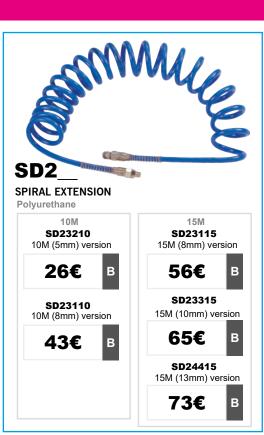



	Max pressure	Air consumption	Air hose	Internal diameter	External diameter	Hose length	Working pressure	Max. pressure	Male thread	Net weight
	⟨MAX ⟩	□□Þ∜		□ □	□ <u></u>	.				kg
SB201	11	39	3/8"		-		6.3	-	1/4"	0.32
SB215	11	39	3/8"	-	-	-	6.3		1/4"	0.32
SA3215A	-	-		8	12	15	6.3	20	1/4"	5
SA3315A	-	-		10	15	15	6.3	20	3/8"	6
SA4320A	-			10	15	20+1	6.3	20	3/8"	24
SA4420A	-	-		13	18	20+1	6.3	20	1/2"	29
SD23210	-	-		5	8	10	7	20	1/4"	0.935
SD23110	-	-		8	12	10	7	20	1/4"	0.5
SD23115	-			8	12	15	7	20	1/4"	1.35
SD23315	-	-		10	15	15	7	20	3/8"	0.65
SD24415	-	-		13	18	15	7	20	1/2"	0.65
SD26125A	17.8			8	14	25	7	-	1/4"	4



(E &

SA1015D 15M - 1.5mm² version 151€

SA1020D 20M - 1.5mm² version

180€ D



	Cable length	Wire cross section	Number of wires	Power	Dimensions	Weight
	М	mm²		٧	mm	kg
		_		4		kg
SA1015D	15	1.5	3	230	350x180x325	5.8
SA1020D	20	1.5	3	230	350x180x325	5.8
SA1115D	15	2.5	3	230	350x180x325	6.8



WORKSHOP ORGANISATION





FOR AIR TOOLS Compatible with all 1/2" air

impact wrenches (except compact and mini ranges).







QB46602AJC

199€

В

SANDER AND AIR GUN FOAM SET -

Extendable air gun. Comes with 2 disk mountings.



SP105 5 kg **SPRING BALANCER**

79€



Practical and compact, these balancers have a rotating wheel for easy cable tension setting. Stainless steel housing. Ball locking system to prevent the cable from retracting into the housing.

	Lifting capacity	Cable Length	Туре	Rope diameter	Net weight
	kg	l 		Ø	kg
SP105	3~5	1.5	Cable	3.2	0.81





TOOL BAG

8 inside pockets, 3 outside pockets and 1 net pocket on the outside. Diagonal strap for balance. Opens 100%. Hard rubber base (anti-slip / shock-proof). 40x22x30cm







389€



AIR VIBRATION INJECTOR PULLER - 24 PCS

Designed to replace the sliding hammer without hand using. Save the power and time to pull out the injector from engine. High torque and two speeds designed to pull out the injector quickly.





	Piston Stroke	Blows frequency	Max. torque	Thread	Air pressure	Max air pressure	Length	Net weight	Air inlet	Air hose
										Inch
		bpm			2 harry	(interpretation)	4 	kg		□
SC0320	38	300/900	600	M18 x 1.5	6-9	10	500	2.7	1/4"	12



SC005

50€



BALL JOINT & TIE-ROD SPLITTER SET - 5 PCS

- Steering ball joint separator 17mm
- Steering ball joint separator 23mm
- Pitman arm tool 28mm
- Air hammer adaptor 184mm
- Air hammer adaptor Ø 10,2mm



MB43015M ()

110,20€ В

1/2" METRIC IMPACT SOCKET SET - 15 PCS

• 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24, 27, 30, 32 mm

(kg) 4,26 kg



MB42011M1

48€

1/2" METRIC IMPACT SOCKET SET - 11 PCS

• 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21 mm

/kg 1,29 kg



MB62010M ()

134€



3/4" METRIC IMPACT SOCKET SET - 10 PCS

• 19, 22, 24, 27, 30, 32, 36, 38, 40, 42 mm √kg \ 4,90 kg





MB42011M ()





1/2" METRIC IMPACT SOCKET SET

- 10, 11, 13, 17, 19, 22, 24, 27, 29, 30, 32 mm kg 1,87 kg
- 13, 17, 19, 21, 22, 24 mm √kg 0,51 kg

- 6 PCS

MA42006M ()


23€

1/2" METRIC MINI IMPACT SOCKET SET



THE LETTER G MEANS THAT THE THREAD OR TAPPING IS CYLINDRICALLY SHAPED.

G threads are only compatible with G tapping.



THE LETTER R MEANS THAT THE THREAD OR TAPPING IS CONICAL.

R threads are compatible with R and G tapping.





ISO 6150-B PROFILE STANDARD OUTPUT USED IN BENELUX, SPAIN, FRANCE, NORWAY AND SWITZERLAND



M7 REFERENC	CE THREAD DIAMETER	TYPE MALE FEMALE	PASSAGE	FOR CONNECTORS	PRICE
DECOMPRESSION COUP	LINGS		ntistatic. Crush-Resistant compact. High output. No A		le ISO 4414. (PREMIUM)
SY271F	G 1/4"	F	Ø 6mm	(ISO 6150-B)	23,50€ В
SY271N	R 1/4"	M	Ø 6 mm	(ISO 6150-B)	28€ В
SY372N	R 3/8"	M IIII	Ø 8 mm	(ISO 6150-B)	36€ в
SY471F	G 1/2"	F	Ø 8 mm	(ISO 6150-B)	33€ в
DECOMPRESSION COUP					
SY200F	D R 1/4"	F	Ø 6mm	(ISO) 6150-B	10,60€ в
SY300F	D R 3/8"	F	Ø 6 mm	(ISO 6150-B)	11€ B
SY400F	D R 1/2"	F	Ø 6 mm	(ISO 6150-B)	11,40€ в
SY200N	ID R 1/4"	M IIII	Ø 6 mm	(ISO 6150-B)	9,90€ В
SY300W	ID R 3/8"	M	Ø 6 mm	(ISO 6150-B)	11€ B
SY400N	ID R 1/2"	M	Ø 6 mm	(ISO 6150-B)	11,40€ В

GARAGE

	M7 REFERENCE	THREAD DIAMETER	TYPE MALE FEMALE	PASSAGE	FOR CONNECTORS	PRICE	
STANDARD COUPLINGS							
	SY1213F	R 1/4"	F	Ø 7.2 mm	EURO	8,80€ в	
	SY1233F			Ø 6 mm	(ISO 6150-B)	8,80€ В	
	SY1313F	R 3/8"	F	Ø 7.2 mm	EURO	9,20€ В	
	SY1333F	·	(<i>////////</i>	Ø 6 mm	(ISO 6150-B	9,20€ В	
	SY1413F	R 1/2"	F	Ø 7.2 mm	EURO	9,80€ В	
	SY1433F	-	<u> </u>	Ø 6 mm	(ISO 6150-B	9,80€ В	
	SY0213M	R 1/4"	M	Ø 7.2 mm	EURO	8,80€ В	
	SY0233M			Ø 6 mm	(ISO 6150-B)	8,80€ В	
	SY0313M	R 3/8"	M	Ø 7.2 mm	EURO	9,20€ В	
	SY0333M			Ø 6 mm	(ISO 6150-B)	9,20€ В	
	SY0413M	R 1/2"	M	Ø 7.2 mm	EURO	9,80€ В	
**************************************	SY0433M			Ø 6 mm	(ISO 6150-B)	9,80€ В	
	SY3213H	Int. Ø for hose 8mm		Ø 7.2 mm	EURO	10,40€ В	
	SY3233H			Ø 6 mm	(ISO) 6150-B	10,30€ В	
	SY3313H	Int. Ø for hose 10mm		Ø 7.2 mm	EURO	11,30€ В	
	SY3333H	TOIIIII	LJI	Ø 6 mm	(ISO 6150-B)	11,30€ В	
	SY3413H	Int. Ø for hose 13mm		Ø 7.2 mm	EURO	12€ B	
	SY3433H			Ø 6 mm	(ISO 6150-B	12€ B	

M7 REFERENCE	THREAD DIAMETER	TYPE MALE FEMALE	PASSAGE	FOR CONNECTORS	PRICE		
STANDARD COUPLINGS							
SY230FD	G 1/4"	F	Ø 6 mm	(ISO 6150-B)	6,30€ В		
SY250MD	R 1/4"	M IIII	Ø 6 mm	(ISO 6150-B)	8,80€ В		
CLAW COUPLING (FIREFIGHTE	ER TYPE)		٨	Max air pressure: 1	istance: -5°C ~ +60°C. 0 bars. Material: brass ANDARD : NFE 29573		
SYRP4F	G 1/2"	F	-	-	11,90€ В		
SYRP4M	G 1/2"	M	-	-	11€ В		
SYRP4T	Ø int. for hose 13mm to 15mm		-	-	12,80€ в		
REDUCER							
SY32FM	R 3/8" G 1/4"	M F	-	-	5,80€ В		
3/8" Tapared male / 1/4" parallel female Brass and nickel-plated brass Operating pressure: 0 to 15 bar	'			A	A: 17 mm C: 17 mm D: 5,5 mm		
360° ARTICULATED CONNECTORS							
SY2011M	R 1/4"	M	-	-	14,90€ в		



	M7 REFERENCE	THREAD DIAMETER	TYPE MALE FEMALE	PASSAGE	PROFILE	PRICE	
CONNECTORS FOR QUICK COUPLINGS							
	SY251F	G 1/4"	F	7.2 mm	EURO	Pack of 2 9,40€ B	
	SY281F	G 1/4"	F	Ø 6 mm	BRITISH	Pack of 2 12,20€ B	
	SY261M	R 1/4"	M	7.2 mm	EURO	Pack of 2 9€ B	
	SY281M	R 1/4"	M	Ø 6 mm	BRITISH	Pack of 2 10,50€ B	
	SY261F	G 1/4"	F	Ø 6 mm	ISO 6150-B	Pack of 2 8,50€ B	
	SY251MD	R 1/4"	M I	Ø 6 mm	(ISO 6150-B	Pack of 2 3,50€ B	
	SY351MD	13mm 15mm R 3/8"	M	Ø 6 mm	(ISO 6150-B	Pack of 2 5,30€ B	
	SY351F	G 3/8"	F	Ø 8 mm	(ISO 6150-B	Pack of 2 16,70€ B	
	SY371M	R 3/8"	M I	Ø 8 mm	(ISO 6150-B	Pack of 2 32€ B	
	SY381M	R 3/8"	M I	Ø 6 mm	BRITISH	Pack of 2 13,60€ B	
	SY471M	R 1/2"	M M	Ø 8 mm	(ISO 6150-B	13€ B	



PNEUMATIC TOOLS

TORQUE TESTS

Our torque tests are carried out in accordance with the ISO standard, using a 3-metre hose and air pressure set at 6.3 bars.



Torque capacity [Tightening test]

Torque range – The range (2 values) reached by the tool after 8 seconds, defined by the lowest speed (1st value) and the highest speed (2nd value) when tightening a fastener.



Max torque [loosening test]

Max torque - The maximum torque reached by the tool, after 5 seconds, when loosening a free fastener.

CLASSIFICATION



Efficiency / performance

Simple use for completing tasks quickly. These tools combine efficiency and performance.



Strength

These tools produce high torque levels, superior grinding power and strong cutting energy.



Endurance

Tools built to last with a low failure rate.

TORQUE LOSS PROBLEMS



Check that the selector is in the correct position



3

Put 5 drops of pneumatic oil into the air inlet then press the trigger



•



Check that the air pressure reaches 90 PSI (6.3 bars)



4

Send the tool to the service centre





© +33 5 49 30 33 27

kingtonyeurope.com

service-clients@kingtony.eu

Offer valid until 31/12/2024. Non-contractual photographs.

King Tony Europe SAS, capital: €7,350,000,
company registration numbers: 424 737 138 - FR 26 424 737 138.

King Tony reserves the right to modify or delete references without prior notice.





