

5000KG

Lifting Capacity

2130MM

Full Travel

25S



Full-Rise Time

8 DIRECTIONS


Play Detector



OVERALL DIMENSION

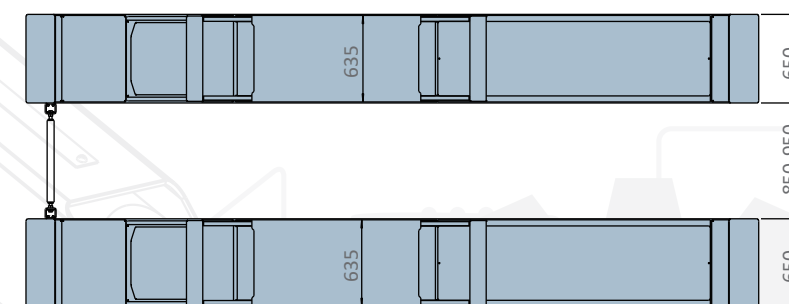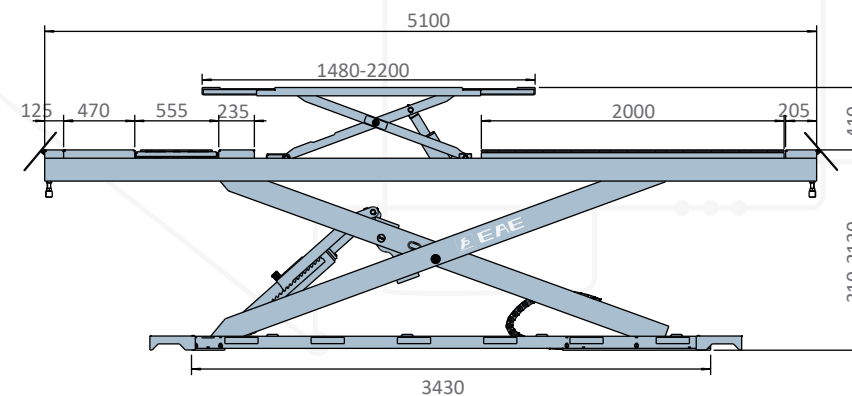

- S Flat platforms
- B Platforms with front recesses and rear slip plates
- BWF Platforms with front recesses, rear slip plates, and wheel free lifts

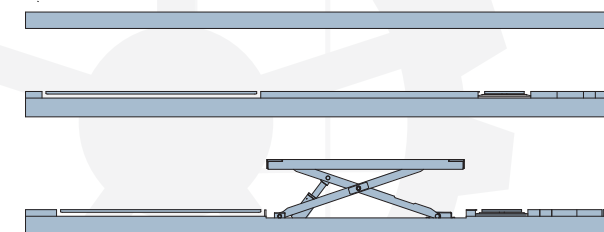

TECHNICAL DATA

MODEL NO.	HX50
Lifting capacity	5000kg
Max. lifting height	2130mm(1800mm above floor)
Min. height	310mm
Lifting time	Approx. 25S
Motor	3.5kWx2
Air supply	6-8bar
Platform width	650mm
Electricity supply	According To Customer Needs

* Machine shown with optional equipment. Actual product appearance may differ.




HX50BWF.PD8




HX50

ALIGNMENT SCISSOR LIFT

- Maximal Rise 1800mm.
- 5100mm long flat runways for general service use.
- Infrared synchronization protection system.
- The most of vehicles can be lifted by the Wheel-free Lifting Platform, which loads as much as 4000kg and extends as long as 2200mm.
- Only 25 seconds for raising to shorten your service time.
- Flexible positions are reserved for turning plates on the wheel-support platforms. Accurate wheel-aligning is efficiently done using its pneumatic-controlled slip plates together with the radius turning plates.
- Four portable LED lamps attached magnetically by the platform ensure the space under vehicles always have sufficient light.
- Optional Play Detector, with its longitudinal and transversal movement being as much as 100 mm, is made as per the DIRECTIVE 2014/45/EU.

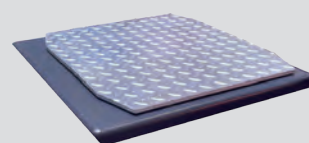


PD8 (Optional)

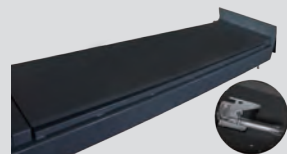

Pneumatic Rear Side Slip



Anti-abrasion Slider

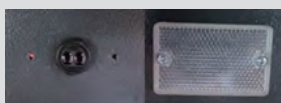

Infrared synchronization protection system



Pneumatic Release Mechanical Lock



Wheel Free Lift