



MagiX 35 DS II

Electro-hydraulic double scissor lift
with 3.5 t capacity

**VERTICAL
POWER**

NxT Generation - Surface-mounted lifts



X-factor at the highest level.

MagiX 35 DS II:

The double scissor lift MagiX 35 DS II convinces with an **optimal lifting range** from small passenger cars to VW T6 short wheelbase / BMW 7 series long and SUVs.

Thanks to the **low overall height of only ≤ 100 mm**, even driving over with flat vehicles is no problem. We achieve full lifting capacity from a low lifting height.

The MagiX 35 DS II comes with a **comfortable working height of over 2 metres**, which is important for ergonomics at the workplace.

The MagiX 35 DS II does not have a predefined drive-on direction, i.e. it can be driven on from both sides and the positioning of the control column can be flexible.

It also **does not require compressed air or a safety ratchet**.

The MagiX 35 DS II scores with lubrication-free teflon sliding bearings in all joints and a **stable scissor construction** that ensures high lateral stability. The **synchronisation** is monitored **electronically**.

Recommendations / Approvals MagiX 35 DS II:

- BMW / Mini
- Volkswagen Group
- Volvo



The highlights of the MagiX 35 DS II:


- Optimum lifting range
- Low overall height of only ≤ 100 mm
- Comfortable working height
- Accessible from both sides

It's a kind of MagiX!


MagiX 35 DS II

AUTOP UPLIFTING COMPANY STENHOJ

Electro-hydraulic double scissor lift with 3.5 t capacity

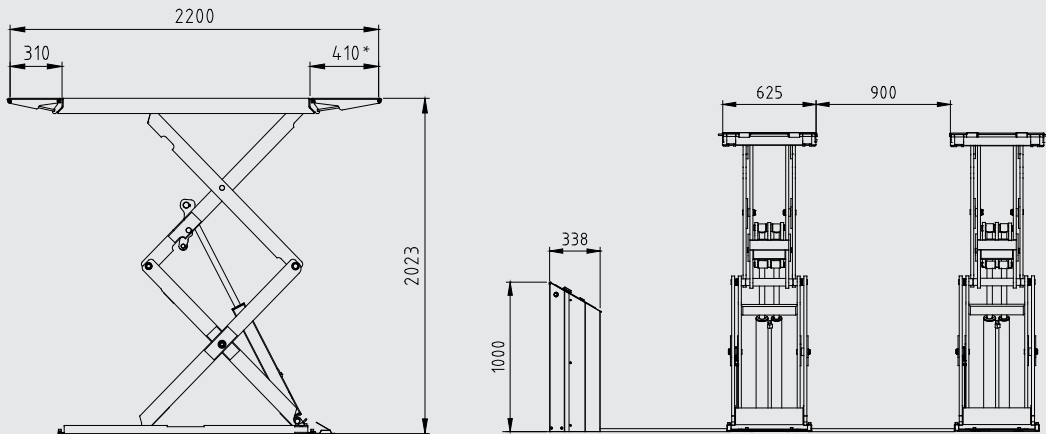

*also available with 310 mm ramp, total length 2100 mm

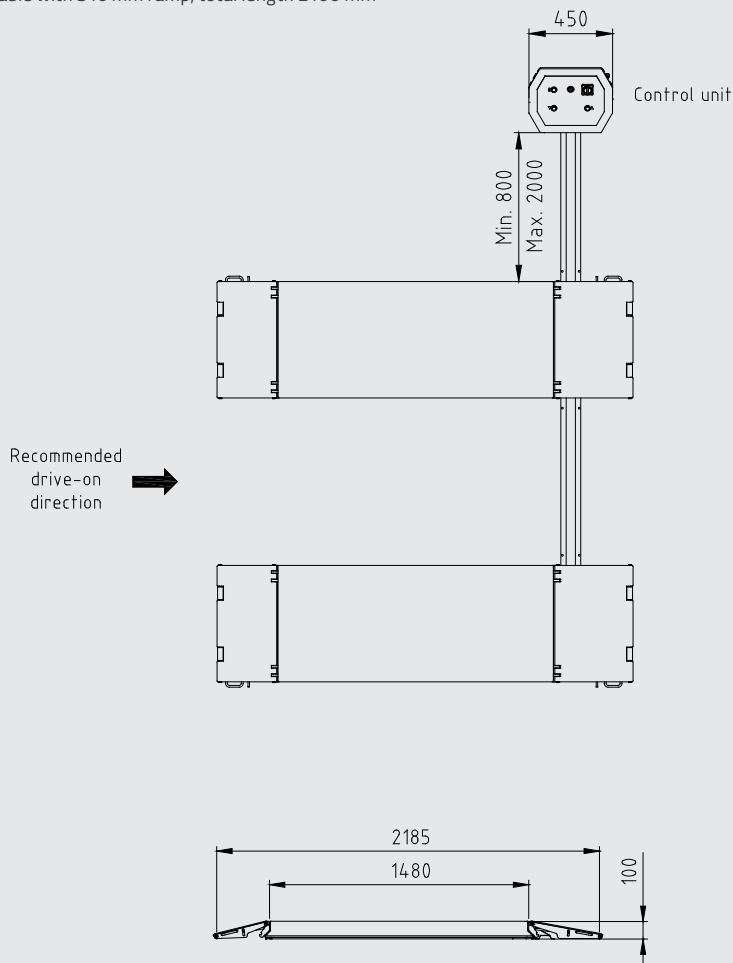

The MagiX 35 DS II can also be installed recessed in the floor.

You can find more information and dimensional sketches at www.autopstenhoj.com.

Illustrations are not binding and optional. Under reserve of dimensional, constructional and technical modifications! Validity 10/2023

MagiX 35 DS II

Technical data

Lifting capacity	3500 kg
Stroke length	1923 mm
Working height	2023 mm / 1923 mm + rubber pads
Lifting / lowering time	~ 40/38 sec.
Pump Unit	3 kW
Voltage	3PH- 230/440V- 50/60 Hz
Recommended distance scissor - control column	0.8 - 2 m

Standard colour:

- Platform & scissor: RAL 7016
- Ramps: RAL 3020

Versions:

- G = galvanized platforms
- Short (310 & 310 mm) and long (310 & 410 mm) drive-on ramps available

Scissor platform

Platform length	Short: 1480 - 2100 mm Long: 1480 - 2200 mm
Platform width	625 mm
Platform height	On-floor: ≤ 100 mm Recessed: 0 mm
Distance between platforms	900 mm (recommended)
Depth of recess	On-floor: 0 mm Recessed: 100 mm

Options:

- Set of expansion bolts
- LED-lighting set for surface-mounted installation
- Installation frame galvanized, for recessed installation
- Rubber blocks in different heights
- Hose extensions incl. covers
- Additional long drive-over ramps for lowered cars
- On-floor or recessed installation with the same lift



MagiX 35 DS II

