



深圳市法比特机电有限公司 SHENZHEN FABIT M&E EQUIPMENT CO.,LTD

🏠 深圳市光明区公明新围第四工业区互利工业园C1栋五楼
The 5th floor, Bldg C1, Huli Industrial Zone, Gongming Office,
Guangming District, Shenzhen City, China.

☎ 0755-61136561 61136563 27125492

📠 0755-27125016

✉ szfabit@163.com fabit@vip.163.com fabit@163.com

🌐 <http://www.fabit.cn>




长按图片 识别二维码 一键关注

润滑油加注设备
LUBRICATING / GREASE FILLING EQUIPMENT



集中（中央）供油系统
CENTRALIZED OIL SUPPLY SYSTEM

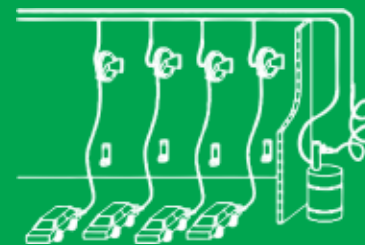

废油收集设备
WASTE OIL COLLECTION EQUIPMENT




FABIT 法比特
2023

About us 关于我们

历史·伙伴· History·Partner

22年制造经验
22 years of manufacturing experience

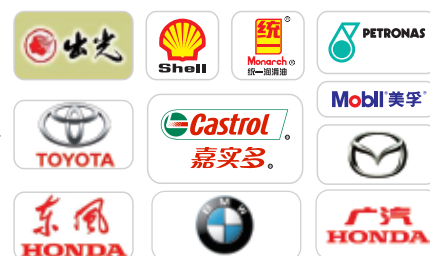

指定供应商 Designated suppliers

理念· Concept

专注技术 Focus on technology
产品至上 Product first



品质 Quality

设计精简 Accurate design
制造规范 Standard manufacturing
可靠耐用 Reliable and durable



应用 Application

丰富的产品体系
广泛应用于汽修、工业等行业
The extensive product series are widely used in
Auto maintenance & repair, Industry applications etc.



PRODUCT SUPPLY 产品供应



专业供应量产高品质产品
Provide high quality products
in mass production

CONTENT 产品目录

润滑油加注设备 04-26
LUBRICATING OIL FILLING EQUIPMENT

集中（中央）供油系统 27-42
CENTRALIZED (CENTRAL) OIL DISTRIBUTION SYSTEM

黄油加注设备 43-51
GREASE FILLING EQUIPMENT


废油收集设备 52-62
WASTE OIL SUCTION/ DRAINER EQUIPMENT

废油回收系统 63-66
WASTE OIL RECYCLING SYSTEM


汽车保养设备 67-75
VEHICLE MAINTENANCE EQUIPMENT



提供产品定制服务
Provide more customized products service




设计安装自动控制流体加注工程
Design and install the automatic control fluid filling system

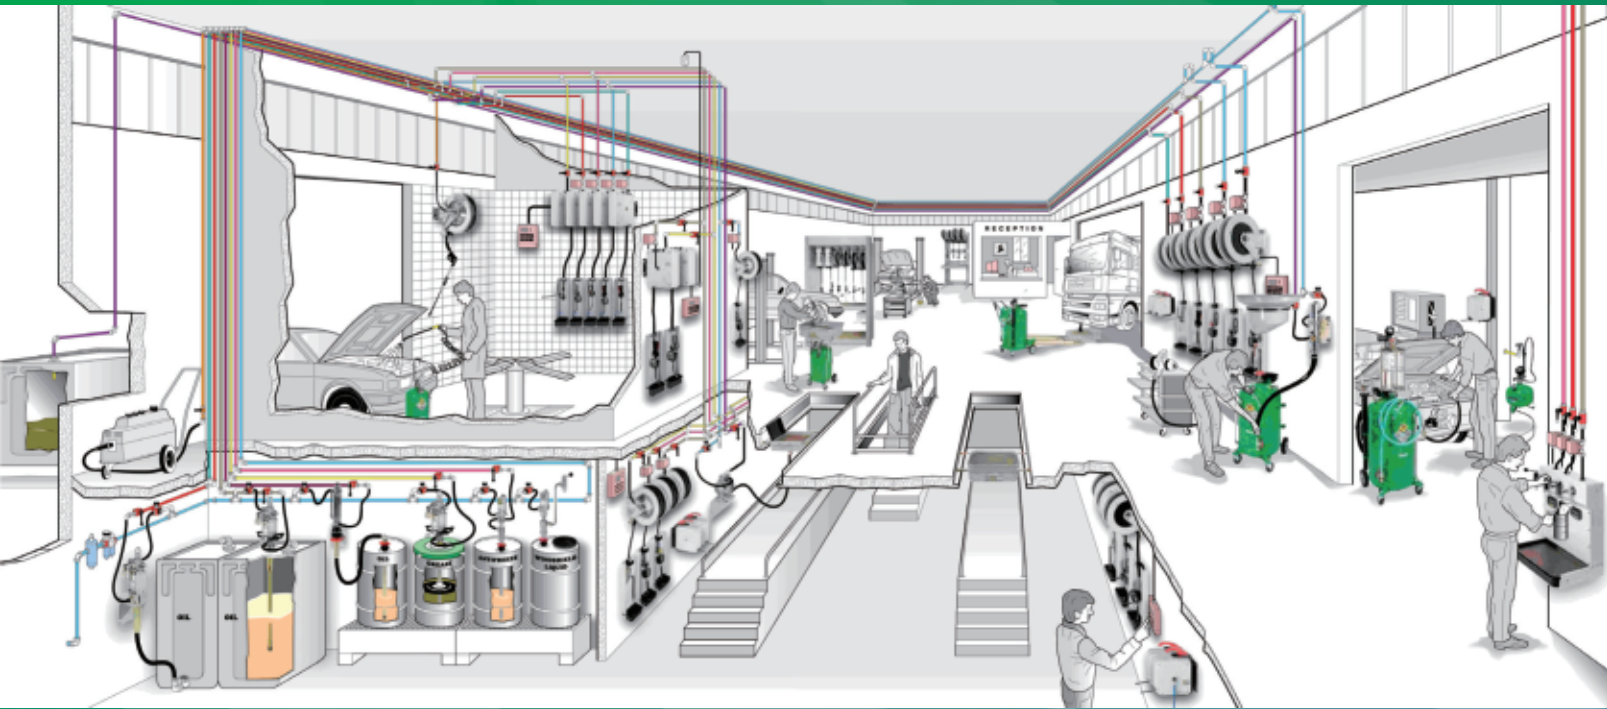

手压式注油机

MANUAL OIL DISPENSER

使用手压注油泵机型，不锈钢罐体，适用于高浓度油品。
The model equipped with the manual pump, is suitable for oils in high-concentration, stainless steel tank.

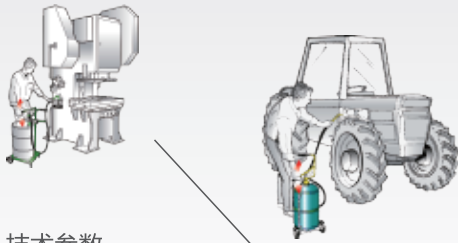

技术参数
Technical parameters


型号 Model	32173	32194	32025	32071
单次注油量 Injection flow/ cycle	50mL	50mL	50mL	50mL
吸油硬管管长 Length of pumping tube	740mm	940mm	410mm	740mm
吸油硬管管径 Diameter of pumping tube	37mm	37mm	37mm	37mm
输油软管管长 Length of filling hose	-	2m	2m	2m
输油软管管径 Diameter of filling hose	-	18mm	18mm	18mm
球阀口径 Diameter of ball valve	G1/4	-	-	-
罐体容量 Tank capacity	-	-	24L	72L
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1170*145*110mm	1170*150*110mm	390*300*880mm	485*485*830mm
产品重量 Gross weight	3.5kg	4kg	9kg	20.3kg



气压式注油机

AIR OPERATED OIL DISPENSER

使用空气压迫式加注机油，不锈钢罐体，适用于机油、齿轮油等油品。
Filling oil with compressed air, stainless steel tank, suitable for engine oil and gear oil etc.



技术参数
Technical parameters

型号 Model	33025	33071
输油软管管长 Length of filling hose	2m	2m
输油软管管径 Diameter of filling hose	13mm	18mm
工作压力 Air working pressure	< 4bar	< 4bar
油品粘度 Max deliverable oil viscosity	80SAE	80SAE
罐体容量 Tank capacity	24L	70L
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	390*300*1050mm	485*485*900mm
产品重量 Gross weight	8.5kg	18kg



气动抽油泵

比率Ratio: 1: 1 流量Flow rate: 35L/min

AIR OPERATED PUMP

比率1: 1的气动泵，用于抽取浓度不高的流量要求较大的液体，如机油、废油、防冻液等。
Pneumatic pump with ratio of 1:1, used for pumping low concentration and high flow requirements Liquids such as engine oil, waste oil, antifreeze, etc.



型号 Model	33160	33194
比率 Ratio	1: 1	1: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	230L/min	230L/min
输送速度 Flow rate	35L/min	35L/min
油温 Fluid temperature	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	80SAE	80SAE
吸油管长 Length of pumping tube	270mm	940mm
吸油管径 Diameter of pumping tube	42mm	42mm
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1130*190*155mm	1345*190*155mm
产品重量 Gross weight	4.4kg	6.5kg

壁装式吸油套件

WALL-MOUNTED PNEUMATIC PUMP KIT

比率1: 1的气动泵，用于抽取浓度不高的流量要求较大的液体，如机油、废油、防冻液等。
Pneumatic pump with ratio of 1:1, used for pumping low concentration and high flow requirements Liquids such as engine oil, waste oil, antifreeze, etc.




型号 Model	33100	33125
气动抽油泵 Air-operated oil pumps	33160	33160
支架孔径 Wall-bracket diameter	54mm	54mm
吸油软管管长 Length of suction hose	2m	2m
吸油软管管径 Diameter of suction hose	1"	1"
吸油硬管管长 Length of pumping tube	940mm	-
吸油硬管管径 Diameter of pumping tube	42mm	-
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1345*195*155mm	810*190*155mm
产品重量 Gross weight	6kg	5kg

气动抽油套件

DIAPHRAGM PNEUMATIC PUMP KIT

适合将容器内的油品抽空的壁装式气动泵套件。
The diaphragm transfer pumps are used in different kind of application. Ideal for transferring fluids out of tank/ drum/ other container.

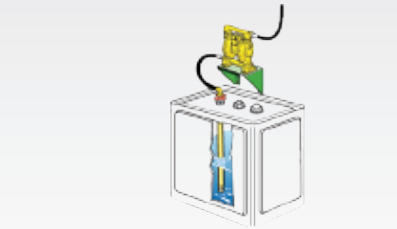

型号 Model	33500	33501
耗气量 Average air consumption	670L/min	670L/min
输送速度 Flow rate	50-60L/min	50-60L/min
最大压力 Max air-working pressure	8bar	8bar
吸油软管管长 Length of suction hose	-	2m
吸油软管管径 Diameter of suction hose	-	1"
吸油硬管管长 Length of pumping tube	-	940mm
吸油硬管管径 Diameter of pumping tube	-	42mm
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	328*265*418mm	328*265*418mm
产品重量 Gross weight	10.2kg	12.7kg



气动工业输油泵


比率Ratio: 5:1 流量Flow rate: 45L/min

PNEUMATIC INDUSTRIAL PUMP

可连续不断工作的工业级油泵，适用于高浓度油品远程输送及准确计量。
This industrial pump that ensures lasting and reliable operation even in extreme conditions, is the ideal for remotely pumping high viscosity and heavy fluids.



型号 Model	36660	36694
比率 Ratio	5: 1	5: 1
进气嘴接头 Air inlet connection	1/2"	1/2"
出油口接头 Fluid outlet connection	3/4"	3/4"
工作压力 Air working pressure	6-8bar	6-8bar
最大压力 Maximum pressure	10bar	10bar
耗气量 Average air consumption	1500L/min	1500L/min
输送速度 Flow rate	45L/min	45L/min
油温 Fluid temperature	-10-60°C	-10-60°C
吸油管长 Length of pumping tube	270mm	940mm
吸油管径 Diameter of pumping tube	70mm	70mm
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	810*300*155mm	1325*300*155mm
产品重量 Gross weight	13.3kg	15.5kg

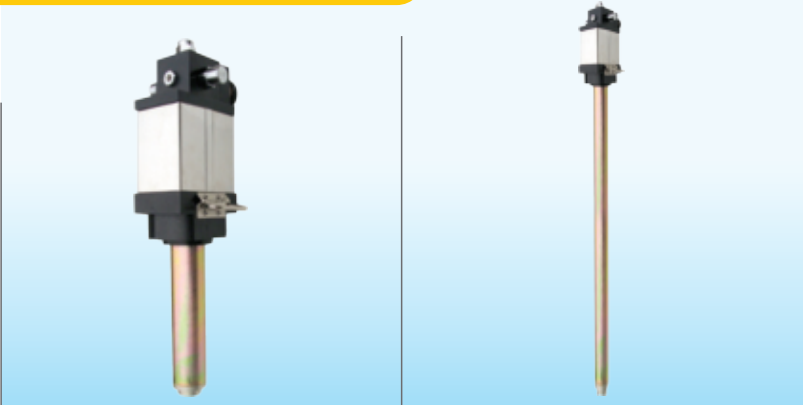

气动输油泵

比率 Ratio: 3:1 流量 Flow rate: 14L/min

PNEUMATIC OIL TRANSFER PUMP

比率3:1的气动泵，适用于抽取并输送中高密度
 的机油和防冻液等。
 Pneumatic pump with ratio of 3:1, suitable for pumping
 and delivering medium to high density engine oil and
 antifreeze, etc.



型号 Model	35140	35160	35173	35194
比率 Ratio	3: 1	3: 1	3: 1	3: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar	8bar
耗气量 Average air consumption	300L/min	300L/min	300L/min	300L/min
输送速度 Flow rate	12L/min	14L/min	14L/min	14L/min
油温 Fluid temperature	-10-60°C	-10-60°C	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	130SAE	130SAE	130SAE	130SAE
吸油管长 Length of pumping tube	400mm	270mm	740mm	940mm
吸油管径 Diameter of pumping tube	32mm	42mm	42mm	42mm
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	810*190*155mm	810*190*155mm	1345*190*155mm	1345*190*155mm
产品重量 Gross weight	3.9kg	4.4kg	4.8kg	6.3kg

气动输油泵

比率 Ratio: 5:1 流量 Flow rate:18L/min

PNEUMATIC OIL TRANSFER PUMP

比率5:1的双向作用气动泵，适用于抽取并远程输
 送高浓度的油品，适合安装在集中供油系统中，此
 泵更适合于计量。
 Double action pneumatic pump with ratio of 5:1, suitable
 for pumping and delivering high-concentration oil products
 remotely, suitable for installation in centralized oil supply
 systems, this pump is more suitable for metering.




型号 Model	36040	36060	36073	36094
比率 Ratio	5: 1	5: 1	5: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar	8bar
耗气量 Average air consumption	320L/min	320L/min	320L/min	320L/min
输送速度 Flow rate	16L/min	18L/min	18L/min	18L/min
油温 Fluid temperature	-10-60°C	-10-60°C	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	240SAE	240SAE	240SAE	240SAE
吸油管长 Length of pumping tube	400mm	270mm	740mm	940mm
吸油管径 Diameter of pumping tube	32mm	42mm	42mm	42mm
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	810*190*155mm	810*190*155mm	1345*190*155mm	1345*190*155mm
产品重量 Gross weight	4.8kg	4.5kg	5.7kg	6.3kg

气动输油泵

比率Ratio: 5:1 流量 Flow rate: 27L/min

PNEUMATIC OIL TRANSFER PUMP

比率5:1的双向作用气动泵，适合准确计量，适用于抽取
 并远程输送高浓度的油品，适合安装在集中供油系统中。
 Air-operated double-acting pumps RATIO 5:1, ideal for
 long distance distribution to transfer high viscosity and
 heavy fluids, This pumps guarantee high performance in
 flow metering, particularly effective in centralized oil
 supply system.

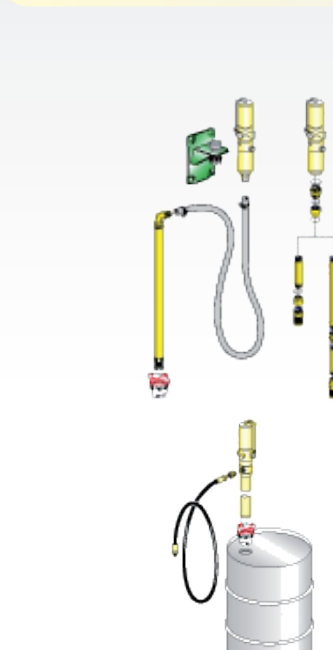

型号 Model	36340	36360	36373	36394
比率 Ratio	5: 1	5: 1	5: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar	8bar
耗气量 Average air consumption	350L/min	350L/min	350L/min	350L/min
输送速度 Flow rate	24L/min	27L/min	27L/min	27L/min
油温 Fluid temperature	-10-60°C	-10-60°C	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	240SAE	240SAE	240SAE	240SAE
吸油管长 Length of pumping tube	400mm	270mm	740mm	940mm
吸油管径 Diameter of pumping tube	32mm	53mm	53mm	53mm
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	810*190*155mm	810*190*155mm	1345*190*155mm	1345*190*155mm
产品重量 Gross weight	4.8kg	4.5kg	5.7kg	6.3kg

便携式注油套件

PORTABLE OIL TRANSFER KIT

可方便携带的，便于操作的注油套件。
Oil dispenser kit for drums or tanks. The ideal combination for dispensing oil in any workplace. The kit is equipped with digital oil gun, which make it easier to operate independently as oil delivery station.



技术参数
Technical parameters

型号 Model	37300	37350
气动输油泵比率 Pneumatic pump ratio	3: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	300L/min	320L/min
输送速度 Flow rate	14L/min	18L/min
油温 Fluid temperature	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	130SAE	240SAE
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	42mm	42mm
注油枪型式 Oil gun series	数显注油枪 Digital oil gun	数显注油枪 Digital oil gun
注油枪咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle
计量精度 Measuring precision	±0.3%	±0.3%
输油软管管长 Length of filling hose	4m	4m
输油软管管径 Diameter of filling hose	3/8"	3/8"
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1345*190*145mm	1345*185*145mm
产品重量 Gross weight	9.7kg	11kg

壁装式输油套件

WALL-MOUNTED OIL TRANSFER KIT

适用于换油中心或集中供油系统套件。
Oil dispensing system with wall-mounted pump. The kits can be connected with centralized lube piping or digital oil gun, which make it easier to operate independently as oil delivery station.



技术参数
Technical parameters

型号 Model	37685	37688
气动输油泵比率 Pneumatic pump ratio	5: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	320L/min	330L/min
输送速度 Flow rate	18L/min	27L/min
油温 Fluid temperature	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	240SAE	240SAE
支架孔径 Wall-bracket diameter	43mm	54mm
吸油软管管长 Length of suction hose	2m	2m
吸油软管管径 Diameter of suction hose	1"	1"
吸油硬管管长 Length of pumping tube	940mm	940mm
吸油硬管管径 Diameter of pumping tube	42mm	42mm
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1345*185*113mm	1130*185*145mm
产品重量 Gross weight	12.3kg	13kg

壁装式注油套件

WALL-MOUNTED OIL TRANSFER KIT

适用于油桶 180-220kg 吸油的壁装式注油套件。
 Equipped with hose reel series and digital oil gun,
 the oil dispensing kit is applied to a drum or tank
 of 180-220 KG.




技术参数
 Technical parameters

型号 Model	37675	37680
气动输油泵比率 Pneumatic pump ratio	5: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	320L/min	320L/min
输送速度 Flow rate	18L/min	18L/min
油温 Fluid temperature	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	240SAE	240SAE
吸油管长 Length of pumping tube	940mm	270mm
吸油管径 Diameter of pumping tube	42mm	42mm
注油枪型式 Oil gun series	数显注油枪 Digital oil gun	数显注油枪 Digital oil gun
注油枪咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle
计量精度 Measuring precision	±0.3%	±0.3%
卷管器型式 Type of hose reel	重型旋转式 Heavy-duty rotary type	重型旋转式 Heavy-duty rotary type
卷管器出油管长 Length of outlet reelpipe	10m	10m
卷管器进油管长 Length of inlet reelpipe	1.5m	1.5m
卷管器管径 Diameter of reelpipe	3/8"	3/8"
挂枪架 Oil gun bracket	150*210*605mm	150*210*605mm
支架孔径 Wall-bracket diameter	-	43mm
吸油软管管长 Length of suction hose	-	2m
吸油软管管径 Diameter of suction hose	-	1"
吸油硬管管长 Length of pumping tube	-	940mm
吸油硬管管径 Diameter of pumping tube	-	42mm
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	565*545*245mm	565*545*245mm
包装尺寸2 Packing size_2	1325*300*155mm	1325*300*155mm
产品重量 Gross weight	38.5kg	41.8kg

手拖车式注油套件

MOBILE OIL TRANSFER KIT

适用于20-60kg 油桶吸油的手拖车式注油套件。
 Equipped with trolley and digital oil gun,
 the oil dispensing kit is applied to a drum
 or tank of 50~60 KG.

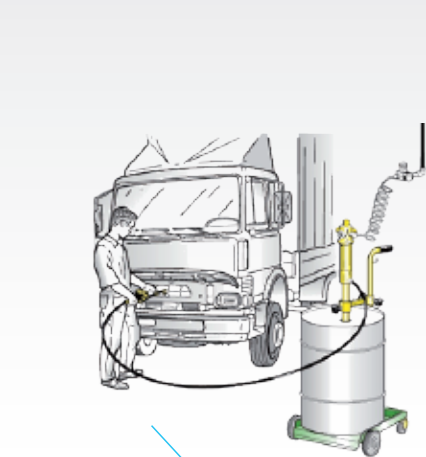


技术参数
 Technical parameters

型号 Model	37500	37550	37500C	37550C
气动输油泵比率 Pneumatic pump ratio	3: 1	5: 1	3: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar	8bar
耗气量 Average air consumption	300L/min	320L/min	300L/min	320L/min
输送速度 Flow rate	14L/min	18L/min	12L/min	16L/min
油温 Fluid temperature	-10-60°C	-10-60°C	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	130SAE	240SAE	130SAE	240SAE
吸油管长 Length of pumping tube	740mm	740mm	400mm	400mm
吸油管径 Diameter of pumping tube	42mm	42mm	32mm	32mm
注油枪型式 Oil gun series	数显注油枪 Digital oil gun	数显注油枪 Digital oil gun	数显注油枪 Digital oil gun	数显注油枪 Digital oil gun
注油枪咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle
计量精度 Measuring precision	±0.3%	±0.3%	±0.3%	±0.3%
拖车适用油桶 Suitable for drums	18-60L	18-60L	18-60L	18-60L
输油软管管长 Length of filling hose	4m	4m	4m	4m
输油软管管径 Diameter of filling hose	3/8"	3/8"	3/8"	3/8"
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	545*495*195mm	545*495*195mm	855*605*210mm	855*605*210mm
包装尺寸2 Packing size_2	1125*185*150mm	1125*185*150mm	1130*185*145mm	1125*185*150mm
产品重量 Gross weight	21.2kg	21.9kg	20.3kg	21.2kg

重型移动式注油套件

HEAVY-DUTY MOBILE OIL TRANSFER KIT

适用于180-220kg 油桶吸油的手拖车式注油套件。
Equipped with digital oil gun, hose reel and trolley, the oil dispensing kit is applied to a drum or tank of 180~220 KG.

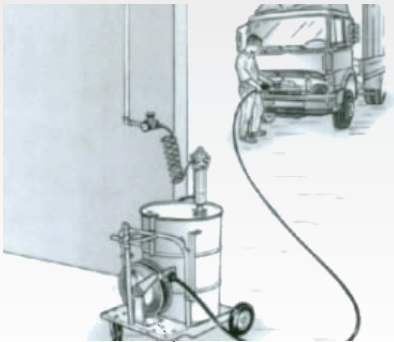

技术参数
Technical parameters



型号 Model	37100	37101	37210	37211	37150	37151	37200	37201
气动输油泵比率 Pneumatic pump ratio	5: 1	5: 1	3: 1	3: 1	5: 1	5: 1	3: 1	3: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar	5-8bar	5-8bar	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar	8bar	8bar	8bar	8bar	8bar
耗气量 Average air consumption	320L/min	320L/min	300L/min	300L/min	320L/min	320L/min	300L/min	300L/min
输送速度 Flow rate	18L/min	18L/min	14L/min	14L/min	18L/min	18L/min	14L/min	14L/min
油温 Fluid temperature	-10-60℃	-10-60℃	-10-60℃	-10-60℃	-10-60℃	-10-60℃	-10-60℃	-10-60℃
油品粘度 Max deliverable oil viscosity	240SAE	240SAE	130SAE	130SAE	240SAE	240SAE	130SAE	130SAE
吸油管长 Length of pumping tube	940mm	940mm	940mm	940mm	940mm	940mm	940mm	940mm
吸油管径 Diameter of pumping tube	42mm	42mm	42mm	42mm	42mm	42mm	42mm	42mm
注油枪型式 Oil gun series	数显注油枪 Digital oil gun	预设定注油枪 Pre-set digital oil gun	数显注油枪 Digital oil gun	预设定注油枪 Pre-set digital oil gun	数显注油枪 Digital oil gun	预设定注油枪 Pre-set digital oil gun	数显注油枪 Digital oil gun	预设定注油枪 Pre-set digital oil gun
注油枪咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle
计量精度 Measuring precision	±0.3%	±0.3%	±0.3%	±0.3%	±0.3%	±0.3%	±0.3%	±0.3%
卷管器型式 Type of hose reel	重型固定式 Heavy-duty fixed type	重型固定式 Heavy-duty fixed type	重型固定式 Heavy-duty fixed type	重型固定式 Heavy-duty fixed type	-	-	-	-
卷管器出油管长 Length of outlet reelpipe	10m	10m	10m	10m	-	-	-	-
卷管器进油管长 Length of inlet reelpipe	1.5m	1.5m	1.5m	1.5m	-	-	-	-
卷管器管径 Diameter of reelpipe	3/8"	3/8"	3/8"	3/8"	-	-	-	-
拖车适用油桶 Suitable for drums	180-220L	180-220L	180-220L	180-220L	180-220L	180-220L	180-220L	180-220L
输油软管管长 Length of filling hose	-	-	4m	4m	4m	4m	4m	4m
输油软管管径 Diameter of filling hose	-	-	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
联网功能 networking function	单机版 Stand-alone version	单机版 Stand-alone version	单机版 Stand-alone version	单机版 Stand-alone version	单机版 Stand-alone version	单机版 Stand-alone version	单机版 Stand-alone version	单机版 Stand-alone version
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	870*865*120mm	870*865*120mm	875*705*120mm	875*705*120mm	875*705*120mm	875*705*120mm	875*705*120mm	875*705*120mm
包装尺寸2 Packing size_2	565*545*245mm	565*545*245mm	565*545*245mm	565*545*245mm	1340*185*180mm	1340*185*180mm	1340*185*180mm	1340*185*180mm
包装尺寸3 Packing size_3	1350*185*145mm	1350*185*145mm	1340*185*180mm	1340*185*180mm	-	-	-	-
产品重量 Gross weight	55kg	55kg	54.5kg	54.5kg	34.2kg	34.2kg	33.3kg	33.3kg

智能网联注油套件

INTELLIGENT NETWORK OIL FILLING KIT

实现手机、电脑远程管理，适用于180-220kg 油桶吸油的手拖车式注油套件。
Realize mobile phone, computer remote management, suitable for 180-220kg oil drum suction hand trailer type oil injection kit.



技术参数
Technical parameters




型号 Model	37159	37209
气动输油泵比率 Pneumatic pump ratio	5: 1	3: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	320L/min	300L/min
输送速度 Flow rate	18L/min	14L/min
油温 Fluid temperature	-10-60℃	-10-60℃
油品粘度 Max deliverable oil viscosity	240SAE	130SAE
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	42mm	42mm
注油枪型式 Oil gun series	预设定注油枪 Pre-set digital oil gun	预设定注油枪 Pre-set digital oil gun
注油枪咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle
计量精度 Measuring precision	±0.3%	±0.3%
卷管器型式 Type of hose reel	-	-
卷管器出油管长 Length of outlet reelpipe	-	-
卷管器进油管长 Length of inlet reelpipe	-	-
卷管器管径 Diameter of reelpipe	-	-
拖车适用油桶 Suitable for drums	180-220L	180-220L
输油软管管长 Length of filling hose	4m	4m
输油软管管径 Diameter of filling hose	3/8"	3/8"
联网功能 networking function	联网版 network version	联网版 network version
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	875*705*120mm	875*705*120mm
包装尺寸2 Packing size_2	1340*185*180mm	1340*185*180mm
包装尺寸3 Packing size_3	-	-
产品重量 Gross weight	34.2kg	33.3kg

容器式注油套件

MOBILE OIL DISPENSER KIT

带有可推动的容器、有计量的注油套件。
The dispenser kit is equipped with movable tank, air-operated pump and digital oil gun.

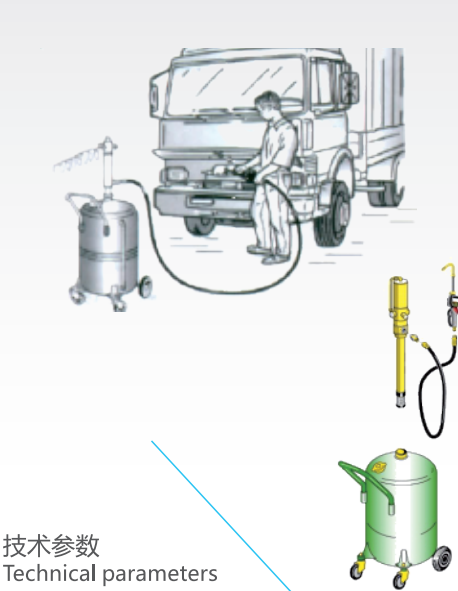

技术参数
Technical parameters



型号 Model	37073	37173	37670	37770
气动输油泵比率 Pneumatic pump ratio	3: 1	5: 1	3: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar	8bar
耗气量 Average air consumption	300L/min	320L/min	300L/min	320L/min
输送速度 Flow rate	14L/min	18L/min	14L/min	18L/min
油温 Fluid temperature	-10-60℃	-10-60℃	-10-60℃	-10-60℃
油品粘度 Max deliverable oil viscosity	130SAE	240SAE	130SAE	240SAE
吸油管长 Length of pumping tube	740mm	740mm	740mm	740mm
吸油管径 Diameter of pumping tube	42mm	42mm	42mm	42mm
注油枪型式 Oil gun series	数显注油枪	数显注油枪	普通注油枪	普通注油枪
注油枪咀型式 Type of oil gun nozzle	自动开闭型	自动开闭型	自动开闭型	自动开闭型
计量精度 Measuring precision	±0.3%	±0.3%	-	-
输油软管管长 Length of filling hose	4m	4m	4m	4m
输油软管管径 Diameter of filling hose	3/8"	3/8"	3/8"	3/8"
罐体容量 Tank capacity	72L	72L	72L	72L
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	595*490*875mm	595*490*875mm	485*485*870mm	485*485*870mm
包装尺寸2 Packing size_2	1345*190*155mm	1345*190*155mm	1130*185*150mm	1130*185*150mm
产品重量 Gross weight	29kg	30kg	28.5kg	29.5kg

油槽注油泵套件

OIL DISPENSING PUMP KIT

用于连接接油槽的油泵套件。
This pump kit is used for connecting with oil groove.




技术参数
Technical parameters

型号 Model	37695	37696
气动输油泵比率 Pneumatic pump ratio	3: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	300L/min	320L/min
输送速度 Flow rate	14L/min	18L/min
油温 Fluid temperature	-10-60℃	-10-60℃
油品粘度 Max deliverable oil viscosity	130SAE	240SAE
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	42mm	42mm
输油软管管长 Length of filling hose	4m	4m
输油软管管径 Diameter of filling hose	3/8"	3/8"
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1345*190*155mm	1345*190*155mm
产品重量 Gross weight	8.7kg	8.7kg

油槽式接油套件

OIL BAR DISPENSER KIT

从油阀直接接油的套件，可装置一个或多个油阀，输出不同液体。
The oil bar kit is designed to dispense oil / or similar liquids through the tap valve. Multiple taps can be configured as needed.




型号 Model	37690	37790	37890
最大轴承 MAX air working pressure	70bar	70bar	70bar
接头 Connector	1/2"	1/2"	1/2"
计量精度 Measuring precision	-	±0.3%	±0.3%
计量表 Meter of measurement	-	数显	预设定
最大流量 MAX flow rate	50L/min	35L/min	35L/min
出油口 Fluid outlet	1/2"	1/2"	1/2"
进油口 Fluid inlet	13mm	13mm	13mm
连接软管管径 Diameter of coupling hose	1/2"	1/2"	1/2"
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	530*450*620mm	530*450*620mm	530*450*620mm
产品重量 Gross weight	14.5kg	15kg	15kg

简易式接油套件

DRUM OIL BAR

从插在大油桶（箱）上的泵直接接油的简易套件。
The oil pump kit is ideal for dispensing fluids directly through the tap valve from the containers of different capacities.

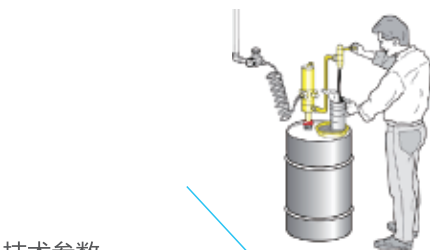

技术参数
Technical parameters

型号 Model	37803	37805
气动输油泵比率 Pneumatic pump ratio	3: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	300L/min	320L/min
输送速度 Flow rate	14L/min	18L/min
油温 Fluid temperature	-10-60℃	-10-60℃
油品粘度 Max deliverable oil viscosity	130SAE	240SAE
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	42mm	42mm
出油口 Fluid outlet	1/2"	1/2"
进油口 Fluid inlet	13mm	13mm
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1345*190*155mm	1345*190*155mm
产品重量 Gross weight	8.7kg	9.7kg

便携式电动注油套件

PORTABLE ELECTRIC OIL FILLING KIT

迷你精致，可方便携带便于操作的电动注油套件。
Compact and exquisite, easy to carry and operate electric oil filling kit.



型号 Model	39208	39308
工作电压 Operating voltage	220V 50Hz	220V 50Hz
电机功率 Power of motor	200W	200W
出油口接头 Oil outlet connector	1/2"	1/2"
输送速度 Flow rate	8L/min	8L/min
油温 Fluid temperature	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	90SAE	90SAE
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	19mm	19mm
注油枪型式 Type of oil gun	数显注油枪 Digital oil gun	预设定注油枪 Pre-set digital oil gun
注油枪咀型式 Type of oil gun nozzle	自动打开型 Automatic open type	自动打开型 Automatic open type
计量精度 Metering accuracy	±0.5%	±0.5%
拖车适用油桶 Oil drum for trailer	60-220L	60-220L
输油软管长度 Length of fuel delivery hose	3m	3m
输油软管管径 Diameter of oil delivery hose	1/2"	1/2"
包装型式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size 1	400*300*260mm	400*300*260mm
产品重量 Gross weight	8.7kg	8.8kg

简易式电动注油套件

SIMPLE ELECTRIC OIL FILLING KIT

可放在大油桶（箱）上，直接输油的电动注油套件。
Electric oil filling kit can be placed on a large oil barrel (box) to directly pump oil.



型号 Model	39008	39108
工作电压 Operating voltage	220V 50Hz	220V 50Hz
电机功率 Power of motor	200W	200W
出油口接头 Oil outlet connector	1/2"	1/2"
输送速度 Flow rate	8L/min	8L/min
油温 Fluid temperature	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	90SAE	90SAE
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	19mm	19mm
计量表 Meter of measurement	-	数显
出油管型式 Type of oil outlet	360° 万向防滴漏	360° 万向防滴漏
计量精度 Metering accuracy	-	±1%
适用油桶 Oil drum for trailer	60-220L	60-220L
包装型式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size 1	340*240*215mm	340*240*215mm
产品重量 Gross weight	6kg	6.5kg

智能网联注油套件

INTELLIGENT NETWORK OIL FILLING KIT

实现手机、电脑远程管理,迷你精致，可方便携带便于操作的电动注油套件。
Realize remote management of mobile phones and computers, mini and exquisite, portable and easy-to-operate electric oil filling kit.

型号 Model	39408
工作电压 Operating voltage	220V 50Hz
电机功率 Power of motor	200W
出油口接头 Oil outlet connector	1/2"
输送速度 Flow rate	8L/min
油温 Fluid temperature	-10-60°C
油品粘度 Max deliverable oil viscosity	90SAE
吸油管长 Length of pumping tube	940mm
吸油管径 Diameter of pumping tube	19mm
注油枪型式 Type of oil gun	预设定注油枪
注油枪咀型式 Type of oil gun nozzle	自动打开型
计量精度 Metering accuracy	±0.5%
拖车适用油桶 Oil drum for trailer	60-220L
输油软管长度 Length of fuel delivery hose	3m
输油软管管径 Diameter of oil delivery hose	1/2"
包装型式 Package type	纸箱 Carton
包装尺寸1 Packing size 1	400*300*260mm
产品重量 Gross weight	8.8kg



重型移动式电动注油套件

HEAVY DUTY MOBILE ELECTRIC OIL FILLING KIT

适用于180-220KG油桶吸油的手拖车式电动泵注油套件，更适合大流量、长时间加注。
Trolley electric pump oil filling kit suitable for oil pumping with 180-220KG oil drum.Suitable for applications with large filling volumes and long filling times .



型号 Model	34006	34012	34018
电压 Voltage	220V50Hz	220V50Hz	220V50Hz
电机功率 The motor power	190W	370w	550W
出油口接头 Fluid outlet connection	1/2"	1/2"	1/2"
最大流量 Maximum flow rate	6L/min	12L/min	18L/min
油温 Fluid temperature	-10-60°C	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	90SAE	90SAE	90SAE
吸油硬管管长 Length of tubing tubing	940mm	940mm	940mm
吸油硬管管径 The length of oil suction pipe diameter	30mm	30mm	30mm
注油枪型式 Type of grease gun	数显注油枪	数显注油枪	数显注油枪
注油枪咀型式 Type of oil gun nozzle	自动打开型	自动打开型	自动打开型
计量精度 Measuring precision	±0.5%	±0.5%	±0.5%
拖车适用油桶 The trailer for oil drum	180-220L	180-220L	180-220L
吸油软管管长 Length of oil suction hose	1.8m	1.8m	1.8m
吸油软管管径 The length of the suction hose diameter	3/4"	3/4"	3/4"
输油软管长度 Length of oil hose	4m	4m	4m
输油软管管径 Length of oil hose pipe	3/8"	1/2"	1/2"
包装型式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	950*710*250mm	950*710*250mm	950*710*250mm
包装尺寸2 Packing size_2	875*705*120mm	875*705*120mm	875*705*120mm
产品质量 Gross weight	40kg	40kg	41.2kg

数显计量注油枪

DIGITAL METERING OIL INJECTING GUN

带有数显计量的注油枪，最适合连接3：1 和 5：1 油泵，不建议连接1：1 油泵。
Equipped with digital oil gauge, the oil gun is suggested to use with oil pump (RATIO 3:1 or 5:1), not good for RATIO 1:1 pump.



型号 Model	37713	37716	37718
注油咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动打开型 Automatic drip-catcher nozzle
计量表 Digital oil gauge	数显 Digital counter	数显 Digital counter	数显 Digital counter
最大承压 MAX air working pressure	70bar	70bar	70bar
接头 Inlet swivel joint	1/2"	1/2"	1/2"
计量精度 Measuring precision	±0.3%	±0.3%	±0.3%
最大流量 MAX flow rate	35L/min	35L/min	35L/min
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	340*195*120mm	340*195*120mm	340*195*120mm
产品重量 Gross weight	1.7kg	1.7kg	1.7kg

流量计量表

DIGITAL OIL GAUGE

可安装于油枪、油泵或管道上的流量计量表。
Flow meters that can be installed on oil guns, oil pumps or pipelines.



技术参数
Technical parameters

型号 Model	37714
最大承压 MAX air working pressure	70bar
接头 Inlet swivel joint	1/2"
计量精度 Measuring precision	±0.3%
最大流量 MAX flow rate	35L/min
显示屏 Display screen	液晶显示 LCD

加注油枪

OIL INJECTING GUN

分别适合各种油泵的流量的加注枪
The oil gun is suitable for the oil pumps with different flow rates.



技术参数
Technical parameters

型号 Model	38025	38125	38325
注油咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动打开型 Automatic drip-catcher nozzle
最大承压 MAX air working pressure	100bar	100bar	100bar
接头 Connector	1/2"	1/2"	1/2"
最大流量 MAX flow rate	40L/min	40L/min	60L/min
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	260*150*50mm	260*150*50mm	260*150*50mm
产品重量 Gross weight	1kg	1kg	1kg

数显预设定量注油枪

DIGITAL PRESET METERING OIL GUN

可在枪上对注油量进行设定、控制的注油枪。
Oil injecting gun that can set and control the amount of lubricant.



技术参数
Technical parameters

型号 Model	37717	37727	37737
控制形式 control type	自设定 self-setting	密码设定 Password setting	联网控制 Network control
注油咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle
计量表 Digital oil gauge	预设定量 preset	预设定量 preset	预设定量 preset
最大承压 MAX air working pressure	70bar	70bar	70bar
接头 Inlet swivel joint	1/2"	1/2"	1/2"
计量精度 Measuring precision	±0.3%	±0.3%	±0.3%
最大流量 MAX flow rate	30L/min	30L/min	30L/min
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	290*170*150mm	290*170*150mm	290*170*150mm
产品重量 Gross weight	1.8kg	1.8kg	1.8kg

油桶拖车

DRUM TROLLEY

可调节支架，适合20-220kg油桶的各式拖车。
Adjustable bracket, suitable for all kinds of trolley with 20-220kg oil drums.



型号 Model	80040	80050	80060	80200	80201
适用油桶 Suitable for drums	18-60L	18-60L	18-60L	180-220L	180-220L
固定轮 Fixed wheels	2个	2个	2个	2个	2个
万向轮 Universal wheels	2个	2个	2个	2个	2个
底座尺寸 Baseplate dimension	400*400mm	400*400mm	460*320mm	690*600mm	690*600mm
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	540*490*190mm	540*490*190mm	850*605*205mm	870*700*115mm	870*865*120mm
产品重量 Gross weight	9.5kg	10.5kg	9.7kg	22kg	25kg

油桶运输车

TROLLEY FOR HEAVY-DUTY DRUMS


适合 180-300kg 油桶的运输作业搬运车。
Trolleys are applied to operated 180~300 KG drums.



型号 Model	81200	81300	81500
搬运重量 Suitable for drums	180-220kg	180-300kg	180-300kg
升举高度 Lifting height	100mm	1500mm	1500mm
其他功能 Other feature	-	-	翻转油桶 Hydraulic turning

自锁加油枪头

SELF-LOCKING OIL GUN NOZZLE

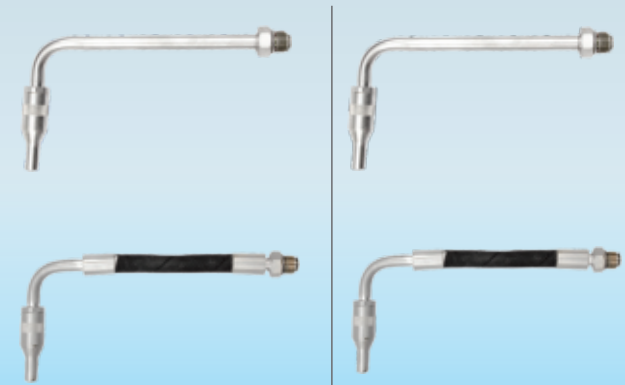


型号 Model	38110	38112	38111	38113
----------	-------	-------	-------	-------

手动锁加油枪头

MANUAL OIL GUN NOZZLE




型号 Model	38010	38011
----------	-------	-------

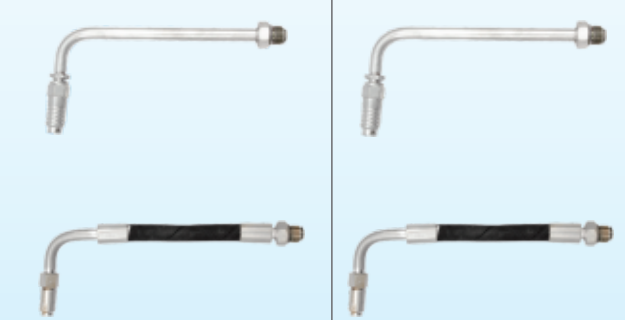

型号 Model	38012	38016	38013	38017
----------	-------	-------	-------	-------

注油枪旋转接头


SWIVEL JOINT FOR OIL GUN

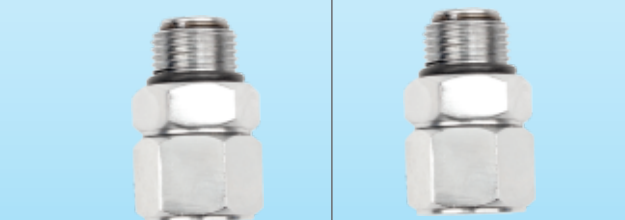

型号 Model	38062	38063
----------	-------	-------

稳压杯套件

STABILIZER CUP

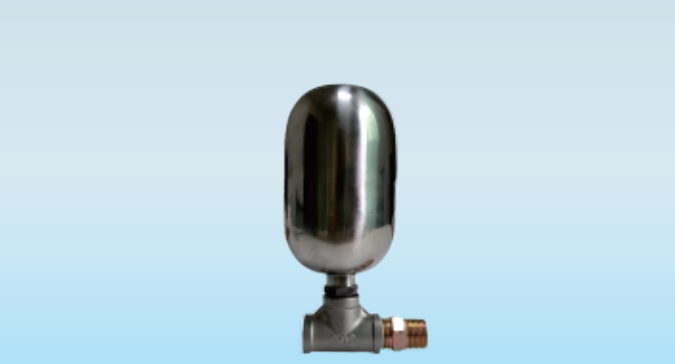

型号 Model	38060
----------	-------

带接头的3/8" 输油软管套件

OIL HOSE KIT WITH 3/8" COUPLINGS



型号 Model	91201	91204
	91202	91205
	91203	91206
	91208	91210

带接头的1/2"输油软管套件

OIL HOSE KIT WITH 1/2" COUPLINGS



型号 Model	91101	91104
	91102	91105
	91103	91106
	91108	91110

挂枪架
OIL GUN BRACKET




型号 Model 38630

吸油软、硬管
SUCTION HOSE / SUCTION TUBE




型号 Model 38026 38027 38028

空气过滤器套件
AIR FILTER KIT

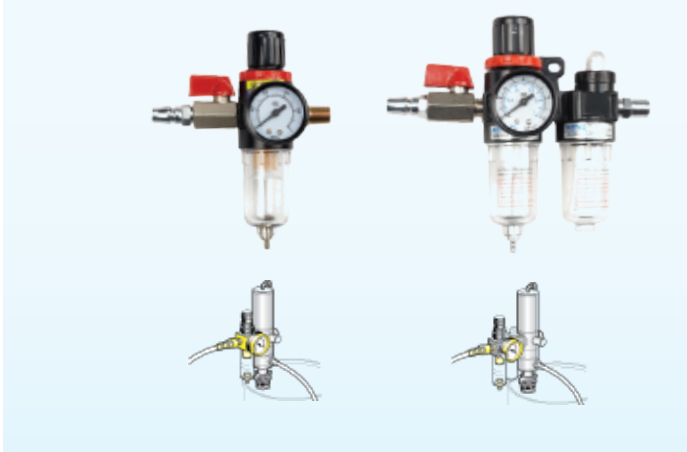

型号 Model 38041 38141 38041 38141

壁装支架
WALL BRACKET

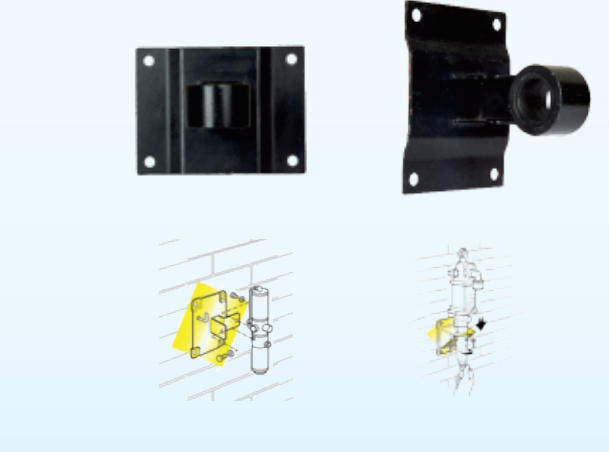

型号 Model 38043 38045

桶孔螺母
BARREL NUT ADAPTOR



型号 Model 38030 38042 38044

壁装支架套件接头
WALL BRACKET KIT CONNECTOR



型号 Model 38047 38048

吸油底阀
OIL SUCTION BOTTOM VALVE



型号 Model 38087 38088 38089

吸油硬管接头
SUCTION TUBE JOINT




型号 Model 38086 38084



CENTRALIZED (CENTRAL) OIL DISTRIBUTION SYSTEM

集中（中央）供油系统

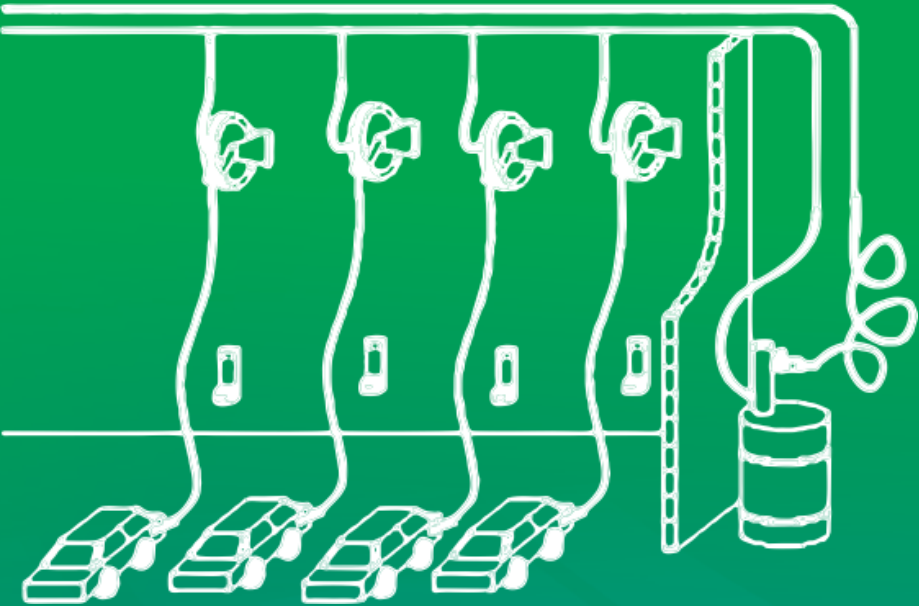

集中(中央)供油系统

系统简述

润滑油集中放置在油料库里，经耐压流体专用管道，输送至多个加油工位，连接形成一个完整的供油系统，实现汽车快速换油和各行业的润滑油集中输送加注，并可通过控制器实现控制和统计。极大的方便用户，节省空间，提高工效，清洁环境。

应用行业

汽车维修车间，快换换油门店，工程机械保养，制造工业车间等。

输送介质


发动机油、齿轮油、液压油、冷却液、黄油等。

系统组成及功能

- 油料库装置
吸油泵总成装置在标准油桶或油箱上，将油料泵入管道中。
- 供油管路
由专用流体管道及各种管件、支架等构成，确保过油的耐压、安全、无渗漏。
- 注油工位
由卷管盘、注油枪、挂枪盒组成，每个加注工位可满足2个以上维修工位使用。
- 控制系统
由控制器、控制三联件、信号线构成，可控制、统计、管理、加注油操作。

系统设计基本信息

- 储油箱所在的位置及注油工位的距离、室温工况等；
- 油料的化学性能（粘度、燃点、腐蚀性等），从而确定所选用输油泵的材质及技术指标；
- 输油量的大小，决定选用的储油箱、管道的大小及油泵的流量大小。
- 需要采用的控制、管理方式。

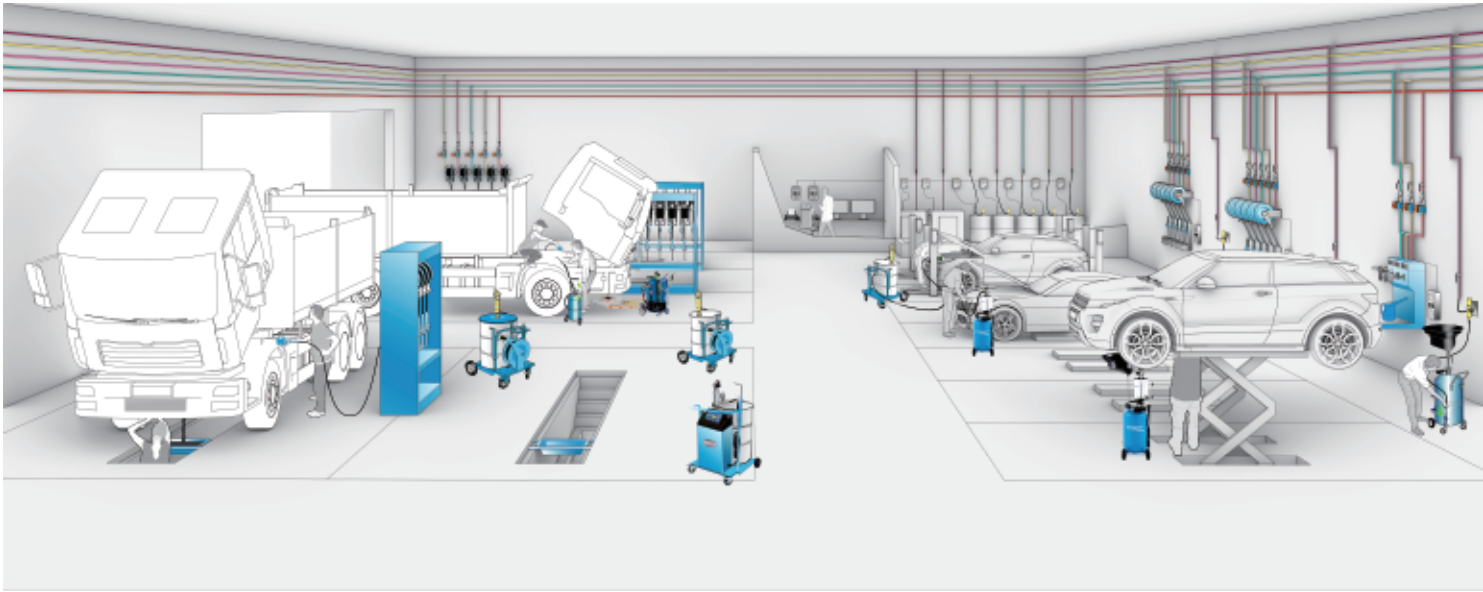

CENTRALIZED (CENTRAL) OIL DISTRIBUTION SYSTEM

System Overview

The lubricating oil is centrally placed in the oil storage, and transported to multiple refueling stations through special pressure-resistant fluid pipelines, and is connected to form a complete oil supply system, which realizes rapid oil change for automobiles and centralized transportation and refilling of lubricating oil in various industries. Control and statistics are realized through the controller. It is very convenient for users, saves space, improves work efficiency

Applicable Industry

AUTO maintenance workshop, Oil-changing repair shop, Machinery maintenance, Manufacturing workshop and so on.

Suitable fluid


Engine oil, Gear oil, Lubricating oil, Antifreeze liquid, Greases etc.

System composition and function

- 1- Oil storage device
The oil suction pump assembly is installed on the standard oil barrel or oil tank, and pumps the oil into the pipeline.
- 2- oil supply line
It is composed of special fluid pipelines, various pipe fittings, brackets, etc., to ensure pressure resistance, safety and no leakage of oil.
- 3- Oil station
is composed of a reel, oil gun, and oil gun bracket. Each filling station can be used by more than 2 maintenance stations..
- 4- Control System
consists of controller, filter, lubricating valve, solenoid valve and signal line, it can control, count,

System Design overview

- 1- The location of the oil storage tank, the distance of the oil filling station, the room temperature conditions, etc.;
- 2- The chemical properties of the oil (viscosity, ignition point, corrosion, etc.), so as to determine the material and technical indicators of the selected oil pump.
- 3- The size of the oil delivery determines the size of the selected oil storage tank, the size of the pipeline and the flow rate of the oil pump.
- 4- The control and management methods that need to be adopted.

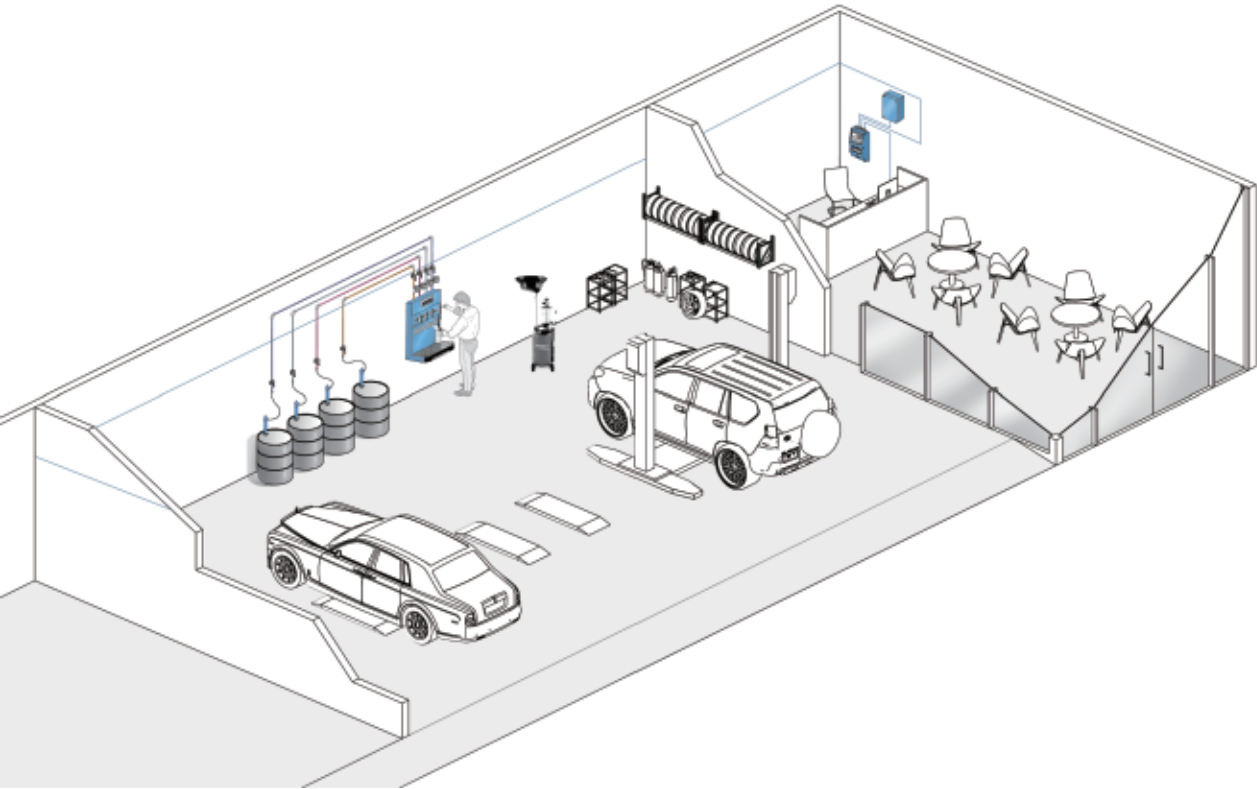


集中供油系统（简易版）

OIL DISTRIBUTION SYSTEM

不设置控制器，经济简易的集中供油系统。
Centralized oil distribution system (simple version).

配置表
The configuration table

型号 Model	96120	96130	96140
输油泵套件 Air-operated pump kit	37685	37685	37685
自动卷管器 Automatic hose reel	82610/2台 Sets	82610/3台 Sets	82610/4台 Sets
数显注油枪 Digital oil gun	37716/2把 Sets	37716/3把 Sets	37716/4把 Sets
挂枪架 Oil gun bracket	38630/2套 Sets	38630/3套 Sets	38630/4套 Sets
管道总成 Pipeline assembly	58000/20m	58000/30m	58000/40m

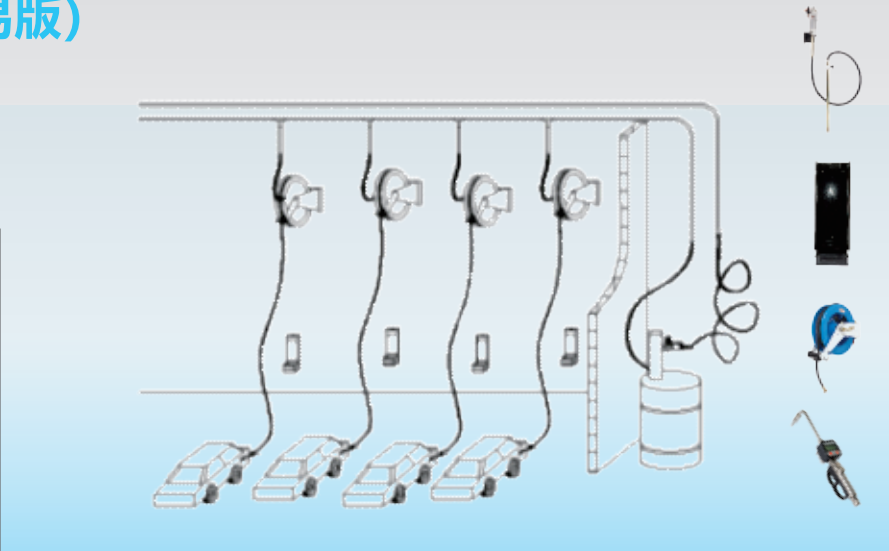

集中供油系统（网联枪版）


CENTRALIZED OIL DISTRIBUTION SYSTEM (NETWORK VERSION)

通过手机电脑控制，ZIGBEE数据传输的智能网联分布式控制集中供油系统。

Intelligent network controlled by mobile phone and computer, ZIGBEE data transmission connected with distributed control centralized oil supply system.

配置表
The configuration table

型号 Model	98120	98130	98140
输油泵套件 Air-operated pump kit	37685	37685	37685
自动卷管器 Automatic hose reel	82610/2台 Sets	82610/3台 Sets	82610/4台 Sets
注油枪 Oil gun	37737/2把 Sets	37737/3把 Sets	37737/4把 Sets
挂枪架 Oil gun bracket	38630/2套 Sets	38630/3套 Sets	38630/4套 Sets
管道总成 Pipeline assembly	58000/20m	58000/30m	58000/40m

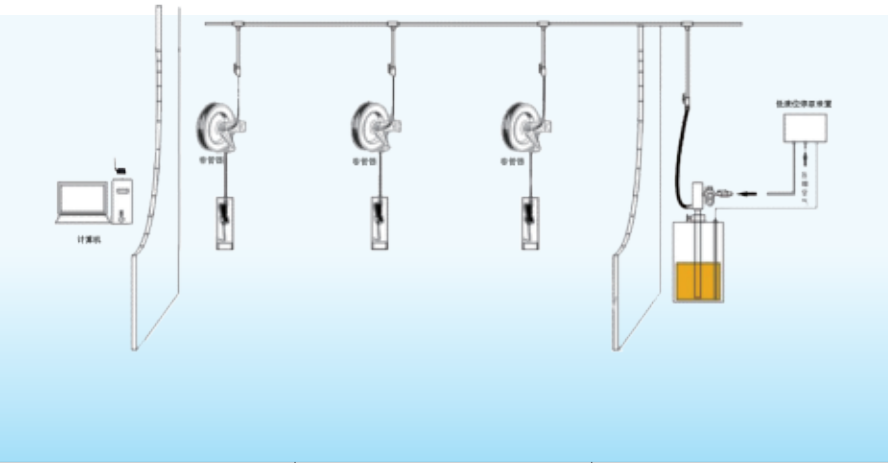

集中供油系统（分布式控制）


CENTRALIZED OIL SUPPLY SYSTEM (DISTRIBUTED CONTROL)

每个加注工位都装有显示输入键盘，工人自助领油的集中供油系统。

Each filling station is equipped with a display input keyboard, a centralized oil supply system for workers to refuel by themselves.

配置表
The configuration table

型号 Model	99120	99130	99140
输油泵套件 Air-operated pump kit	37685	37685	37685
自动卷管器 Automatic hose reel	82610/2台 Sets	82610/3台 Sets	82610/4台 Sets
注油枪 Oil gun	38325/2把 Sets	38325/3把 Sets	38325/4把 Sets
挂枪架 Oil gun bracket	38630/2套 Sets	38630/3套 Sets	38630/4套 Sets
管道总成 Pipeline assembly	58000/20m	58000/30m	58000/40m
信号线总成 Signal-wire assembly	58500/40m	58500/60m	58500/80m
系统控制器 System controller	53212	53213	53214
控制三联件 Control FRL parts	50550/2 套 Sets	50550/3 套 Sets	50550/4 套 Sets

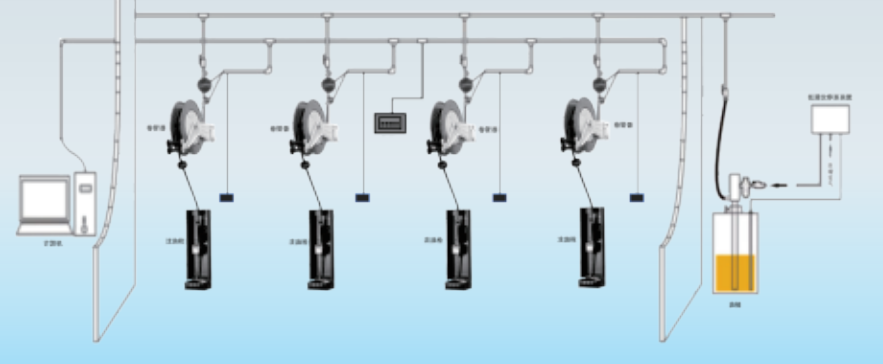

集中供油系统（分布式控制）


CENTRALIZED OIL SUPPLY SYSTEM (DISTRIBUTED CONTROL)

电脑管理软件管理，多个分布式控制器控制的集中供油系统。

Centralized oil supply system managed by computer management software and controlled by multiple distributed controllers.

配置表
The configuration table

型号 Model	99220	99230	99240
输油泵套件 Air-operated pump kit	37685	37685	37685
自动卷管器 Automatic hose reel	82610/2台 Sets	82610/3台 Sets	82610/4台 Sets
注油枪 Oil gun	38325/2把 Sets	38325/3把 Sets	38325/4把 Sets
挂枪架 Oil gun bracket	38630/2套 Sets	38630/3套 Sets	38630/4套 Sets
管道总成 Pipe assembly	58000/20m	58000/30m	58000/40m
信号线总成 Signal-wire assembly	58000/40m	58000/60m	58000/80m
分布式控制器 Distributed controller	53202	53203	53204
控制三联件 Control FRL parts	50550/2 套 Sets	50550/3 套 Sets	50550/4 套 Sets

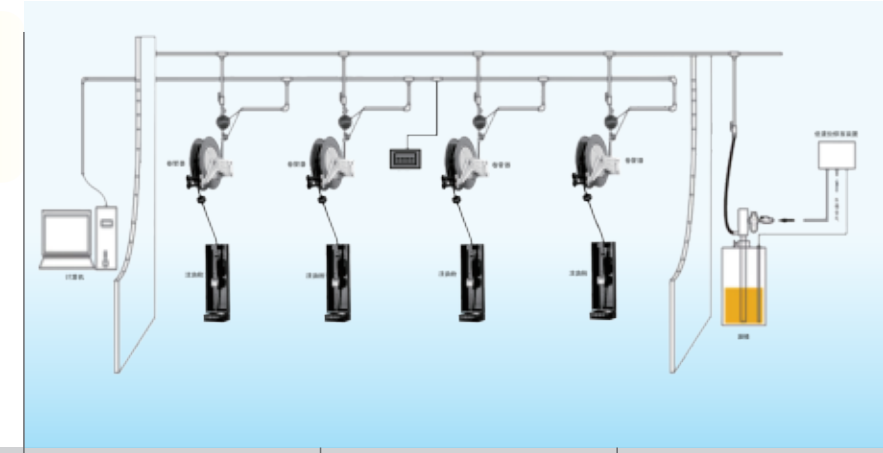


集中供油系统(中央控制)

CENTRALIZED OIL DISTRIBUTION SYSTEM (CENTRAL CONTROL)

设置一个中央控制器(油料库或车间) 的集中供油系统。
This centralized oil supply system is designed to manage the distribution process by a remote controller device (at the workshop/oil depot).

配置表
The configuration table

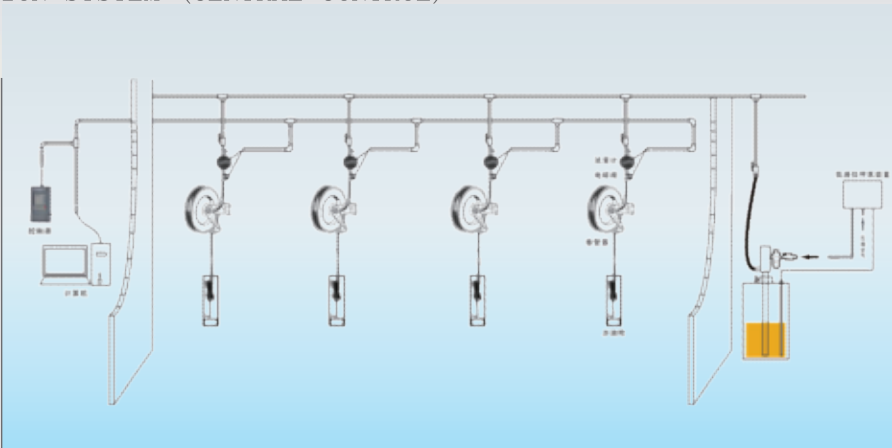

型号 Model	99420	99430	99440
输油泵套件 Air-operated pump kit	37685	37685	37685
自动卷管器 Automatic hose reel	82610/2 台 Sets	82610/3 台 Sets	82610/4 台 Sets
注油枪 Oil gun	38325/2 把 Sets	38325/3 把 Sets	38325/4 把 Sets
挂枪架 Oil gun bracket	38630/2 套 Sets	38630/3 套 Sets	38630/4 套 Sets
管道总成 Pipeline assembly	58000/20m	58000/30m	58000/40m
信号线总成 Signal-line assembly	58500/50m	58500/75m	58500/100m
系统控制器 Controller device	53102	53103	53104
控制三联件 Control FRL parts	50550/2套 Sets	50550/3套 Sets	50550/4套 Sets

供油系统选配件

OIL SUPPLY SYSTEM OPTIONAL COMPONENTS

根据用途、场地等条件，可自主选择装配的集中供油系统组件件。

According to the application, installation site and other conditions, you can choose optional centralized oil supply system components.




型号 Model 50610 型号 Model 50600 型号 Model 83010、83015 型号 Model 82015

供油系统选配件

OIL SUPPLY SYSTEM OPTIONAL COMPONENTS

根据用途、场地等条件，可自主选择装配的集中供油系统组件件。

According to the application, installation site and other conditions, you can choose optional centralized oil supply system components.

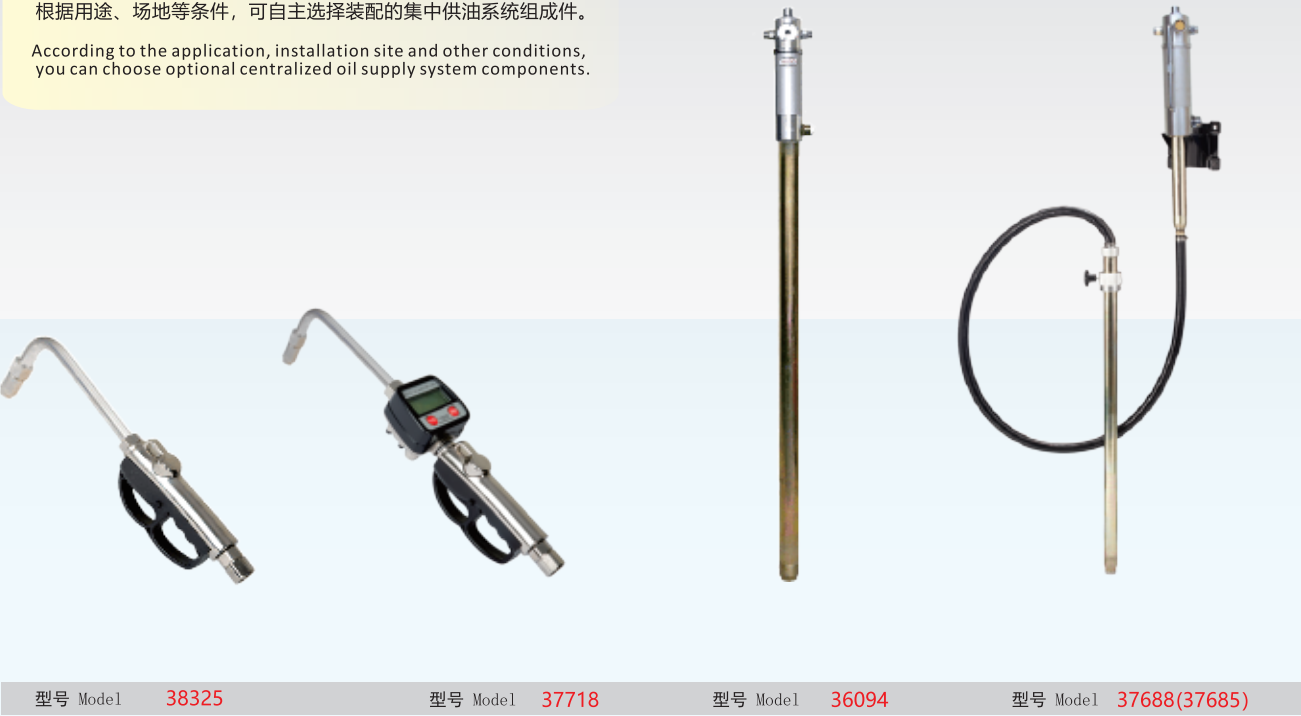

型号 Model 38325 型号 Model 37718 型号 Model 36094 型号 Model 37688(37685)



型号 Model 50109 型号 Model 50102 型号 Model 50103



型号 Model 50505 型号 Model 50101 型号 Model 97100 一吨油桶

智能网联加注机（气动）

INTELLIGENT NETWORK FUELING MACHINE（PNEUMATIC）

远程智能操控，精准加油的移动式注油机。
Intelligent remote mobile fueling machine, precise fueling.



型号 Model	59100	59200
油泵比率 Pump ratio	5: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	320L/min	320L/min
输送速度 Flow rate	18L/min	18L/min
油温 Fluid temperature	- 10-60℃	- 10-60℃
油品粘度 Max deliverable oil viscosity	240SAE	240SAE
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	42mm	42mm
计量精度 Measuring precision	±0.3%	±0.3%
注油枪咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle
推车底座尺寸 Trolley base sizes	690*600mm	690*600mm
工作电压 Working Voltage	220V50Hz	220V50Hz
无线工作距离 Remote working distance	1000m	1000m
软管长度 Length of filling hose	4m	4m
联网功能 Network function	单机版 Console device	联网版 Available
包装形式 Package type	木箱+纸箱 Plywood case+Carton	木箱+纸箱 Plywood case+Carton
包装尺寸1 Packing size_1	860*820*1000mm	860*820*1000mm
包装尺寸2 Packing size_2	870*700*115mm	870*700*115mm
包装尺寸3 Packing size_3	1325*300*155mm	1325*300*155mm
重量 Gross weight	40kg	40kg

智能网联加注机（电动）

INTELLIGENT NETWORK OIL FILLING MACHINE（ELECTRIC）

配备8寸灵敏触控大屏，支持手机和电脑远程智能操控加油枪，实现精准加油的移动式电动注油机。
Equipped with an 8-inch sensitive touch screen, supports mobile phones and computers intelligently to remote control the refueling gun to achieve precise refueling.



型号 Model	59200EW-6	59200EW-12	59200EW-18
工作电压 Working Voltage	220V50Hz	220V50Hz	220V50Hz
电机功率 The motor power	190W	370W	550W
出油口接头 Fluid outlet connection	1/2"	1/2"	1/2"
输送速度 Flow rate	6L/min	12L/min	18L/min
油温 Fluid temperature	-10-60℃	-10-60℃	- 10-60℃
油品粘度 Max deliverable oil viscosity	90SAE	90SAE	90SAE
吸油管长 Length of pumping tube	90mm	90mm	90mm
吸油管径 Diameter of pumping tube	30mm	30mm	30mm
计量精度 Measuring precision	±0.5%	±0.5%	±0.5%
注油枪咀型式 Type of oil gun nozzle	自动打开型 Automatic drip-catcher nozzle	自动打开型 Automatic drip-catcher nozzle	自动打开型 Automatic drip-catcher nozzle
软管长度 Length of filling hose	4m	4m	4m
通讯方式 Mode of communication	WIFI 4G	WIFI 4G	WIFI 4G
联网功能 Network function	联网版 network version	联网版 network version	联网版 network version
管理系统 System management	FABIT SAAS SYSTEM	FABIT SAAS SYSTEM	FABIT SAAS SYSTEM
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	430*310*940mm	430*310*940mm	430*310*940mm
包装尺寸2 Packing size_2	950*710*250mm	950*710*250mm	950*710*250mm
重量 Gross weight	40kg	40kg	40kg

智能网联加注机（气动）

REMOTE-CONTROL REFUELING CABINET

配备8寸灵敏触控大屏，支持手机和电脑远程智能操控加油枪，实现精准加油的移动式气动注油机。

Equipped with 8 inch sensitive touch screen, support mobile phone and computer remote intelligent control of the refueling gun, to achieve accurate refueling mobile pneumatic oiler.



型号 Model	59200AW-14	59200AW-18
油泵比率 Pump ratio	3: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	300L/min	300L/min
输送速度 Flow rate	14L/min	18L/min
油温 Fluid temperature	- 10-60℃	- 10-60℃
油品粘度 Max deliverable oil viscosity	130SAE	240SAE
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	42mm	42mm
计量精度 Measuring precision	±0.3%	±0.3%
注油枪咀型式 Type of oil gun nozzle	自动打开型 Automatic drip-catcher nozzle	自动打开型 Automatic drip-catcher nozzle
推车底座尺寸 Trolley base sizes	690*600mm	690*600mm
工作电压 Working Voltage	220V50Hz	220V50Hz
无线工作距离 Remote working distance	1000m	1000m
软管长度 Length of filling hose	4m	4m
联网功能 Network function	联网版 Available	联网版 Available
管理系统 System management	法比特SAAS系统	法比特SAAS系统
通讯方式 Mode of communication	WIFI/4G	WIFI/4G
包装形式 Package type	木箱+纸箱 Plywood case+Carton	木箱+纸箱 Plywood case+Carton
包装尺寸1 Packing size_1	860*820*1000mm	860*820*1000mm
包装尺寸2 Packing size_2	870*700*115mm	870*700*115mm
包装尺寸3 Packing size_3	1325*300*155mm	1325*300*155mm
重量 Gross weight	40kg	40kg

集成式加注系统

CENTRALIZED DISPENSING STATION

可放置在车间或门店的小型集中供油系统，可随意组合油品及功能。

A small centralized oil distribution system that can be placed in workshops or stores Combination of oil products and functions at will.



配置表
The configuration table

型号 Model	59500	59600
自动卷管器 Automatic pipe reel	82010/2台	82010/3台
注油枪 Oil gun	38125/2把	38125/3把
输油泵套件 Air-operated pump kit	37688/2套	37688/3套
系统控制器 Controller device	53102/1台	53104/1台
控制三联件 Control FRL parts	50500/2套	50500/3套
管道总成 Pipeline assembly	58000	58000
信号线总成 Signal-line assembly	58500	58500
门架尺寸 Platform rack dimensions	1200*750*2400mm	1450*750*2400mm

工业自控加注机

INDUSTRIAL AUTOMATIC FUELING MACHINE

适合复杂工况，可持续不断地工作，带有自动控制系统的工业加注机。

Suitable for complex working conditions, continuous work, industrial fueling machine with automatic control system.



型号 Model	59800
工业控制器 Controller device	54103/ 台 Sets
控制三联件 Control FRL parts	50550/3 套 Sets
注油枪 Oil gun	38125/3 把 Sets
自动卷管器 Automatic hose reel	82060/3 台 Sets
条码枪 Barcode scanner	1把 Set
连接油管 Connecting hose	91102
外控箱尺寸 Cabinet shell size	670×650×1360mm
管理软件 Management software	1套 set

系统控制器

SYSTEM CONTROLLER

可对供油系统或单机进行设定、控制、管理的仪器。

It can set, control and manage the oil supply system or single machine instrument.

技术参数
Technical parameters

型号 Model	53101	53102	53104
通讯输出接口 Controller output interface	RS-232串口 Serial ports RS-485 MODBUS 两组 2 sets	RS-232串口 Serial ports RS-485 MODBUS 两组 2 sets	RS-232串口 Serial ports RS-485 MODBUS 两组 2 sets
工作电源 Working power	AC220/50Hz	AC220/50Hz	AC220/50Hz
控制加油终端数 Applied refueling terminals	1 个 One	2 个 Two	4 个 Four
显示 Display interface	128X64点阵液晶屏 LED screen size	128X64点阵液晶屏 LED screen size	128X64点阵液晶屏 LED screen size
计量精度 Instrument precision	< 0.2%	< 0.2%	< 0.2%
工作环境温度 Workplace temperature	-10℃ -60℃	-10℃ -60℃	-10℃ -60℃
工作环境湿度 Workplace relative humidity	≤ 85%	≤ 85%	≤ 85%
扩展功能 Scalable functions	可外接 IC 卡、扫描器 External IC card, scanner	可外接 IC 卡、扫描器 External IC card, scanner	可外接 IC 卡、扫描器 External IC card, scanner
外形尺寸 Shell sizes	400*230*100mm	400*230*100mm	400*230*100mm
产品重量 Gross weight	3kg	3kg	3.6kg

系统控制器

SYSTEM CONTROLLER

使用15.6寸超大触摸屏，可对供油系统或单机进行设定、控制、管理的仪器。

Use the 15.6-inch super large touch screen to set, control and manage the oil supply system or stand-alone equipment.

技术参数
Technical parameters

型号 Model	53112	53124
通讯输出接口 Controller output interface	RS-485 MODBUS	RS-485 MODBUS
工作电源 Working power	AC220/50Hz	AC220/50Hz
控制加油终端数 Applied refueling terminals	12个 FOUR	24个 EIGHT
同时操作加油终端数 Available refueling terminals	12个 FOUR	24个 EIGHT
显示 Display interface	15.6"液晶屏 15.6" LED screen	15.6"液晶屏 15.6" LED screen
计量精度 Instrument precision	<0.2%	<0.2%
工作环境温度 Workplace temperature	-10-60℃	-10-60℃
工作环境湿度 Workplace relative humidity	≤85%	≤85%
扩展功能 Scalable functions	可外接打印机 External IC card, scanner	可外接打印机 External IC card, scanner
外形尺寸 Shell sizes	480*130*340mm	480*130*340mm
产品重量 Gross weight	3kg	3kg

分布式控制器

DISTRIBUTED CONTROLLER

可对供油系统进行控制、管理并显示工位信息和实时加注量的仪器。

An instrument that can control, manage and display station information and real-time filling of the fuel supply system.

技术参数
Technical parameters

型号 Model	53211	53212	53214
通讯输出接口 Controller output interface	RS485MODBUS	RS485MODBUS	RS485MODBUS
工作电源 Working power	AC220/50Hz	AC220/50Hz	AC220/50Hz
控制加油终端数 Applied refueling terminals	1 个 One	2 个 Two	4 个 Four
显示 Display interface	8*32点阵屏	8*32点阵屏	8*32点阵屏
计量精度 Instrument precision	< 0.2%	< 0.2%	< 0.2%
工作环境温度 Workplace temperature	-10℃ -60℃	-10℃ -60℃	-10℃ -60℃
工作环境湿度 Workplace relative humidity	≤ 85%	≤ 85%	≤ 85%
外形尺寸 Shell sizes	163*102*50mm	163*102*50mm	163*102*50mm
产品重量 Gross weight	0.33kg	0.33kg	0.33kg

分布式控制器

STATION CONTROLLER ACCESSORIES(STATION DISPLAY SCREEN)

可对供油系统进行控制、管理的仪器。

An instrument that can control and manage the oil supply system.

技术参数
Technical parameters

型号 Model	53201	53202	53204
通讯输出接口 Controller output interface	RS485MODBUS	RS485MODBUS	RS485MODBUS
工作电源 Working power	AC220/50Hz	AC220/50Hz	AC220/50Hz
控制加油终端数 Applied refueling terminals	1 个 One	2 个 Two	4 个 Four
计量精度 Instrument precision	< 0.2%	< 0.2%	< 0.2%
工作环境温度 Workplace temperature	-10℃ -60℃	-10℃ -60℃	-10℃ -60℃
工作环境湿度 Workplace relative humidity	≤ 85%	≤ 85%	≤ 85%
外形尺寸 Shell sizes	265*185*100mm	265*185*100mm	265*185*100mm
产品重量 Gross weight	0.9kg	0.9kg	0.9kg

工业流体控制器

INDUSTRIAL FLUID CONTROLLER

使用触摸屏的工业控制器。
This instrument equipped with touch screen operating system .



液位监控器

LIQUID LEVEL MONITOR

可对油桶（箱）内的液位进行监控、停机、报警的装置。
The device has the functions of monitoring, alarming and stopping the pumping liquids in the oil tank/ depot.



型号 Model	54103	型号 Model	50505
工作电源 Working power	AC220/50Hz	输入电压 Input voltage	220v
控制加注终端数 Applied refueling terminals	3个 Three	输出电压 Output voltage	12v
显示 Display interface	十寸触摸式液晶屏 10" LCD touch screen	报警油位 Alarm pumping level	30L
通讯输出接口 Controller output interface	232串口 Serial ports RS485	停泵油位 Halt pumping level	5-6L
扩展功能 Scalable functions	可外接IC卡、扫描器、工业机器人 External IC card, scanner, industrial robot		

工位显示屏
(分布式控制器附件)

STATION DISPLAY
(DISTRIBUTED CONTROLLER ATTACHMENT)

显示工位编号和实时加注进度。
Display station number and real-time filling progress.



型号: 50610

工位显示屏
(系统控制器附件)

STATION DISPLAY
(SYSTEM CONTROLLER ATTACHMENT)

显示工位编号和实时加注进度。
Display station number and real-time filling progress.



型号: 50600

控制三联件

CONTROL FRL PARTS

由过滤器、计量器、电磁阀组成的开关控制阀。
The control valve is consists of Filter,Regulating valve and Lubricating gauges.



型号 Model	50500
电磁阀电压 Valve voltage	24v
计量精度 Instrument precision	0.3%
过滤精度 Filtration accuracy	80um

信号传输模块连接器

SIGNAL TRANSMISSION MODULE CONNECTOR

可将控制器信息与电脑连接共享的装置。
A device that can share control information with computer.



9针/USB

型号 Model 50102

型号 Model 50103

系统打印机

SYSTEM PRINTER

可将控制器的信息打印出来的装置。
A device that can print out controller information.



型号 Model 50101

信号线总成


SIGNAL-LINE ASSEMBLY

适用于流体控制系统的信号线及线管。
The signal-line with sleeve is specifically applied in the fluid control system.


总成型号 Model 58500



型号 Model 58501 0.75mm², 5芯铜芯软线



型号 Model 58503 线套 Sleeve

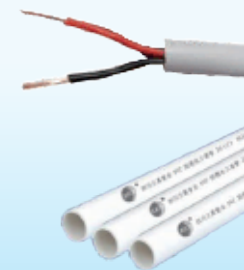

型号 Model 58503 线套 Sleeve

1/2"管道总成

1/2" PIPELINE ASSEMBLY

主管道为1/2" 的专用流体管及管件。
The main pipeline is equipped with 1/2" special fluid pipe and pipe fittings.



三通
T-joint

外丝直通
Screwed joint

直通
Connector

弯通
Elbow connector

总成型号 Model 58000



高压球阀
High-pressure adjusting valve

过滤器
Filter

支架
Rack

管道
Pipeline

型号 Model	58204	58203	58202	58201	58106	38021	58303	58406
总成构件 Assembly components	弯通 Elbow connector	外丝直通 Screwed joint	直通 Connector	三通 T-joint	高压球阀 High-pressure adjusting valve	过滤器 Filter	支架 Rack	管道 Pipeline

1"管道总成

1" PIPELINE ASSEMBLY

主管道为1" 的专用流体管及其管件。
The main pipeline is equipped with 1" special fluid pipe and pipe fittings.



三通
T-joint

外丝直通
Screwed joint

直通
Connector

弯通
Elbow connector

总成型号 Model 58001
58000



高压球阀
High-pressure adjusting valve

过滤器
Filter


支架
Rack

管道
Pipeline

型号 Model	58208	58207	58206	58205	58110	38021	58303	58410
总成构件 Assembly components	弯通 Elbow connector	外丝直通 Screwed joint	直通 Connector	三通 T-joint	高压球阀 High-pressure adjusting valve	过滤器 Filter	支架 Rack	管道 Pipeline

GREASE FILLING EQUIPMENT

黄油加注设备

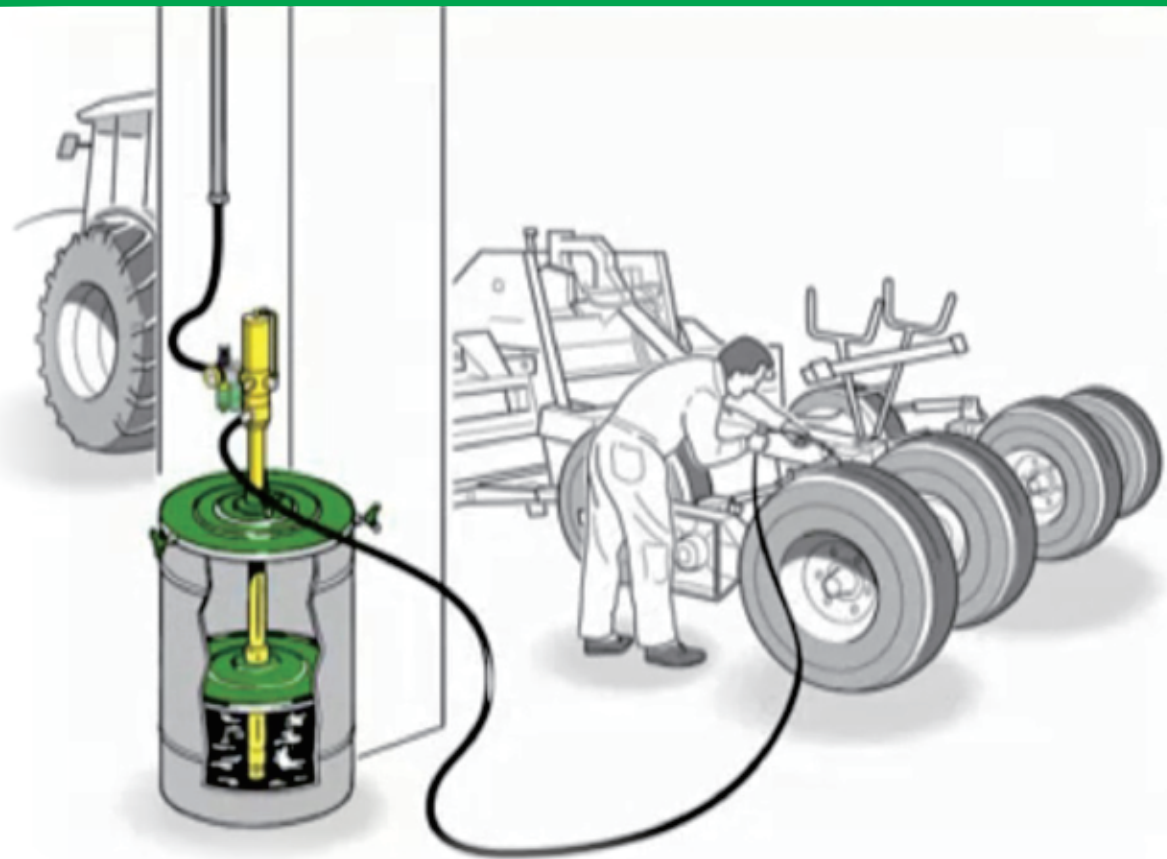

气动黄油泵

比率 Ratio: 50:1 500g/min

AIR-OPERATED GREASE PUMP

比率50:1 的黄油泵。
The air-operated pumps (Ratio 50:1) is used for high-pressure greasing. Ideal for pumping to transfer grease and high-viscosity oil.

技术参数
Technical parameters

型号 Model	62041	62048	62074	62095
比率 Ratio	50: 1	50: 1	50: 1	50: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/4"	1/4"	1/4"	1/4"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar	8bar
耗气量 Average air consumption	300L/min	300L/min	300L/min	300L/min
输送速度 Flow rate	500g/min	500g/min	500g/min	500g/min
吸油管长 Length of pumping tube	410mm	480mm	740mm	940mm
吸油管径 Diameter of pumping tube	32mm	32mm	32mm	32mm
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1345*190*155mm	1345*190*155mm	1345*190*155mm	1345*190*155mm
产品重量 Gross weight	3.5kg	4.2kg	4.6kg	5.1kg

气动黄油泵

比率Ratio: 48:1 800g/min

AIR-OPERATED GREASE PUMP

比率48:1 的气动黄油泵，流量更大。
The air-operated pumps (Ratio 48:1) is used for high-pressure greasing with big flow rate.

技术参数
Technical parameters

型号 Model	62141	62174	62195
比率 Ratio	48: 1	48: 1	48: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/4"	1/4"	1/4"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar
耗气量 Average air consumption	350L/min	350L/min	350L/min
输送速度 Flow rate	500g/min	500g/min	500g/min
吸油管长 Length of pumping tube	410mm	740mm	940mm
吸油管径 Diameter of pumping tube	32mm	32mm	32mm
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1345*190*155mm	1345*190*155mm	1345*190*155mm
产品重量 Gross weight	8.2kg	8.7kg	9.2kg

工业黄油泵

比率Ratio: 50:1 5500g/min

INDUSTRIAL GREASE PUMP

比例 50:1 的工业黄油泵，可持续不间断工作，流量更大的气动黄油泵。

The industrial air-operated pumps (Ratio 50:1) is used for high-pressure greasing with bigger flow rate,The high quality of the materials used ensure the lasting and reliable operation.

技术参数
Technical parameters

型号 Model	62341	62395
比率 Ratio	50: 1	50: 1
进气嘴接头 Air inlet connection	1/2"	1/2"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	4-8bar	4-8bar
最大压力 Maximum pressure	10bar	8bar
耗气量 Average air consumption	1800L/min	1800L/min
输送速度 Flow rate	5500g/min	5500g/min
吸油管长 Length of pumping tube	410mm	940mm
吸油管径 Diameter of pumping tube	45mm	45mm
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1345*190*155mm	1345*190*155mm
产品重量 Gross weight	13.2kg	17.3kg

手动黄油加注机

MANUAL GREASE DISPENSER KITS

使用手压式黄油泵，带有容器的黄油加注机或不带容器的套件。

The ideal combination for dispensing grease in any workplace. The mobile kits are equipped with manual grease pump, filling hose etc. The container with wheels is an option at your need.


技术参数
Technical parameters

型号 Model	68012	68022
输油压力 Filling pressure	130-140bar	130-140bar
吸油管长 Length of pumping tube	410mm	410mm
吸油管径 Diameter of pumping tube	32mm	32mm
随动板直径 Diameter of follower plate	265mm	265mm
桶盖直径 Diameter of drum cover	-	285mm
输油软管管长 Length of filling hose	4m	4m
输油软管管径 Diameter of filling hose	1/4"	1/4"
罐体容量 Tank capacity	13L	-
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	380*340*890mm	400*380*640mm
产品重量 Gross weight	10kg	8kg

壁装式黄油泵加注套件

WALL-MOUNTED GREASE DISPENSING KITS

适用于180-220kg 油桶的壁装式黄油加注套件。
The wall-mounted grease dispensing kit is suitable for 180~220KG drums.

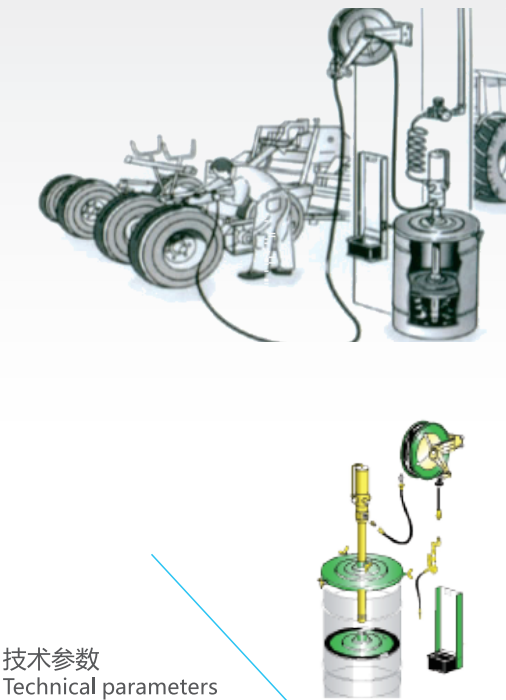


技术参数
Technical parameters

型号 Model	63110	63115
比率 Ratio	50: 1	50: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/4"	1/4"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	300L/min	300L/min
输送速度 Flow rate	500g/min	500g/min
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	32mm	32mm
卷管器型式 Type of hose reel	重型旋转式	重型旋转式
卷管器出油管长 Length of outlet reelpipe	10m	15m
卷管器进油管长 Length of inlet reelpipe	1.5m	1.5m
卷管器管径 Diameter of reelpipe	1/4"	1/4"
黄油枪口径 Diameter of grease gun nozzle	1/8"	1/8"
随动板直径 Diameter of follower plate	590mm	590mm
桶盖直径 Diameter of drum cover	600mm	600mm
挂枪架尺寸 Grease gun rack size	150*210*605mm	150*210*605mm
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	635*635*145mm	635*635*145mm
包装尺寸2 Packing size_2	565*545*245mm	565*545*245mm
包装尺寸3 Packing size_3	1335*180*145mm	1335*180*145mm
产品重量 Gross weight	39.7kg	40.7kg

重型移动式黄油加注套件

HEAVY-DUTY MOBILE GREASE DISPENSING KITS

适用于180-220kg油桶，带拖车的黄油加注套件。
The mobile grease dispensing kit is equipped with the compact trolley, suitable for 180~220KG oil drum.

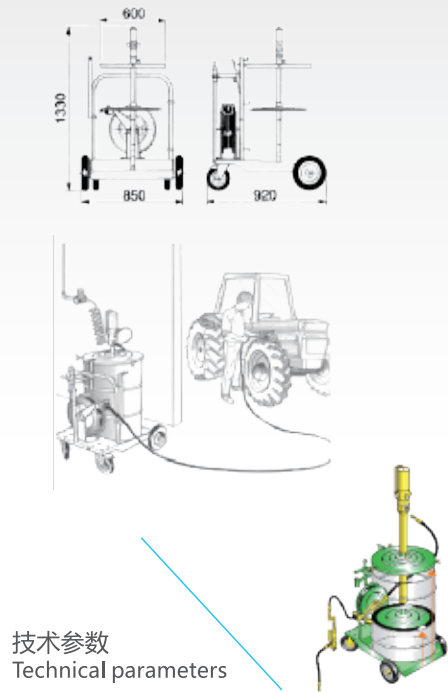


技术参数
Technical parameters

型号 Model	64000	64070
比率 Ratio	50: 1	50: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/4"	1/4"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	300L/min	300L/min
输送速度 Flow rate	500g/min	500g/min
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	32mm	32mm
卷管器型式 Type of hose reel	重型固定式	-
卷管器出油管长 Length of outlet reelpipe	10m	-
卷管器进油管长 Length of inlet reelpipe	1.5m	-
卷管器管径 Diameter of reelpipe	1/4"	-
黄油枪口径 Diameter of grease gun nozzle	1/8"	1/8"
随动板直径 Diameter of follower plate	590mm	590mm
桶盖直径 Diameter of drum cover	600mm	600mm
拖车适用油桶 Suitable for drums	180-220L	180-220L
输油软管管长 Length of filling hose	-	5m
输油软管管径 Diameter of filling hose	-	1/4"
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	870*700*115mm	870*700*115mm
包装尺寸2 Packing size_2	1335*180*145mm	1335*180*145mm
包装尺寸3 Packing size_3	625*625*125mm	625*625*125mm
包装尺寸4 Packing size_4	565*545*245mm	-
产品重量 Gross weight	62.7kg	44kg

手推车式黄油加注套件

MOBILE GREASE DISPENSING KITS

适用于20-60kg 油桶，带手拖车的黄油加注设备套件。
The mobile grease dispensing kit is equipped with the wheels, suitable for 20~60KG oil drum.

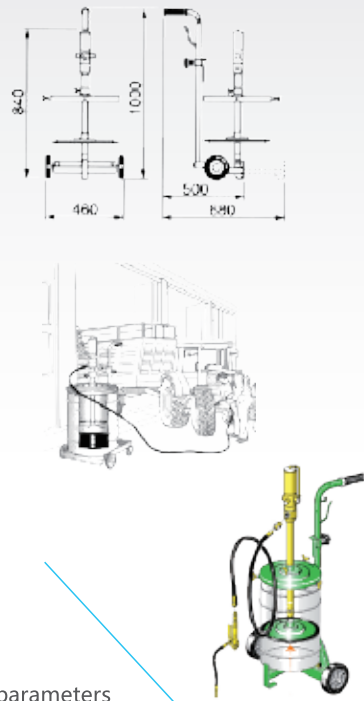

技术参数
Technical parameters




型号 Model	64035	64038	64041
比率 Ratio	50: 1	50: 1	50: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/4"	1/4"	1/4"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar
耗气量 Average air consumption	300L/min	300L/min	300L/min
输送速度 Flow rate	500g/min	500g/min	500g/min
吸油管长 Length of pumping tube	480mm	740mm	740mm
吸油管径 Diameter of pumping tube	32mm	32mm	32mm
黄油枪口径 Diameter of grease gun nozzle	1/8"	1/8"	1/8"
随动板直径 Diameter of follower plate	310mm	370mm	400mm
桶盖直径 Diameter of drum cover	310mm	350mm	385mm
拖车适用油桶 Suitable for drums	18-60L	18-60L	18-60L
输油软管管长 Length of filling hose	4m	4m	4m
输油软管管径 Diameter of filling hose	1/4"	1/4"	1/4"
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	465*465*145mm	635*635*145mm	635*635*145mm
包装尺寸2 Packing size_2	1020*220*100mm	1345*190*155mm	1345*190*155mm
包装尺寸3 Packing size_3	540*490*190mm	540*490*190mm	540*490*190mm
产品重量 Gross weight	25.6kg	26.6kg	27.6kg

便携式黄油加注套件

PORTABLE GREASE DISPENSING KITS

适用于 12-40kg油桶，方便携带的黄油加注套件。
The portable grease dispensing kit is suitable for 12~40KG oil drum.

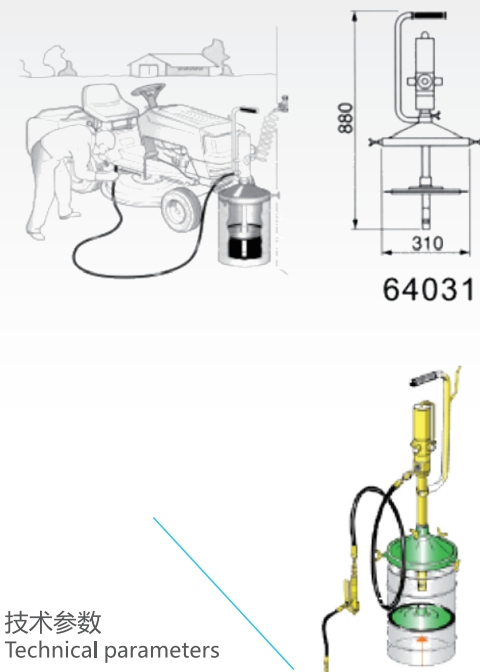

技术参数
Technical parameters




型号 Model	64021	64031
比率 Ratio	50: 1	50: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/4"	1/4"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	300L/min	300L/min
输送速度 Flow rate	500g/min	500g/min
吸油管长 Length of pumping tube	410mm	410mm
吸油管径 Diameter of pumping tube	32mm	32mm
黄油枪口径 Diameter of grease gun nozzle	1/8"	1/8"
随动板直径 Diameter of follower plate	265mm	310mm
桶盖直径 Diameter of drum cover	280mm	310mm
输油软管管长 Length of filling hose	4m	4m
输油软管管径 Diameter of filling hose	1/4"	1/4"
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	465*465*145mm	465*465*145mm
包装尺寸2 Packing size_2	1020*220*100mm	1020*220*100mm
产品重量 Gross weight	12kg	13kg

带有容器及气动黄油泵的加注机

WITH CONTAINER AND AIR-OPERATED GREASE DISPENSER

带有容器及气动黄油泵的加注机。
The dispensing device is equipped with air-operated greasu pump and container.

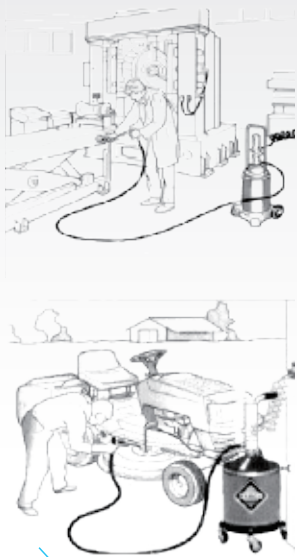

技术参数
Technical parameters

型号 Model	68213	68240
比率 Ratio	50: 1	50: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/4"	1/4"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	300L/min	300L/min
输送速度 Flow rate	500g/min	500g/min
吸油管长 Length of pumping tube	410mm	410mm
吸油管径 Diameter of pumping tube	32mm	32mm
黄油枪口径 Diameter of grease gun nozzle	1/8"	1/8"
随动板直径 Diameter of follower plate	265mm	370mm
桶盖直径 Diameter of drum cover	-	385mm
输油软管管长 Length of filling hose	4m	4m
输油软管管径 Diameter of filling hose	1/4"	1/4"
罐体容量 Tank capacity	13L	40L
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	350*290*860mm	450*430*860mm
产品重量 Gross weight	15kg	17.8kg



气动黄油枪

AIR-OPERATED GREASE GUN

用途多样的各式气动黄油加注枪。

Various grease gun with flexible terminal / rigid nozzle.



口径: 1/8"
Inlet 1/8"

油枪旋转接头

GREASE GUN ROTARY



配置表

型号 Model	66860	66880	66888	66661	66663
参数	带有软管的注油枪 Grease control valve with hose	注油枪带有一个160 毫米金属管 Grease control valve with 160mm cranked steel pipe.It is preset to receive straight swivel or "Z" swivel	注油枪并带有一个旋转接头 Grease control valve with outletflexible/cranked straight swivel.	旋转接头 MF1/4 英寸. 当管路系统处于压力下时也能轻易接到枪上 Straight swivel MF 1/4It allows an easy rotation of the gun even when all thesystem is under pressure.	"z"型旋转接头 MF1/4 英寸. 当管路系统处于压力下时, 也能轻易接到枪上. "z" swivel MF 1/4, it allows an easy rotation of the gun even when all the system is under pressure.

油桶盖

DRUM COVER



1/4 "软管套件

1/4" hose kit

均含有两个 1/4" 外牙接头
The hose kit is equipped with 2 pcs of thread connector.



配置表 Configuration table

型号 Model	65240	65280	65310	65350	65385	65420	65600	型号 Model	91401	91402	91403	91404	91405	91406	91408	91410	91415
直径 Diameter (mm)	240	280	310	350	385	420	600	管长 Length	15m	15m	15m	4m	5m	6m	8m	10m	15m

随动板

Follower plate



型号 Model	66220	66265	66310	66340	66370	66400	66590
直径 Diameter (mm)	220	265	310	340	370	400	590
适合油桶内径 For drums internal diameter φ (mm)	190-210	235-255	280-300	310-330	340-360	370-390	560-580




气动抽废油机

AIR-OPERATED SUCTION-DRAINER

通过量杯及罐体直接产生负压吸油的抽废油机
(注: 不能抽取带有腐蚀性的液体)。

The waste oil extractor generates negative pressure through the measuring cup and tank to absorb oil (note: corrosive liquid is not allowed).



技术参数
Technical parameters


型号 Model	43025	43035
抽油速度 Suction rate	1.8-3.0L/min	1.8-3.0L/min
排油压力 Max pressure for draining	0.5bar	0.5bar
罐体容积 Tank capacity	25L	25L
量杯容积 Prechamber capacity	-	10L
耗气量 Average air consumption	200L/min	200L/min
工作压力 Air working pressure	6-8bar	6-8bar
抽油管长 Length of suction hose	1.6m	1.6m
排油管长 Length of discharging hose	1.6m	1.6m
抽油最高温度 MAX temperature of sucking oil	< 80°C	< 80°C
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	530*450*680mm	530*450*680mm
包装尺寸2 Packing size_2	-	240*240*470mm
产品重量 Gross weight	12kg	16kg

接废油机

GRAVITY WASTE OIL COLLECTING KIT

利用重力收集废油的装置。

The waste oil drainer is suitable for gravity drainage of engine.



技术参数
Technical parameters

型号 Model	41075	41220
接油高度 MAX lifting height	1.6m	1.6m
接油范围 Scope of oil collecting	580m	580m
拖车适用油桶 Trolley capacity	50-60L	180-220L
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	1315*290*145mm	1315*290*145mm
包装尺寸2 Packing size_2	545*495*195mm	870*700*115mm
产品重量 Gross weight	15.6kg	25.8kg


气动抽废油机

AIR-OPERATED SUCTION-DRAINER

通过量杯及罐体直接产生负压吸油的抽废油机（注：不能抽取带有腐蚀性的液体）。

The waste oil extractor generates negative pressure through the measuring cup and tank to absorb oil (note: corrosive liquid is not allowed).

技术参数
Technical parameters



型号 Model	43075E	43090E
抽油速度 Suction rate	1.8-3.0L/min	1.8-3.0L/min
排油压力 Max pressure for draining	0.5bar	0.5bar
罐体容积 Tank capacity	70L	85L
量杯容积 Prechamber capacity	10L	10L
耗气量 Average air consumption	200L/min	200L/min
工作压力 Air working pressure	6-8bar	6-8bar
抽油管长 Length of suction hose	1.6m	1.6m
排油管长 Length of discharging hose	1.6m	1.6m
抽油最高温度 MAX temperature of sucking oil	< 80°C	< 80°C
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	240*240*470mm	240*240*470mm
包装尺寸2 Packing size_2	470*470*880mm	470*470*1010mm
产品重量 Gross weight	23.8kg	26kg



气动抽废油机

AIR-OPERATED SUCTION-DRAINER

通过量杯及罐体直接产生负压，可手动平衡量杯罐体真空，让量杯罐体真空一体吸油的抽废油机，其真空容量更大，抽油更快更久，可脱离气源工作。（注：不能抽取带有腐蚀性的液体）。

The negative pressure is directly generated through the measuring cup and the tank, and vacuum of the measuring cup and tank can be manually balanced, so that the waste oil extractor that allows the measuring cup and tank to absorb oil together with a larger vacuum capacity, faster and longer oil extraction, and can work without air source. (note: corrosive liquid is not allowed).

技术参数
Technical parameters



型号 Model	43075H	43090H
抽油速度 Suction rate	1.8-3.0L/min	1.8-3.0L/min
排油压力 Max pressure for draining	0.5bar	0.5bar
罐体容积 Tank capacity	70L	85L
量杯容积 Prechamber capacity	10L	10L
耗气量 Average air consumption	200L/min	200L/min
工作压力 Air working pressure	6-8bar	6-8bar
抽油管长 Length of suction hose	1.6m	1.6m
排油管长 Length of discharging hose	1.6m	1.6m
抽油最高温度 MAX temperature of sucking oil	< 80°C	< 80°C
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	240*240*470mm	240*240*470mm
包装尺寸2 Packing size_2	470*470*880mm	470*470*1010mm
产品重量 Gross weight	24kg	26.2kg




气动抽废油机

AIR-OPERATED SUCTION-DRAINER

配备抗腐蚀、不龟裂、不漏气的金刚不坏量杯，量杯及罐体直接产生负压，可手动平衡量杯罐体真空，让量杯罐体真空一体吸油的抽废油机，其真空容量更大，抽油更快更久，可脱离气源工作。

Equipped with a high borosilicate glass measuring cup that is corrosion-resistant, crack-free, and air-tight, the measuring cup and the tank directly generate negative pressure, and the vacuum of the measuring cup and tank can be manually balanced, so that the waste oil extractor that allows the measuring cup and tank to absorb oil together with a larger vacuum capacity, faster and longer oil extraction, and can work without air source.

技术参数
Technical parameters




型号 Model	43075D	43090D
抽油速度 Suction rate	1.8-3.0L/min	1.8-3.0L/min
排油压力 Max pressure for draining	0.5bar	0.5bar
罐体容积 Tank capacity	70L	85L
量杯容积 Prechamber capacity	10L	10L
耗气量 Average air consumption	200L/min	200L/min
工作压力 Air working pressure	6-8bar	6-8bar
抽油管长 Length of suction hose	1.6m	1.6m
排油管长 Length of discharging hose	1.6m	1.6m
抽油最高温度 MAX temperature of sucking oil	< 80°C	< 80°C
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	240*240*470mm	240*240*470mm
包装尺寸2 Packing size_2	470*470*880mm	470*470*1010mm
产品重量 Gross weight	23.8kg	26kg



气动接废油机

AIR-OPERATED OIL COLLECTING DRAINER

利用重力收集废油的装置。
The waste oil drainer is suitable for gravity drainage of engine.



技术参数
Technical parameters

型号 Model	42080E	42095E
接油高度 MAX lifting height	1.6m	1.6m
罐体容积 Tank capacity	70L	85L
接油范围 Scope of oil collecting	580mm	580mm
排油压力 Max pressure for draining	0.5bar	0.5bar
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	470*470*880mm	470*470*1010mm
产品重量 Gross weight	23.8kg	26kg



气动抽接废油机

AIR-OPERATED OIL COLLECTING SUCTION-DRAINER


通过罐体直接产生负压吸油的抽废油机（注：不能抽取带有腐蚀性的液体）。

waste oil extractor that directly generates negative pressure to absorb oil through the tank (note: corrosive liquid is not allowed).

技术参数

Technical parameters

型号 Model	44080E	44095E
抽油速度 Suction rate	1.8-3.0L/min	1.8-3.0L/min
接油高度 MAX lifting height	1.35-1.75m	1.35-1.85m
罐体容积 Tank capacity	70L	85L
接油范围 Scope of oil collecting	580mm	580mm
排油压力 Max pressure for draining	0.5bar	0.5bar
工作压力 Air working pressure	6-8bar	6-8bar
耗气量 Average air consumption	200L/min	200L/min
抽油管长 Length of suction hose	1.6m	1.6m
排油管长 Length of discharging hose	1.6m	1.6m
抽油最高温度 MAX temperature of sucking oil	< 80℃	< 80℃
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	470*470*880mm	470*470*1010mm
产品重量 Gross weight	24.8kg	27kg



气动抽接废油机

AIR-OPERATED OIL COLLECTING SUCTION-DRAINER

通过量杯及罐体直接产生负压吸油的抽废油机（注：不能抽取带有腐蚀性的液体）。

The waste oil extractor generates negative pressure through the measuring cup and tank to absorb oil (note: corrosive liquid is not allowed).



型号 Model	44090E	44105E
抽油速度 Suction rate	1.8-3.0L/min	1.8-3.0L/min
接油高度 MAX lifting height	1.35-1.75m	1.35-1.85m
罐体容积 Tank capacity	70L	85L
量杯容积 Prechamber capacity	10L	10L
接油范围 Scope of oil collecting	580mm	580mm
排油压力 Max pressure for draining	0.5bar	0.5bar
工作压力 Air working pressure	6-8bar	6-8bar
耗气量 Average air consumption	200L/min	200L/min
抽油管长 Length of suction hose	1.6m	1.6m
排油管长 Length of discharging hose	1.6m	1.6m
抽油最高温度 MAX temperature of sucking oil	< 80℃	< 80℃
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	470*470*880mm	470*470*1010mm
包装尺寸2 Packing size_2	240*240*470mm	240*240*470mm
产品重量 Gross weight	27.5kg	29.7kg




气动抽接废油机

AIR-OPERATED OIL COLLECTING SUCTION-DRAINER
(PATENT NEW PRODUCT)

通过量杯及罐体直接产生负压，可手动平衡量杯罐体真空，让量杯罐体真空一体吸油的抽废油机，其真空容量更大，抽油更快更久，可脱离气源工作。（注：不能抽取带有腐蚀性的液体）。

The negative pressure is directly generated through the measuring cup and the tank, and vacuum of the measuring cup and tank can be manually balanced, so that the waste oil extractor that allows the measuring cup and tank to absorb oil together with a larger vacuum capacity, faster and longer oil extraction, and can work without air source. (note: corrosive liquid is not allowed).



型号 Model	44090H	44105H
抽油速度 Suction rate	1.8-3.0L/min	1.8-3.0L/min
接油高度 MAX lifting height	1.35-1.75m	1.35-1.85m
罐体容积 Tank capacity	70L	85L
量杯容积 Prechamber capacity	10L	10L
接油范围 Scope of oil collecting	580mm	580mm
排油压力 Max pressure for draining	0.5bar	0.5bar
工作压力 Air working pressure	6-8bar	6-8bar
耗气量 Average air consumption	200L/min	200L/min
抽油管长 Length of suction hose	1.6m	1.6m
排油管长 Length of discharging hose	1.6m	1.6m
抽油最高温度 MAX temperature of sucking oil	< 80℃	< 80℃
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	470*470*880mm	470*470*1010mm
包装尺寸2 Packing size_2	240*240*470mm	240*240*470mm
产品重量 Gross weight	28.6kg	30.8kg




气动抽接废油机

AIR-OPERATED OIL COLLECTING SUCTION-DRAINER
(PATENT NEW PRODUCT)

配备抗腐蚀、不龟裂、不漏气的金刚不坏量杯，量杯及罐体直接产生负压，可手动平衡量杯罐体真空，让量杯罐体真空一体吸油的抽废油机，其真空容量更大，抽油更快更久，可脱离气源工作。

Equipped with a high borosilicate glass measuring cup that is corrosion-resistant, crack-free, and air-tight, the measuring cup and the tank directly generate negative pressure, and and vacuum of the measuring cup and tai can be manually balanced, so that the waste oil extractor that allows the measuring cup and tank to absorb oil together with a larger vacuum capac faster and longer oil extraction, and can work without air source.



型号 Model	44090D	44105D
抽油速度 Suction rate	1.8-3.0L/min	1.8-3.0L/min
接油高度 MAX lifting height	1.35-1.75m	1.35-1.85m
罐体容积 Tank capacity	70L	85L
量杯容积 Prechamber capacity	10L	10L
接油范围 Scope of oil collecting	580mm	580mm
排油压力 Max pressure for draining	0.5bar	0.5bar
工作压力 Air working pressure	6-8bar	6-8bar
耗气量 Average air consumption	200L/min	200L/min
抽油管长 Length of suction hose	1.6m	1.6m
排油管长 Length of discharging hose	1.6m	1.6m
抽油最高温度 MAX temperature of sucking oil	< 80℃	< 80℃
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	470*470*880mm	470*470*1010mm
包装尺寸2 Packing size_2	240*240*470mm	240*240*470mm
产品重量 Gross weight	28.6kg	30.8kg



气动抽废油机

AIR-OPERATED SUCTION-DRAINER

通过罐体直接产生负压吸油的抽废油机（注：不能抽取带有腐蚀性的液体）。
The air-operated drainer is used for changing engine oil of any motor vehicle by means of vacuum or depression. Not available for brake fluids, fuels, flammable or corrosive liquids.

技术参数
Technical parameters

型号 Model	43065	43080
抽油速度 Suction rate	1.8-3.0L/min	1.8-3.0L/min
排油压力 Max pressure for draining	0.5bar	0.5bar
罐体容积 Tank capacity	70L	85L
耗气量 Average air consumption	200L/min	200L/min
工作压力 Air working pressure	6-8bar	6-8bar
抽油管长 Length of suction hose	1.6m	1.6m
排油管长 Length of discharging hose	1.6m	1.6m
抽油最高温度 MAX temperature of sucking oil	< 80℃	< 80℃
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	470*470*880mm	470*470*880mm
产品重量 Gross weight	19kg	21.2kg



气动抽接废油机

AIR OPERATED OIL COLLECTING MACHINE

带有侧向托盘，可用于商用车的抽接两用机。
（注：不能抽取带有腐蚀性的液体）
The device is equipped with lateral tray. It may be applicable for pumping and picking of commercial vehicle. The corrosive liquids may be not pumped.




型号 Model	44110	44120
抽油速度 Suction rate	1.8-3.0L/min	1.8-3.0L/min
接油高度 MAX lifting height	1.5m	1.5m
罐体容积 Tank capacity	85L	85L
量杯容积 Prechamber capacity	450*375*120mm	450*375*120mm
接油范围 Scope of oil collecting	580mm	580mm
排油压力 Max pressure for draining	0.5bar	0.5bar
工作压力 Air working pressure	6-8bar	6-8bar
耗气量 Average air consumption	200L/min	200L/min
抽油管长 Length of suction hose	1.6m	1.6m
排油管长 Length of discharging hose	1.6m	1.6m
抽油最高温度 MAX temperature of sucking oil	< 80℃	< 80℃
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	475*475*840mm	475*475*840mm
包装尺寸2 Packing size_2	575*470*140mm	575*470*140mm
包装尺寸3 Packing size_3	-	240*240*470mm
包装尺寸4 Packing size_4	1400*100*100mm	1400*100*100mm
产品重量 Gross weight	39kg	44kg



电动抽废油机

ELECTRIC OIL SUCTION-DRAINER

使用电动齿轮泵抽吸油的装置。
The suction-drainer, equipped with electric pump, is used to suck petrol or engine oil of any motor vehicle.





型号 Model	4007C	40080
抽油速度 Suction rate	0-8L/min	0-8L/min
电压 Working voltage	220V	220V
油壶容积 Oilcan capacity	70L	80L
量杯容积 Prechamber capacity	-	10L
排油压力 Max pressure for draining	0.5bar	0.5bar
抽油管长 Length of suction hose	1.5m	1.5m
抽油最高油温 MAX temperature of sucking oil	< 80℃	< 80℃
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	240*240*470mm	240*240*470mm
包装尺寸2 Packing size_2	600*490*815mm	600*490*815mm
产品重量 Gross weigh	40kg	40kg

专用接油小车

WASTE OIL COLLECTING PIT

带轮子可移动的接油小车，配有吸油接头。
The waste oil pit with wheels, equipped with draining oil filter and oil suction, is suitable for gravity draining of engine, gearbox and different oil from any motor vehicle.



型号 Model	42030	42031	42050	42051
接油量 Container capacity	30L	30L	50L	50L
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	670*510*280mm	750*460*200mm	860*660*280mm	960*600*200mm
产品重量 Gross weight	15kg	22.5kg	15kg	22.5kg

壁装式强力抽废油套件

WALL-MOUNTED OIL PUMP DRAINER

使用气动废油泵抽油的壁装式套件。
The wall-mounted suction drainer, equipped with air-operated pump, is suitable for sucking and delivering waste oil, similar liquids etc.

型号 Model	45100	45110
比率 Ratio	1: 1	1: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	230L/min	230L/min
输送速度 Flow rate	1-3L/min	1-3L/min
油温 Temperature of pumping oil	< 80°C	< 80°C
支架孔径 Wall-bracket diameter	54mm	54mm
真空度 Vacuum degree	-0.8-0bar	-0.8-0bar
抽油管长 Length of suction hose	2m	2m
排油管长 Length of discharging hose	2m	2m
探针管总成 Probes assembly	1套 Set	1套 Set
卷管器型式 Type of hose reel	-	重型旋转式 Heavy-duty fixed type
卷管器出油管长 Length of outlet reelpipe	-	10m
卷管器进油管长 Length of inlet reelpip	-	1.5m
卷管器管径 Diameter of reelpipe	-	3/8"
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	1345*190*155mm	1345*190*155mm
包装尺寸2 Packing size_2	-	560*540*245mm
产品重量 Gross weight	8kg	29.2kg

移动式强力抽废油机

MOBIL PUISSANT OIL PUMP DRAINER

使用气动废油泵抽油的拖车式套件。
The mobile suction drainer, equipped with air-operated pump and trolley, is suitable for sucking and delivering waste oil, similar liquids etc.

型号 Model	45160	45180
比率 Ratio	1: 1	1: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	230L/min	230L/min
输送速度 Flow rate	1-3L/min	1-3L/min
油温 Temperature of pumping oil	< 80°C	< 80°C
抽油管长 Length of suction hose	2m	2m
排油管长 Length of discharging hose	2m	2m
探针管总成 Probes assembly	1套 Set	1套 Set
真空度 Vacuum degree	- 0.8-0bar	- 0.8-0bar
拖车适用油桶 Oil drum for trailer	18-60L	180-220L
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	1345*190*155mm	1345*190*155mm
包装尺寸2 Packing size_2	540*490*190mm	870*700*115mm
产品重量 Gross weight	16.5kg	28kg

强力抽废油泵

PUISSANT OIL PUMP

配有特殊装置的气动油泵，可产生持续不断的真空，专用于抽吸废油。
The air-operated oil pump, equipped with special suction device, can pump and suck constantly to creat a complete vacuum, Ideal for waste oil draining.

型号 Model	45000
比率 Ratio	1: 1
进气嘴接头 Air inlet connection	1/4"
出油口接头 Fluid outlet connection	1/2"
工作压力 Air working pressure	5-8bar
最大压力 Maximum pressure	8bar
耗气量 Average air consumption	230L/min
输送速度 Flow rate	1-3L/min
油温 Temperature of pumping oil	< 80°C
包装形式 Package type	纸箱 Carton
包装尺寸 Packing size	1345*190*155mm
产品重量 Gross weight	4.8kg



接油盘

OIL COLLECTING TRAY



型号 Model	3881	3885
直径 Diameter	接油范围 Scope of oil collecting φ580mm	接油范围 Scope of oil collecting φ580mm

接油针管

OIL INJECTING NEEDLE



型号 Model	4660 4670	46000 4601 4602 4603	46001 4611 4612 4613	46002
技术参数	1套	Φ5mm Φ6mm Φ8mm	1套	Φ5mm Φ6mm Φ8mm
吸油专用接头 Quick-release connector	塑料接头 Plastic probe	金属接头 Rigid probe	套筒 Sleeve	

抽油量杯


SUCTION OIL CHAMBER




型号 Model	3895D	3893	3892	3892E	3892H
	不带吸油管和发生器总成 Without suction hose and vacuum generator assembly.				

真空发生器

VACUUM GENERATOR

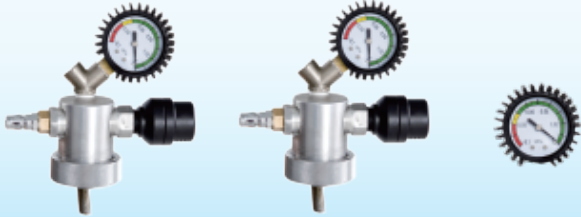




型号 Model	3870	3871	3841	3875
----------	------	------	------	------

油管

OIL PIPE



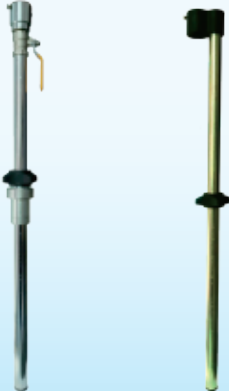


抽油管 排油管 放油管

型号 Model	3850	2m	3860	2m	3835	0.8m	3830	3831
----------	------	----	------	----	------	------	------	------

FABIT

WASTE OIL RECYCLING SYSTEM

废油回收系统

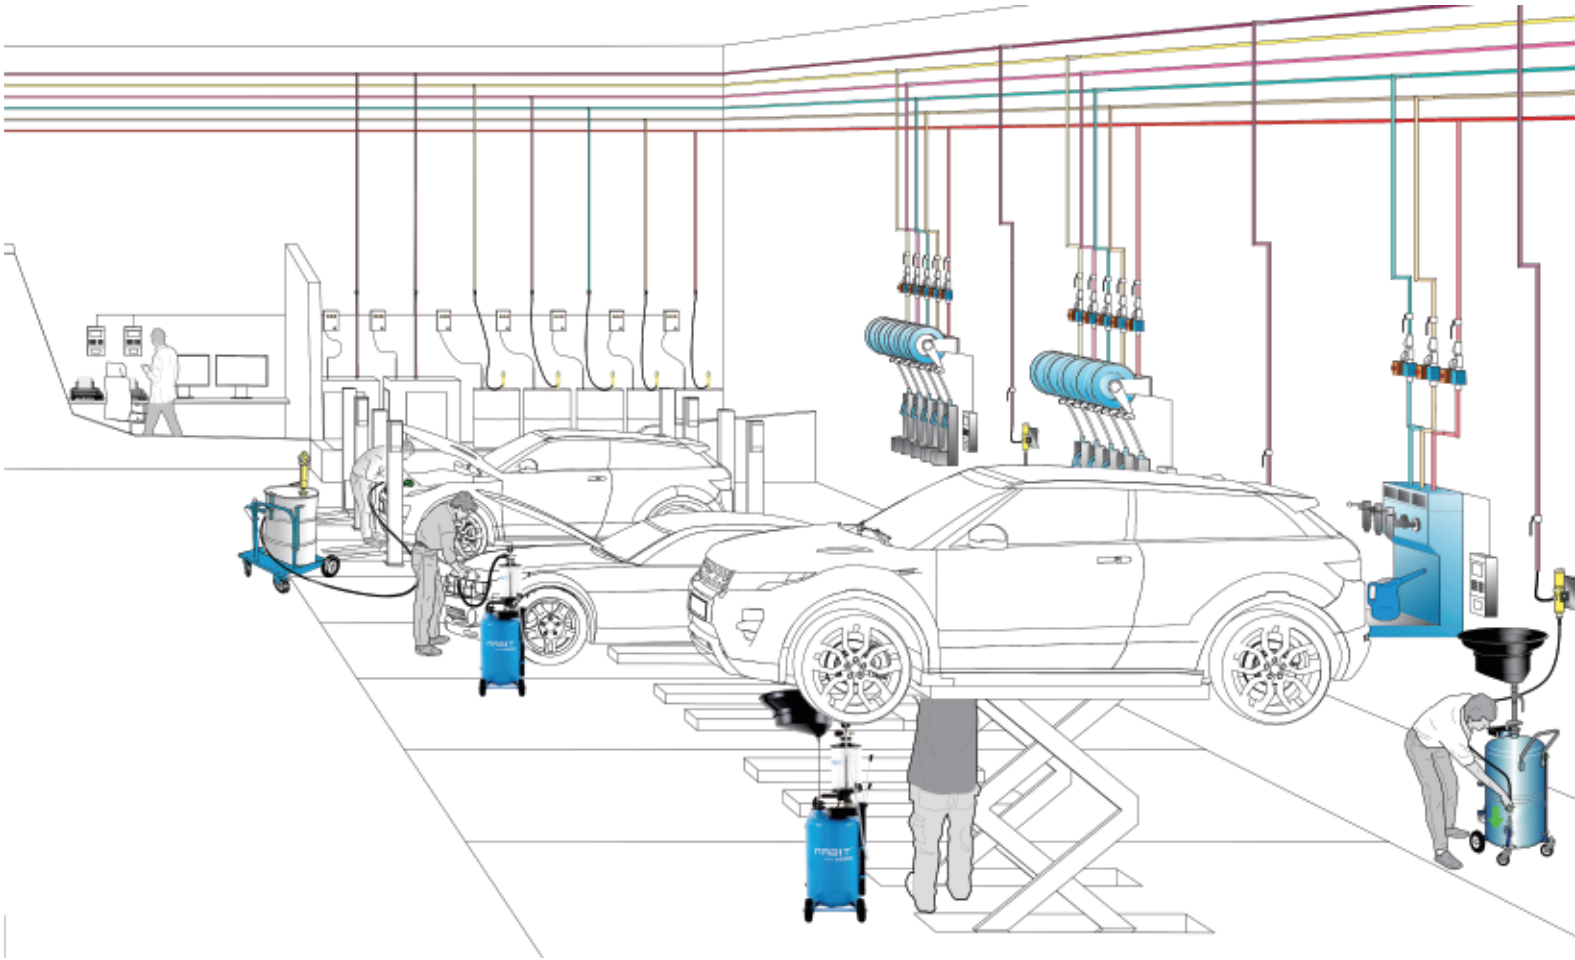

废油回收系统

系统简述

车间的废油料，经废油泵抽取后，经过专用输送管道统一送到油料库的收集器里。本系统有利于车间的有效管理，使环境清洁美观，工效提升。

应用行业

汽车4S店、维修车间、汽车快速换油中心、大型巴士保养站、工程机械和卡车保养站、车间生产线等。

回收油类

发动机油、燃油、冷却液、动力油、液压油等。

系统组成及主要功能


- 1. 油料库收纳器：
在油料库设置储油箱，集中收纳车间的废油料。储油箱安装一套中转泵，可方便地将油料从箱里泵出。并安装一套液位控制器，及时监控油箱的油料容量。采用专用耐压的流体管及管件、阀门等组成。
- 2. 吸油工位：
在车间设置吸油泵，将废油料泵吸进管道里，最终输送到储油箱里。

系统设计基本信息

- 1. 储油箱所在的位置及吸油工位的距离、室温工况等；
- 2. 油料的化学性能(粘度、燃点、腐蚀性等)，从而确定所选用废油泵的材质及技术指标；
- 3. 输油量的大小，决定选用的储油箱、管道的大小及油泵的流量大小。

系统分类

- 1. 间接吸油式：
采用抽、接废油机从汽车、机器上抽、接废油，油满时再推送至系统吸油工位吸进管道。
- 2. 直接吸油式：
使用系统吸油工位的废油泵(配置吸油针管)，将汽车或机器上的废油直接吸进管道里。

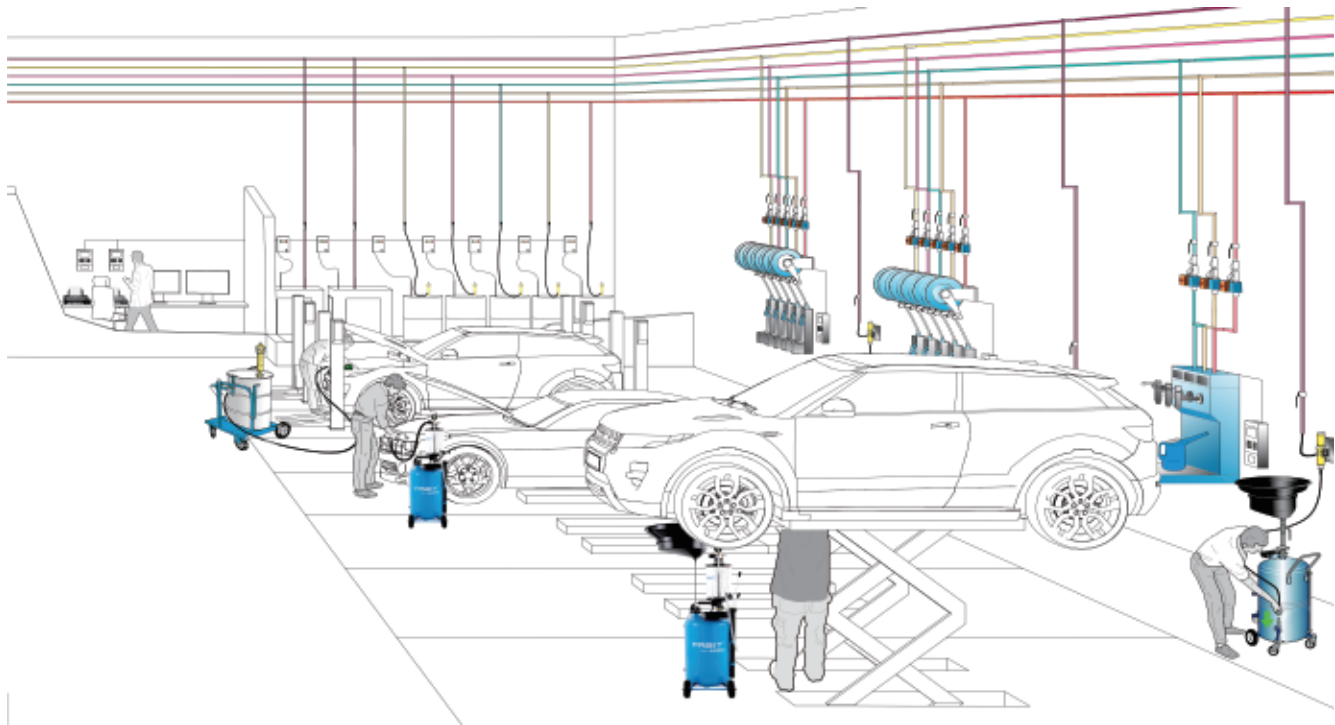

WASTE OIL RECYCLING SYSTEM

System Overview

THE WASTE OIL RECYCLING SYSTEM is in relation to the managing of waste oil collection in the workshops. The system is designed to recycle the drained oil through an emptying pump.

Applicable Industry

AUTO 4S-shop, Bus maintenance workshop, Oil-changing repair center, Machinery maintenance, Manufacturing workshop and so on.

Recycling Fluids

Engine oil, Fuel, Gear oil, Lubricating oil, Hydraulic oil etc.

System Design & Functions


- 1- Oil Storage Depot Device
The Oil Depot is designed as a storage tank equipped with a transfer pump and a liquid level monitor, for collecting the waste oil in the workshop. The system is also composed of reinforced fluid pipeline, brackets and kinds of pipe fittings.
- 2- Operating Stations
Each station is equipped with suction oil pump device to recycle the waste oil by pipelines connected to the oil depot.

Elements of System Design

- 1- The location of Oil Storage Depot & Operating Stations, the related distance, workshop temperature, working condition etc.
- 2- According to the chemical properties of fluids (Viscosity, Ignition Temperature, corrosion, etc.), our engineer will recommend the matching oil pumps (related to Technical Parameters).
- 3- According to the requirements of fluids transfer, our engineer will recommend the sizes of oil storage tank, pipelines and the flow rate of oil pump.

System Category

- 1- Suction-drainer Operation
The waste oil will be transferred from the suction-drainer device to the oil depot recycling system by using the emptying pump at Operating Stations.
- 2- Suction System Operation
The waste oil will be transferred directly from the motor vehicle at Operating Stations to the oil depot by suction with the probe and pump connected to the recycling system.

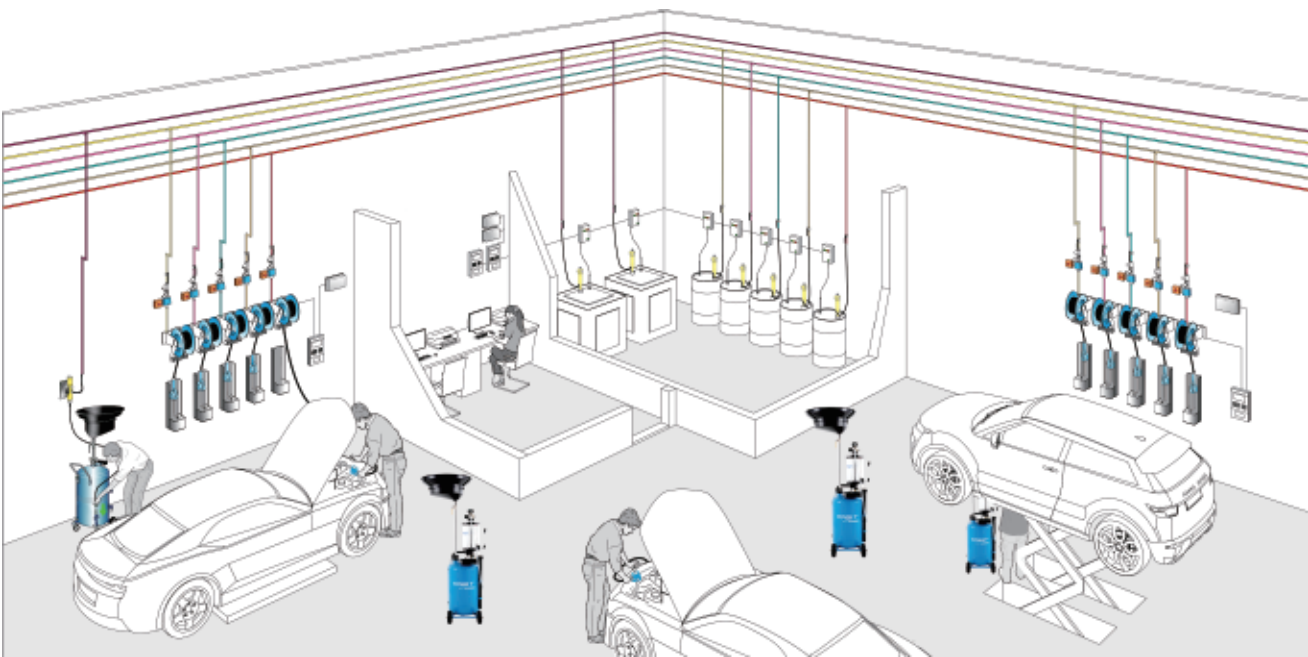

废油回收系统

WASTE OIL RECYCLING SYSTEM

47000 通过本系统可方便快捷地统一收集废油机里的废油。
47000 system is applied to recycle the waste oil from the filled suction-drainer device.

第一步：将废油接到油罐内。
Step-1, to recycle the waste oil from any motor vehicle to the drainer device by gravity or pumping.

第二步：将油罐内的废油抽到废油库。
Step-2, to pump the waste oil from the drainer device to the oil depot.

配置表
Configuration table

型号 Model	47000
壁装式吸油套件 Wall-mounted suction pump kit	33100/1台 Sets
壁装式吸油套件 Wall-mounted suction pump kit	33125/2台 Sets
气动抽接废油机 Air-operated oil collecting drainer	44080/2台 Sets
管道系统 Pipeline system	58003/20m
1吨大油桶尺寸 1-TON drum size	1200X1000X1150mm

废油回收系统

WASTE OIL RECYCLING

48000 可将车里的废机油直接抽入管道系统，统一收集。
48000 system is applied to pump the waste oil directly from the motor vehicle at stations to the oil depot.

配置表
Configuration table

型号 Model	48000
壁装式吸油套件 Wall-mounted suction pump kit	33100/1台 Sets
壁装式吸油套件 Wall-mounted suction pump kit	45100/4台 Sets
管道系统 Pipeline system	58003/20m
1吨大油桶尺寸 1-TON drum size	1200X1000X1150mm

废油回收系统

WASTE OIL RECYCLING SYSTEM

49000 带有卷管盘，可将距离较远的废油直接抽入管道系统，统一收集。
49000 system is applied to pump the waste oil directly from the motor vehicle at stations to the oil depot.


配置表
Configuration table

型号 Model	49000
壁装式吸油套件 Wall-mounted suction pump kit	33100/1台 Sets
壁装式吸油套件 Wall-mounted suction pump kit	45100/3台 Sets
管道系统 Pipeline system	58003/30m
1吨大油桶尺寸 1-TON drum size	1200X1000X1150mm




VEHICLE MAINTENANCE EQUIPMENT

汽车养护设备

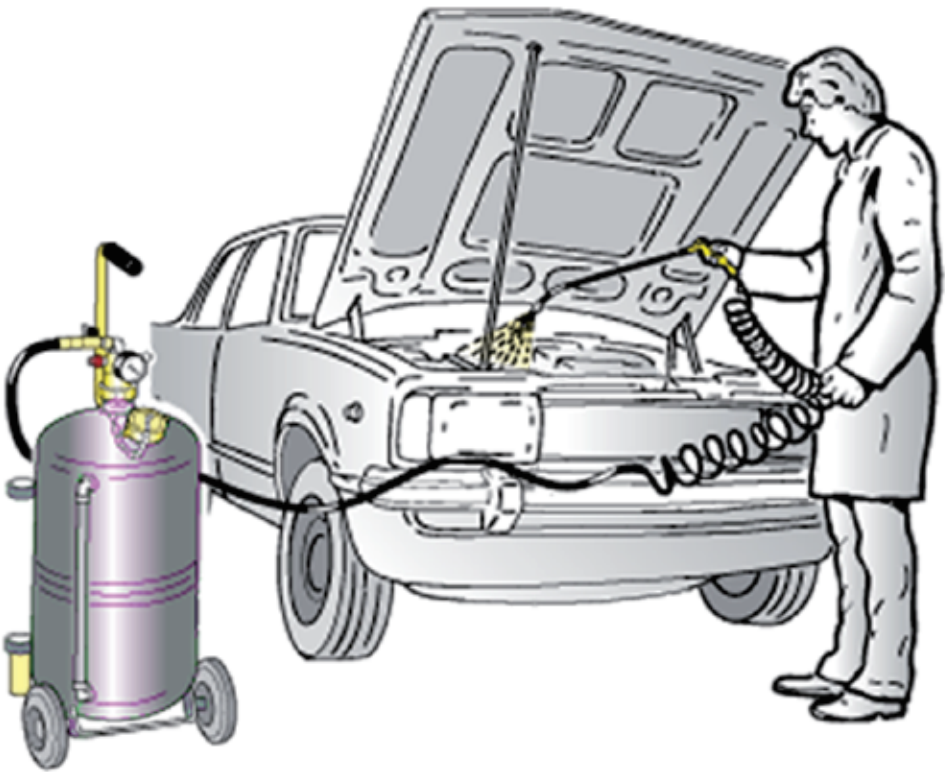

轻型气管、水管卷管器
HOSE REEL for AIR / WATER

坚固的注塑外壳，内置金属机构的轻型专业卷管器。
The professional hose reel is equipped with metal swivel joint structure and molding shell.



墙壁安装
Frontal installation



顶部安装
Ceiling installation



型号 Model	86010 (气)	86310 (水)	86410 (清洗液)
管长 Hose length	10m	10m	10m
管径 Hose diameter	6.5mm	6.5mm	6.5mm
工作压力 Air working pressure	18bar	18bar	18bar
管材 Hose characteristics	pu夹纱	pu夹纱	聚醚
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	385*330*210mm	385*330*210mm	385*330*210mm
产品重量 Gross weight	4.7kg	4.7kg	4.7kg

轻型电线、灯线卷管器
HOSE REEL for WIRE / LIGHT-LINE


坚固的注塑外壳，内置金属机构的轻型专业卷管器。
The professional hose reel is equipped with metal swivel joint structure and molding shell.



墙壁安装
Frontal installation



顶部安装
Ceiling installation

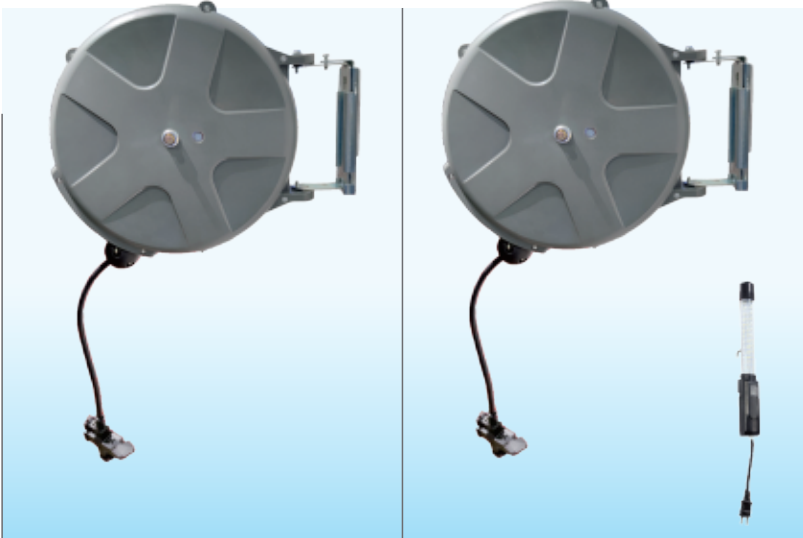

型号 Model	86110 (电线 WIRE)	86210 (灯线 LIGHT-LINE)
线径 Wire diameter	1.5mm ² *3	1.5mm ² *3
线长 Wire length	10m	10m
电压/功率 Voltage	210/240V	210/240V
插排 Electric plug	3*3	3*3
LED灯功率 LED lamp power	-	3W
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	385*330*210mm	385*330*210mm
产品重量 Gross weight	5.3kg	5.3kg

重型并联式组合卷管器
HEAVY-DUTY PARALLEL COMBINATION COILER

美观的外壳，可随意组合多用途的卷管器。
The parallel combination device can be equipped with hose reel as required.It is reliable with high quality materials of rewinding spring, shell, hose fittings.



型号 Model	配置表 Configuration table	数量 Quantity	用途 Usage
89210	81710	1 个 One	高压热水 High-pressure water MAX 130℃
	86310	1 个 One	低压冷水 Low pressure cold water
	组合外罩 Combination shell	2 组 Sets	—
89310	81710	1 个 One	高压热水 High-pressure water MAX 130℃
	86310	1 个 One	低压冷水 Low pressure cold water
	86010	1 个 One	空气 Air
	组合外罩 Combination shell	3 组 Sets	—
89410	81710	1 个 One	高压热水 High-pressure water MAX 130℃
	86310	1 个 One	低压冷水 Low pressure cold water
	86010	1 个 One	空气 Air
	86110	1 个 One	电源 Power
	组合外罩 Combination shell	4 组 Sets	—
89510	81710	1 个 One	高压热水 High-pressure water MAX 130℃
	86310	1 个 One	低压冷水 Low pressure cold water
	86010	2 个 Two	空气 Air
	86110	1 个 One	电源 Power
	组合外罩 Combination shell	5 组 Sets	—

并联式卷管器外罩
PARALLEL HOSE REEL HOUSING

美观的外壳，可随意组合多种加注油枪数量。
Beautiful housing, can be freely combined with a variety quantity of fuel guns.




型号 Model	89000
包装形式 Package type	木箱 Wooden box
产品尺寸 Packing size	380*400*480mm
重量 weight	8kg

固定式重型卷管器

STATIONARY HEAVY DUTY HOSE REEL

坚固的钢盘和卷簧构成的可承受高压的重型卷盘。
The heavy-duty hose reel, equipped with the sturdy steel joint and a rewinding spring with constant tension, is applied for the fluids transmission under the pressures.

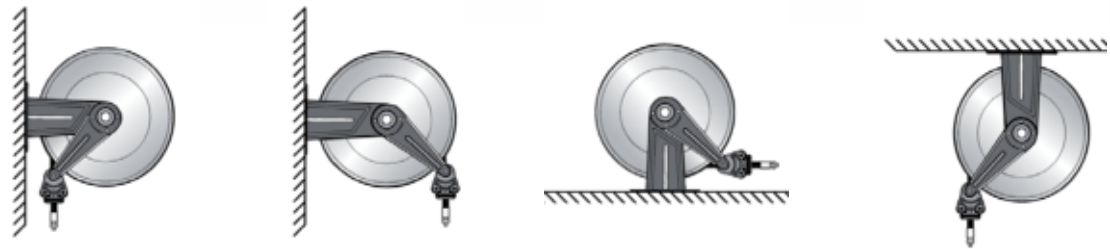


型号 Model	81510	81515	81810	81610	81615
用途 Applicable fluids	稀油 Oils/ Lubricants	稀油 Oils/ Lubricants	稀油 Oils/ Lubricants	黄油 Grease	黄油 Grease
出油管长 Length of outlet reelpipe	10m	15m	10m	10m	15m
进油管长 Length of inlet reelpipe	1.5m	1.5m	1.5m	1.5m	1.5m
管径 Hose diameter	3/8"	3/8"	1/2"	1/4"	1/4"
压力 Pressure of fluid	60bar	60bar	60bar	600bar	600bar
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	540*500*240mm	560*540*260mm	560*540*240mm	540*500*240mm	540*500*240mm
产品重量 Gross weight	19kg	23kg	21kg	18.2kg	19.2kg

型号 Model	81710	81715	81410	81415	81500	81700
用途 Applicable fluids	冷热水 WATER MAX 130°C	冷热水 WATER MAX 130°C	空气 AIR	空气 AIR	稀油、空气 Lubricants/ AIR	冷热水 Lubricants/ AIR
出油管长 Length of outlet reelpipe	10m	15m	10m	15m	-	-
进油管长 Length of inlet reelpipe	1.5m	1.5m	1.5m	1.5m	-	-
管径 Hose diameter	3/8"	3/8"	1/4"	1/4"	-	-
压力 Pressure of fluid	120bar	120bar	60bar	60bar	-	-
包装形式 Package type	纸箱	纸箱	纸箱	纸箱	纸箱	纸箱
包装尺寸 Packing size	540*500*240mm	540*500*240mm	530*490*250mm	530*490*250mm	530*490*250mm	530*490*250mm
产品重量 Gross weight	17kg	19kg	18kg	19kg	5kg	5kg

旋转式重型卷管器

ROTARY HEAVY DUTY HOSE REEL

安装在旋转底板上，可左右摆动的卷盘。
The hose reel may swing left and right,t may install on the rotary plate.

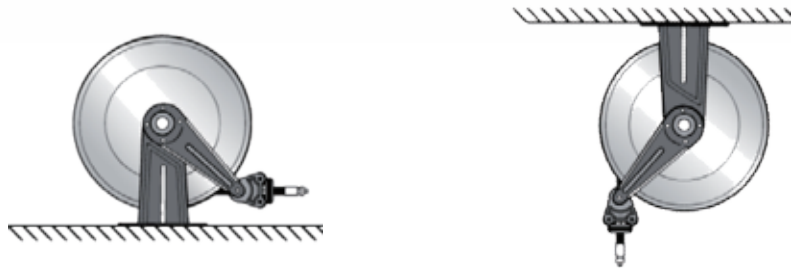

型号 Model	82010	82015	82610	82110	82115
用途 Applicable fluids	稀油 Oils/ Lubricants	稀油 Oils/ Lubricants	稀油 Oils/ Lubricants	黄油 Grease	黄油 Grease
出油管长 Length of outlet reelpipe	10m	15m	10m	10m	15m
进油管长 Length of inlet reelpipe	1.5m	1.5m	1.5m	1.5m	1.5m
管径 Hose diameter	3/8"	3/8"	1/2"	1/4"	1/4"
压力 Pressure of fluid	60bar	60bar	60bar	600bar	600bar
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	560*540*245mm	560*540*260mm	560*540*240mm	560*540*240mm	560*540*240mm
产品重量 Gross weight	21.2kg	23.5kg	21.5kg	18.7kg	19.7kg

型号 Model	82310	82315	82410	82415	82000	82300
用途 Applicable fluids	冷热水 WATER MAX 130°C	冷热水 WATER MAX 130°C	空气 AIR	空气 AIR	稀油、空气 Lubricants/ AIR	冷热水 Lubricants/ AIR
出油管长 Length of outlet reelpipe	10m	15m	10m	15m	-	-
进油管长 Length of inlet reelpipe	1.5m	1.5m	1.5m	1.5m	-	-
管径 Hose diameter	3/8"	3/8"	1/4"	1/4"	-	-
压力 Pressure of fluid	120bar	120bar	60bar	60bar	-	-
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	560*540*240mm	560*540*240mm	560*540*240mm	560*540*240mm	560*540*240mm	560*540*240mm
产品重量 Gross weight	16.5kg	18.5kg	18.5kg	19.5kg	8kg	8kg

封闭式重型卷管器

CLOSED HEAVY REEL

由坚固的钢盘、卷簧、钢罩构成的可承受高压的卷盘。
The enclosed hose reel, equipped with the sturdy steel joint, reinforce shell and a rewinding spring with constant tension,is applied for the fluids transmission under the pressures.



型号 Model		83010	83015	83060	83110	83115
用途 Applicable fluids		稀油 Oils/ Lubricants	稀油 Oils/ Lubricants	稀油 Oils/ Lubricants	黄油 Grease	黄油 Grease
出油管长 Length of outlet reelpipe		10m	15m	10m	10m	15m
进油管长 Length of inlet reelpipe		1.5m	1.5m	1.5m	1.5m	1.5m
管径 Hose diameter		3/8"	3/8"	1/2"	1/4"	1/4"
压力 Pressure of fluid		60bar	60bar	60bar	600bar	600bar
包装形式 Package type		纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size		560*540*180mm	560*540*180mm	560*540*180mm	560*540*180mm	560*540*180mm
产品重量 Gross weight		25kg	26.3kg	28.8kg	28kg	29kg

型号 Model		83310	83315	83410	83415	83000	83300
用途 Applicable fluids	冷热水 WATER MAX 130°C	冷热水 WATER MAX 130°C	空气 AIR	空气 AIR	稀油、空气 Lubricants/ AIR	冷热水 WATER MAX 130°C	
出油管长 Length of outlet reelpipe	10m	15m	10m	15m	-	-	
进油管长 Length of inlet reelpipe	1.5m	1.5m	1.5m	1.5m	-	-	
管径 Hose diameter	3/8"	3/8"	1/4"	1/4"	-	-	
压力 Pressure of fluid	120bar	120bar	60bar	60bar	-	-	
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	
包装尺寸 Packing size	560*540*180mm	560*540*180mm	560*540*180mm	560*540*180mm	560*540*180mm	560*540*180mm	
产品重量 Gross weight	23kg	25kg	4kg	26kg	15kg	15kg	

快修工具车

AUTO REPAIR TOOLS TROLLEY

专为快修快保设计的，操作简便快捷的专用工作车。
the auto repair tools trolley, using humanized design concept and advanced manufacturing technology, is equipped with the inspection and maintenance hand-operated tools.its operation is easy.



配置表
Configuration table

型号 Model		71000	71001
伸缩气源管 Retractable air-supply pipe		4 组 Sets	最大举重70kg, Maximum Loading 70KG. 举升最大行程600mm, Maximum Maximum Lifting Distance 600mm.70KG. 举升时轮胎中心 离地高度1430mm, MAX height of tire center in lifting H=1430mm. 工作气压: 4-8bar Air working pressure 4~8 bar.
抽屉 Slidable drawer		1 个 One	
快速支撑脚 Quick support device		1 个 One	
刹车油抽吸器 Brake oil suction probe		1 个 One	
轮胎架 Tire lifting rack		1 组 Set	
工具托盘 Tools tray		3 个 Three	
360 度旋转机构 360° rotating mechanism		√	
套筒架 Probe sleeve		1 个 One	
重型转向轮 Heavy-duty steering wheel		4 个 Four	
包装形式 Package type		木箱 Plywood case	
包装尺寸 Packing size		650*500*900mm	930*725*1010mm
产品重量 Gross weight		95kg	60kg

废油收集车

WASTE LIQUID COLLECTING DEVICE

可快速收集废油废液的专用工作车。
The device is applied to collect the waste oil/ liquid easily.



配置表
Configuration table

型号 Model	71120
配置 Configuration	25L 油桶 2 个, 接油盘 2 个, 万向轮 4 个 25 Oil drum/ 2 PCS, Oil collecting tray/ 2 PCS, Universal wheel/ 4 PCS.
外形尺寸 Dimension	660*470*915mm
毛净重 Gross/ Net weight	23/22kg

轮胎装运车

TYRE TRANSFER CART

配有四个万向轮，其中两个带有刹车功能，移动灵活载重80kg。
The tyre cart is equipped with 4 pieces of universal wheels(2 PCS of brake wheels). It is easy to operate, with load capacity 80KG.



配置表
Configuration table

型号 Model	71210	71220
配置 Configuration	万向轮 4 个, 承重 80kg, 置物底板 1 个 Universal wheel/ 4 PCS, Shelf baseplate/ 1 PCS, Loading 80KG.	
外形尺寸 Dimension	850*500*950mm	940*500*950mm
毛净重 Gross/ Net weight	13/12kg	15/14kg

引擎冷却系统免拆清洗机

ENGINE RADIATOR CHANGE MACHINE

循环深度清洗，彻底分解清除冷却系统中铁锈、水垢及其它沉积，配有专用接头，移动灵活、操作简单，自由控制清洗时间。
Circulating deep cleaning, thorough decomposition and removal of rust, scale and other deposits in the cooling system, equipped with special joints, flexible movement, simple operation, free control of cleaning time.

型号 Model	26260
工作电压 working voltage	DC12V
电机功率 Motor power	150w
出油管长 Length of outlet reelpipe	2.5m
回油管长 Length of oil return pipe	2.5m
滤清器精度 Filter accuracy	5um
油桶容量 tank capacity	20L
适用范围 Scope of application	小型汽油车、柴油车
包装形式 Form of packing	纸箱 Carton
包装尺寸 Packing size	570*540*1000mm
产品重量 Gross weight	38kg



引擎燃油系统免拆清洗机

ENGINE FUEL SYSTEM FREE CLEANING MACHINE

设备自带脉冲，能对引擎燃油系统，燃烧室及进排气门组件的积碳胶质有效清除。移动灵活、操作简单，自由控制清洗时间。
The device comes with pulse, which can effectively remove carbon deposits in the fuel system, combustion chamber and intake and exhaust valve assembly. Flexible movement, simple operation, free control of cleaning time.

型号 Model	26270
工作电压 working voltage	DC12V
工作气压 Working air pressure	0.25-0.4Mpa
出油管长 Length of outlet reelpipe	2.5m
回油管长 Length of oil return pipe	2.5m
过滤器数量 Number of filters	2
适用范围 Scope of application	小型汽油车、柴油车
包装形式 Form of packing	纸箱 Carton
包装尺寸 Packing size	510*510*1080mm
产品重量 Gross weight	48kg净重/51毛重



引擎润滑油系统免拆清洗机

LUBRICATION SYSTEM CLEANING MACHINE

循环深度清洗，彻底把聚积在引擎内的油泥和积碳溶解清理干净，配有专用接头，移动灵活、操作简单，自由控制清洗流程和时间。
Cycle deep cleaning, thoroughly the accumulation of oil sludge and carbon in the engine dissolved clean, equipped with special joint, flexible movement, simple operation, free control of cleaning process and time.

型号 Model	26280
工作电压 working voltage	AC220V
电机功率 Motor power	90w
出油管长 Length of outlet reelpipe	2m
回油管长 Length of oil return pipe	2m
适用范围 Scope of application	小型汽油车、柴油车
包装形式 Form of packing	纸箱 Carton
包装尺寸 Packing size	530*440*1030mm
产品重量 Gross weight	35kg



自动波箱油更换机

AUTOMATIC GEARBOX OIL CHANGE MACHINE

全自动智能电子控制新旧油彻底等量交换，配有专用接头，移动灵活、操作简单，自由控制清洗流程和时间。
Fully automatic intelligent electronic control of old and new oil completely equal exchange, equipped with a special connector, flexible movement, simple operation, Free control of cleaning process and time.

型号 Model	26290
工作电压 working voltage	DC12V
电机功率 Motor power	200w
出油管长 Length of outlet reelpipe	2.5m
回油管长 Length of oil return pipe	2.5m
排废油管长 Long waste oil discharge pipe	1.5m
滤清器精度 Filter accuracy	55um
适用范围 Scope of application	小型汽油车、柴油车
包装形式 Form of packing	纸箱 Carton
包装尺寸 Packing size	510*510*1080mm
产品重量 Gross weight	48kg净重/51毛重



冷却液更换机

COOLANT REPLACEMENT MACHINE

通过压缩空气产生正压和负压进行新旧冷却液的加注和抽取，同时配有新液罐和旧液罐，能准确进行冷却液等量交换。
The positive pressure generated by compressed air is used to fill new coolant, and the negative pressure is used to extract old coolant, equipped with new coolant tank and wasted coolant tank for accurate amount exchange.

型号 Model	26161
储油缸容积 Storage tank capacity	约4.0L/min
排废油速度	约4.6L/min
工作压力 Air working pressure	5-8bar
抽废油速度	约2.4L/min
加新油速度	约2.6L/min
包装形式 Package type	木箱 Wooden box
包装尺寸 Packing size	700*480*1250mm
重量 weight	38kg



气动零件清洗机

AIR-OPERATED PARTS WASHER

带有大清洗槽和大容罐，可清洗更大的零件。
The automatic washing unit is designed with a large washing chamber to wash more bigger removable parts.

型号 Model	25085
清洗槽容积 Washing chamber capacity	135L
清洗槽尺寸 Washing chamber size	900*500*300mm
工作压力 Air working pressure	1-1.2bar
包装形式 Package type	纸箱 Carton
包装尺寸 Packing size	965*560*885mm
产品重量 Gross weight	50kg

