


气动输油泵

Pneumatic oil transfer pump

比率Ratio:3:1 流量Flow≤20L/min

用于抽取并输送中低粘度的机油防冻液等，输送速度快，工作噪声低。

Used for extracting and transporting medium and low viscosity engine oil antifreeze, with fast conveying speed and low working noise.

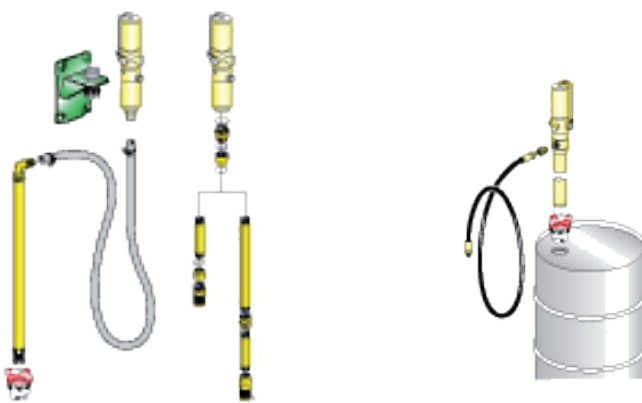

型号 Model	35894	35873
比率 Ratio	3:1	
进气嘴接头 Air intake nozzle connector	1/4"	
出油口接头 Oil outlet connector	1/2"	
工作压力 Working pressure	3-7bar	
最大压力 Maximum pressure	7bar	
耗气量 Gas consumption	350L/min	
输送速度 Conveying speed	≤20L/min	
油温 Oil temperature	-10-60℃	
油品粘度 Oil viscosity	130 SAE	
吸油管长 Oil suction pipe length	940mm	740mm
吸油管径 Oil suction pipe diameter	42mm	

气动抽接油套件

Pneumatic oil extraction kit

即开即用 out-of-the-box

操作简单, 流量大小可调节, 安全环保, 免安装!

Easy to operate, adjustable flow rate, safe and environmentally friendly, no installation required!



型号 Model	37813
比率 Ratio	3:1
进气嘴接头 Air intake nozzle connector	1/4"
工作压力 Working pressure	3-7bar
最大压力 Maximum pressure	7bar
耗气量 Gas consumption	300L/min
抽油速度 Pumping speed	≤13L/min
油温 Oil temperature	-10-60°C
油品粘度 Oil viscosity	130 SAE
吸油管长 Oil suction pipe length	940mm
吸油管径 Oil suction pipe diameter	42mm

手压式注油机

Manual oil dispenser

大流量出油High flow oil output

使用手压注油泵操作简单, 实用性高, 适用于高浓度油品。

The manual injection pump is easy to operate, highly practical, and suitable for high concentration oil products.



型号 Model	32294
单次注油量 Injection flow / cycle	83ml
吸油硬管管长 Length of pumping tube	940mm
吸油硬管管径 Diameter of pumping tube	37mm
输油硬管管径 Diameter of oil pipe	20mm



便携式注油套件

Portable oiling kit



比率Ratio:3:1 流量Flow≤20L/min

可方便携带的, 便于操作的带计量油枪的注油套件。

A portable and easy to operate oil injection kit with a measuring oil gun.

型号 Model	37300K
比率 Ratio	3:1
进气嘴接头 Air intake nozzle connector	1/4"
出油口接头 Oil outlet connector	1/2"
工作压力 Working pressure	3-7bar
最大压力 Maximum pressure	7bar
耗气量 Gas consumption	350L/min
输送速度 Conveying speed	≤20L/min
油温 Oil temperature	-10-60°C
油品粘度 Oil viscosity	130 SAE
吸油管长 Oil suction pipe length	940mm
吸油管径 Oil suction pipe diameter	42mm
注油枪型式 Oil gun type	数显注油枪Digital oil gun
注油枪咀型式 Type of oil injection nozzle	自动打开型Automatic opening type
计量精度 Accuracy	±0.5%
输油管长 Oil pipeline length	4m
输油软管 cargo hose	3/8"


气动输油泵

Pneumatic oil transfer pump

比率Ratio:10:1 流量Flow:≤22L/min

10:1双向作用气动泵,适用于抽取并远程输送高浓度的油品,适合安装在集中供油系统中。


10: 1 bidirectional pneumatic pump, suitable for extracting and remotely transporting high concentration oil products, suitable for installation in the centralized fuel supply system.

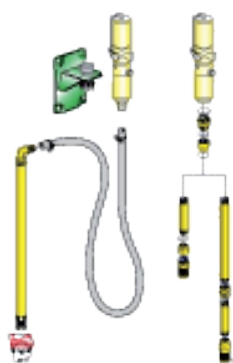

型号 Model	36494	36460
比率 Ratio	10:1	
进气嘴接头 Air intake nozzle connector	1/4"	
出油口接头 Oil outlet connector	1/2"	
工作压力 Working pressure	5-8bar	
最大压力 Maximum pressure	8bar	
耗气量 Gas consumption	500l/min	
输送速度 Conveying speed	≤22l/min	
油温 Oil temperature	-10-60℃	
油品粘度 Oil viscosity	240SAE	
吸油管长 Oil suction pipe length	940mm	270mm
吸油管径 Oil suction pipe diameter	42mm	



壁装式注油套件 (重型旋转式)

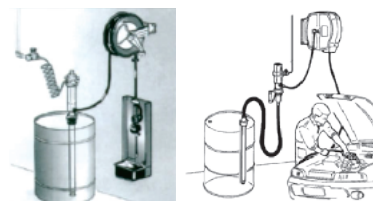

Wall mounted oil injection kit (heavy-duty rotary)

比率Ratio:3:1 流量Flow≤20L/min

适用于油桶180-220kg吸油的壁装式注油套件。


Wall mounted oil injection kit suitable for oil drums 180-220kg oil suction.

型号 Model	37675k
比率 Ratio	3:1
进气嘴接头 Air intake nozzle connector	1/4"
出油口接头 Oil outlet connector	1/2"
工作压力 Working pressure	3-7bar
最大压力 Maximum pressure	7bar
耗气量 Gas consumption	350L/min
输送速度 Conveying speed	≤20L/min
油温 Oil temperature	-10-60°C
油品粘度 Oil viscosity	130 SAE
吸油管长 Oil suction pipe length	940mm
吸油管径 Oil suction pipe diameter	42mm
注油枪型式 Oil gun type	数显注油枪Digital oil gun
注油枪咀型式 Type of oil injection nozzle	自动打开型Automatic opening type
计量精度 Accuracy	±0.5%
油管总长 Total length of oil pipe	10m+1.5m
输油软管 cargo hose	3/8"



重型移动式注油套件

Heavy duty mobile oiling kit



比率Ratio:3:1 适用Suit:180-220kg

适用于180-220kg油桶吸油的手拖车式注油套件。

Hand trailer oil filling kit suitable for 180-220kg oil drum suction.

型号 Model	37200K
比率 Ratio	3:1
进气嘴接头 Air intake nozzle connector	1/4"
出油口接头 Oil outlet connector	1/2"
工作压力 Working pressure	3-7bar
最大压力 Maximum pressure	7bar
耗气量 Gas consumption	350L/min
输送速度 Conveying speed	≤20L/min
油温 Oil temperature	-10-60°C
油品粘度 Oil viscosity	130 SAE
吸油管长 Oil suction pipe length	940mm
吸油管径 Oil suction pipe diameter	42mm
注油枪型式 Oil gun type	数显注油枪Digital oil gun
注油枪咀型式 Type of oil injection nozzle	自动打开型Automatic opening type
计量精度 Accuracy	±0.5%
油管总长 Total length of oil pipe	4m
输油软管 cargo hose	3/8"



重型移动式注油套件 (固定式卷管器)



Heavy duty mobile oiling kit ((Fixed coil type))

比率Ratio:3:1 适用Suit:180-220kg

适用于180-220kg油桶吸油的手拖车式注油套件。


Hand trailer oil filling kit suitable for 180-220kg oil drum suction.

型号 Model	37210K
比率 Ratio	3:1
进气嘴接头 Air intake nozzle connector	1/4"
出油口接头 Oil outlet connector	1/2"
工作压力 Working pressure	3-7bar
最大压力 Maximum pressure	7bar
耗气量 Gas consumption	350L/min
输送速度 Conveying speed	≤20L/min
油温 Oil temperature	-10-60°C
油品粘度 Oil viscosity	130 SAE
吸油管长 Oil suction pipe length	940mm
吸油管径 Oil suction pipe diameter	42mm
注油枪型式 Oil gun type	数显注油枪Digital oil gun
注油枪咀型式 Type of oil injection nozzle	自动打开型Automatic opening type
计量精度 Accuracy	±0.5%
油管总长 Total length of oil pipe	10m+1.5m
输油软管 cargo hose	3/8"



手拖车式注油套件

Hand trailer oil filling kit



比率Ratio:3:1 适用Suit:20-60kg

适用于20-60kg油桶吸油的手拖车式注油套件。

Hand trailer oil filling kit suitable for suction of 20-60kg oil drums.

型号 Model	37500K
比率 Ratio	3:1
进气嘴接头 Air intake nozzle connector	1/4"
出油口接头 Oil outlet connector	1/2"
工作压力 Working pressure	3-7bar
最大压力 Maximum pressure	7bar
耗气量 Gas consumption	350L/min
输送速度 Conveying speed	≤20L/min
油温 Oil temperature	-10-60°C
油品粘度 Oil viscosity	130 SAE
吸油管长 Oil suction pipe length	740mm
吸油管径 Oil suction pipe diameter	42mm
注油枪型式 Oil gun type	数显注油枪Digital oil gun
注油枪咀型式 Type of oil injection nozzle	自动打开型Automatic opening type
计量精度 Accuracy	±0.5%
油管总长 Total length of oil pipe	4m
输油软管 cargo hose	3/8"



封闭式重型卷管器

Closed heavy-duty reel

油管总长Total length of oil pipe : **10m+1.5m**

有坚固的钢盘、卷簧、钢罩构成的可承受高压的卷盘。

The enclosed hose reel, equipped with the sturdy steel jo int, reinforce shell and a rewinding spring with constant tension, is applied for th e fluids transmission under the pressures.

型号 Model	83610R
用途 Usage	稀油 Thin oil
出油管长 Oil outlet pipe length	10m
进油管长 Oil inlet pipe length	1.5m
管径 Pipe diameter	1/2"
压力 pressure	60bar