

**PRODUCT
CATALOGUE**



LUBRICANTS FACTORY

WWW.ROYALSUPER.AE


OVER 22 YEARS OF CUSTOMER SATISFACTION AND ENGINEERING EXCELLENCE

To be the leading provider of high-quality lubricants and related products that enhance the performance and longevity of machinery and equipment while reducing the impact on the environment.

Our mission is to provide our customers with superior lubrication solutions that optimise equipment performance, extend equipment life, and minimise environmental impact. We strive to achieve this by utilising advanced technologies, innovative products, and a highly trained and motivated team. We are committed to conducting our business with integrity, transparency, and social responsibility, and to continuously improving our processes and products to meet the evolving needs of our customers and the industry.

Teams depend on the personalities of the members as well as the leadership style of the managers. However, the ingredients for what makes a successful team are similar across the board. Having mutual respect, common and aligned goals, open communication, and patience can all help make for a successful team.

Leading manufacturer and supplier of lubricants, gear oil fluids, grease, and coolant world-wide. Superior-quality oil is important, and fundamental characteristics of your vehicle depend on it like smooth running, fuel efficiency, performance, and emissions. Multi-grade synthetic engine oils for modern petrol engines have optimal viscosity at wide ranging temperatures.

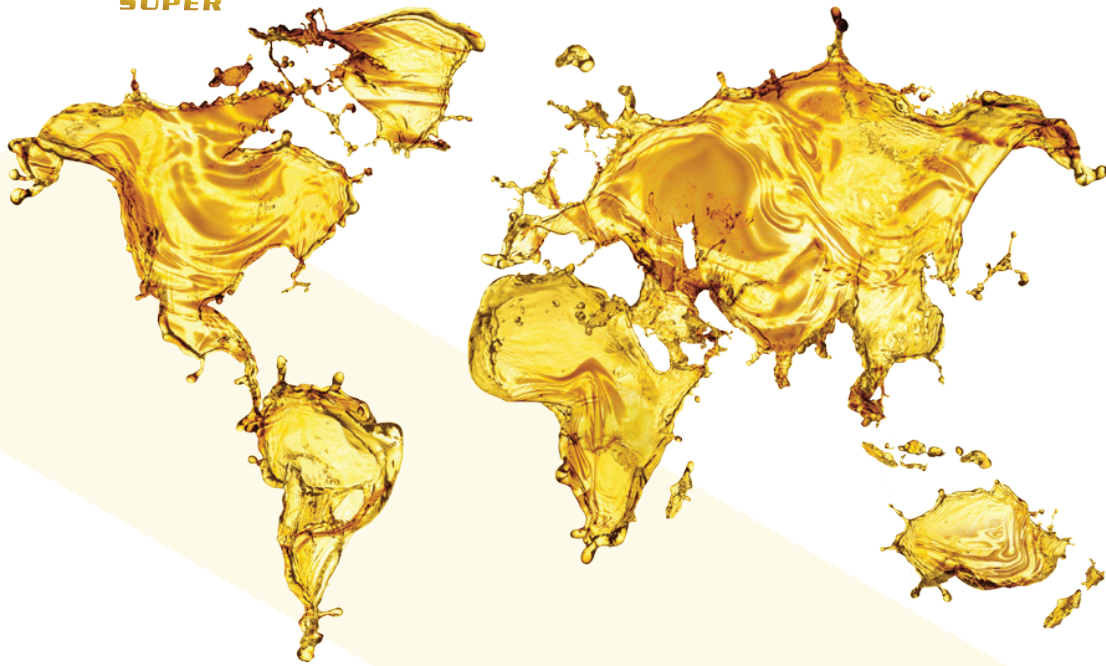

Royal Super Lubricants Brand was founded in 2015 as a lubricant manufacturer in the UAE and has been a supplier and exporter of all types of lubricants worldwide for over 22 years, with a strong presence in Asia, Africa, and Europe. The highest international standards of quality, meeting ISO 9001:2015.

Our laboratory was set up and equipped with the latest technology and machinery to carry out testing and quality control measures to ensure quality control. The advanced technology logistics system allows for unlimited growth opportunities, guarantees high-quality products, and has an extraordinary ability to make faster deliveries worldwide.

All our products are made with 100% virgin base oil. We are a leading manufacturer and supplier of lubricants, gear oil, hydraulic oil, automatic transmission fluid, brake fluid, grease, industrial oil, coolant, and antifreeze worldwide. Superior-quality oil is important, and fundamental characteristics of your vehicle depend on it like smooth running, fuel efficiency, performance, and emissions.

Multi-grade synthetic engine oils for modern petrol engines have optimal viscosity at a wide range of temperatures. Provides quality products and services for our customers. In doing so, we act responsibly toward those who work for us, the communities in which we operate, and our business partners. These are the core values that guide our approach to business.



License No: 3947

SCHEDULE A - LICENSE AGREEMENT

The marks referred to and licensed under the Agreement between API and
LUK INTERNATIONAL TRADING

may be used through 31-Mar-2025 are as follows:

API SERVICE SYMBOL

Licensee is authorized to display the API Certification Mark on the following products:



BRAND NAME	SAE VISCOSITY GRADE	API SERVICE CATEGORY	CLASSIFICATION
ROYAL SUPER	0W-16	SP	Resource Conserving, SN PLUS
ROYAL SUPER	0W-20	SP	Resource Conserving, SN PLUS
ROYAL SUPER	0W-20	SN	
ROYAL SUPER	0W-30	SP	Resource Conserving, SN PLUS
ROYAL SUPER	5W-20	SP	Resource Conserving, SN PLUS
ROYAL SUPER	5W-20	SN	
ROYAL SUPER	5W-30	SP	Resource Conserving, SN PLUS
ROYAL SUPER	5W-30	SN	
ROYAL SUPER	5W-40	SN	
ROYAL SUPER	5W-40	SM	
ROYAL SUPER	10W-30	SP	Resource Conserving, SN PLUS
ROYAL SUPER	10W-30	SN	
ROYAL SUPER	10W-30	SL	
ROYAL SUPER	10W-40	SN	
ROYAL SUPER	10W-40	SL	
ROYAL SUPER	15W-40	SN	
ROYAL SUPER	15W-40	SL	
ROYAL SUPER	15W-40	CI-4/SL	
ROYAL SUPER	20W-40	SN	

Bill O'Keefe

Manager - EOLCS/DEF/MOM

Date: 28-May-2024

Engine Oil Licensing and Certification System

Copyright 2020 – American Petroleum Institute, all rights reserved. API, the API logo, the API Certification Mark ("Starburst"), the API Service Symbol ("Donut"), and the API Certification Mark ("Shield") are either trademarks or registered trademarks of API. 2020-342 | 02.20

To verify the authenticity of this document, go to: engineoil.api.org/Directory/EolcsSearch

License No: 3947

SCHEDULE A - LICENSE AGREEMENT

The marks referred to and licensed under the Agreement between API and
LUK INTERNATIONAL TRADING

may be used through 31-Mar-2025 are as follows:

API SERVICE SYMBOL

Licensee is authorized to display the API Certification Mark on the following products:



BRAND NAME	SAE VISCOSITY GRADE	API SERVICE CATEGORY	CLASSIFICATION
ROYAL SUPER	20W-50	SN	
ROYAL SUPER	20W-50	SL	
ROYAL SUPER	20W-50	CI-4	
ROYAL SUPER	40	SL	

Bill O'Reilly

Manager - EOLCS/DEF/MOM

Date: 28-May-2024

Engine Oil Licensing and Certification System

Copyright 2020 – American Petroleum Institute, all rights reserved. API, the API logo, the API Certification Mark ("Starburst"), the API Service Symbol ("Donut"), and the API Certification Mark ("Shield") are either trademarks or registered trademarks of API. 2020-342 | 02.20

To verify the authenticity of this document, go to: engineoil.api.org/Directory/EolcsSearch

License No: 3947

SCHEDULE A - LICENSE AGREEMENT

The marks referred to and licensed under the Agreement between API and
LUK INTERNATIONAL TRADING

may be used through 31-Mar-2025 are as follows:

API CERTIFICATION MARK

Licensee is authorized to display the API Certification Mark on the following products:



BRAND NAME	SAE VISCOSITY GRADE	ILSAC SPECIFICATION
ROYAL SUPER	0W-20	GF-6A
ROYAL SUPER	0W-30	GF-6A
ROYAL SUPER	5W-20	GF-6A
ROYAL SUPER	5W-30	GF-6A
ROYAL SUPER	10W-30	GF-6A

Bill O'R

Manager - EOLCS/DEF/MOM

Date: 28-May-2024

Engine Oil Licensing and Certification System

Copyright 2020 - American Petroleum Institute, all rights reserved. API, the API logo, the API Certification Mark ("Starburst"), the API Service Symbol ("Donut"), and the API Certification Mark ("Shield") are either trademarks or registered trademarks of API. 2020-342 | 02.20

To verify the authenticity of this document, go to: engineoil.api.org/Directory/EolcsSearch

License No: 3947

SCHEDULE A - LICENSE AGREEMENT

The marks referred to and licensed under the Agreement between API and
 LUK INTERNATIONAL TRADING

may be used through 31-Mar-2025 are as follows:

API CERTIFICATION MARK

Licensee is authorized to display the API Certification Mark on the following products:



BRAND NAME

ROYAL SUPER

SAE VISCOSITY
 GRADE

0W-16

ILSAC SPECIFICATION

GF-6B

Engine Oil Licensing and Certification System

Copyright 2020 - American Petroleum Institute, all rights reserved. API, the API logo, the API Certification Mark ("Starburst"), the API Service Symbol ("Donut"), and the API Certification Mark ("Shield") are either trademarks or registered trademarks of API. 2020-342 | 02.20

To verify the authenticity of this document, go to: engineoil.api.org/Directory/EolcsSearch

Bill O'Keefe

Manager - EOLCS/DEF/MOM

Date: 28-May-2024

Certificate of Registration

This is to Certify that
Quality Management Systems of



L U K INTERNATIONAL AUTO SPARE PARTS TRADING L.L.C
(ROYAL SUPER)

Shop No. 06, Vista Square Hotel Building, 21C Street, Naif, Deira,
Dubai – UAE, PO BOX: 380672.

has been assessed and found to conform to the requirements of

ISO 9001:2015

for the following scope:

Lubricants and Auto Spare Parts Trading

Certificate No. : 179AGL0301
Initial Registration Date : 13.04.2022 Issuance Date : 08.03.2024
Date of Expiry * : 07.03.2027
1st Surve. Due : 07.03.2025 2nd Surve. Due : 07.03.2026

Director



Accurate Global Ltd.

Address- 27, Old Gloucester Street, London, WC1N3AX, United Kingdom

*Validity of the Certificate is subject to successful completion of surveillance audit on or before of due date. (In case surveillance audit is not allowed to be conducted, this certificate shall be suspended/withdrawal).

Certificate Verification: Please Re-check the validity of certificate at www.accurateiso.com at Active Clients. Certificate is the property of Accurate Global Ltd. London, UK and shall be returned immediately when demanded).

Highest international standards of quality, meeting ISO 9001-2015. Our laboratory was set up and equipped with the latest technology and machinery to carry out testing and quality control measures to ensure quality control.

The advanced technology logistics system allows for unlimited growth opportunities, guarantees high-quality products, and has an extraordinary ability to make faster deliveries worldwide.



PETROL ENGINE OIL



**HIGH
PERFORMANCE OIL**

WWW.ROYALSUPER.AE





ROYAL SUPER ENERGIZE 0W-16 API SP

Fully synthetic motor oil for gasoline engine

DESCRIPTION

0W-16 API SP Fully Synthetic Motor Oil is a premium-grade lubricant engineered specifically for gasoline engines. Formulated with advanced synthetic base oils and state-of-the-art additives.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.84
Viscosity @100°C, cSt	ASTM D 445	7.4
Viscosity @40°C, cSt	ASTM D 445	38.25
Viscosity Index	ASTM D 2270	165
Pour Point, °C	ASTM D 97	-42
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	7.2
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API SP, SN PLUS, SN, SM, SL, SJ, API SP RESOURCE CONSERVING, SN PLUS RESOURCE CONSERVING, SN RESOURCE CONSERVING, ILSAC GF-6B, HONDA, TOYOTA, MITSUBISHI, GENERAL MOTORS DEXOS1 GEN2

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER ENERGIZE 0W-20 API SP

Fully synthetic motor oil for gasoline engine

DESCRIPTION

0W-20 API SP Fully Synthetic Motor Oil is a high-quality lubricant specially designed for gasoline engines.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.842
Viscosity @100°C, cSt	ASTM D 445	8.36
Viscosity @40°C, cSt	ASTM D 445	44.8
Viscosity Index	ASTM D 2270	173
Pour Point, °C	ASTM D 97	-42
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	7.2
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

APLSP, SN PLUS, SN, SM, SL, SJ, API SN PLUS RESOURCE CONSERVING, SN RESOURCE CONSERVING, ILSAC GF-6A, GF-5HONDA, TOYOTA, MITSUBISHI, NISSAN, LEXUS, ISUZUKI-GENERAL MOTORS DEXOS 1 GEN3FORD WSS-M2C947

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER ENERGIZE 0W-30 API SP

Fully synthetic motor oil for gasoline engine


DESCRIPTION

0W-30 API SP Fully Synthetic Motor Oil is a premium-grade lubricant engineered specifically for gasoline engines. Formulated with advanced synthetic base oils and cutting-edge additives.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.845
Viscosity @100°C, cSt	ASTM D 445	10.45
Viscosity @40°C, cSt	ASTM D 445	58
Viscosity Index	ASTM D 2270	171
Pour Point, °C	ASTM D 97	-42
Flash point °C	ASTM D 92	225
TBN, mgKOH/gm	ASTM D 2896	7.2
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API SP, SN PLUS, SN, SM, SL, SJ, API SP RESOURCE CONSERVING, SN PLUS RESOURCE CONSERVING, SN RESOURCE CONSERVING, ILSAC GF-6A, HONDA, TOYOTA, MITSUBISHI, GENERAL MOTORS DEXOS1 GEN2

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER ECO BOOST 0W-40 API SP

Fully synthetic motor oil for gasoline engine

DESCRIPTION

0W-40 API SP Fully Synthetic Motor Oil is a high-performance lubricant crafted for gasoline engines. Engineered with premium synthetic base oils and advanced additives.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.845
Viscosity @100°C, cSt	ASTM D 445	14.3
Viscosity @40°C, cSt	ASTM D 445	80.9
Viscosity Index	ASTM D 2270	185
Pour Point, °C	ASTM D 97	-48
Flash point °C	ASTM D 92	230
TBN, mgKOH/gm	ASTM D 2896	10
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API SP, SN PLUS, SN, SM, SL, SJ, API SP RESOURCE CONSERVING, SN PLUS RESOURCE CONSERVING, SN RESOURCE CONSERVING, ILSAC GF-6A, HONDA, TOYOTA, MITSUBISHI, GENERAL MOTORS DEXOS1 GEN2

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER ECO BOOST 5W-20 API SN/CF

Fully synthetic engine oil for petrol vehicle


DESCRIPTION

5W-20 API SN/CF Fully Synthetic Engine Oil for gasoline engines is a premium-grade lubricant specifically formulated to meet the demands of modern petrol engines.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.855
Viscosity @100°C, cSt	ASTM D 445	7.95
Viscosity @40°C, cSt	ASTM D 445	42.75
Viscosity Index	ASTM D 2270	161
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	215 Min
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-30°C,mPa.s	ASTM D 5293	4500

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API SN, SM, SL, SJ, ILSAC GF-5, FORD WSS-M2C947-A, GM DEXOS 1.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER ECO BOOST 5W-30 API SN/CF

Fully synthetic engine oil for petrol vehicle

DESCRIPTION

5W-30 API SN/CF Fully Synthetic Engine Oil is a high-quality lubricant specifically designed for gasoline engines. Formulated with advanced synthetic base oils and premium additives, it offers outstanding protection against friction, wear,

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.855
Viscosity @100°C, cSt	ASTM D 445	10.8
Viscosity @40°C, cSt	ASTM D 445	63
Viscosity Index	ASTM D 2270	164
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	215 Min
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-30°C,mPa.s	ASTM D 5293	4700

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API SN, CF, ACEA C3/C2-16, BMW LL-04, VW 502/505, MB 229.31, PORSCHE C30.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER ECO BOOST 5W-40 API SN/CF

Fully synthetic engine oil for petrol vehicle

DESCRIPTION

5W-40 API SN/CF Fully Synthetic Engine Oil is a top-tier lubricant engineered specifically for gasoline engines. Crafted with premium synthetic base oils and advanced additives.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.855
Viscosity @100°C, cSt	ASTM D 445	14.8
Viscosity @40°C, cSt	ASTM D 445	92
Viscosity Index	ASTM D 2270	169
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	215 Min
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-25°C,mPa.s	ASTM D 5293	4950

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API SN, SM, SL, SJ, CF, ACEA A3/B3, A3/B4, BMW LL-01, RENAULT RN 0700/0710, VW 502 00/ 505 00, MB 229.3/229.1, PORSCHE A40.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER ECO BOOST 10W-30 API SN/CF

Synthetic engine oil for petrol vehicle

DESCRIPTION

10W-30 API SN/CF Synthetic Engine Oil is a high-quality lubricant specifically formulated for gasoline engines. Engineered with advanced synthetic base oils and premium additives.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.86
Viscosity @100°C, cSt	ASTM D 445	10.4
Viscosity @40°C, cSt	ASTM D 445	62.6
Viscosity Index	ASTM D 2270	156
Pour Point, °C	ASTM D 97	-36
Flash point °C	ASTM D 92	215 Min
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-25°C,mPa.s	ASTM D 5293	5600

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API SN, SM, SL, SJ, CF, ACEA A3/B3, A3/B4, RENAULT RN 0700/0710, VW 502 00/ 505 00, MB 229.3.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER ECO BOOST 10W-40 API SN/CF

Synthetic engine oil for petrol vehicle

DESCRIPTION

10W-40 API SN/CF Synthetic Engine Oil is a premium lubricant specially designed for gasoline engines. Crafted with advanced synthetic base oils and fortified with top-quality additives.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	15.1
Viscosity @40°C, cSt	ASTM D 445	102
Viscosity Index	ASTM D 2270	155
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	215 Min
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-25°C,mPa.s	ASTM D 5293	5800

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API SN, SM, SL, SJ, CF, ACEA A3/B3, A3/B4, RENAULT RN 0700/0710, VW 502 00/ 505 00, MB 229.3, PSA B71 2300.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER ECO BOOST 10W-30 API SL/CF

High performance engine oil for petrol vehicle


DESCRIPTION

10W-30 API SL/CF Engine Oil is a high-quality lubricant tailored for gasoline engines. Crafted with advanced base oils and premium additives, it delivers exceptional protection against friction, wear, and deposit buildup.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	11.8
Viscosity @40°C, cSt	ASTM D 445	78
Viscosity Index	ASTM D 2270	145
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-25°C,mPa.s	ASTM D 5293	5650

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API SL,SJ,CF MB 229.1,ACEA A3/B3, VW 505 00

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER ECO BOOST 10W-40 API SL/CF

High performance engine oil for petrol vehicle


DESCRIPTION

10W-40 API SL/CF Engine Oil is a premium-grade lubricant engineered specifically for gasoline engines. Formulated with advanced high performance engine oil for petrol vehicle base oils and high-quality additives.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	15.1
Viscosity @40°C, cSt	ASTM D 445	102
Viscosity Index	ASTM D 2270	155
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	215
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-25°C,mPa.s	ASTM D 5293	5800

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API SL,SJ,CF MB 229.1,ACEA A3/B3, VW 505 00

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER ECO BOOST 15W-40 API SL/CF

High Performance Technology engine oil for petrol vehicle

DESCRIPTION

15W-40 API SL/CF is a type of engine oil suitable for gasoline vehicles. High Performance Technology suggests that it's formulated to meet the demands of modern engines, possibly offering improved performance, protection.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	15
Viscosity @40°C, cSt	ASTM D 445	112
Viscosity Index	ASTM D 2270	139
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	7.8
CCS @-15°C,mPa.s	ASTM D 5293	6100

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API SL,SJ,CF MB 229.1,ACEA A3/B3, VW 505 00

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

ROYAL SUPER ECO BOOST 20W-50 API SL/CF

High Performance Technology engine oil for petrol vehicle

DESCRIPTION

20W-50 API SL/CF High Performance Technology engine oil is specifically designed for gasoline engines. Its viscosity rating ensures optimal flow in both cold and hot conditions.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.87
Viscosity @100°C, cSt	ASTM D 445	20.4
Viscosity @40°C, cSt	ASTM D 445	176
Viscosity Index	ASTM D 2270	136
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	7.4
CCS @-15°C,mPa.s	ASTM D 5293	7500

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API SL,SJ,CF MB 229.1,ACEA A3/B3, VW 505 00

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

ROYAL SUPER ECO BOOST 20W-60 API SL/CF

High Performance Technology engine oil for petrol vehicle

DESCRIPTION

20W-60 API SL/CF High Performance Technology engine oil is tailored for gasoline engines, offering a viscosity profile suitable for varying temperatures.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.878
Viscosity @100°C, cSt	ASTM D 445	25.4
Viscosity @40°C, cSt	ASTM D 445	
Viscosity Index	ASTM D 2270	140
Pour Point, °C	ASTM D 97	-24
Flash point °C	ASTM D 92	238
TBN, mgKOH/gm	ASTM D 2896	7.5
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API SL,SJ,CF MB 229.1,ACEA A3/B3, VW 505 00

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

ROYAL SUPER ECO BOOST 25W-60 API SL/CF

High Performance Technology engine oil for petrol vehicle

DESCRIPTION

25W-60 API SL/CF High Performance Technology engine oil is engineered for gasoline engines, featuring a viscosity range suitable for diverse temperature conditions. Meeting API SL standards ensures reliable protection against wear.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.878
Viscosity @100°C, cSt	ASTM D 445	25.8
Viscosity @40°C, cSt	ASTM D 445	
Viscosity Index	ASTM D 2270	139
Pour Point, °C	ASTM D 97	-24
Flash point °C	ASTM D 92	238
TBN, mgKOH/gm	ASTM D 2896	7.5
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API SL,SJ,CF MB 229.1,ACEA A3/B3, VW 505 00

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

PETROL OIL

ROYAL SUPER FULL SYNTHETIC ENGINE OIL API SAE IS AN ADVANCED FULLY SYNTHETIC MOTOR OIL DESIGNED TO KEEP YOUR ENGINE RUNNING LIKE NEW BY PROVIDING EXCEPTIONAL WEAR PROTECTION, CLEANING POWER, AND OVERALL PERFORMANCE.



رويال سوپر

ROYAL[®]
SUPER

DIESEL
ENGINE OIL

**HIGH
PERFORMANCE OIL**

WWW.ROYALSUPER.AE





ROYAL SUPER PRO TECH 5W-40 API CK-4/SN

Synthetic Pro - Efficient Technology heavy duty diesel engine oil


DESCRIPTION

5W-40 API CK-4/SN Synthetic Pro is a top-tier heavy-duty diesel engine oil. Formulated with a blend of synthetic components, it offers enhanced efficiency & durability.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.84
Viscosity @100°C, cSt	ASTM D 445	15.1
Viscosity @40°C, cSt	ASTM D 445	94.5
Viscosity Index	ASTM D 2270	170
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	9.9
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API CK-4, CJ-4, CI-4+, CI-4, CH-4, CF, SN, SM, SL, ACEA E11/ E7-22, CAT ECF-3, MB 228.31, MTU TYPE 2.1, VOLVO VDS 4.5, MACK EOS 4.5, MAN 3275/3775, RENAULT VI RLD-4, CUMMINS CES 20086, JASO DH-2, DUETZ DQC III-18 LA.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER PRO TECH 10W-40 API CK-4/SN

Synthetic Pro - Efficient Technology heavy duty diesel engine oil


DESCRIPTION

10W-40 API CK-4/SN Synthetic Pro is a cutting-edge heavy-duty diesel engine oil infused with advanced technology for optimal performance. Meeting the strict API CK-4 standards.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.858
Viscosity @100°C, cSt	ASTM D 445	14.4
Viscosity @40°C, cSt	ASTM D 445	96
Viscosity Index	ASTM D 2270	155
Pour Point, °C	ASTM D 97	-36
Flash point °C	ASTM D 92	225
TBN, mgKOH/gm	ASTM D 2896	9.8
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API CK-4, CJ-4, CI-4+, CI-4, CH-4, CF, SN, SM, SL, ACEA E11/ E7-22, MB 228.31, MAN 3275/3775, VOLVO VDS 4.5, RENAULT VI RLD-4, MACK EOS-4.5, MTU 2.1, CATERPILLAR ECF-3, DEUTZ DQC III-18 LA, CUMMINS CES 20086, DETROIT DIESEL POWER GUARD 93K222.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER PRO TECH 15W-40 API CK-4/SN

Synthetic Pro - Efficient Technology heavy duty diesel engine oil

DESCRIPTION

15W-40 API CK-4/SN is a high-quality heavy-duty diesel engine oil formulated to meet the rigorous standards set by the American Petroleum Institute (API).

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	15.4
Viscosity @40°C, cSt	ASTM D 445	120
Viscosity Index	ASTM D 2270	136
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	228
TBN, mgKOH/gm	ASTM D 2896	9.9
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API CK-4, CJ-4, CI-4+, CI-4, CH-4, CF, SN, SM, SL, ACEA E11/ E7-22, MB 228.31, MAN 3275/3775, VOLVO VDS 4.5, RENAULT VI RLD-4, MACK EOS-4.5, MTU 2.1, CATERPILLAR ECF-3, DEUTZ DQC III-18 LA, CUMMINS CES 20086, DETROIT DIESEL POWER GUARD 93K222, FORD 171-F1.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER PRO TECH 10W-40 CI-4/SL

Synthetic Pro - Efficient Technology heavy duty diesel engine oil


DESCRIPTION

10W-40 CI-4/SL is a premium-grade engine oil designed for both diesel and gasoline engines. It meets the specifications of API CI-4 for diesel engines and API SL for gasoline engines.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	15
Viscosity @40°C, cSt	ASTM D 445	101
Viscosity Index	ASTM D 2270	156
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	230
TBN, mgKOH/gm	ASTM D 2896	11
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

CI-4, CH-4, CG-4, CF-4, CF, SL, SJ, ACEA E7-16, A3/B4, MB 228.3, MAN 3275, VOLVO VDS-3, DEUTZ DQC-III, DEUTZ DQC II, MTU 2.0, MACK EO-M+, CUMMINS CES 20078/ 77, CATERPILLAR ECF-1A, ECF-2, RENAULT RLD-2.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER PRO TECH 15W-40 API CI-4/SL

Synthetic Pro - Efficient Technology heavy duty diesel engine oil

DESCRIPTION

15W-40 API CI-4/SL is a high-quality engine oil suitable for both diesel and gasoline engines. Meeting the standards of API CI-4 for diesel engines and API SL for gasoline engines.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.863
Viscosity @100°C, cSt	ASTM D 445	15.15
Viscosity @40°C, cSt	ASTM D 445	119
Viscosity Index	ASTM D 2270	133
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	220
TBN, mgKOH/gm	ASTM D 2896	11
CCS @-20°C,mPa.s	ASTM D 5293	6450

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API CI-4, CH-4, SL, SJ, ACEA E7-16, MB 228.3, MAN 3275, VOLVO VDS-3, DEUTZ DQC-III, DEUTZ DQC II, MTU 2.0, MACK EO-N, MACK EO-M+, CUMMINS CES 20078/ 77, CATERPILAR ECF-1A, ECF-2, RENAULT RLD-2, JASO DH-1, GLOBAL DHD-1, DDC 93K215.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER PRO TECH 20W-50 API CH-4/SJ

Clean-Shield Technology heavy duty diesel engine oil


DESCRIPTION

20W-50 API CH-4/SJ is a robust engine oil primarily designed for heavy-duty diesel engines. It adheres to the stringent specifications set by the API for CH-4 classification, indicating its suitability for high-performance diesel engines.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.87
Viscosity @100°C, cSt	ASTM D 445	20.2
Viscosity @40°C, cSt	ASTM D 445	170
Viscosity Index	ASTM D 2270	138
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	10.1
CCS @-15°C,mPa.s	ASTM D 5293	7250

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

MB 228.1, MAN 3275, CATERPILLAR ECF-1A, ACEA E7-16.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER PRO TECH SAE-40 API CF/SF

Super premium heavy duty diesel engine oil

DESCRIPTION

SAE-40 API CF/SF is a high-quality engine oil formulated to meet the specifications of both API CF and API SF classifications. It is suitable for use in gasoline and diesel engines, offering excellent protection against wear, oxidation, and deposits.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.872
Viscosity @100°C, cSt	ASTM D 445	15.1
Viscosity Index	ASTM D 2270	123
Pour Point, °C	ASTM D 97	
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	8

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API CF, CD, SF, MB 228.0, CATERPILLAR TO-2, MTU TYPE-1, ACEA E2.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER PRO TECH SAE-50 API CF/SF

Super premium heavy duty diesel engine oil

DESCRIPTION

SAE-50 API CF/SF is a robust engine oil designed to meet the requirements of both API CF and API SF classifications. This high-quality oil is suitable for use in gasoline and diesel engines.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.872
Viscosity @100°C, cSt	ASTM D 445	20.2
Viscosity @40°C, cSt	ASTM D 445	164
Viscosity Index	ASTM D 2270	132
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	8

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API CF, CD, SF, MB 228.0, CATERPILLAR TO-2, MTU TYPE-1, ACEA E2

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER PRO TECH SAE-60 API CF

Super premium heavy duty diesel engine oil

DESCRIPTION

SAE-60 API CF is a heavy-duty engine oil engineered to meet the specifications of API CF classification. Specifically formulated for diesel engines, it offers superior protection against wear, oxidation, and deposits.

SPECIFICATION

Density @29.5°C, gm/CC	ASTM D 4052	0.879
Viscosity @100°C, cSt	ASTM D 445	24.3
Viscosity @40°C, cSt	ASTM D 445	267
Viscosity Index	ASTM D 2270	115
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	8

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API CF, CD, SF, MB 228.0, CATERPILLAR TO-2. MTU TYPE-1, ACEA E2.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER PRO TECH SAE-70 API CF

Super premium heavy duty diesel engine oil

DESCRIPTION

SAE-70 API CF is a heavy-duty engine oil designed to meet the requirements of the API CF classification. Tailored for use in diesel engines, this oil offers outstanding protection against wear, oxidation, and deposits.

SPECIFICATION

Density @29.5°C, gm/CC	ASTM D 4052	0.879
Viscosity @100°C, cSt	ASTM D 445	29.5
Viscosity @40°C, cSt	ASTM D 445	328.8
Viscosity Index	ASTM D 2270	123
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	240
TBN, mgKOH/gm	ASTM D 2896	8

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API CF, CD, SF, MB 228.0, CATERPILLAR TO-2. MTU TYPE-1, ACEA E2.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER PRO TECH HD-50 API CF/SF

Super premium diesel engine oil

DESCRIPTION

HD-50 API CF/SF is a high-performance engine oil engineered to meet the standards of both API CF and API SF classifications. Suitable for gasoline and diesel engines, this oil offers excellent protection against wear, oxidation, and deposits.

SPECIFICATION

Density @29.5°C, gm/CC	ASTM D 4052	0.884
Viscosity @100°C, cSt	ASTM D 445	20.2
Viscosity @40°C, cSt	ASTM D 445	234
Viscosity Index	ASTM D 2270	98
Pour Point, °C	ASTM D 97	-18
Flash point °C	ASTM D 92	245
TBN, mgKOH/gm	ASTM D 2896	8

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API CF, CD, SF, MB 228.0, CATERPILLAR TO-2. MTU TYPE-1, ACEA E2.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



DIESEL OIL

ROYAL SUPER FULL SYNTHETIC ENGINE OIL API CI4 SAE IS AN ADVANCED FULLY SYNTHETIC MOTOR OIL DESIGNED TO KEEP YOUR ENGINE RUNNING LIKE NEW BY PROVIDING EXCEPTIONAL WEAR PROTECTION, CLEANING POWER, AND OVERALL PERFORMANCE.

رويال سوپر



ROYAL[®]
SUPER



GEAR
OIL

**OVERALL
GEAR PROTECTION**

WWW.ROYALSUPER.AE





ROYAL SUPER VITAL TECH 75W-80 API GL 5

Manual transmission high performance gear oil

DESCRIPTION

75W-80 API GL 5 is a specialized gear oil designed for automotive transmissions and differentials. Meeting the API GL 5 specification, it provides exceptional protection against wear, corrosion, and extreme pressures in various gear systems.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.87
Viscosity @100°C, cSt	ASTM D 445	16.3
Viscosity @40°C, cSt	ASTM D 445	125
Viscosity Index	ASTM D 2270	139
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	220

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

MIL L 2105 C; FORD WSD-M2C200-C; MACK GO-J PLUS; PSA B71 2330

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER VITAL TECH 75W-90 API GL 5

Manual transmission high performance gear oil

DESCRIPTION

75W-90 API GL 5 is a high-performance gear oil formulated for use in automotive transmissions and differentials. Compliant with the API GL 5 specification, it offers superior protection against wear.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.875
Viscosity @100°C, cSt	ASTM D 445	16.3
Viscosity @40°C, cSt	ASTM D 445	125
Viscosity Index	ASTM D 2270	139
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API GL-5/MT-1 (EQV.MIL-L2105D), SAE J2360, SCANIA STO 1:0, MAN 342 M2, ZF TE ML 05A, 7A, 12E, 16B, C & D, 17B, 19B, 21A, VOLVO 1273.10.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER VITAL TECH 80W-90 API GL 5

Manual transmission high performance gear oil

DESCRIPTION

80W-90 API GL 5 is a heavy-duty gear oil specifically designed for automotive transmissions and differentials. Formulated to meet the API GL 5 specification, it offers superior protection against wear, corrosion, and extreme.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.885
Viscosity @100°C, cSt	ASTM D 445	14.6
Viscosity @40°C, cSt	ASTM D 445	152
Viscosity Index	ASTM D 2270	96
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API GL-5, MIL-L-2105D (U.S MILITARY SPECIFICATIONS), MAN 342 M2, ZF TE ML 05A, 7A, 12E, 16EB, C & D, 17B, 19B, 21A.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER VITAL TECH 85W-90 API GL 5

Manual transmission high performance gear oil

DESCRIPTION

85W-90 API GL 5 is a robust gear oil engineered for automotive transmissions and differentials, meeting the API GL 5 specification. Designed to withstand high pressures and temperatures.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.885
Viscosity @100°C, cSt	ASTM D 445	14.6
Viscosity @40°C, cSt	ASTM D 445	152
Viscosity Index	ASTM D 2270	96
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	245

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API GL-5, MIL-L-2105D (U.S MILITARY SPECIFICATIONS), MAN 342 M2, ZF TE ML 05A, 7A, 12E, 16EB, C & D, 17B, 19B, 21A.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER VITAL TECH 85W-140 API GL 5

Manual transmission high performance gear oil

DESCRIPTION

85W-140 API GL 5 is a heavy-duty gear oil designed for use in automotive transmissions and differentials, meeting the API GL 5 specification. Engineered to endure extreme pressures and temperatures.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.894
Viscosity @100°C, cSt	ASTM D 445	25.3
Viscosity @40°C, cSt	ASTM D 445	375
Viscosity Index	ASTM D 2270	90
Pour Point, °C	ASTM D 97	-15
Flash point °C	ASTM D 92	260

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API GL-5, MIL-L-2105D (U.S MILITARY SPECIFICATIONS), MAN 342 M2, ZF TE ML 05A, 7A, 12E, 16EB, C & D, 17B, 19B, 21A SCANIA STO 1:0, VOLVO 1273.10.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER VITAL TECH SAE 90 API GL 5

Manual transmission high performance gear oil

DESCRIPTION

SAE 90 API GL 5 is a heavy-duty gear oil specifically formulated for use in automotive transmissions and differentials. It meets the API GL 5 specification, indicating its capability to provide superior protection against wear & corrosion.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.885
Viscosity @100°C, cSt	ASTM D 445	15
Viscosity @40°C, cSt	ASTM D 445	167
Viscosity Index	ASTM D 2270	94
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	245

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API GL-5, MIL-L-2105D (U.S MILITARY SPECIFICATIONS), MAN 342 M2, ZF TE ML 05A, 7A, 12E, 16EB, C & D, 17B, 19B, 21A.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER VITAL TECH SAE 140 API GL 5

Manual transmission high performance gear oil

DESCRIPTION

SAE 140 API GL 5 is a heavy-duty gear oil specially formulated for use in automotive transmissions and differentials. It adheres to the API GL 5 specification, indicating its ability to provide superior protection against wear & corrosion.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.894
Viscosity @100°C, cSt	ASTM D 445	25.8
Viscosity @40°C, cSt	ASTM D 445	380
Viscosity Index	ASTM D 2270	90
Pour Point, °C	ASTM D 97	-15
Flash point °C	ASTM D 92	265

Download DATA SHEET



Scan QR


MEETS OR EXCEEDS:

API GL-5, MIL-L-2105D (U.S MILITARY SPECIFICATIONS), MAN 342 M2, ZF TE ML 05A, 7A, 12E, 16EB, C & D, 17B, 19B, 21A.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

GEAR OIL

ROYAL SUPER LUBRICANT GEAR OIL SAE API GL-5 IS MIXED WITH GREAT MINERAL BASE OIL AS WELL AS SOME ANTI-WEAR AND ANTI-FROTHING ADDED SUBSTANCES THAT HAVE SOLID OXIDATION AND FROTHING OBSTRUCTION USE IN UNCOMPROMISING ACTIVITIES TRACKED DOWN IN BUSINESS ARSENALS, MANUAL TRANSMISSIONS, AXELS, AND LAST DRIVES.

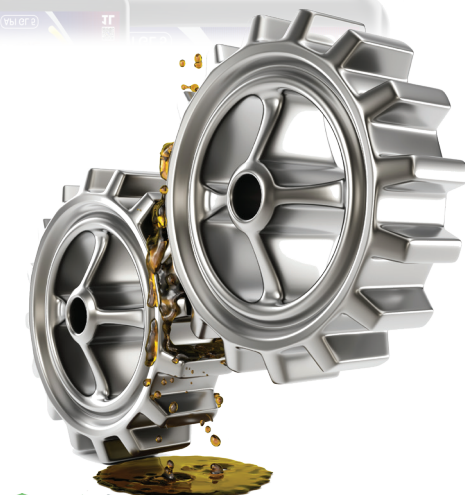



HYDRAULIC
FLUID

ANTIWEAR
HIGH PROTECTION

WWW.ROYALSUPER.AE



ROYAL SUPER ULTRA TECH ISO-10

Heavy duty protection antiwear hydraulic fluid

DESCRIPTION

ISO 10 is a low-viscosity hydraulic oil suitable for use in hydraulic systems where precise control and responsiveness are required. It belongs to the ISO VG (Viscosity Grade) classification system, indicating its viscosity at 40°C

MEETS OR EXCEEDS:

DENISON HF-0, HF-1, HF-2, DIN 51524 PART II, ISO 11158 HM, SAE MS 1004 HM AND ASTM D6158 HM, CINCINNATI MACHINE P-68, P-69 AND P-70

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.858
Viscosity @100°C, cSt	ASTM D 445	2.75
Viscosity @40°C, cSt	ASTM D 445	10.4
Viscosity Index	ASTM D 2270	105
Pour Point, °C	ASTM D 97	-15
Flash point °C	ASTM D 92	190

Download DATA SHEET



Scan QR



ROYAL SUPER ULTRA TECH ISO-32

Heavy duty protection antiwear hydraulic fluid

DESCRIPTION

ISO 32 hydraulic oil offers a balanced viscosity that provides sufficient lubrication while ensuring smooth operation and efficient energy transfer within hydraulic systems.

MEETS OR EXCEEDS:

DENISON HF-0, HF-1, HF-2, DIN 51524 PART II, ISO 11158 HM, SAE MS 1004 HM AND ASTM D6158 HM, CINCINNATI MACHINE P-68, P-69 AND P-70

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.868
Viscosity @100°C, cSt	ASTM D 445	5.15
Viscosity @40°C, cSt	ASTM D 445	32.8
Viscosity Index	ASTM D 2270	92
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR



ROYAL SUPER ULTRA TECH ISO-37

Heavy duty protection antiwear hydraulic fluid

DESCRIPTION

ISO 37 is indeed a specific type of hydraulic fluid designed for heavy-duty applications, particularly emphasizing anti-wear protection.

MEETS OR EXCEEDS:

DENISON HF-0, HF-1, HF-2, DIN 51524 PART II, ISO 11158 HM, SAE MS 1004 HM AND ASTM D6158 HM, CINCINNATI MACHINE P-68, P-69 AND P-70

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.869
Viscosity @100°C, cSt	ASTM D 445	5.65
Viscosity @40°C, cSt	ASTM D 445	37.5
Viscosity Index	ASTM D 2270	93
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR



ROYAL SUPER ULTRA TECH ISO-46

Heavy duty protection antiwear hydraulic fluid

DESCRIPTION

ISO 46 heavy-duty protection anti-wear hydraulic fluid offers superior lubrication and protection for hydraulic systems operating under demanding conditions.

MEETS OR EXCEEDS:

DENISON HF-0, HF-1, HF-2, DIN 51524 PART II, ISO 11158 HM, SAE MS 1004 HM AND ASTM D6158 HM, CINCINNATI MACHINE P-68, P-69 AND P-70

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.868
Viscosity @100°C, cSt	ASTM D 445	6.7
Viscosity @40°C, cSt	ASTM D 445	46.8
Viscosity Index	ASTM D 2270	94
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR





ROYAL SUPER ULTRA TECH ISO-68

Heavy duty protection antiwear hydraulic fluid

DESCRIPTION

ISO 68 heavy-duty protection anti-wear hydraulic fluid is engineered to provide exceptional lubrication and protection for hydraulic systems subjected to rigorous conditions.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.873
Viscosity @100°C, cSt	ASTM D 445	8.49
Viscosity @40°C, cSt	ASTM D 445	66.5
Viscosity Index	ASTM D 2270	97
Pour Point, °C	ASTM D 97	-21
Flash point °C	ASTM D 92	230

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

DENISON HF-O, HF-1, HF-2, DIN 51524 PART II, ISO 11158 HM, SAE MS 1004 HM AND ASTM D6158 HM, CINCINNATI MACHINE P-68, P-69 AND P-70

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER HYDRAULIC OIL ISO IS A HIGH-PERFORMANCE ANTI-WEAR HYDRAULIC OIL SPECIFICALLY FORMULATED FROM SELECTED BASE OILS AND A PROPRIETARY ADDITIVE SYSTEM TO PROVIDE WELL-BALANCED PERFORMANCE IN A RANGE OF APPLICATIONS.

MANUFACTURED FROM A HIGH QUALITY OF VIRGIN BASE OILS COMBINED WITH ANTI-WEAR ADDITIVES AND RUST INHIBITORS TO PROVIDE HIGHLY STABLE PREMIUM HYDRAULIC FLUIDS WITH QUALITY RESERVE FOR EXCELLENT PERFORMANCE UNDER SEVERE OPERATING CONDITIONS IN MOBILE INDUSTRIAL SERVICE. DESIGNED TO PROVIDE EASY OPERATION AND LONG-LIFE PERFORMANCE.



**ABSOLUTE ENGINE ENDURANCE
IN EVERY CONDITION**

WWW.ROYALSUPER.AE



ROYAL SUPER FLUID TECH ATF CVTF

Energize performance automatic transmission fluid

DESCRIPTION

ATF CVTF is engineered to meet the unique requirements of CVTs, providing smooth operation & optimal friction control.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.85
Viscosity @100°C, cSt	ASTM D 445	7.15
Viscosity @40°C, cSt	ASTM D 445	34.7
Viscosity Index	ASTM D 2270	175
Pour Point, °C	ASTM D 97	-48
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

AUDI/VW (TL 52180; G 052 180, G 052 516), DAIHATSU (AMIX CVTF-DC/AMIX CVTF DFE), FORD (CVT23/CVT30/MERCON C/CFT30/WSS-M2C933-A/MOTORCRAFT XT-7-QCFT), HONDA (HMMF, HCF-2), JASO 1A, MAZDA CVTF 3320, SUBARU (NS-2/LINEART-RONIC CVTF/I-CVTF/KO425Y0710/CV-30/E-CVTF), SHELL GREEN IV, BMW/MINI COOPER 8322 O 136 376/8322 O 429 154 (EZL 799), DODGE/JEEP CVT (NS-2/CVTF+4/MOPAR CVT 4), HYUNDAI GENUINE CVTF, MERCEDES BENZ CVT28 (236.20), NISSAN NS-1/NS-2/NS-3, TOYOTA/LEXUS TC/FE, GM/SATURN (DEX-CVT/CVTF F-GREEN2*), HYUNDAI/KIA (SP-II, SP CVT 1), MITSUBISHI (CVTF-JI/CVTF-DIAQUEEN JI/DIAQUEEN J-4/5P-), PUNCH (EZL 799A), SUZUKI (TC/NS-2/CVT GREEN 1/CVTF GREEN 2/CVTF 3320), ZF CVT V1.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER FLUID TECH ATF DEX VI

Energize performance automatic transmission fluid

DESCRIPTION

ATF DEX VI is an advanced automatic transmission fluid formulated to meet the specifications of General Motors' DEXRON VI specification.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.85
Viscosity @100°C, cSt	ASTM D 445	6
Viscosity @40°C, cSt	ASTM D 445	30.5
Viscosity Index	ASTM D 2270	150
Pour Point, °C	ASTM D 97	-51
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

GENERAL MOTORS DEXRON-VI, TOYOTA T-WS (JWS 3324), ZF M-1375.4 (6HP), VICKERS M2950-S, I-286-S, ALLISON C-3 & C-4, MITSUBISHI DIAQUEEN SP-IV, ACURA ATF-Z1, JASO 1A-LV, HYUNDAI/ KIA SP-IV, HONDA ATF DW-1/ ACURA ATF-Z1 VOLVO CE 97340, PORSCHE T-IV (JWS 3309), CHRYSLER ATF+, +2, +3 (MS 7176E), +4 (MS 9602) AUDI 5 HP LT71141, FORD MERCON LV, NISSAN MATIC S/ CAT TO-2, MB 236.12 & 236.14, HYUNDAI NWS-9638, MB 236.1/236.9, BMW MINI/LA2634, CAT TO-2.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER FLUID TECH ATF DEX III

Energize performance automatic transmission fluid

DESCRIPTION

ATF DEX III is a type of automatic transmission fluid designed to meet the specifications set by General Motors for DEXRON III fluid.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.850
Viscosity @100°C, cSt	ASTM D 445	7.7
Viscosity @40°C, cSt	ASTM D 445	39
Viscosity Index	ASTM D 2270	171
Pour Point, °C	ASTM D 97	-39
Flash point °C	ASTM D 92	210

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

GM DEXRON III & FORD MERCON, MB 236.1/5/6/7, TOYOTA T-III T-IV, ALLISON C-4 & CAT TO-2, MAN 339 Z1 & V1/339 Z2 & V2, VOITH TURBO 55.6335, ZF TE-ML 03D/O4D/O9/11A/11B/14A/17C.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER FLUID TECH ATF DEX II

Energize performance automatic transmission fluid

DESCRIPTION

ATF DEX II is a specific type of automatic transmission fluid formulated to meet the requirements of General Motors' DEXRON II specification.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.85
Viscosity @100°C, cSt	ASTM D 445	7.2
Viscosity @40°C, cSt	ASTM D 445	35.5
Viscosity Index	ASTM D 2270	160
Pour Point, °C	ASTM D 97	-45
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

GM DEXRON II & FORD MERCON, MB 236.1/5/6/7, ZF TE-ML 03D/ O4D/O9/11A/11B/14A/17C, MAN 339 Z1 & V1/339 Z2 & V2, VOITH TURBO 55.6335 (G607 LIST) , ALLISON C-4 & CAT TO-2.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER FLUID TECH ATF TYPE A

Energize performance automatic transmission fluid

DESCRIPTION

ATF Type A Energize is a high-performance automatic transmission fluid (ATF) designed to optimize transmission performance and reliability. Engineered with advanced additives.

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.85
Viscosity @100°C, cSt	ASTM D 445	6.8
Viscosity @40°C, cSt	ASTM D 445	36
Viscosity Index	ASTM D 2270	148
Pour Point, °C	ASTM D 97	-30
Flash point °C	ASTM D 92	215

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

GM DEXRON , TYPE A, MB 236.2.

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER BRAKE FLUID DOT-3

Heavy duty high-quality synthetic

DESCRIPTION

Royal Super DOT 3 BRAKE FLUID is a high-quality synthetic brake and clutch fluid conforming to the DOT 3 specification and based on poly glycol type fluid that is a general standard used in world-wide automotive brake equipment. It is suitable for passenger cars, trucks and buses that require synthetic brake oil.

Download DATA SHEET



Scan QR

AVAILABLE SIZE

250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER BRAKE FLUID DOT-4

Heavy duty high-quality synthetic

DESCRIPTION

Royal Super DOT 4 BRAKE FLUID is a high-quality synthetic brake and clutch fluid conforming to the DOT 4 specification and based on poly glycol type fluid that is a high-performance standard used in worldwide automotive brake equipment. It is suitable for passenger cars, trucks and buses that require DOT 4 synthetic brake fluid, as well as high performance cars.

Download DATA SHEET



Scan QR

AVAILABLE SIZE

250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER RADIATOR COOLANT

Ultra long life radiator coolant 240,000km protection

DESCRIPTION

Royal Super Ultra Tech Radiator Coolant is a premium quality, Virgin ethylene glycol-based anti-coolant. Concentrate high quality coolant for year-round use. Ready-mixed high performance coolant designed to prevent winter freezing and summer overheating with very good protection against corrosion. It will give excellent corrosion protection to all metals used in the construction of gasoline and diesel engines especially the principle metals iron, copper and aluminum.

Download DATA SHEET



Scan QR

AVAILABLE SIZE

250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



رويال سوپر
ROYAL[®]
SUPER

MOTORCYCLE
OIL

PROTECTION
WHEREVER YOU GO

WWW.ROYALSUPER.AE



ROYAL SUPER 4T STROKE OIL 10W-40 SN

Off road superior performance motorcycle engine oil

DESCRIPTION

4T STROKE OIL 10W-40 SN is a four-stroke engine oil with a viscosity grade of 10W-40, suitable for engines with a separate oil reservoir. It meets the SN specifications, providing modern performance and protection for gasoline engines.

MEETS OR EXCEEDS:

API SN,SM,SL, JASO MA,JASO MA2, JASO 4T CLUTCH PERFORMANCE

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.862
Viscosity @100°C, cSt	ASTM D 445	14.3
Viscosity @40°C, cSt	ASTM D 445	130
Viscosity Index	ASTM D 2270	158
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	230
TBN, mgKOH/gm	ASTM D 2896	8
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

ROYAL SUPER 4T STROKE OIL 10W-40 SL

Off road superior performance motorcycle engine oil

DESCRIPTION

4T STROKE OIL 10W-40 SL is a four-stroke engine oil with a viscosity grade of 10W-40, suitable for engines with separate oil reservoirs. It meets the SL specifications, providing modern performance and protection for gasoline engines.

MEETS OR EXCEEDS:

API SL, JASO MA,JASO MA2, JASO 4T CLUTCH PERFORMANCE

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.873
Viscosity @100°C, cSt	ASTM D 445	15
Viscosity @40°C, cSt	ASTM D 445	101
Viscosity Index	ASTM D 2270	156
Pour Point, °C	ASTM D 97	-33
Flash point °C	ASTM D 92	225
TBN, mgKOH/gm	ASTM D 2896	7.8
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

ROYAL SUPER 4T STROKE OIL 20W-50 SL

Off road superior performance motorcycle engine oil

DESCRIPTION

4T STROKE OIL 20W-50 SL is a four-stroke engine oil with a viscosity grade of 20W-50, suitable for engines with separate oil reservoirs. It meets the SL specifications, providing modern performance and protection for gasoline engines.

MEETS OR EXCEEDS:

API SL, JASO MA,JASO MA2, JASO 4T CLUTCH PERFORMANCE

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.87
Viscosity @100°C, cSt	ASTM D 445	20.4
Viscosity @40°C, cSt	ASTM D 445	175
Viscosity Index	ASTM D 2270	136
Pour Point, °C	ASTM D 97	-27
Flash point °C	ASTM D 92	230
TBN, mgKOH/gm	ASTM D 2896	7.2
CCS @-15°C,mPa.s	ASTM D 5293	7500

Download DATA SHEET



Scan QR

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX

ROYAL SUPER 2T STROKE OIL TC/JASO FD

Off road superior performance motorcycle engine oil

DESCRIPTION

2T STROKE OIL TC/JASO FD is a high-quality two-stroke engine oil suitable for engines requiring a premixed oil and fuel mixture. It meets the TC specifications for two-stroke engines and complies with the JASO FD standard for superior performance and cleanliness.

MEETS OR EXCEEDS:

API TC,JASO FB,FC,FD

SPECIFICATION

Density @29.5°C,gm/CC	ASTM D 4052	0.866
Viscosity @100°C, cSt	ASTM D 445	7.8
Viscosity @40°C, cSt	ASTM D 445	47.5
Viscosity Index	ASTM D 2270	135
Pour Point, °C	ASTM D 97	-24
Flash point °C	ASTM D 92	96
Sulphated Ash, %wt	ASTM D 874	0.09

Download DATA SHEET



Scan QR

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER 2T STROKE OIL TC/JASO FB

Off road superior performance motorcycle engine oil

DESCRIPTION

2T STROKE OIL TC/JASO FB is a two-stroke engine oil suitable for engines requiring a premixed oil and fuel mixture. It meets the TC specifications for two-stroke engines and complies with the JASO FB standard for good lubrication properties.

SPECIFICATION

Density @29.5°C, gm/CC	ASTM D 4052	0.872
Viscosity @100°C, cSt	ASTM D 445	7.95
Viscosity @40°C, cSt	ASTM D 445	48.5
Viscosity Index	ASTM D 2270	135
Pour Point, °C	ASTM D 97	-24
Flash point °C	ASTM D 92	105
Foam Characteristics	ASTM 892	

Download DATA SHEET



Scan QR

MEETS OR EXCEEDS:

API TC, JASO FB, FC, FD

SIZE : 250ml, 500ml, 1L, 2L, 3L, 4L, 5L, 6L, 7L, 20L, 25L, 60L, 208L, 1000L, 25,000L, BULK & FLEX



ROYAL SUPER MOTORCYCLE OIL IS A HIGH-TECH OIL LUBRICANT THAT IS SUITABLE FOR ALL MOTORCYCLES THAT RUN ON LEAD-FREE GASOLINE, CATALYTIC CONVERTERS, HIGH-PERFORMANCE NORMALLY ASPIRATED GASOLINE ENGINES, AND LIGHT COMMERCIAL VEHICLES.


روپال سوپر

ROYAL[®]
SUPER

LUBRICANTS

ENGINE PROTECTION

ENGINE OIL

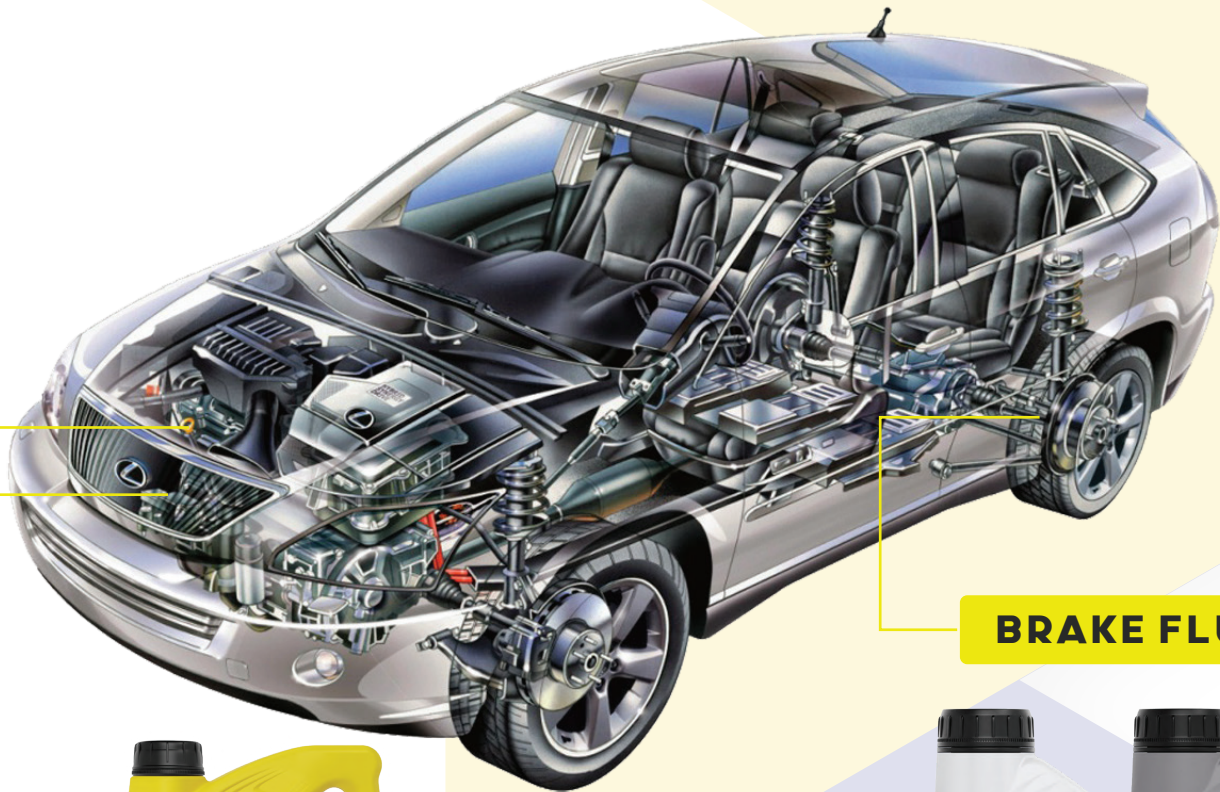

BRAKE FLUID



COOLANT

روپال سوپر



LUBRICANTS PRODUCTS



**208 LITERS
AVAILABLE**



HIGH PERFORMANCE ENGINE OIL



250ML, 500ML, 1L, 2L, 3L, 4L, 5L, 6L, 7L-[CAN] 20L, 25L-[PAIL] 60L, 208L-[DRUM] 1000L, 25,000L-[IBC]

Customize Packing

ORDER NOW!

FOR INQUIRIES

+971 55 125 3503

CALL OR WHATSAPP US

FOR INQUIRIES

INFO@ROYALSUPER.AE

SALES@ROYALSUPER.AE

EMAIL US

Follow us!



ON SOCIAL MEDIA
#ROYALSUPEROIL

SCAN QR CODE





20FT CONTAINER LOAD UP TO 26 TON

PRODUCTS SIZE	UNITS	WEIGHT	QUANTITY	TOTAL WEIGHT
25OML CTN	24	9.8 KG	2200 CTN	21,560 KG
500ML CTN	24	13.5 KG	1500 CTN	20,250 KG
1L CTN	12	11.4 KG	1400 CTN	15,960 KG
1L CTN	24	22.8 KG	700 CTN	15,960 KG
2L CTN	12	23.3 KG	685 CTN	15,960 KG
3L CTN	6	17.35 KG	980 CTN	17,000 KG
4L CTN	3	11.4 KG	1350 CTN	15,390 KG
4L CTN	4	14.9 KG	1050 CTN	15,645 KG
4L CTN	6	22.3 KG	700 CTN	15,610 KG
5L CTN	3	14 KG	1100 CTN	15,400 KG
5L CTN	4	18.4 KG	850 CTN	15,640 KG
5L CTN	6	27.7 KG	550 CTN	15,235 KG
6L CTN	3	16.9 KG	975 CTN	16,477 KG
6L CTN	4	22.4 KG	780 CTN	17,476 KG
7L CTN	3	22 KG	900 CTN	19,800 KG
20L PAIL	1	18.3 KG	960 PAIL	17,568 KG
25L PAIL	1	22.6 KG	800 PAIL	18,080 KG
60L DRUM	1	57 KG	324 DRUM	18,468 KG
208L DRUM	1	190 KG	100 DRUM	19,000 KG



40FT CONTAINER LOAD UP TO 28 TON

PRODUCTS SIZE	UNITS	WEIGHT	QUANTITY	TOTAL WEIGHT
250ML CTN	24	9.8 KG	2850 CTN	27,900 KG
500ML CTN	24	13.5 KG	2070 CTN	27,950 KG
1L CTN	12	11.4 KG	2400 CTN	27,360 KG
1L CTN	24	22.8 KG	1200 CTN	27,360 KG
2L CTN	12	23.3 KG	1200 CTN	27,960 KG
3L CTN	6	17.35 KG	1610 CTN	27,934 KG
4L CTN	3	11.4 KG	2400 CTN	27,360 KG
4L CTN	4	14.9 KG	1880 CTN	28,000 KG
4L CTN	6	22.3 KG	1255 CTN	27,990 KG
5L CTN	3	14 KG	1950 CTN	27,300 KG
5L CTN	4	18.4 KG	1520 CTN	27,970 KG
5L CTN	6	27.7 KG	1000 CTN	27,700 KG
6L CTN	3	16.9 KG	1650 CTN	27,885 KG
6L CTN	4	22.4 KG	1250 CTN	28,000 KG
7L CTN	3	22 KG	1270 CTN	28,000 KG
20L PAIL	1	18.3 KG	1530 PAIL	28,000 KG
25L PAIL	1	22.6 KG	1240 PAIL	28,000 KG
60L DRUM	1	57 KG	490 DRUM	27,930 KG
208L DRUM	1	190 KG	145 DRUM	27,550 KG

ROYAL SUPER LUBRICANTS

📍 **HEAD OFFICE ADDRESS**
NO. 403, AL HABTOOR NAIF BUILDING, DEIRA,
DUBAI, UNITED ARAB EMIRATES

📍 **SHOWROOM ADDRESS**
SHOP 6, 21C ST, NAIF, DEIRA,
DUBAI, UNITED ARAB EMIRATES

📍 **PLANT ADDRESS**
SAJAA INDUSTRIAL, SHARJAH



📞 **CONTACT US**

TEL +971 4 232 4844
PH. +971 55 125 3503

✉ **EMAIL**

INFO@ROYALSUPER.AE
SALES@ROYALSUPER.AE

🌐 **WEBSITE**

WWW.ROYALSUPER.AE