



Made in Malaysia

**MAINTENANCE FREE
BATTERY**



JYC BATTERY SDN BHD.

FEATURES

Safety Valve : relieves excess pressure.


Special Plate Compound Material to Withstand Vibration, prolong battery life and dependability.

Polypropylene Cover and Container, reserve electrolyte capacity for cooler operating temperatures; provides greater resistance to gas and oil and withstands higher impact in extreme weather conditions.

Nitrogen Filling to ensure a good dry charge performance.

Bigger Plate gives extra surface area for more power and higher capacity.

Absorbed Glass Mat (AGM) Separators : absorb electrolyte, making the battery non-spillable.

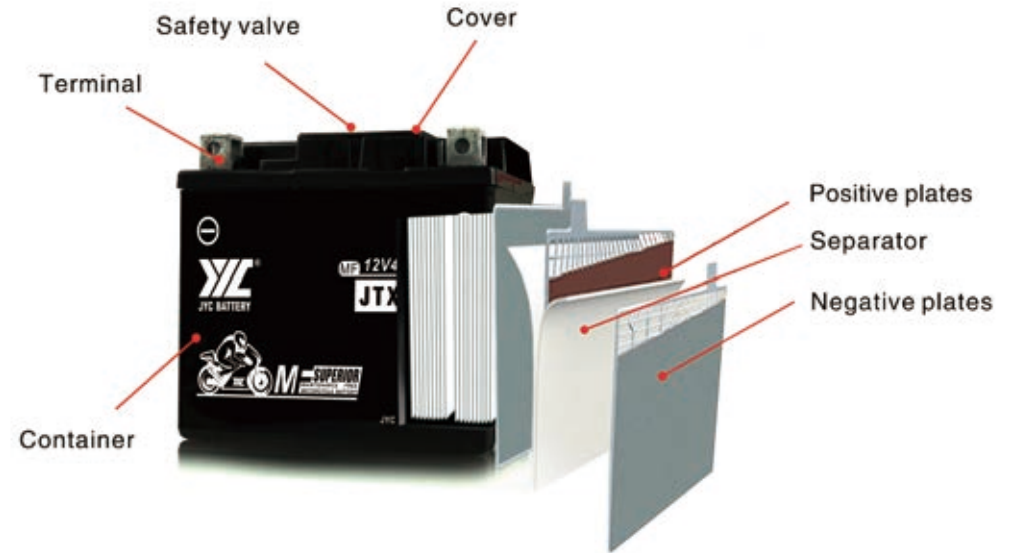

Usage

A. After check the voltage ($\geq 12.6V$) and the polarity, this type of batteries are ready to use.

B. If the voltage less than 12.6V, it needs to recharge the battery.

C. If the battery stored in the warehouse for long-time ,it suggests to check the voltage each 6 months, make sure the battery voltage $\geq 12.6V$.

JYC BATTERY SDN BHD.

🌐 www.jycbattery.my ✉ sales@jycbattery.com

📍 No.8, Lot 3302, Jalan Permata 2, Arab Malaysian Industrial Park, 71800 Nilai, Negeri Sembilan, Malaysia

AGM Motorcycle Battery



Model No	Voltage (V)	Capacity 10HR (Ah)	Dimensions				Weight (Kg)	Charge Current (A)	Assembly Figure	Terminal Type	CCA*	CCA/ -18°C
			L	W	H	HL						
JB2.5L-C	12	2.5	80	77	105	105	1.02	0.25		-	70	25
JB3L-A	12	3	98	56	109	109	1.23	0.3		5	80	30
JB5L-B	12	5	120	60	130	130	1.8	0.5		5	140	65
JB7BL-B	12	7	149	59	130	130	2.2	0.7		5	160	95
JB7B-B	12	7	149	59	130	130	2.2	0.7		5	160	95
JB7-A	12	7	137	76	123	123	2.5	0.7		9	180	95
YB7L-A	12	7	137	76	123	123	2.5	0.7		9	180	95
JB9L-B	12	9	135	76	130.5	130.5	2.8	0.9		5	185	120
YB9-B	12	9	135	76	130.5	130.5	2.8	0.9		5	185	120
JB10L-A2	12	11	135	90	145	145	3.93	1.1		9	200	135
JB12AL-A	12	12	134	80	160	160	4.07	1.2		5	230	150
JB12A-A	12	12	134	80	160	160	4.07	1.2		5	230	150
JB14L-A2	12	14	135	90	168	168	4.75	1.4		9	305	200
JB14AL-A2	12	14	135	90	168	178	4.75	1.4		9	305	200
JB16AL-A2	12	16	205	70	162	162	5.82	1.6		6	280	230
JB16-B	12	19	175	100	155	155	6.4	1.9		4	400	190
JB16L-B	12	19	175	100	155	155	6.4	1.9		4	400	190
JB16CL-B	12	16	175	100	175	175	6.57	1.6		4	300	240
JTX4L-BS	12	4	113	69	85	85	1.32	0.4		4	135	45
JTX5L-BS	12	5	113	69	105	105	1.92	0.5		4	145	65
JTX6.5L	12	6.5	139	66	102	102	2.1	0.65		4	170	80
JTX7A-BS	12	7	150	87	95	95	2.45	0.7		4	180	105

JTX9-BS	12	9	152	83.6	105	105	2.81	0.9		9	190	135
JT12A-BS	12	10	150	86	106	106	3.32	1		9	265	125
JTX12-BS	12	12	150	87	132	132	3.8	1.2		9	290	155
JTX14-BS	12	14	150	87	148	148	4.67	1.4		9	310	200
JTX16-BS	12	16	150	87	162	162	5.25	1.6		9	315	185
JTX20CH-BS	12	20	151	87	162	162	6.03	2		9	360	290
JTX20L-BS	12	20	177	88	154	154	5.8	2		4	380	250
JTX24HL-BS	12	24	205	87	162	162	7.32	2.4		4	480	320
JTX30L-BS	12	30	166	126	175	175	9.5	3		4	390	300
JT4A-BS	12	2.5	114	47	85	85	1.05	0.25		10	100	30
JT4B-BS	12	2.3	113	39	86	86	0.95	0.23		11	80	35
JT7B-BS	12	7	150	65	94	94	2.06	0.7		9	200	90
JT9B-BS	12	9	150	70	104	104	2.82	0.9		9	240	140
JT12B-BS	12	12	150	70	130	130	3.6	1.2		9	260	160
JT14B-BS	12	14	150	70	144	144	4.25	1.2		9	290	180
JT51913	12	21**	183	79	171	171	6.09	1.9		3	390	260
JTZ5S	12	4	113	70	85	85	1.4	0.4		9	145	50
JTZ7S	12	6.5	113	70	105	105	2.1	0.65		9	160	95
JTZ8V	12	7	113	70	130	130	2.56	0.7		9	200	115
JTZ10S	12	8.6	151	87	95	95	2.9	0.86		9	260	140
JTZ12S	12	11.2	150	87	105	105	3.4	1.12		9	280	160
JTZ14S	12	12.2	150	86	111	111	3.5	1.22		9	290	170
JYZ14H	12	14	149	87	144	144	4.60	1.40		21	350	220
JYZ14HL	12	14	149	87	144	144	4.60	1.40		21	350	220
JYZ20H	12	20	175	87	151	151	5.80	2.00		20	380	250
JYZ20HL	12	20	175	87	151	151	5.80	2.00		20	380	250
JYZ30HL	12	30	166	126	175	175	9.83	3.00		20	450	380