


## Specification

- Power source: DC 12V ~14.8V
- Delivery volume: Approx. 16 LPM (4.2 GPM) - DC12V with water
- Applicable liquids: Gasoline, Diesel, DEF(AdBlue), Water, Kerosene, Antifreeze, Windshield washer fluid, Mild detergents, Agricultural chemicals




## 4. Drum bung adapter

- Improved grip of drum bung adapter - 60mm (2.4") wide grip makes it easy to tighten and loosen
- Length is adjustable by 15mm (0.6") to fit different drum heights



※ 2" NPT to 2" buttress adapter (2.5x5) / trisure adapter (2.2x4) / mauser adapter (2.7x6) - optional part

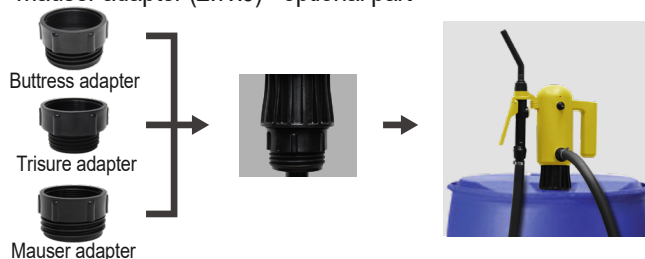

## 5. Nozzle lever

- Nozzle lever designed to operate in two different ways according to the application



## 6. Swivel connection

- Great for removing twists - can be rotated 360°



## 7. Hose

- 15mm ID hose with oil, flame & weather resistance
- High grade polyester yarn reinforcement with flexible construction



## 8. Suction pipe

- Suction pipe: 575mm (22.6") ~ 865mm (34")
- Applicable to 55 gallon or smaller drum
- Suction end Outer Dia.: 38mm (1.5")




## 9. End cap filter

- Filter-equipped intake end protects the motor from damage due to alien matters



## 1. Handy nozzle holder

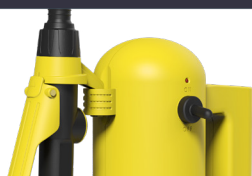

## 2. Power source

### Rechargeable Battery

- Li-ion battery 2,900mAh
- Fully charged battery can discharge about 800 liters (211 gallons) of water




### AC/DC Adapter

DC12V AC/DC adapter • AC 100 ~ 240V 50/60Hz

- The power cord to be plugged into an AC outlet
- AC cable: Approx. 1m (3.3ft)
- DC cable: Approx. 4m (13.1ft)



## 3. Toggle switch with LED light for operating signal

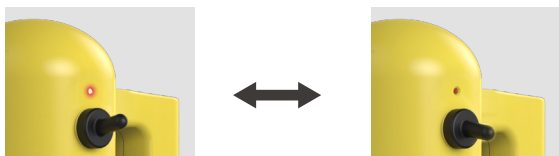

POWER OFF

POWER ON