



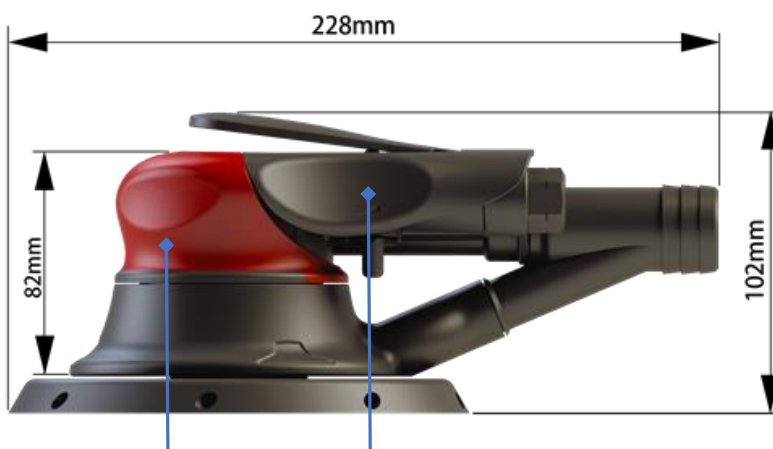

Oil-Free

Random Orbital Sander YU-SD406D

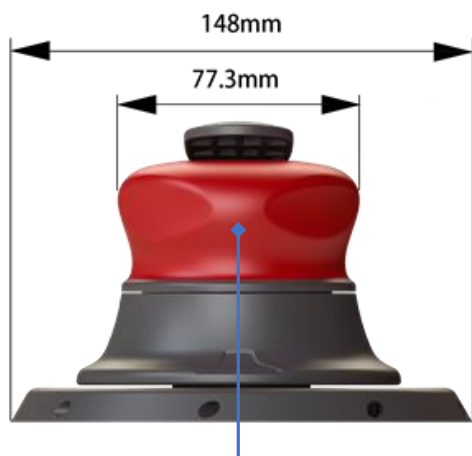

◆ Low Vibration & High Power

Given by Double-Air-Intake Mechanism, increase work efficiency.

◆ Oil-Free Motor

Available for long-time operation

◆ High Hardness & High Wear-Resistance Cylinder

With upgraded design, special surface treatment and 8 pcs Kevlar rotor blades, give the cylinder supreme wear-resistance and longer service-life.

◆ Easy Maintenance


Bearings are separated from the eccentric shaft

◆ Comfortable Operation

Only 82mm height, Low center of gravity design, greatly increase operational comfort.

◆ Ergonomic Handle

Greatly reduce hand-gripping fatigue

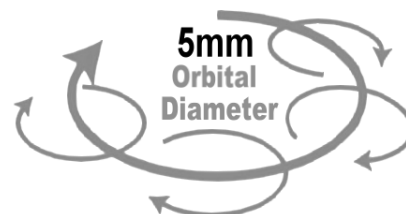

Model No.	YU-SD406D
Free Speed	10,000 RPM
Orbit Diameter	5 mm
Pad Diameter	5" or 6" Velcro type
Net Weight	0.9 kg
Air Pressure	90 PSI
Air Inlet	1/4"
Hose Size	3/8" (10mm)
Air Consumption	3.1 CFM (22 scfm, 88 L/min)



Patents of Double-Air-Intake Mechanism

EUROPE EP 3351723

USA US 10,677,060 B2