



营口通广汽车保修设备有限公司
YINGKOUTONGGUANG AUTOMOTIVE MAINTENANCE EQUIPMENT CO.,LTD.

- ADD / NO.98 West Donghai Street, Xishi District, Yingkou City, Liaoning China
- P.C / 115004
- Tel / +86-417-3283000/3283222/2673777/2871701
- Fax / +86-417-3284787
- E-mail / tongguang@tgqb.com.cn
- http / www.tgqb.com.cn



营口通广汽车保修设备有限公司
YINGKOUTONGGUANG AUTOMOTIVE MAINTENANCE EQUIPMENT CO.,LTD.

Company profile

企业简介

Yingkou Tongguang Automotive Maintenance Equipment Co., Ltd is a high-tech enterprise which specializes in developing and producing automotive maintenance and diagnostic equipment, we lay stress on market as our development orientation new products development as our responsibility and try our best to offer high quality products for the users.

This truck tyre changer allows to mount and demount trucks and buses and the large wheel balancer allows to balance the trucks, buses and cars, they produced by our company are essential products and widely used in the field of automotive maintenance and tyre service. We have sound production system, strong and perfect sale network and after-sale service.

We always insist on the quality begets the existence, the service strives for the development as our enterprise aim, so that our company is highly praised and approved by the users, in order to providing work better products for the users, we offer the following equipments: universal Approved truck (bus), tyre changers and wheel balancer.

Certificate

资质证书





TRUCK TYRE CHANGER T568

技术参数 TECHNICAL DATA

轮辋直径 Rim diameter	14" - 26"
最大车轮重量 Max.wheel weight	500kg
最大车轮宽度 Max.wheel width	780mm
最大轮胎直径 Max.tyre diameter	1600mm
液压动力单元 Hydraulic pump motor	1.5kw 380v-3ph(220v Optional)
齿轮箱电机 Gearbox motor	2.2kw 380v-3ph(220v Optional)
胎边压力 Bead breaker force	2500kg
最大扭矩 Max.Torque	6457N.m
移动控制手柄电压 Operation control voltage	24v
设备净重 Machine weight approx	517kg
设备占地面积 Overall dimensions approx	2500 x 2000mm
电压 Power	220/400V 50/60HZ 1P/3P Optional

产品介绍 PRODUCTS INTRODUCTION

- SEMI-AUTOMATIC TRUCK TYRE CHANGER T568 UNIVERSAL
SELF-CENTERING CHUCK RIM CAPACITY 14" - 26"
- CLOCKWISE AND ANTICLOCKWISE ROTATION OF CHUCK
- ITALIAN PUMP OPTIONAL
- 可移动式低压控制手柄进行操作
- 操作电压24V, 安全稳定
- 适用于14" -26" 全部轮辋尺寸
- 举升臂和夹具均为液压驱动
- 意大利泵可选

可选配件 OPTIONAL ACCESSORIES



铝合金轮辋保护圈
Alu alloy rims protection rings



铝合金轮辋保护套
Alu alloy rims protection set




真空胎压滚
Tubeless roller

标准配件 STANDARD ACCESSORIES



重量&包装尺寸 WEIGHT&DIMENSIONS

型号 Model	T568
毛重 Gross Weight (kg)	633
包装尺寸 Outside Dimension L x W x H (mm)	2030x1580x850

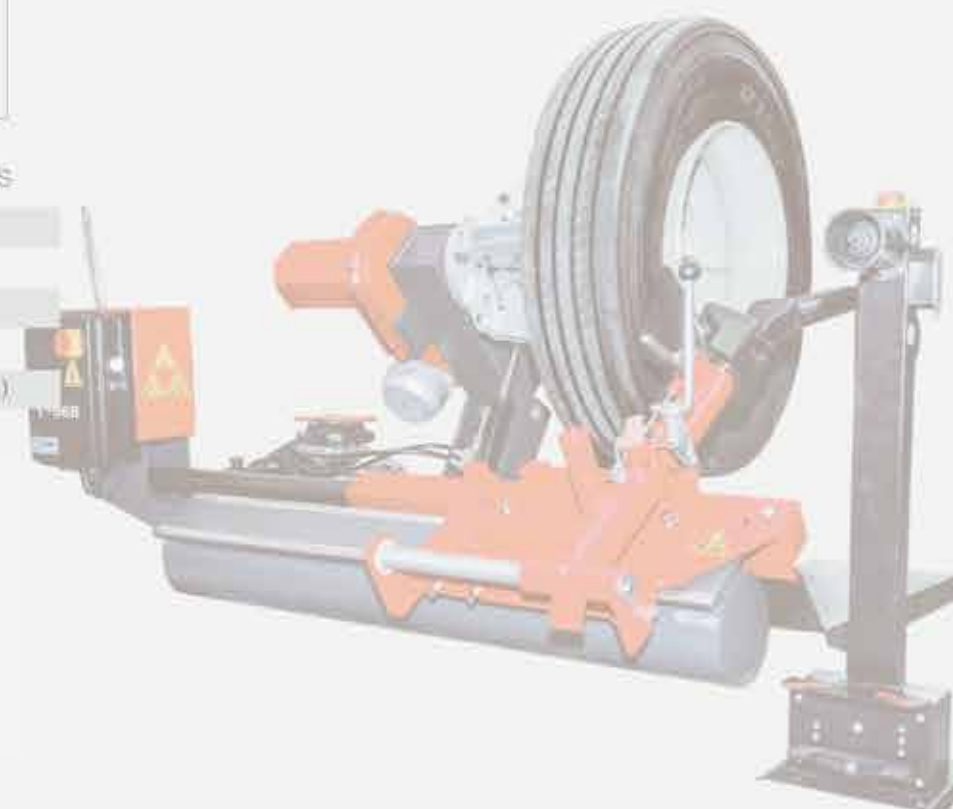



TRUCK TYRE CHANGER T568-2

技术参数 TECHNICAL DATA

轮辋直径 Rim diameter	14" - 28"
最大车轮重量 Max.wheel weight	500kg
最大车轮宽度 Max.wheel width	780mm
最大轮胎直径 Max.tyre diameter	1600mm
液压动力单元 Hydraulic pump motor	1.5kw 380v~3ph(220v Optional)
齿轮箱电机 Gearbox motor	2.2kw 380v~3ph(220v Optional)
胎边压力 Bead breaker force	2500kg
移动控制手柄电压 Operation control voltage	24v
设备净重 Machine weight approx	588kg
设备占地面积 Overall dimensions approx	2500 x 2000mm
电压 Power	220/400V 50/60HZ 1P/3P Optional

产品介绍 PRODUCTS INTRODUCTION

- DOUBLE SPEED FOR ROTATION MOTOR
- IMPORT HYDRAULIC PUMP
- ALU PROTECTION KIT AS STANDARD ACCESSORY
- SMALL FLOOR AREA
- 双速旋转电机
- 进口泵站
- 标配铝爪保护套
- 占地面积小

产品细节图 PRODUCTION DETAILS



标准配件 STANDARD ACCESSORIES



铝合金轮辋保护套
Alu.alloy rims protection set



重量&包装尺寸 WEIGHT&DIMENSIONS

型号 Model	T568-2
毛重 Gross Weight (kg)	650
包装尺寸 Outside Dimension L×W×H (mm)	1830×1450×850





VERTICAL 立式轮胎拆装机 TRUCK TYRE CHANGER

T588


技术参数 TECHNICAL DATA

轮胎直径 Rim diameter	17.5" - 26"
最大车轮重量 Max.wheel weight	350kg
最大车轮宽度 Max.wheel width	470mm
最大轮胎直径 Max.wheel diameter	1400mm
液压动力单元 Hydraulic pump motor	3.3kw 380v-3ph-50hz
设备净重 Machine weight approx	485kg

产品介绍 FEATURE


- Hydraulic motor system lets operation much more powerful;
- Automatic hydraulic mounting arm finds precise angle;
- Double pressing roller suitable for different sizes of tubeless tyre;
- This vertical version truck tyre changer saves more space and works more efficiency;
- 采用液压马达传动系统驱动，使拆装轮胎更有力。
- 自动伸缩拆装臂，让拆装轮胎角度更准确。
- 针对不同的轮胎，配有双压滚。
- 立式拆装机占地面积小，拆装机速度快。

产品细节图 PRODUCTION DETAILS

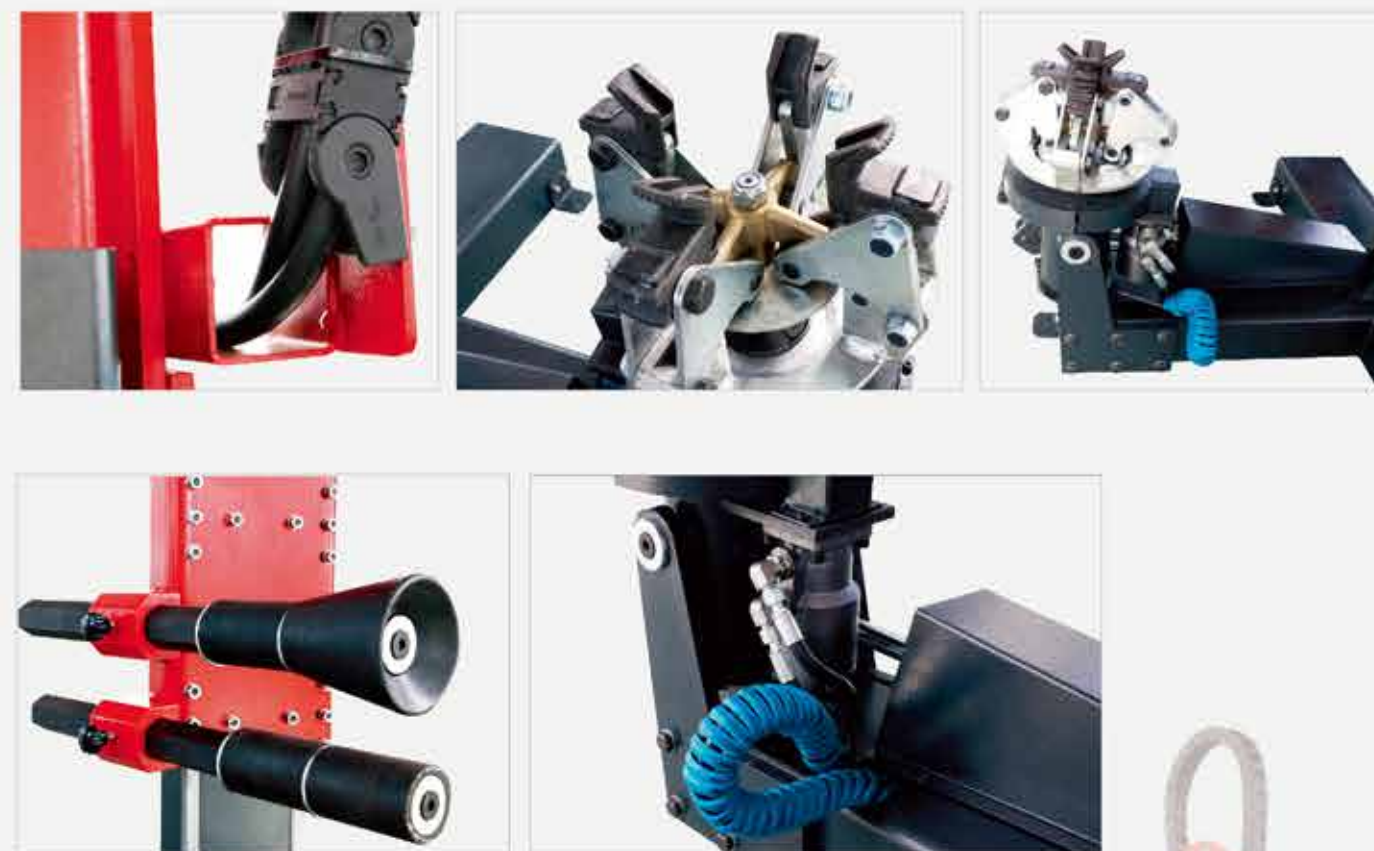

重量&包装尺寸 WEIGHT&DIMENSIONS

型号 Model	T588
毛重 Gross Weight (kg)	560
包装尺寸 Outside Dimension L×W×H (mm)	1150×1220×1720

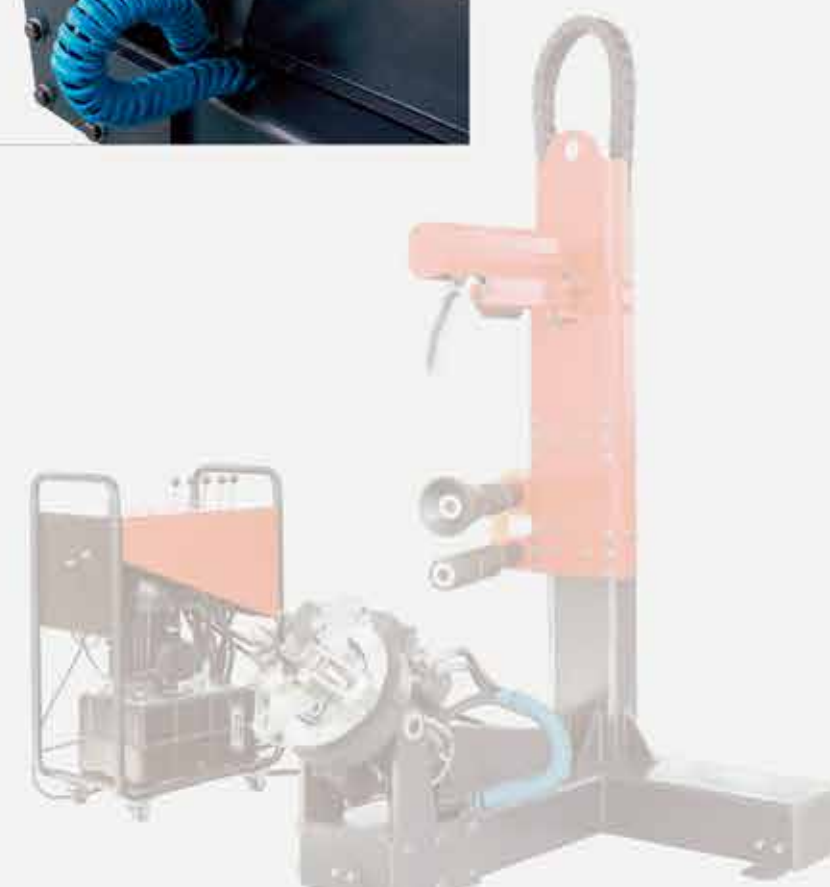



TRUCK TYRE CHANGER T598


技术参数 TECHNICAL DATA

轮胎直径 Rim diameter	14" - 42"
最大车轮重量 Max.wheel weight	1600kg
最大车轮宽度 Max.wheel width	1050mm
最大轮胎直径 Max.tyre diameter	2300mm
液压动力单元 Hydraulic pump motor	2.2kw 380v-3ph-50HZ(220v Optional)
齿轮箱电机 Gearbox motor	2.2kw 380v-3ph-50HZ(220v Optional)
胎边压力 Bead breaker force	3300kg
最大扭矩 Max.Torque	5265N.m
移动控制手柄电压 Operation control voltage	24v
设备净重 Machine weight approx	758kg
设备占地面积 Overall dimensions approx	2500 x 2000mm
电压 Power	220/400V 50/60HZ 1P/3P Optional
噪音指数 Noise Level	≤70db
温度 Temperature	0℃~40℃

产品介绍 PRODUCTS INTRODUCTION

- SEMI-AUTOMATIC UNIVERSAL TRUCK TYRE CHANGER T598 FOR INDUSTRIAL, AGRICULTURAL AND EARTHMOVING WHEELS
- RIM CAPACITY 14" - 42"
- ITALIAN PUMP
- 半自动多功能轮胎拆装机
- 适用于轮胎直径14" - 42" 的工业、农业、工程车轮胎
- 意大利泵

可选配件 OPTIONAL ACCESSORIES

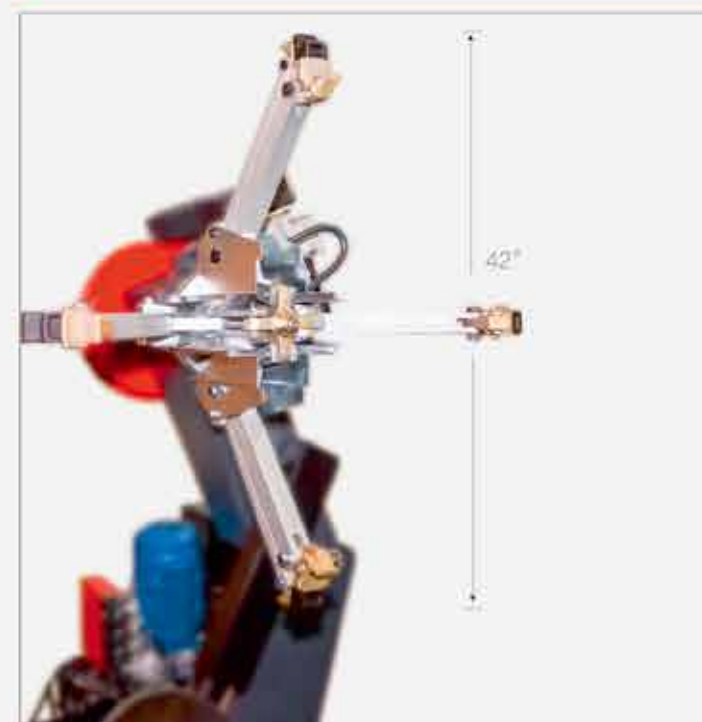

通用自动定心卡盘，操作尺寸从14" 到42"
UNIVERSAL SELF-CENTRING CHUCK,
OPERATE SIZE FROM 14" TO 42"



铝合金轮胎保护套
Alu alloy rims protection set



真空胎压滚
Tubeless roller



铝合金轮胎保护圈
Alu alloy rims protection rings



遥控可选
Wireless Remote Control Unit

标准配件 STANDARD ACCESSORIES



重量&包装尺寸 WEIGHT&DIMENSIONS

型号 Model	T598
毛重 Gross Weight (kg)	850
包装尺寸 Outside Dimension L×W×H (mm)	2015×1815×1040





TRUCK TYRE CHANGER T698

技术参数 TECHNICAL DATA

轮辋直径 Rim diameter:	14" - 42"
最大车轮重量 Max.wheel weight	1600kg
最大车轮宽度 Max.wheel width	1050mm
最大轮胎直径 Max.tyre diameter	2300mm
液压动力单元 Hydraulic pump motor	2.2kw 380v-3ph-50HZ(220v Optional)
齿轮箱电机 Gearbox motor	2.2kw 380v-3ph-50HZ(220v Optional)
胎边压力 Bead breaker force	3300kg
移动控制手柄电压 Operation control voltage	24v
设备净重 Machine weight approx	≈760kg
设备占地面积 Overall dimensions approx	2500 x 2000mm
电压 Power	220/400V-50/60HZ 1P/3P Optional (可选)
噪音指数 Noise Level	≤70db
温度 Temperature	0℃~40℃

产品介绍 PRODUCTS INTRODUCTION

- FULLY-AUTOMATIC UNIVERSAL TRUCK TYRE CHANGER T698 FOR INDUSTRIAL, AGRICULTURAL AND EARTH-MOVING WHEELS
- RIM CAPACITY 14" - 42"
- DOUBLE ROTATIONAL SPEEDS OPTIONAL
- ITALIAN PUMP OPTIONAL

- 全自动轮胎拆装机
- 适用于轮辋直径14" - 42" 的工业、农业、工程车
- 双速可选
- 意大利泵可选

产品细节图 PRODUCTION DETAILS



可选配件 OPTIONAL ACCESSORIES



铝合金轮辋保护圈
Alu alloy rims protection rings



铝合金轮辋保护套
Alu alloy rims protection set





真空胎压滚
Tubeless roller

标准配件 STANDARD ACCESSORIES



重量&包装尺寸 WEIGHT&DIMENSIONS

型号 Model	T698
毛重 Gross Weight (kg)	850
包装尺寸 Outside Dimension L x W x H (mm)	2230x2020x1080

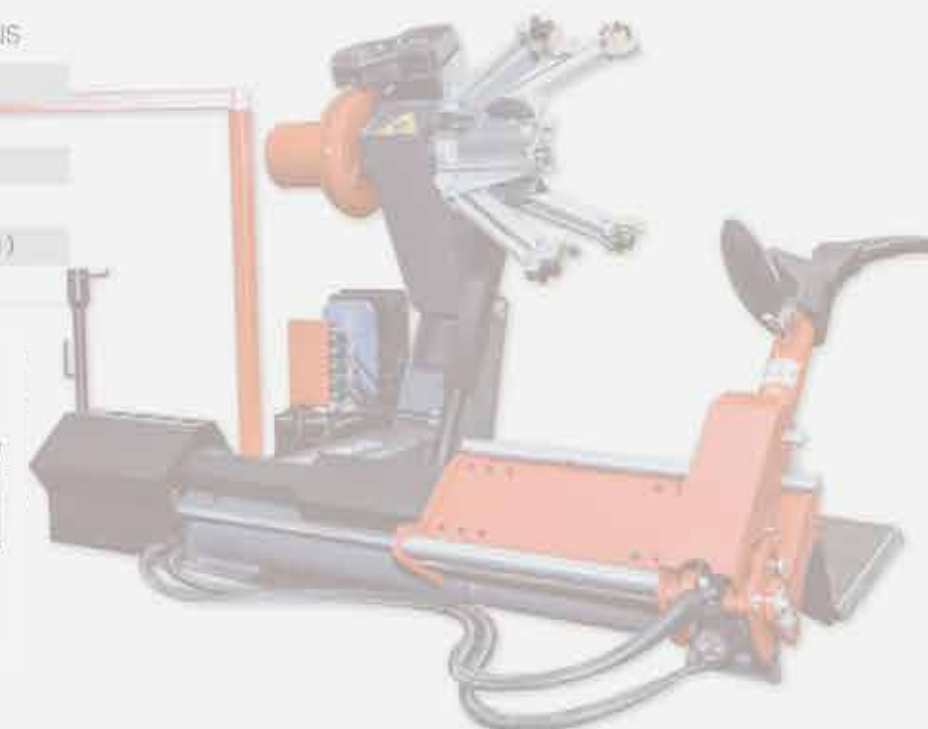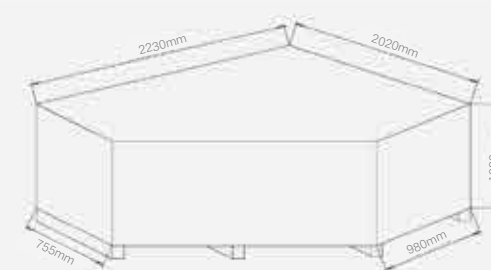



Wireless Remote Control Unit
遥控可选



TRUCK TYRE CHANGER TY008

技术参数 TECHNICAL DATA

轮辋直径 Rim diameter	13" - 26"
最大车轮重量 Max.wheel weight	700kg
最大车轮宽度 Max.wheel width	800mm
最大轮胎直径 Max.tyre diameter tyre	1300mm
液压动力单元 Hydraulic pump motor	1.1kw
齿轮箱电机 Gearbox motor	1.1kw
胎边压力 Bead breaker force	2500kg
电压 Power	220/400V 50/60Hz 1P/3P Optional(可选)

车门范围 DIMENSIONS OF VAN' S DOOR

Min.Height of Machines Chassis to the Top of the Door	1450mm
Min.Width of Inner Van	1650mm
Min.Width of Door	980mm
Thick of Van	≤ 160mm
Chassis of the Van to Floor	≈ 700mm

产品介绍 PRODUCTS INTRODUCTION

- TY008 IS AN ELECTRO HYDRAULIC TYRE CHANGER FOR TRUCKS, BUSES AND TRACTORS.
- EQUIPMENT WITH A POWER GENERATOR OPTIONAL
- TY008 CAN BE RUN IN THE WORKSHOP AND IS SUITABLE FOR MOBILE SERVICE
- ITALIAN PUMP OPTIONAL

- TY008是一款电动液压轮胎拆装机, 适用于卡车、客车等轮胎
- 此设备适用于移动式紧急救援服务
- 可配发电机
- 意大利泵可选

产品细节图 PRODUCTION DETAILS



欧洲/国内发电机组可选
Power Generator & Air Compressor



可选配件 OPTIONAL ACCESSORIES



铝合金轮辋保护圈
Alu alloy rims protection rings

标准配件 STANDARD ACCESSORIES



重量&包装尺寸 WEIGHT&DIMENSIONS

Model	TY008
Gross Weight (kg)	580
Power Generator & Air Compressor & Machines (kg)	880
Outside Dimension L × W × H (mm)	1160 × 1000 × 1550

1700 × 1100 × 1650



TRUCK TYRE CHANGER T980 SUPER

技术参数 TECHNICAL DATA

轮胎直径 Rim diameter	14" - 46"
Rim capacity(with extensions)	14" - 56"
最大车轮重量 Max.wheel weight	2000kg
最大车轮宽度 Max.wheel width	1200mm
最大轮胎直径 Max.tyre diameter	2500mm
液压动力单元 Hydraulic pump motor	3.3/4.0kw
齿轮箱电机 Gearbox motor	3.3/4.0kw
设备净重 Machine weight approx	1175kg
电压 Power	400v 50HZ 3PH

产品介绍 PRODUCTS INTRODUCTION

- T980 SUPER TRUCK TYRE CHANGER HAS BEEN SPECIFICALLY DESIGNED TO MOUNT AND DEMOUNT TYRES FROM TRUCKS, BUSES, TRACTORS AND EARTHMOVING VEHICLES
- RIM CAPACITY 14" - 56"
- BI-DIRECTIONAL CHUCK WITH 2 ROTATIONAL SPEEDS
- ITALIAN PUMP OPTIONAL

- 适用于卡车, 客车, 拖拉机, 工程车等轮胎
- 轮胎直径14" - 56"
- 双速
- 意大利泵(可选)

产品细节图 PRODUCTION DETAILS



标准配件 STANDARD ACCESSORIES



56" 延伸爪配件
56" Extension chucks

可选配件 OPTIONAL ACCESSORIES



铝合金轮辋保护圈
Alu alloy rims protection rings



遥控可选
Wireless Remote Control Unit (optional)

重量&包装尺寸 WEIGHT&DIMENSIONS

型号 Model	T980
毛重 Gross Weight (kg)	1410
包装尺寸 Outside Dimension L×W×H (mm)	2310×2100×1100



轮胎拆装机
TRUCK TYRE CHANGER

T980-30

技术参数 TECHNICAL DATA

轮辋直径 Rim diameter	14" - 42"
轮辋承载力 Rim capacity (with extensions)	14" - 60"
最大车轮重量 Max.wheel weight	2500kg
最大车轮宽度 Max.wheel width	1600mm
最大轮胎直径 Max.tyre diameter	3000mm
液压动力单元 Hydraulic pump motor	3.3/4.0kw
齿轮箱电机 Gearbox motor	3.3/4.0kw
设备净重 Machine weight approx	1405kg
电压 Power	380-400V/50HZ/3PH

产品介绍 FEATURE

- T980-30 super truck tyre changer has been specifically designed to mount and demount tyres from trucks,buses,tractors and earthmoving vehicles.
- 适用于卡车，客车，拖拉机，工程车等
- Rim capacity 14 " -60 "
- 轮辋直径14" - 60"
- Bi-directional chuck with 2 rotational speeds
- 双速

产品细节图 PRODUCTION DETAILS



加长一体旋转头
Extended integrated rotating head



导轨一体油缸
Integrated guide rail oil cylinder

标准配件 STANDARD ACCESSORIES



60 " 延伸爪配件
60 " Extension chucks



可选配件 OPTIONAL ACCESSORIES



铝合金轮辋保护圈
Alu alloy rims protection rings

重量&包装尺寸 WEIGHT&DIMENSIONS

型号 Model
T980-30
毛重 Gross Weight (kg)
1639kg
包装尺寸 Outside Dimension L×W×H (mm)
2610×2190×1060




TRUCK TYRE CHANGER T998A

技术参数 TECHNICAL DATA

轮胎直径 Rim diameter	14" - 48"
Rim capacity(with extensions)	14" - 60"
最大轮胎重量 Max.wheel weight	2000kg
最大轮胎宽度 Max.wheel width	1400mm
最大轮胎直径 Max.tyre diameter	2600mm
液压动力单元 Hydraulic pump motor	3.3/4.0kw
齿轮箱电机 Gearbox motor	3.3/4.0kw
电压 Power	400v 50HZ 3PH(optional可选)

产品细节图 PRODUCTION DETAILS

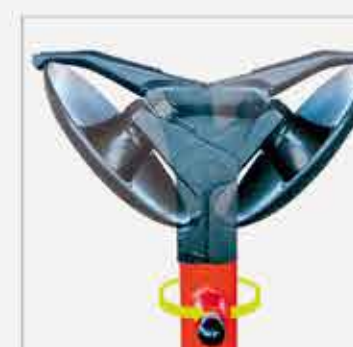

可选配件 OPTIONAL ACCESSORIES



标准配件 STANDARD ACCESSORIES



60° 延伸爪配件
60° Extension chucks

重量&包装尺寸 WEIGHT&DIMENSIONS

型号 Model	T998A
毛重 Gross Weight (kg)	1737
包装尺寸 Outside Dimension L×W×H (mm)	2310×2100×1100





FOOT BRAKE 脚踏制动

TRUCK WHEEL BALANCER CB1200

技术参数 TECHNICAL DATA

轮轴直径 Rim diameter	13" - 24"
轮轴宽度 Rim width	5.5-20"
最大车轮重量 Max.wheel weight	150kg
最大车轮宽度 Max.wheel width	1200mm
气压 Air pressure	6-8bar
测试时间 Testing time	8s
车轮保护罩 Protection cover	supplied
气动举升车 Pneumatic built-in lift	supplied
设备净重 Machine weight approx	250kg
设备占地面积 Overall dimensions approx	2000 × 1500mm 长 × 宽
电压 Power supply	400V/220V (optional可选)
标准配件 Standard accessories (supplied)	International universal standard flange tapering(diameter range 40-285mm) wheel width calipers,lock nut Wheel ballast weight pliers

产品介绍 PRODUCTS INTRODUCTION

- Easy operation of lifting device and mount-demount tyre with protection cover, well-consideration safety and stable.
- The microprocessor is composed of integrate circuit,with high-capacity and high-stability can realize the converting of big or small model wheels,suitable for trucks, buses, cars and motorcycle wheels.
- Tyre high precise balance operation thanks to its precise balancing spindle special design for balancing tyre with big rim hole.
- 轮胎的升降与装卸做到轻而易举，附带的保护杠安全可靠。
- 由集成电路组成的微处理器高智能，高稳定可实现大小车换装，适用于卡车，客车，轿车和摩托车轮胎的平衡。
- 精密加工的平衡主轴，是平衡机对车轮进行高精度平衡的根本保证，转为您平衡大轮轴的轮胎而特别设计。

产品细节图 PRODUCTION DETAILS



举升车
Wheel lifter



轮胎保护罩
Wheel protection cover



40mm主轴
40mm Mainshaft

标准配件 STANDARD ACCESSORIES



可选配件 OPTIONAL ACCESSORIES



重量&包装尺寸 WEIGHT&DIMENSIONS

型号 Model	CB1200
毛重 Gross Weight (kg)	320
包装尺寸 Outside Dimension L×W×H (mm)	1260 × 960 × 1130





轮胎举升车
WHEEL LIFTER

WL80/WL100

技术参数 TECHNICAL DATA

型号 Model	WL80	WL100
举升重量 Max capacity	80kg	100kg
最大举升高度 Max.lifting height	1290mm	1150mm
最大轮胎直径 Max.wheel diameter	800mm	800mm
最大车轮宽度 Max.wheel width	300mm	350mm
电池 Batteries	12v-12Ah	24V-15Ah
净重 Net weight	72kg	85kg

产品介绍 FEATURE

- Very convenient to lift the wheel which can save your time and power
- Easy to move in any direction by the universal wheel
- WL100 comes with a toolbox
- 举升轮胎方便快捷省时省力
- 配有万向轮，随意移动
- WL100配有一个工具箱

WL80产品细节图 WL80 PRODUCTION DETAILS



WL100产品细节图 WL100 PRODUCTION DETAILS



重量&包装尺寸 WEIGHT&DIMENSIONS

型号 Model	WL80/WL100
毛重 Gross Weight (kg)	91kg/104kg
包装尺寸 Outside Dimension L×W×H (mm)	1680 × 525 × 450



