

A scenic landscape featuring a winding asphalt road that curves through a valley. In the background, there are rugged mountains under a bright sun that creates a strong lens flare effect across the sky. The sky is filled with soft, white clouds. On the right side of the frame, the rear portion of a white SUV is visible, parked on the shoulder of the road. The overall mood is one of freedom and adventure.

**CONFIDENCE
ALONG
WITH YOU**

LANVIGATOR

TYRE FAMILY

LANVIGATOR

CATALOG

PCR	01-12
ALL SEASON	13-16
SUV	17-22
4X4	23-28
COMMERCIAL	29-36
WINTER	37-50



Comfort II



Comfort I



CATCHPOWER EV



CATCHPOWER PLUS



CatchPower

PCR



CATCHFORS A/S



CATCHFORS A/S II


ALL SEASON



CatchPower



PERFORMAX



PRIMETOURL

SUV



CATCHFORS A/T



WARRIOR RT
LAND WARRIOR-R/T



CATCHFORS M/T



CATCHFORS M/T II


4X4




GAZILL



MILE max



TOURING max



CATCHFORS VAN A/S

COMMERCIAL



WinterGrip HP



WinterGrip UHP



SnowPower



WinterGrip VAN



IceLandMax



ICE-SPIDER II



ICE-SPIDER

WINTER



Comfort II M+S

PRODUCT FEATURES



Comfortable silent performance
Adopt 5 frequency pattern block, virtual analysis and optimized permutation design, effectively reduce the pattern block noise resonance phenomenon, reduce product noise, improve driving comfort.



Excellent wetland performance
Optimization of longitudinal/transverse groove design and the use of the best groove curve, improve the drainage performance of tires in wetlands and greatly improve the safety performance of tires.



Extraordinary handling performance
The internal and external asymmetrical shoulder design is adopted to ensure wet performance while improving tire handling performance, bringing driving pleasure.



Excellent wear resistance
The optimum sea-land ratio and optimized steel sheet design can prevent the stress concentration when the tire is running, so that all points of the tire are uniformly worn, and the wear performance is improved.

UTQG:360AA—380 AA



COMFORT




SILENCE



WET



BRAKING

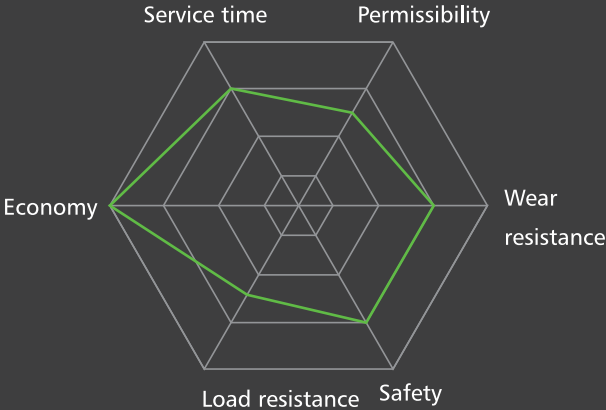

Comfort II M+S



Size	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Kg	Load lbs	MAX Pressure Kpa	MAX Psi	Sidewall Description
145/70R12	69	T	150	4.5	509	360 AA	325	716	300	44	BSW
155/70R12	73	T	157	4.5	523	360 AA	365	805	300	44	BSW
165/70R12	77	T	170	5	537	360 AA	412	908	300	44	BSW
175/70R12	80	T	177	5	551	360 AA	450	992	300	44	BSW
145/70R13	71	T	150	4.5	534	360 AA	345	761	300	44	BSW
145/80R13	75	T	145	4	562	360 AA	387	853	300	44	BSW
155/65R13	73	T	157	4.5	532	360 AA	365	805	300	44	BSW
155/70R13	75	T	157	4.5	548	360 AA	387	853	300	44	BSW
155/80R13	79	T	157	4.5	578	360 AA	437	963	300	44	BSW
165/65R13	77	T	170	5	544	360 AA	412	908	300	44	BSW
165/70R13	79	T	170	5	562	360 AA	437	963	300	44	BSW
165/80R13	83	T	165	4.5	594	360 AA	487	1074	300	44	BSW
175/60R13	77	H	177	5	540	360 AA	412	908	300	44	BSW
175/65R13	80	T	177	5	558	360 AA	450	992	300	44	BSW
175/70R13	82	T	177	5	576	360 AA	475	1047	300	44	BSW
185/70R13	86	T	189	5.5	590	360 AA	530	1168	300	44	BSW
155/65R14	75	H	157	4.5	558	360 AA	387	853	300	44	BSW
165/60R14	75	H	170	5	554	360 AA	387	853	300	44	BSW
165/65R14	79	H	170	5	570	360 AA	437	963	300	44	BSW
165/65R14	79	T	170	5	570	360 AA	437	963	300	44	BSW
165/70R14	81	H	170	5	588	360 AA	462	1019	300	44	BSW
165/70R14	81	T	170	5	588	360 AA	462	1019	300	44	BSW
165/70R14 XL	85	T	170	5	588	360 AA	515	1135	340	50	BSW
175/65R14	82	H	177	5	584	360 AA	475	1047	300	44	BSW
175/65R14	82	T	177	5	584	360 AA	475	1047	300	44	BSW
175/65R14 XL	86	T	177	5	584	360 AA	530	1168	340	50	BSW
175/70R14	84	H	177	5	602	360 AA	500	1102	300	44	BSW
175/70R14	84	T	177	5	602	360 AA	500	1102	300	44	BSW
175/70R14 XL	88	T	177	5	602	360 AA	560	1235	340	50	BSW
185/50R14	77	V	194	6	542	380 AA	412	908	300	44	BSW
185/55R14	80	H	194	6	560	380 AA	450	992	300	44	BSW
185/60R14	82	H	189	5.5	578	360 AA	475	1047	300	44	BSW
185/65R14	86	H	189	5.5	596	360 AA	530	1168	300	44	BSW
185/70R14	88	H	189	5.5	616	360 AA	560	1235	300	44	BSW
195/60R14	86	H	201	6	590	380 AA	530	1168	300	44	BSW
195/65R14	89	H	201	6	610	380 AA	580	1279	300	44	BSW
195/70R14	91	H	201	6	630	380 AA	615	1356	300	44	BSW
205/60R14	88	H	209	6	602	380 AA	560	1235	300	44	BSW
205/70R14	95	H	209	6	644	380 AA	690	1521	300	44	BSW
215/70R14	96	H	221	6.5	658	380 AA	710	1565	300	44	BSW
145/65R15	72	T	150	4.5	569	360 AA	355	783	300	44	BSW
155/60R15	74	T	157	4.5	567	360 AA	375	827	300	44	BSW
165/60R15	77	H	170	5	579	360 AA	412	908	300	44	BSW
165/65R15	81	H	170	5	595	360 AA	462	1019	300	44	BSW
175/50R15	75	H	182	5.5	557	360 AA	387	853	300	44	BSW
175/55R15	77	H	182	5.5	573	360 AA	412	908	300	44	BSW
175/60R15	81	H	177	5	591	360 AA	462	1019	300	44	BSW
175/65R15	84	H	177	5	609	360 AA	500	1102	300	44	BSW
185/45R15	75	V	183	6	547	380 AA	387	853	300	44	BSW
185/55R15	82	V	194	6	585	380 AA	475	1047	300	44	BSW
185/60R15	84	H	189	5.5	603	360 AA	500	1102	300	44	BSW
185/60R15 XL	88	H	189	5.5	603	360 AA	560	1235	340	50	BSW
185/65R15	88	H	189	5.5	621	360 AA	560	1235	300	44	BSW
185/65R15 XL	92	T	189	5.5	621	360 AA	630	1389	340	50	BSW
195/45R15 XL	82	V	195	6.5	557	380 AA	475	1047	340	50	BSW
195/50R15	82	V	201	6	577	380 AA	475	1047	300	44	BSW
195/55R15	85	V	201	6	595	380 AA	515	1135	300	44	BSW
195/60R15	88	H	201	6	615	380 AA	560	1235	300	44	BSW
195/60R15	88	V	201	6	615	380 AA	560	1235	300	44	BSW
195/65R15	91	H	201	6	635	380 AA	615	1356	300	44	BSW
195/65R15	91	V	201	6	635	380 AA	615	1356	300	44	BSW
195/65R15 XL	95	H	201	6	635	380 AA	690	1521	340	50	BSW
205/55R15	88	V	214	6.5	607	380 AA	560	1235	300	44	BSW
205/60R15	91	V	209	6	627	380 AA	615	1356	300	44	BSW
205/65R15	94	H	209	6	647	380 AA	670	1477	300	44	BSW
205/65R15	94	V	209	6	647	380 AA	670	1477	300	44	BSW
205/70R15	96	H	209	6	669	380 AA	710	1565	300	44	BSW
215/65R15	96	H	221	6.5	661	380 AA	710	1565	300	44	BSW
215/70R15	98	H	221	6.5	683	380 AA	750	1653	300	44	BSW
225/70R15	100	H	228	6.5	697	380 AA	800	1764	300	44	BSW
175/50R16	77	V	182	5.5	582	360 AA	412	908	300	44	BSW
185/50R16	81	V	194	6	592	380 AA	462	1019	300	44	BSW
185/55R16 XL	87	V	194	6	610	380 AA	545	1201	340	50	BSW
185/60R16	86	H	189	5.5	628	360 AA	530	1168	300	44	BSW
195/45R16 XL	84	V	195	6.5	582	380 AA	500	1102	340	50	BSW
195/50R16 XL	88	V	201	6	602	380 AA	560	1235	340	50	BSW
195/55R16	87	V	201	6	620	380 AA	545	1201	300	44	BSW
195/55R16 XL	91	V	201	6	620	380 AA	615	1356	340	50	BSW
195/60R16	89	H	201	6	640	380 AA	580	1279	300	44	BSW
205/55R16	91	V	214	6.5	632	380 AA	615	1356	300	44	BSW
205/55ZR16 XL	94	W	214	6.5	632	380 AA	670	1477	340	50	BSW
205/60R16	92	V	209	6	652	380 AA	630	1389	300	44	BSW
205/60R16 XL	96	H	209	6	652	380 AA	710	1565	340	50	BSW
205/65R16	95	H	209	6	672	380 AA	690	1521	300	44	BSW
215/45ZR16 XL	90	W	213	7	600	380 AA	600	1323	340	50	BSW
215/55ZR16 XL	97	W	226	7	642	380 AA	730	1609	340	50	BSW
215/60R16	95	V	221	6.5	664	380 AA	690	1521	300	44	BSW
215/60R16 XL	99	H	221	6.5	664	380 AA	775	1709	340	50	BSW
215/65R16	98	H	221	6.5	686	380 AA	750	1653	300	44	BSW
225/60R16	98	H	228	6.5	676	380 AA	750	1653	300	44	BSW
235/60R16	100	H	240	7	688	380 AA	800	1764	300	44	BSW

The labeling information is subject to change without notice



Comfort I M+S

PRODUCT FEATURES



Perfect handling performance and good cornering performance.



Asymmetric pattern shape, optimized variable pitch pattern design, provide quiet ride environment.



Nice driving pleasure comes from strong tread and soft sidewall.



Silica tread compound for low rolling resistance and good wet grip.

UTQG:420AA—500 AA



ECONOMY




STABILITY



SILENCE



WET

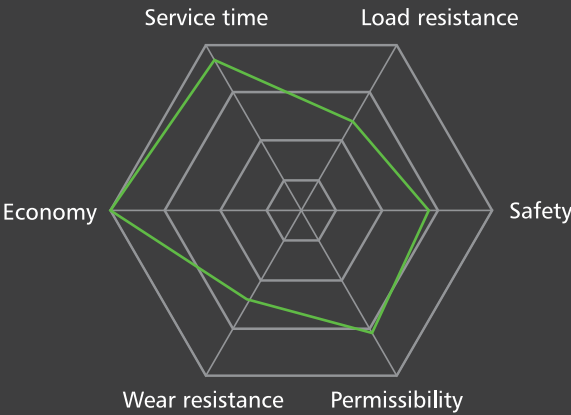

Comfort I M+S



Size	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	Load lbs	MAX Pressure Kpa	Psi	Sidewall Description
155/65R13	73	T	157	4.50B	532	420 AA	365	805	300	44	BSW
165/65R13	77	T	170	5.00B	544	420 AA	412	908	300	44	BSW
165/70R13	79	T	170	5.00B	562	420 AA	437	963	300	44	BSW
165/80R13	83	T	165	4.50B	594	420 AB	487	1074	300	44	BSW
175/70R13	82	T	177	5.00B	576	420 AA	475	1047	300	44	BSW
185/70R13	86	T	189	5.50B	590	420 AA	530	1168	300	44	BSW
175/65R14	82	H	177	5J	584	480 AA	475	1047	300	44	BSW
175/70R14	84	H	177	5J	602	480 AA	500	1102	300	44	BSW
185/60R14	82	H	189	5 1/2J	578	480 AA	475	1047	300	44	BSW
185/65R14	86	H	189	5 1/2J	596	480 AA	530	1168	300	44	BSW
185/70R14	88	H	189	5 1/2J	616	480 AA	560	1235	300	44	BSW
195/60R14	86	H	201	6J	590	480 AA	530	1168	300	44	BSW
195/70R14	91	H	201	6J	630	480 AA	615	1356	300	44	BSW
175/65R15	84	H	177	5J	609	480 AA	500	1102	300	44	BSW
185/55R15	82	V	194	6J	585	480 AA	475	1047	300	44	BSW
185/60R15	84	H	189	5 1/2J	603	480 AA	500	1102	300	44	BSW
185/65R15	88	H	189	5 1/2J	621	480 AA	560	1235	300	44	BSW
195/55R15	85	H	201	6 J	595	480 AA	515	1135	300	44	BSW
195/55R15	85	V	201	6J	595	480 AA	515	1135	300	44	BSW
195/60R15	88	H	201	6J	615	480 AA	560	1235	300	44	BSW
195/60R15	88	V	201	6J	615	480 AA	560	1235	300	44	BSW
195/65R15	91	H	201	6J	635	480 AA	615	1356	300	44	BSW
195/65R15	91	V	201	6J	635	480 AA	615	1356	300	44	BSW
205/60R15	91	V	209	6J	627	480 AA	615	1356	300	44	BSW
205/65R15	94	H	209	6J	647	480 AA	670	1477	300	44	BSW
205/70R15	96	H	209	6J	669	480 AA	710	1565	300	44	BSW
215/60R15	94	H	221	6 1/2J	639	480 AA	670	1477	300	44	BSW
215/65R15	96	H	221	6 1/2J	661	480 AA	710	1565	300	44	BSW
215/70R15	98	H	221	6 1/2J	683	480 AA	750	1653	300	44	BSW
205/55R16	91	H	214	6 1/2J	632	480 AA	615	1356	300	44	BSW
205/55R16	91	V	214	6 1/2J	632	480 AA	615	1356	300	44	BSW
205/60R16	92	V	209	6J	652	480 AA	630	1389	300	44	BSW
205/65R16	95	H	209	6J	672	500 AA	690	1521	300	44	BSW
215/55R16	93	H	226	7J	642	480 AA	650	1433	300	44	BSW
215/60R16	95	H	221	6 1/2J	664	480 AA	690	1521	300	44	BSW
215/65R16	98	H	221	6 1/2J	686	480 AA	750	1653	300	44	BSW
225/60R16	98	H	228	6 1/2J	676	480 AA	750	1653	300	44	BSW
235/60R16	100	H	240	7J	688	480 AA	800	1764	300	44	BSW

The labeling information is subject to change without notice



CatchPower M+S

PRODUCT FEATURES




Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.



Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.



Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.



Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.

UTQG:300 AA



DRAINAGE




COMFORT



SILENCE



HIGH
PERFORMANCE

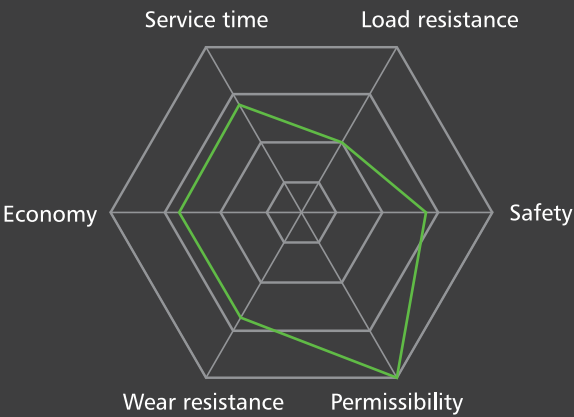

CatchPower M+S



Size	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load 1bs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
195/50R15	82	V	201	6J	577	300 AA	475	1047	300	44	BSW
195/55R15	85	V	201	6J	595	300 AA	515	1135	300	44	BSW
185/55R16 XL	87	V	194	6 J	610	300 AA	545	1201	340	50	BSW
195/45R16 XL	84	V	195	6 1/2J	582	300 AA	500	1102	340	50	BSW
195/50R16 XL	88	V	201	6J	602	300 AA	560	1235	340	50	BSW
195/55R16 XL	91	V	201	6J	620	300 AA	615	1356	340	50	BSW
205/45ZR16 XL	87	W	206	7J	590	300 AA	545	1201	340	50	BSW
205/50ZR16 XL	91	W	214	6 1/2J	612	300 AA	615	1356	340	50	BSW
205/55ZR16 XL	94	W	214	6 1/2J	632	300 AA	670	1477	340	50	BSW
215/55ZR16 XL	97	W	226	7J	642	300 AA	730	1609	340	50	BSW
225/50ZR16 XL	96	W	233	7J	632	300 AA	710	1565	340	50	BSW
225/55ZR16 XL	99	W	223	7J	654	300 AA	775	1709	340	50	BSW
235/50ZR17 XL	100	W	245	7 1/2J	668	300 AA	800	1764	340	50	BSW
245/40ZR17 XL	95	W	248	8 1/2J	628	300 AA	690	1521	340	50	BSW
245/45ZR17 XL	99	W	243	8J	652	300 AA	775	1709	340	50	BSW
255/35ZR18 XL	94	W	260	9J	635	300 AA	670	1477	340	50	BSW
255/40ZR18 XL	99	W	260	9J	661	300 AA	775	1709	340	50	BSW
255/45ZR18 XL	103	W	255	8 1/2J	687	300 AA	875	1929	340	50	BSW
225/35ZR20 XL	90	W	230	8J	666	300 AA	600	1323	340	50	BSW
225/35ZR20 XL	93	W	230	8J	666	300 AA	650	1433	340	50	BSW
245/30ZR20 XL	90	W	248	8 1/2J	656	300 AA	600	1323	340	50	BSW
245/30ZR20 XL	97	W	248	8 1/2J	656	300 AA	730	1609	340	50	BSW
245/35ZR20 XL	95	W	248	8 1/2J	680	300 AA	690	1521	340	50	BSW
245/45ZR20 XL	103	W	243	8J	728	300 AA	875	1929	340	50	BSW
255/35ZR20 XL	97	W	260	9J	686	300 AA	730	1609	340	50	BSW
255/35ZR20 XL	102	W	260	9J	686	300 AA	850	1874	340	50	BSW
255/45ZR20 XL	105	W	255	8 1/2J	738	300 AA	925	2039	340	50	BSW
275/40R20 XL	106	V	278	9 1/2J	728	300 AA	950	2094	340	50	BSW
275/45R20 XL	110	V	273	9J	756	300 AA	1060	2337	340	50	BSW
305/35R20 XL	107	V	313	11J	722	300 AA	975	2149	340	50	BSW
295/35ZR21 XL	107	W	301	10 1/2J	739	300 AA	975	2149	340	50	BSW
295/40ZR21 XL	111	W	301	10 1/2J	769	300 AA	1090	2403	340	50	BSW
245/30ZR22 XL	92	W	248	8 1/2J	707	300 AA	630	1389	340	50	BSW
255/30ZR22 XL	95	W	260	9 J	713	300 AA	690	1521	340	50	BSW
265/35R22 XL	102	V	271	9 1/2J	745	300 AA	850	1874	340	50	BSW
285/35R22 XL	106	V	290	10J	759	300 AA	950	2094	340	50	BSW
305/40R22 XL	114	V	313	11J	803	300 AA	1180	2601	340	50	BSW
305/45R22 XL	118	V	303	10J	833	300 AA	1320	2910	340	50	BSW
255/30ZR24 XL	97	W	260	9 J	764	300 AA	730	1609	340	50	BSW
275/25ZR24 XL	96	W	283	10J	748	300 AA	710	1565	340	50	BSW
295/35R24 XL	110	V	301	10 1/2J	816	300 AA	1060	2337	340	50	BSW
305/35R24 XL	112	V	313	11J	824	300 AA	1120	2469	340	50	BSW

The labeling information is subject to change without notice



CATCHPOWER PLUS M+S


PRODUCT FEATURES



The meteoric steel design brings the swift sensation of speed and allows the driver to enjoy the instantaneous speed.



The asymmetrical shoulder design with soft inside and rigid outside ensures wet performance while improving tire handling performance and bringing driving pleasure.



The innovative sound storage cabin can effectively warm up the noise generated when driving, and the sound waves will disappear into the air.



Optimal groove ratio(5 grooves&4 grooves), improve the handling ability while ensuring the braking and safety performance of the tire on slippery roads.

UTQG: 280/AA/A



DRAINAGE




COMFORT



SILENCE



HIGH
PERFORMANCE

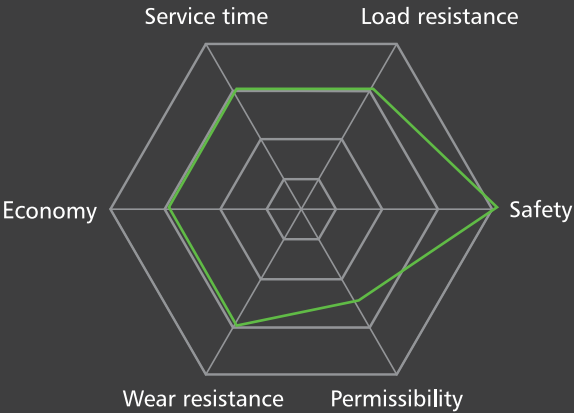

CATCHPOWER PLUS M+S



C-B



C-B



B

Size	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	1bs	MAX Pressure Kpa	Psi	Sidewall Description
205/50R15	86	V	214	6.5J	587	280/AA/A	530	1168	300	44	BSW
205/45ZR16 XL	87	W	206	7.0J	590	280/AA/A	545	1201	340	50	BSW
205/50ZR16 XL	91	W	214	6.5J	612	280/AA/A	615	1356	340	50	BSW
215/40ZR16 XL	86	W	218	7.5J	578	280/AA/A	530	1168	340	50	BSW
225/50ZR16 XL	96	W	233	7.0J	632	280/AA/A	710	1565	340	50	BSW
225/55ZR16 XL	99	W	233	7.0J	654	280/AA/A	775	1709	340	50	BSW
195/40R17 XL	81	W	200	7J	588	280/AA/A	462	1019	340	50	BSW
195/45R17 XL	85	W	195	6 1/2J	608	280/AA/A	515	1135	340	50	BSW
205/40ZR17 XL	84	W	212	7 1/2J	596	280/AA/A	500	1102	340	50	BSW
205/45ZR17 XL	88	W	206	7J	616	280/AA/A	560	1235	340	50	BSW
205/50ZR17 XL	93	W	214	6 1/2J	638	280/AA/A	650	1433	340	50	BSW
205/55ZR17 XL	95	W	214	6 1/2J	658	280/AA/A	690	1521	340	50	BSW
215/40ZR17 XL	87	W	218	7 1/2J	604	280/AA/A	545	1201	340	50	BSW
215/45ZR17 XL	91	W	213	7J	626	280/AA/A	615	1356	340	50	BSW
215/45ZR17 XL	91	Y	213	7J	626	280/AA/A	615	1356	340	50	BSW
215/50ZR17 XL	95	W	226	7J	648	280/AA/A	690	1521	340	50	BSW
215/50ZR17 XL	95	Y	226	7J	648	280/AA/A	690	1521	340	50	BSW
215/55ZR17 XL	98	W	226	7J	668	280/AA/A	750	1653	340	50	BSW
225/45ZR17 XL	94	W	225	7 1/2J	634	280/AA/A	670	1477	340	50	BSW
225/45ZR17 XL	94	Y	225	7 1/2J	634	280/AA/A	670	1477	340	50	BSW
225/50ZR17 XL	98	W	233	7J	658	280/AA/A	750	1653	340	50	BSW
225/50ZR17 XL	98	Y	233	7J	658	280/AA/A	750	1653	340	50	BSW
225/55R17 XL	101	W	233	7J	680	280/AA/A	825	1819	340	50	BSW
235/45ZR17 XL	97	W	236	8J	644	280/AA/A	730	1609	340	50	BSW
235/45ZR17 XL	97	Y	236	8J	644	280/AA/A	730	1609	340	50	BSW
235/50ZR17 XL	100	W	245	7.5J	668	280/AA/A	800	1764	340	50	BSW
235/55ZR17 XL	103	W	245	7 1/2J	690	280/AA/A	875	1929	340	50	BSW
245/40ZR17 XL	95	W	248	8.5J	628	280/AA/A	690	1521	340	50	BSW
245/45ZR17 XL	99	W	243	8.0J	652	280/AA/A	775	1709	340	50	BSW
205/40ZR18 XL	86	W	212	7.5J	621	280/AA/A	530	1168	340	50	BSW
215/35ZR18 XL	84	W	218	7 1/2J	607	280/AA/A	500	1102	340	50	BSW
215/40ZR18 XL	89	W	218	7 1/2J	629	280/AA/A	580	1279	340	50	BSW
215/45ZR18 XL	93	Y	213	7J	651	280/AA/A	650	1433	340	50	BSW
215/50ZR18	92	W	226	7J	673	280/AA/A	630	1389	300	44	BSW
215/55R18 XL	99	W	226	7J	693	280/AA/A	775	1709	340	50	BSW
225/35ZR18 XL	87	Y	230	8J	615	280/AA/A	545	1201	340	50	BSW
225/40ZR18 XL	92	W	230	8J	637	280/AA/A	630	1389	340	50	BSW
225/40ZR18 XL	92	Y	230	8J	637	280/AA/A	630	1389	340	50	BSW
225/45ZR18 XL	95	W	225	7 1/2J	659	280/AA/A	690	1521	340	50	BSW
225/45ZR18 XL	95	Y	225	7 1/2J	659	280/AA/A	690	1521	340	50	BSW
225/50ZR18 XL	99	W	233	7J	683	280/AA/A	775	1709	340	50	BSW
225/55ZR18 XL	102	W	233	7J	705	280/AA/A	850	1874	340	50	BSW
235/40ZR18 XL	95	Y	241	8 1/2J	645	280/AA/A	690	1521	340	50	BSW
235/45ZR18 XL	98	W	236	8J	669	280/AA/A	750	1653	340	50	BSW
235/45ZR18 XL	98	Y	236	8J	669	280/AA/A	750	1653	340	50	BSW
235/50ZR18 XL	101	W	245	7 1/2J	693	280/AA/A	825	1819	340	50	BSW
235/50ZR18 XL	101	Y	245	7 1/2J	693	280/AA/A	825	1819	340	50	BSW
235/55ZR18 XL	104	W	245	7 1/2J	715	280/AA/A	900	1984	340	50	BSW
245/35ZR18 XL	92	Y	248	8 1/2J	629	280/AA/A	630	1389	340	50	BSW
245/40ZR18 XL	97	Y	248	8 1/2J	653	280/AA/A	730	1609	340	50	BSW
245/45ZR18 XL	100	Y	243	8J	677	280/AA/A	800	1764	340	50	BSW
255/35ZR18 XL	94	Y	260	9J	635	280/AA/A	670	1477	340	50	BSW
255/40ZR18 XL	99	Y	260	9.0J	661	280/AA/A	775	1709	340	50	BSW
255/45ZR18 XL	103	W	255	8.5J	687	280/AA/A	875	1929	340	50	BSW
255/55ZR18 XL	109	Y	265	8J	737	280/AA/A	1030	2271	340	50	BSW
265/35ZR18 XL	97	Y	271	9 1/2J	643	280/AA/A	730	1609	340	50	BSW
265/40ZR18 XL	101	Y	271	9.5J	669	280/AA/A	825	1819	340	50	BSW
275/35ZR18 XL	99	Y	278	9.5J	649	280/AA/A	775	1709	340	50	BSW
275/40ZR18 XL	103	Y	278	9.5J	677	280/AA/A	875	1929	340	50	BSW

The labeling information is subject to change without notice



CATCHPOWER PLUS M+S

PRODUCT FEATURES

The meteoric steel design brings the swift sensation of speed and allows the driver to enjoy the instantaneous speed.

The asymmetrical shoulder design with soft inside and rigid outside ensures wet performance while improving tire handling performance and bringing driving pleasure.

The innovative sound storage cabin can effectively warm up the noise generated when driving, and the sound waves will disappear into the air.

Optimal groove ratio(5 grooves&4 grooves), improve the handling ability while ensuring the braking and safety performance of the tire on slippery roads.


UTQG: 280/AA/A

DRAINAGE

COMFORT

SILENCE

HIGH PERFORMANCE

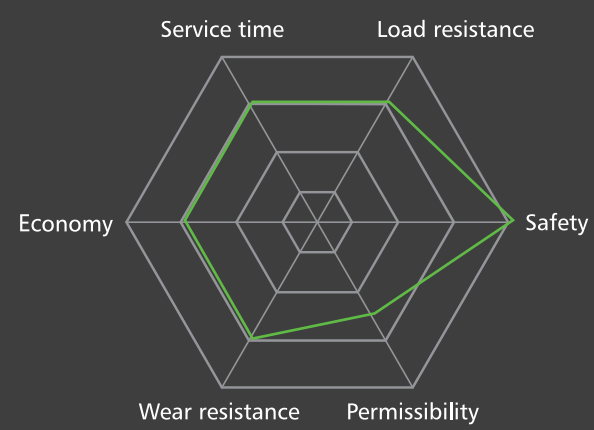

CATCHPOWER PLUS M+S														
Size	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	1bs	MAX Pressure Kpa	Psi	Sidewall Description			
215/35ZR19 XL	85	Y	218	7.5J	633	280/AA/A	515	1135	340	50	BSW			
225/35ZR19 XL	88	Y	230	8J	641	280/AA/A	560	1235	340	50	BSW			
225/40ZR19 XL	93	Y	230	8J	663	280/AA/A	650	1433	340	50	BSW			
225/45ZR19 XL	96	Y	225	7 1/2J	685	280/AA/A	710	1565	340	50	BSW			
225/55ZR19 XL	103	W	233	7J	731	280/AA/A	875	1929	340	50	BSW			
235/35ZR19 XL	91	Y	241	8 1/2J	647	280/AA/A	615	1356	340	50	BSW			
235/40ZR19 XL	96	Y	241	8 1/2J	671	280/AA/A	710	1565	340	50	BSW			
235/45ZR19 XL	99	W	236	8J	695	280/AA/A	775	1709	340	50	BSW			
235/50ZR19 XL	103	Y	245	7 1/2J	719	280/AA/A	875	1929	340	50	BSW			
235/55ZR19 XL	105	W	245	7 1/2J	741	280/AA/A	925	2039	340	50	BSW			
235/55ZR19 XL	105	Y	245	7 1/2J	741	280/AA/A	925	2039	340	50	BSW			
245/35ZR19 XL	93	Y	248	8 1/2J	655	280/AA/A	650	1433	340	50	BSW			
245/40ZR19 XL	98	Y	248	8 1/2J	679	280/AA/A	750	1653	340	50	BSW			
245/45ZR19 XL	102	Y	243	8J	703	280/AA/A	850	1874	340	50	BSW			
245/55ZR19 XL	107	W	253	7 1/2J	753	280/AA/A	975	2149	340	50	BSW			
255/30ZR19 XL	91	Y	260	9J	637	280/AA/A	615	1356	340	50	BSW			
255/35ZR19 XL	96	Y	260	9J	661	280/AA/A	710	1565	340	50	BSW			
255/40ZR19 XL	100	Y	260	9J	687	280/AA/A	800	1764	340	50	BSW			
255/45ZR19 XL	104	Y	255	8.5J	713	280/AA/A	900	1984	340	50	BSW			
255/50ZR19 XL	107	W	265	8.0J	739	280/AA/A	975	2149	340	50	BSW			
255/55ZR19 XL	111	W	265	8J	763	280/AA/A	1090	2403	340	50	BSW			
265/30ZR19 XL	93	Y	271	9 1/2J	643	280/AA/A	650	1433	340	50	BSW			
265/35ZR19 XL	98	Y	271	9.5J	669	280/AA/A	750	1653	340	50	BSW			
265/50ZR19 XL	110	W	277	8 1/2J	749	280/AA/A	1060	2337	340	50	BSW			
275/30ZR19 XL	96	Y	278	9 1/2J	649	280/AA/A	710	1565	340	50	BSW			
275/35ZR19 XL	100	Y	278	9 1/2J	675	280/AA/A	800	1764	340	50	BSW			
275/40ZR19 XL	105	Y	278	9 1/2J	703	280/AA/A	925	2039	340	50	BSW			
275/45ZR19 XL	108	W	273	9J	731	280/AA/A	1000	2205	340	50	BSW			
275/55ZR19 XL	111	W	284	8 1/2J	785	280/AA/A	1090	2403	300	44	BSW			
285/45ZR19 XL	111	Y	285	9 1/2J	739	280/AA/A	1090	2403	340	50	BSW			
195/55R20 XL	95	H	201	6J	722	280/AA/A	690	1521	340	50	BSW			
225/35ZR20 XL	93	Y	230	8.0J	666	280/AA/A	650	1433	340	50	BSW			
235/30ZR20 XL	88	Y	241	8 1/2J	650	280/AA/A	560	1235	340	50	BSW			
235/45ZR20XL	100	W	236	8J	720	280/AA/A	800	1764	340	50	BSW			
235/55ZR20 XL	105	W	245	7.5J	766	280/AA/A	925	2039	340	50	BSW			
245/30ZR20 XL	97	Y	248	8.5J	656	280/AA/A	730	1609	340	50	BSW			
245/35ZR20 XL	95	Y	248	8.5J	680	280/AA/A	690	1521	340	50	BSW			
245/40ZR20 XL	99	W	248	8 1/2J	704	280/AA/A	775	1709	340	50	BSW			
245/45ZR20 XL	103	Y	243	8.0J	728	280/AA/A	875	1929	340	50	BSW			
245/50ZR20 XL	105	Y	253	7 1/2J	754	280/AA/A	925	2039	340	50	BSW			
255/30ZR20 XL	92	Y	260	9J	662	280/AA/A	630	1389	340	50	BSW			
255/35ZR20 XL	102	Y	260	9.0J	686	280/AA/A	850	1874	340	50	BSW			
255/45ZR20 XL	105	Y	255	8.5J	738	280/AA/A	925	2039	340	50	BSW			
255/50ZR20 XL	109	W	265	8.0J	764	280/AA/A	1030	2271	340	50	BSW			
255/50ZR20 XL	109	Y	265	8.0J	764	280/AA/A	1030	2271	340	50	BSW			
255/55ZR20 XL	110	W	265	8.0J	788	280/AA/A	1060	2337	340	50	BSW			
265/45ZR20 XL	108	Y	266	9.0J	746	280/AA/A	1000	2205	340	50	BSW			
265/50ZR20 XL	111	W	277	8 1/2J	774	280/AA/A	1090	2403	340	50	BSW			
275/30ZR20 XL	97	Y	278	9 1/2J	674	280/AA/A	730	1609	340	50	BSW			
275/35ZR20 XL	103	W	278	9 1/2J	700	280/AA/A	875	1929	340	50	BSW			
275/35ZR20 XL	102	Y	278	9 1/2J	700	280/AA/A	850	1874	340	50	BSW			
275/40ZR20 XL	106	Y	278	9.5J	728	280/AA/A	950	2094	340	50	BSW			
275/45ZR20 XL	110	Y	273	9.0J	756	280/AA/A	1060	2337	340	50	BSW			
275/50ZR20 XL	113	W	284	8 1/2J	784	280/AA/A	1150	2535	340	50	BSW			
275/55ZR20 XL	117	W	284	8.5J	810	280/AA/A	1285	2833	340	50	BSW			
275/60ZR20 XL	119	W	279	8.0J	838	280/AA/A	1360	2998	340	50	BSW			
285/50ZR20 XL	116	W	297	9.0J	794	280/AA/A	1250	2756	340	50	BSW			
295/40ZR20 XL	110	Y	301	10 1/2J	744	280/AA/A	1060	2337	340	50	BSW			
305/40ZR20 XL	112	Y	313	11.0J	752	280/AA/A	1120	2469	340	50	BSW			
315/35ZR20 XL	110	Y	320	11J	728	280/AA/A	1060	2337	340	50	BSW			
245/35ZR21 XL	96	Y	248	8 1/2J	705	280/AA/A	710	1565	340	50	BSW			
255/40ZR21 XL	102	Y	260	9.0J	737	280/AA/A	850	1874	340	50	BSW			
275/30ZR21 XL	98	Y	278	9 1/2J	699	280/AA/A	750	1653	340	50	BSW			
275/40ZR21 XL	107	Y	278	9 1/2J	753	280/AA/A	975	2149	340	50	BSW			
275/45ZR22 XL	112	W	273	9.0J	807	280/AA/A	1120	2469	340	50	BSW			
275/45ZR21 XL	110	Y	273	9J	781	280/AA/A	1060	2337	340	50	BSW			
295/35ZR21 XL	107	Y	301	10.5J	739	280/AA/A	975	2149	340	50	BSW			
295/40ZR21 XL	111	Y	301	10.5J	769	280/AA/A	1090	2403	340	50	BSW			
315/35ZR21 XL	111	Y	320	11J	753	280/AA/A	1090	2403	340	50	BSW			
315/40ZR21 XL	115	Y	320	11J	785	280/AA/A	1215	2679	340	50	BSW			
265/35ZR22 XL	102	Y	271	9.5J	745	280/AA/A	850	1874	340	50	BSW			
265/40ZR22 XL	106	Y	271	9.5J	771	280/AA/A	950	2094	340	50	BSW			
265/45ZR22 XL	110	W	266	9.0J	797	280/AA/A	1060	2337	340	50	BSW			
275/35ZR22 XL	104	Y	278	9.5J	751	280/AA/A	900	1984	340	50	BSW			
275/40ZR22 XL	108	Y	278	9.5J	779	280/AA/A	1000	2205	340	50	BSW			

The labeling information is subject to change without notice



CATCHPOWER EV

M+S

PRODUCT FEATURES



Moer Powerful
Easy handling on dry ground
The high block/groove ratio design of the outer tread increases the contact area with the road surface and improves the grip performance. The multi-layer skeleton structure provides stronger support rigidity and reduces the lag of the tire when cornering and steering, enabling the tire to grip the road surface and achieve perfect dry-ground handling performance.



More Safety
Safe and stable in wetlands
The optimal groove ratio design of the inner tread greatly improves the drainage efficiency in wetlands. The spiked tangent angle design with linear steel blade layout allows it to fully pierce the water film, bringing a safe and stable driving environment and providing protection from hardware for safe traveling.



More Comfortable
All the sizes have used AI virtual analysis to imitate the working state of the tire under real road conditions, optimize the tread pitch permutation, eliminate excess noise interference furtherly, and provide a more comfortable and quiet experience for the driver and passenger.



Ultra High Performance
The best groove ratio (5 and 4 grooves) combined with the innovative formula optimize the raw material ratio ,new mixing technology added to improve the overall pattern block rigidity,enhance the tread grip, and meet the handling and braking ability, so that the tires could reach a higher driving limit and meet a higher level of driving needs.

UTQG: 280/AA/A



DRAINAGE




COMFORT



SILENCE



HIGH
PERFORMANCE

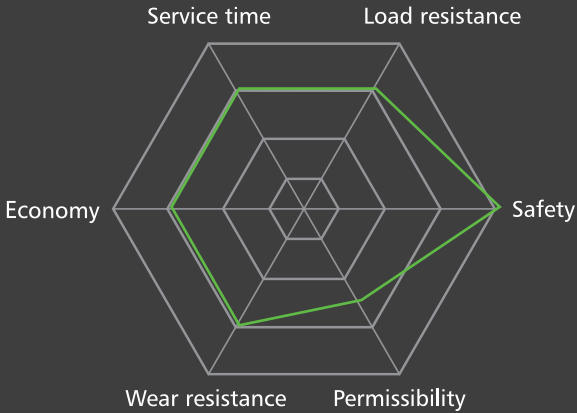

CATCHPOWER EV M+S



Size	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
235/45ZR18	98	Y	236	8	669	280/AA/A	750	1653	340	50	BSW
235/40ZR19	96	W	241	8.5	671	280/AA/A	710	1565	340	50	BSW
235/35ZR20	92	Y	241	8.5	672	280/AA/A	630	1389	340	50	BSW
245/45ZR19	102	Y	243	8	703	280/AA/A	850	1874	340	50	BSW
245/35ZR21	96	Y	248	8.5	705	280/AA/A	710	1565	340	50	BSW
255/50R19	107	V	265	8	739	280/AA/A	975	2149	340	50	BSW
255/40ZR20	101	Y	260	9	712	280/AA/A	825	1819	340	50	BSW
255/45ZR20	105	W	255	8.5	738	280/AA/A	925	2039	340	50	BSW
255/50R20	109	V	265	8	764	280/AA/A	1030	2271	340	50	BSW
255/35ZR21	98	W	260	9	711	280/AA/A	750	1653	340	50	BSW
265/35ZR21	101	Y	271	9.5	719	280/AA/A	825	1819	340	50	BSW
265/45ZR21	108	W	266	9	771	280/AA/A	1000	2205	340	50	BSW
275/35ZR21	103	W	278	9.5	725	280/AA/A	875	1929	340	50	BSW
275/45ZR20	110	Y	273	9	756	280/AA/A	1060	2337	340	50	BSW

The labeling information is subject to change without notice



CATCHFORS A/S II

M+S




PRODUCT FEATURES



Rigid pattern block provides superior handling performance
The pattern block is coherent, and the width is uniform, which ensures the rigidity of the tread to the maximum extent, brings super handling performance, and meets the driving needs of high-end cars.



Three-stage main channel design
The inclination angle is constantly changing, the drainage performance is better, and the wet skid resistance is improved, providing safety guarantee for driving in rainy and snowy weather.



Reduce noise
The narrow pitch design is adopted, and the pitch arrangement is analyzed and optimized by AI to reduce the noise resonance phenomenon of pattern blocks, making the driving process more quiet and comfortable.



Precise control of driving
High-density 3D steel sheet design increases the strength of the pattern and can easily cope with rain and snow environment, providing you with extraordinary grip on the road.

UTQG:320AA



OIL




STABILITY



SILENCE



WET

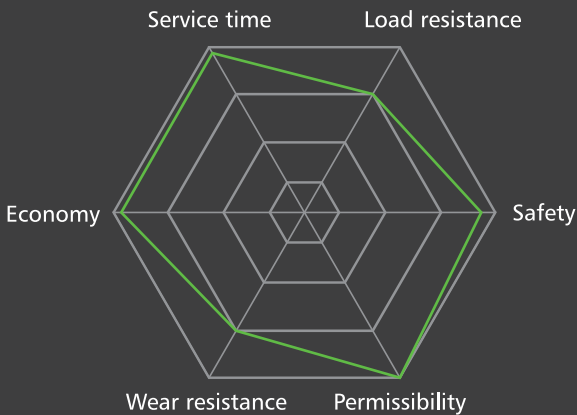

ALL SEASON

CATCHFORS A/S II

M+S



C



C



B

Size	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	1bs	MAX Pressure Kpa	Psi	Sidewall Description
195/55R16	87	V	201	6J	620	320 AA	545	1201	300	44	BSW
195/50R20	93	H	201	6J	704	320 AA	650	1433	340	50	BSW
195/55R20	95	H	201	6J	722	320 AA	690	1521	340	50	BSW
205/55ZR16	94	W	214	6 1/2J	632	320 AA	670	1477	340	50	BSW
205/40ZR17	84	W	212	7 1/2J	596	320 AA	500	1102	340	50	BSW
205/50ZR17	93	W	214	6 1/2J	638	320 AA	650	1433	340	50	BSW
205/55ZR17	95	W	214	6 1/2J	658	320 AA	690	1521	340	50	BSW
205/55ZR19	97	W	214	6 1/2J	709	320 AA	730	1609	340	50	BSW
215/55ZR16	97	W	226	7J	642	320 AA	730	1609	340	50	BSW
215/40ZR17	87	W	218	7 1/2J	604	320 AA	545	1201	340	50	BSW
215/50ZR17	95	W	226	7J	648	320 AA	690	1521	340	50	BSW
215/55ZR17	98	W	226	7J	668	320 AA	750	1653	340	50	BSW
215/50ZR18	92	W	226	7J	673	320 AA	630	1389	300	44	BSW
215/55R18	99	V	226	7J	693	320 AA	775	1709	340	50	BSW
225/45ZR17	94	W	225	7 1/2J	634	320 AA	670	1477	340	50	BSW
225/50ZR17	98	W	233	7J	658	320 AA	750	1653	340	50	BSW
245/45ZR17	99	W	243	8J	652	320 AA	775	1709	340	50	BSW
225/55ZR17	101	W	233	7J	680	320 AA	925	1819	340	50	BSW
225/40ZR18	92	W	230	8J	637	320 AA	630	1389	340	50	BSW
225/45ZR18	95	W	225	7 1/2J	659	320 AA	690	1521	340	50	BSW
225/35ZR19	88	W	230	8J	641	320 AA	560	1235	340	50	BSW
225/40ZR19	93	W	230	8J	663	320 AA	650	1433	340	50	BSW
225/45ZR19	96	W	225	7 1/2J	685	320 AA	710	1565	340	50	BSW
225/55ZR19	99	W	233	7J	731	320 AA	775	1709	300	44	BSW
235/55ZR17	103	W	245	7 1/2J	690	320 AA	875	1929	340	50	BSW
235/65R17	108	V	240	7J	738	320 AA	1000	2205	340	50	BSW
235/45ZR18	98	W	236	8J	669	320 AA	750	1653	340	50	BSW
235/55R18	104	V	245	7 1/2J	715	320 AA	900	1984	340	50	BSW
235/60R18	107	V	240	7J	739	320 AA	975	2149	340	50	BSW
235/35ZR19	91	W	241	8 1/2J	647	320 AA	615	1356	340	50	BSW
235/55ZR19	105	W	245	7 1/2J	741	320 AA	925	2039	340	50	BSW
245/40ZR18	97	W	248	8 1/2J	653	320 AA	730	1609	340	50	BSW
245/45ZR18	100	W	243	8J	677	320 AA	800	1764	340	50	BSW
245/40ZR19	98	W	248	8 1/2J	679	320 AA	750	1653	340	50	BSW
245/45ZR19	102	W	243	8J	703	320 AA	850	1874	340	50	BSW
255/35ZR19	96	W	260	9J	661	320 AA	710	1565	340	50	BSW
255/40ZR19	100	W	260	9J	687	320 AA	800	1764	340	50	BSW

The labeling information is subject to change without notice



CATCHFORS A/S

M+S



PRODUCT FEATURES




The compound mixture ensures longevity without compromising on safety and performance.



This unique design offers stability in cornering, it has superior performance due to its superior design, where the Royal A/S provided performance as an all-rounder tyre, the Royal A/S provides superior performance in cornering on slippery conditions.



This design has a superior pitch frequency, which offers a considerable reduction in noise, offering a very comfortable and quite ride.



Superior high tensile steel belts for durability, nylon blend cap to maximizes the contact area with the road surface, all of these combined exceeds the goal of having a tyre which not only meets the needs of an exceptional all seasons tyre, but also provides exceptional performance.

UTQG:420AA—450 AA



OIL




STABILITY



SILENCE



WET

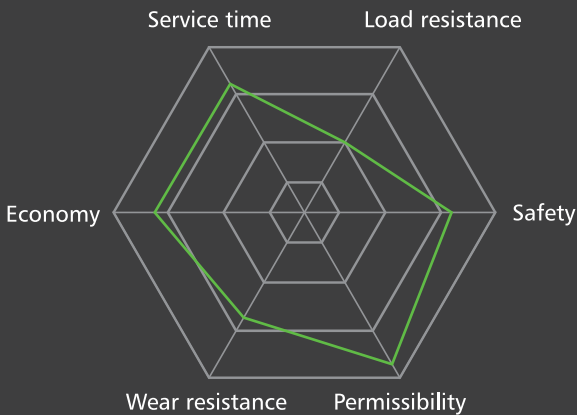

ALL SEASON

CATCHFORS A/S M+S



Size	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
155/65R13	73	T	157	4.50B	532	420 AA	365	805	300	44	BSW
155/70R13	75	T	157	4.50B	548	420 AA	387	853	300	44	BSW
155/80R13	79	T	157	4.50B	578	420 AB	437	963	300	44	BSW
165/70R13	79	T	170	5.00B	562	420 AA	437	963	300	44	BSW
175/65R13	80	T	177	5.00B	558	420 AA	450	992	300	44	BSW
175/70R13	82	T	177	5.00B	576	420 AA	475	1047	300	44	BSW
155/65R14	75	H	157	4 1/2J	558	420 AA	387	853	300	44	BSW
165/60R14	75	H	170	5J	554	420 AA	387	853	300	44	BSW
165/65R14	79	H	170	5J	570	420 AA	437	963	300	44	BSW
165/70R14	81	H	170	5J	588	420 AA	462	1019	300	44	BSW
175/65R14 XL	86	T	177	5J	584	420 AA	530	1168	340	50	BSW
175/70R14 XL	88	T	177	5J	602	420 AA	560	1235	340	50	BSW
185/60R14	82	H	189	5 1/2J	578	420 AA	475	1047	300	44	BSW
185/65R14	86	H	189	5 1/2J	596	420 AA	530	1168	300	44	BSW
185/55R14	80	H	194	6J	560	420 AA	450	992	300	44	BSW
185/70R14	88	H	189	5 1/2J	616	420 AA	560	1235	300	44	BSW
175/55R15	77	H	182	5 1/2J	573	420 AA	412	908	300	44	BSW
175/60R15	81	H	177	5J	591	420 AA	462	1019	300	44	BSW
175/65R15	84	H	177	5J	609	420 AA	500	1102	300	44	BSW
185/55R15	82	V	194	6 J	585	420 AA	475	1047	300	44	BSW
185/60R15	88	H	189	5 1/2J	603	420 AA	560	1235	340	50	BSW
185/65R15	92	T	189	5 1/2J	621	420 AA	630	1389	340	50	BSW
195/50R15	82	V	201	6 J	577	420 AA	475	1047	300	44	BSW
195/55R15	85	V	201	6J	595	420 AA	515	1135	300	44	BSW
195/60R15	88	H	201	6 J	615	420 AA	560	1235	300	44	BSW
195/65R15	91	H	201	6 J	635	420 AA	615	1356	300	44	BSW
205/65R15	94	V	209	6J	647	420 AA	670	1477	300	44	BSW
215/65R15	96	H	221	6 1/2J	661	420 AA	710	1565	300	44	BSW
195/45R16 XL	84	V	195	6 1/2J	582	420 AA	500	1102	340	50	BSW
195/50R16 XL	88	V	201	6J	602	420 AA	560	1235	340	50	BSW
195/55R16 XL	91	V	201	6 J	620	420 AA	615	1356	340	50	BSW
205/45R16 XL	87	W	206	7J	590	420 AA	545	1201	340	50	BSW
205/55R16 XL	94	V	214	6 1/2J	632	420 AA	670	1477	340	50	BSW
205/60R16 XL	96	H	209	6 J	652	420 AA	710	1565	340	50	BSW
215/45R16 XL	90	V	213	7J	600	420 AA	600	1323	340	50	BSW
215/55R16 XL	97	V	226	7J	642	420 AA	730	1609	340	50	BSW
215/60R16 XL	99	H	221	6 1/2J	664	420 AA	775	1709	340	50	BSW
215/65R16 XL	102	H	221	6 1/2J	686	420 AA	850	1874	340	50	BSW
215/70R16	100	H	221	6 1/2J	708	420 AA	800	1764	300	44	BSW
225/55R16 XL	99	W	233	7J	654	420 AA	775	1709	340	50	BSW
205/45R17 XL	88	W	206	7J	616	420 AA	560	1235	340	50	BSW
205/50R17 XL	93	W	214	6 1/2J	638	420 AA	650	1433	340	50	BSW
215/45R17 XL	91	W	213	7J	626	420 AA	615	1356	340	50	BSW
215/50R17 XL	95	W	226	7J	648	420 AA	690	1521	340	50	BSW
215/55R17 XL	98	W	226	7J	668	420 AA	750	1653	340	50	BSW
215/60R17 XL	100	V	221	6 1/2J	690	420 AA	800	1764	340	50	BSW
225/45R17 XL	94	W	225	7 1/2J	634	420 AA	670	1477	340	50	BSW
225/50R17 XL	98	W	233	7J	658	420 AA	750	1653	340	50	BSW
225/55R17 XL	101	W	233	7J	680	420 AA	825	1819	340	50	BSW
225/60R17 XL	103	V	228	6 1/2J	702	420 AA	875	1929	340	50	BSW
225/65R17 XL	106	V	228	6 1/2J	724	420 AA	950	2094	340	50	BSW
235/45R17 XL	97	W	236	8J	644	420 AA	730	1609	340	50	BSW
235/55R17 XL	103	W	245	7 1/2J	690	420 AA	875	1929	340	50	BSW
235/65R17 XL	108	V	240	7J	738	420 AA	1000	2205	340	50	BSW
225/40ZR18 XL	92	Y	230	8J	637	420 AA	630	1389	340	50	BSW
225/45R18 XL	95	W	225	7 1/2J	659	420 AA	690	1521	340	50	BSW
225/55R18 XL	102	V	233	7J	705	420 AA	850	1874	340	50	BSW
235/50R18 XL	101	W	245	7 1/2J	693	420 AA	825	1819	340	50	BSW
245/40ZR18 XL	97	Y	248	8 1/2J	653	450AA	730	1609	340	50	BSW
245/45ZR18 XL	100	Y	243	8J	677	420 AA	800	1764	340	50	BSW

The labeling information is subject to change without notice



CatchPower

M+S

PRODUCT FEATURES




Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.



Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.



Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.



Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.

UTQG:300AA—420 AA



DRAINAGE




COMFORT



SILENCE



HIGH PERFORMANCE

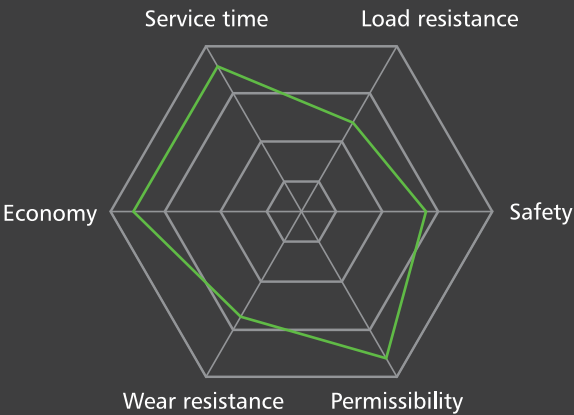

SUV

CatchPower M+S



D-C



C-B



B

Size	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
235/65R17 XL	108	H	240	7J	738	420 AA	1000	2205	340	50	BSW
245/65R17	107	H	248	7J	750	420 AA	975	2149	300	44	BSW
255/60R17 XL	110	V	260	7 1/2J	738	300 AA	1060	2337	340	50	BSW
255/65R17	110	H	260	7 1/2J	764	420 AA	1060	2337	300	44	BSW
265/65R17	112	H	272	8J	776	420 AA	1120	2469	300	44	BSW
255/55R18 XL	109	V	265	8J	737	300 AA	1030	2271	340	50	BSW
255/60R18 XL	112	V	260	7 1/2J	763	300 AA	1120	2469	340	50	BSW
225/55R19 XL	103	V	233	7J	731	300 AA	875	1929	340	50	BSW
235/55R19 XL	105	V	245	7 1/2J	741	300 AA	925	2039	340	50	BSW
255/50R19 XL	107	V	265	8J	739	300 AA	975	2149	340	50	BSW
255/55R19 XL	111	V	265	8J	763	300 AA	1090	2403	340	50	BSW
285/45R19 XL	111	V	285	9 1/2J	739	300 AA	1090	2403	340	50	BSW
245/55R19 XL	107	V	253	7 1/2J	753	300 AA	975	2149	340	50	BSW
265/50R20 XL	111	V	277	8 1/2J	774	300 AA	1090	2403	340	50	BSW
275/55R20 XL	117	V	284	8 1/2J	810	300 AA	1285	2833	340	50	BSW
275/60R20 XL	119	V	279	8J	838	300 AA	1360	2998	340	50	BSW
285/50R20 XL	116	V	297	9J	794	300 AA	1250	2756	340	50	BSW

The labeling information is subject to change without notice



PERFORMAX M+S

PRODUCT FEATURES




Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.



The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. Continuous tread blocks on both shoulder give great support to enhance the ride stability when cornering.



Variable pitch pattern and solid center ribs improve the ride stability, reduce the noise and deliver a comfortable ride.



High-density sipes with special compound deliver a smooth ride and improve traction on dry and wet roads. Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability.

UTQG:420 AA



DRAINAGE




COMFORT



SILENCE



HIGH
PERFORMANCE

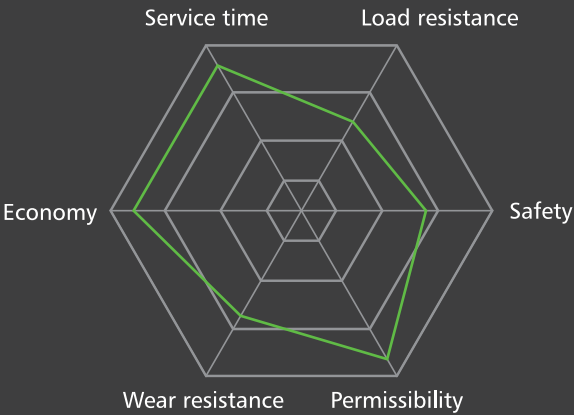

SUV

PERFORMAX M+S



Size	PR	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Kg	Load lbs	MAX Pressure Kpa	Psi	Sidewall Description
215/70R16	-	100	H	221	6 1/2J	708	420 AA	800	1764	300	44	BSW
225/70R16 XL	-	107	H	228	6 1/2J	722	420 AA	975	2149	340	50	BSW
235/70R16	-	106	H	240	7J	736	420 AA	950	2094	300	44	BSW
245/70R16	-	107	H	248	7J	750	420 AA	975	2149	300	44	BSW
245/70R16 XL	-	111	H	248	7J	750	420 AA	1090	2403	340	50	BSW
255/65R16	-	109	H	260	7 1/2J	738	420 AA	1030	2271	300	44	BSW
255/70R16	-	111	H	260	7 1/2J	764	420 AA	1090	2403	300	44	BSW
265/70R16	-	112	H	272	8J	778	420 AA	1120	2469	300	44	BSW
275/70R16	-	114	H	279	8J	792	420 AA	1180	2601	300	44	BSW
215/60R17	-	96	H	221	6 1/2J	690	420 AA	710	1565	300	44	BSW
215/65R17	-	99	H	221	6 1/2J	712	420 AA	775	1709	300	44	BSW
225/60R17	-	99	H	228	6 1/2J	702	420 AA	775	1709	300	44	BSW
225/65R17	-	102	H	228	6 1/2J	724	420 AA	850	1874	300	44	BSW
235/60R17	-	102	H	240	7J	714	420 AA	850	1874	300	44	BSW
235/60R17 XL	-	106	H	240	7J	714	420 AA	950	2094	340	50	BSW
235/65R17	-	104	H	240	7J	738	420 AA	900	1984	300	44	BSW
245/65R17	-	107	H	248	7J	750	420 AA	975	2149	300	44	BSW
245/65R17 XL	-	111	H	248	7J	750	420 AA	1090	2403	340	50	BSW
255/65R17	-	110	H	260	7 1/2J	764	420 AA	1060	2337	300	44	BSW
265/65R17	-	112	H	272	8J	776	420 AA	1120	2469	300	44	BSW
265/70R17	-	115	H	272	8J	804	420 AA	1215	2679	300	44	BSW
275/65R17	-	115	H	279	8J	790	420 AA	1215	2679	300	44	BSW
285/65R17	-	116	H	292	8 1/2J	802	420 AA	1250	2756	300	44	BSW
225/55R18	-	98	H	233	7J	705	420 AA	750	1653	300	44	BSW
225/60R18 XL		104	H	228	6 1/2J	727	420 AA	900	1984	340	50	BSW
235/55R18 XL	-	104	H	245	7 1/2J	715	420 AA	900	1984	340	50	BSW
235/60R18 XL	-	107	H	240	7J	739	420 AA	975	2149	340	50	BSW
235/65R18 XL	-	110	H	240	7J	763	420 AA	1060	2337	340	50	BSW
245/60R18	-	105	H	248	7J	751	420 AA	925	2039	300	44	BSW
255/70R18	-	113	H	260	7 1/2J	815	420 AA	1150	2535	300	44	BSW
265/60R18	-	110	H	272	8J	775	420 AA	1060	2337	300	44	BSW
275/60R18	-	113	H	179	8J	787	420 AA	1150	2535	300	44	BSW
275/65R18	-	116	H	279	8J	815	420 AA	1250	2756	300	44	BSW
285/60R18	-	116	H	292	8 1/2J	799	420 AA	1250	2756	300	44	BSW
LT225/75R16	10PR	115/112	S	223	6 J	744	-	1215/1120	2680/2470	550	80	BSW
LT235/85R16	10PR	120/116	S	235	6 1/2J	806	-	1380/1260	3042/2778	550	80	BSW
LT245/75R16	10PR	120/116	S	248	7J	774	-	1380/1260	3042/2778	550	80	BSW
LT265/75R16	10PR	123/120	S	267	7 1/2J	804	-	1550/1400	3415/3085	550	80	BSW
LT245/75R17	10PR	121/118	S	248	7J	800	-	1450/1320	3195/2910	550	80	BSW
LT265/70R17	10PR	121/118	S	272	8J	804	-	1450/1320	3195/2910	550	80	BSW

The labeling information is subject to change without notice




PRIMETOUR M+S


PRODUCT FEATURES




Four main grooves provide good driving stability and wet performance.



Reasonable pattern area, perfect collocation of every grooves.



Special tread compound, ensure tire performance stability in all kinds of weather conditions.



White sidewall rib shows extraordinary appearance.

UTQG:420 AB



OIL




STABILITY



SILENCE



WET

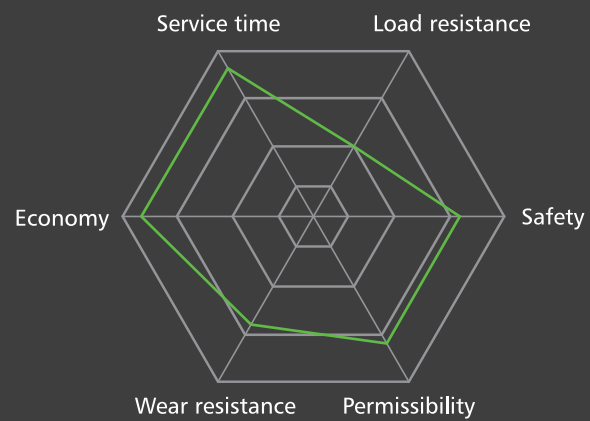

SUV

PRIMETOUR M+S

Size	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Kg	Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
P195/75R14	92	S	196	5 1/2J	648	420 AB	635	1400	300	44	WR
P205/75R14	95	S	203	5 1/2J	664	420 AB	695	1532	300	44	WR
P205/70R15	95	S	209	6J	669	420 AB	680	1499	300	44	WR
P205/75R15	97	T	203	5 1/2J	689	420 AB	725	1598	300	44	WR
P215/75R15	100	T	216	6J	703	420 AB	790	1742	300	44	WR
P225/70R15	100	T	228	6 1/2J	697	420 AB	795	1753	300	44	WR
P225/75R15	102	T	223	6J	719	420 AB	850	1874	300	44	WR
P235/75R15	105	S	235	6 1/2J	733	420 AB	920	2028	300	44	WR



CATCHFORS A/T M+S

PRODUCT FEATURES



Four main zigzag grooves and rough lateral blocks provide excellent traction on all kind of road conditions.



The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. The white letter styling provide a artistic image.



The block tread design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition.



Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.

UTQG:500 AB



4 SEASON




STABILITY



BRAKING



DRAINAGE

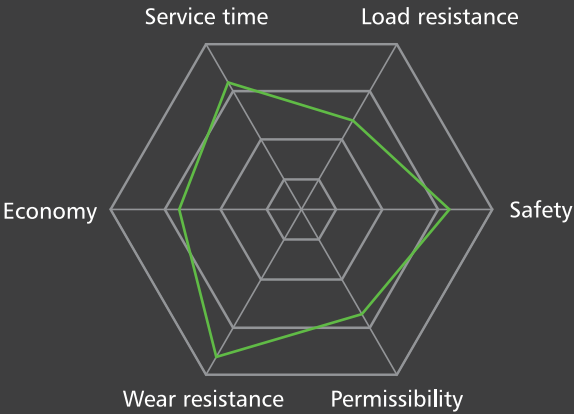

4X4

CATCHFORS A/T M+S



Size	PR	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	UTQG	MAX Kg	Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
P205/75R15	-	97	T	203	5 1/2J	689	500 AB	725	1598	300	44	OWL
P215/75R15	-	100	T	216	6J	703	500 AB	800	1764	300	44	OWL
P225/75R15	-	102	T	223	6J	719	500 AB	850	1874	300	44	OWL
P235/75R15 XL	-	109	S	235	6 1/2J	733	500 AB	1030	2271	340	50	OWL
P265/70R15	-	112	T	272	8J	753	500 AB	1120	2469	300	44	OWL
P215/70R16	-	100	T	221	6 1/2J	708	500 AB	800	1764	300	44	BSW
P215/70R16	-	99	T	221	6 1/2J	708	500 AB	775	1709	300	44	BSW
P225/70R16	-	101	T	228	6 1/2J	722	500 AB	825	1819	300	44	OWL
P225/70R16	-	103	T	228	6 1/2J	722	500 AB	875	1929	300	44	OWL
P235/70R16	-	106	T	240	7J	736	500 AB	950	2094	300	44	OWL
P235/70R16	-	104	T	240	7J	736	500 AB	900	1984	300	44	OWL
P245/70R16	-	107	T	248	7J	750	500 AB	975	2149	300	44	OWL
P245/70R16 XL	-	111	S	248	7J	750	500 AB	1090	2403	340	50	OWL
P245/70R16	-	106	T	248	7J	750	500 AB	950	2094	300	44	OWL
P255/70R16	-	109	T	260	7 1/2J	764	500 AB	1030	2271	300	44	OWL
P255/70R16	-	111	T	260	7 1/2J	764	500 AB	1090	2403	300	44	OWL
P265/70R16	-	112	T	272	8J	778	500 AB	1120	2469	300	44	OWL
P265/70R16	-	111	T	272	8J	778	500 AB	1090	2403	300	44	OWL
P275/70R16	-	114	T	279	8J	792	500 AB	1180	2601	300	44	OWL
P235/65R17	-	104	T	240	7J	738	500 AB	900	1984	300	44	BSW
P245/65R17	-	107	T	248	7J	750	500 AB	975	2149	300	44	BSW
P255/65R17	-	110	T	260	7 1/2J	764	500 AB	1060	2337	300	44	OWL
P265/65R17	-	110	T	272	8J	776	500 AB	1060	2337	300	44	OWL
P265/65R17	-	112	T	272	8J	776	500 AB	1120	2469	300	44	OWL
P265/70R17	-	113	T	272	8J	804	500 AB	1150	2535	300	44	OWL
P265/70R17	-	115	T	272	8J	804	500 AB	1215	2679	300	44	OWL
P275/65R17	-	115	T	279	8J	790	500 AB	1215	2679	300	44	OWL
P275/55R20 XL	-	117	T	284	8 1/2J	810	500 AB	1285	2833	340	50	BSW
P275/60R20 XL	-	119	T	279	8J	838	500 AB	1360	2998	340	50	BSW
185/75R16C	8PR	104/102	S	184	5J	684	-	900/850	1985/1875	450	65	BSW
205R16C	8PR	110/108	S	208	6J	736	-	1060/1000	2335/2205	450	65	BSW
215R15C	8PR	112/110	S	218	6J	725	-	1120/1060	2470/2337	450	65	BSW
215/70R15C	8PR	109/107	R	221	6 1/2J	683	-	1030/975	2270/2150	450	65	BSW
245/75R15C	6PR	109/107	S	248	7J	749	-	1030/975	2270/2150	375	55	BSW
255/70R15C	6PR	112/110	S	260	7 1/2J	739	-	1120/1060	2470/2335	375	55	BSW
LT235/75R15	6PR	104/101	S	235	6 1/2J	733	-	900/825	1985/1820	350	50	OWL
31x10.50R15LT	6PR	109	S	268	8 1/2J	775	-	1030	2270	350	51	OWL
LT215/85R16	10PR	115/112	S	216	6J	772	-	1215/1120	2680/2470	550	80	OWL
LT225/75R16	10PR	115/112	S	223	6J	744	-	1215/1120	2680/2470	550	80	OWL
LT225/75R16	12PR	119/116	Q	223	6J	744	-	1360/1250	3000/2755	650	95	OWL
LT235/85R16	10PR	120/116	S	235	6 1/2J	806	-	1380/1260	3042/2778	550	80	BSW
LT245/75R16	10PR	120/116	S	248	7J	774	-	1380/1260	3042/2778	550	80	OWL
LT265/75R16	10PR	123/120	S	267	7 1/2J	804	-	1550/1400	3415/3085	550	80	OWL
LT285/75R16	8PR	122/119	S	286	8J	834	-	1500/1360	3305/3000	450	65	OWL
LT245/75R17	10PR	121/118	S	248	7J	800	-	1450/1320	3195/2910	550	80	OWL
LT265/70R17	10PR	121/118	S	272	8J	804	-	1450/1320	3195/2910	550	80	OWL
LT275/65R18	10PR	123/120	S	278	8J	815	-	1550/1400	3415/3085	550	80	BSW
LT275/70R18	10PR	125/122	S	279	8J	843	-	1650/1500	3640/3305	550	80	BSW

The labeling information is subject to change without notice



WARRIOR RT LAND WARRIOR-R/T M+S

PRODUCT FEATURES



STAGGERED SHOULDER LUGS: Provides traction in off-road environments.



Slingstone structure:Protect the bottom of groove from sharp stone.



STEP BLOCK EDGE: Step block edge provide additional biting edges for more traction.



Shoulder and block design: Shoulder grooves are arranged in alternating widths and lengths to clear mud and maintain traction. Irregular block provide more traction on different road condition.

UTQG:600 AB



4 SEASON



STABILITY



BRAKING



DRAINAGE

4X4

WARRIOR RT M+S



Size	PR	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Kg	Load 1bs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
LT235/85R16	10PR	120/116	Q	235	6 1/2J	806	1380/1260	3042/2778	550	80	GSW
LT225/75R16	10PR	115/112	Q	223	6J	744	1215/1120	2680/2470	550	80	GSW
LT235/75R15	8PR	110/107	Q	235	6 1/2J	733	1060/975	2335/2150	450	65	GSW
LT245/75R16	10PR	120/116	Q	248	7J	774	1380/1260	3042/2778	550	80	GSW
LT265/75R16	10PR	123/120	Q	267	7 1/2J	804	1550/1400	3415/3085	550	80	GSW
LT285/75R16	10PR	126/123	Q	286	8J	834	1700/1550	3750/3415	550	80	GSW
LT215/70R16	6PR	100/97	Q	221	6 1/2J	708	800/730	1765/1610	350	50	GSW
LT245/70R16	8PR	113/110	Q	248	7J	750	1150/1060	2535/2335	450	65	GSW
LT245/70R17	10PR	119/116	Q	248	7J	776	1360/1250	3000/2755	550	80	GSW
LT255/70R16	10PR	120/117	Q	260	7 1/2J	764	1400/1285	3085/2835	550	80	GSW
LT265/70R16	10PR	121/118	Q	272	8J	778	1450/1320	3195/2910	550	80	GSW
LT265/70R17	10PR	121/118	Q	272	8J	804	1450/1320	3195/2910	550	80	GSW
LT275/70R16	8PR	119/116	Q	279	8J	792	1360/1250	3000/2755	450	65	GSW
LT225/65R17	8PR	107/103	Q	228	6 1/2J	724	975/875	2150/1930	450	65	GSW
LT245/65R17	10PR	117/114	Q	248	7J	750	1285/1180	2835/2600	550	80	GSW
LT255/65R17	8PR	114/110	Q	260	7 1/2J	764	1180/1060	2600/2335	450	65	GSW
LT265/70R18	10PR	124/121	Q	272	8J	829	1600/1450	3525/3195	550	80	GSW
LT285/70R17	10PR	121/118	Q	292	8 1/2J	832	1450/1320	3195/2910	550	80	GSW
LT305/70R16	10PR	124/121	Q	311	9J	834	1600/1450	3525/3195	450	65	GSW
LT315/70R17	10PR	121/118	Q	323	9 1/2J	874	1450/1320	3195/2910	450	65	GSW
LT265/65R18	10PR	122/119	Q	272	8J	801	1500/1360	3305/3000	550	80	GSW
LT275/65R18	10PR	123/120	Q	279	8J	815	1550/1400	3415/3085	550	80	GSW
LT265/60R20	10PR	121/118	Q	272	8J	826	1450/1320	3195/2910	550	80	GSW
LT255/55R18	8PR	109/105	Q	265	8J	737	1030/925	2270/2040	450	65	GSW
LT275/55R20	10PR	120/117	Q	284	8 1/2J	810	1400/1285	3085/2835	550	80	GSW
LT265/50R20	10PR	115/112	Q	277	8 1/2J	774	1215/1120	2680/2470	550	80	GSW
LT285/50R20	10PR	119/116	Q	297	9J	794	1360/1250	3000/2755	550	80	GSW
31×10.50R15LT	6PR	109	Q	268	8 1/2J	775	1030	2270	350	50	GSW
33×12.50R18LT	10PR	118	Q	318	10J	826	1320	2910	450	65	GSW
33×12.50R17LT	10PR	120	Q	318	10J	826	1400	3085	450	65	GSW
35×12.50R18LT	10PR	123	Q	318	10J	883	1550	3415	450	65	GSW
255/55R19	-	111	Q	265	8J	763	1090	2403	340	50	GSW

LAND WARRIOR-R/T M+S



Size	PR	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	Kg	MAX	Load 1bs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
33×12.50R20LT	10PR	114	Q	318	10.0J	826	1180		2600	450	65	GSW
35×12.50R20LT	10PR	121	Q	318	10.0J	877	1450		3195	450	65	GSW
33×12.50R22LT	10PR	109	Q	318	10.0J	826	1030		2270	450	65	GSW
35×12.50R22LT	10PR	117	Q	318	10.0J	877	1285		2835	450	65	GSW
LT265/65R17	10PR	120/117	S	272	8J	776	1400/1285		3085/2835	550	80	OWL
LT265/60R18	10PR	119/116	S	272	8J	775	1360/1250		3000/2755	550	80	OWL

The labeling information is subject to change without notice



CATCHFORS M/T M+S
CATCHFORS M/T II M+S


CATCHFORS M/T M+S



Three main zigzag grooves and aggressive pattern design provide outstanding traction on all of road conditions.



High void ratio and open shoulder offer excellent resistance to aquaplaning and self-cleaning performance.



The blockt road design with multiple-sipes provide outstanding off-road condition. Special casing profile and solid shoulder pattern enhance the max traction and conering performance.



Jointless Nylon band and strong structure design provide the strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.

CATCHFORS M/T II M+S



Off-Road Maximum Traction Tyre, designed for extreme 4X4 application, confidence in performance on muddy, snowy and rocky terrain as well as sealed road performance,with extra ground clearance, higher load-carrying capacity, and greater ability to go off-road. 4X4 enthusiasts know it for its long wear, low noise and aggressive tread pattern.



Strategically placed ribs within the lateral grooves of the tread design help to discharge stones and resist stone drilling.



Specially developed tread compound helps resist the cutting, tearing and chunking commonly developed in extended off-road applications.



Strategically placed in the lower side wall area, a raised rim protector helps protect the wheel and tyre from hazards in off-road driving conditions.

4X4

CATCHFORS M/T M+S

Size	PR	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Kg	Load 1bs	MAX Pressure Kpa	Psi	Sidewall Description
31×10.50R15LT	6PR	109	Q	268	8 1/2J	775	1030	2270	350	51	BSW
33×12.50R15LT	6PR	108	Q	318	10J	826	1000	2205	250	35	BSW
35×12.50R15LT	6PR	113	Q	318	10J	877	1150	2535	250	35	BSW
LT235/85R16	10PR	120/116	Q	235	6 1/2J	806	1380/1260	3042/2778	550	80	BSW
LT245/75R16	10PR	120/116	Q	248	7J	774	1380/1260	3042/2778	550	80	BSW
LT265/75R16	10PR	123/120	Q	267	7 1/2J	804	1550/1400	3415/3085	550	80	BSW
LT285/75R16	10PR	126/123	Q	286	8J	834	1700/1550	3750/3415	550	80	BSW
305/70R16LT	10PR	124/121	Q	311	9J	840	1600/1450	3525/3195	450	65	BSW
315/75R16LT	10PR	127/124	Q	313	8 1/2J	884	1750/1600	3860/3525	450	65	BSW
LT265/70R17	10PR	121/118	Q	272	8J	804	1450/1320	3195/2910	550	80	BSW
LT285/70R17	10PR	121/118	Q	292	8 1/2J	832	1450/1320	3195/2910	550	80	BSW
33×12.50R17LT	10PR	120	Q	318	10J	832	1400	3085	450	65	BSW
35×12.5R17LT	10PR	121	Q	318	10J	877	1450	3195	450	65	BSW
37×12.50R17LT	8PR	124	Q	318	10J	934	1600	3525	350	50	BSW
33×12.50R18LT	10PR	118	Q	318	10J	832	1320	2910	450	65	BSW
35×12.50R18LT	10PR	123	Q	318	10J	883	1550	3415	450	65	BSW

4X4

CATCHFORS M/T II M+S

Size	PR	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Kg	Load 1bs	MAX Pressure Kpa	Psi	Sidewall Description
33×12.50R20LT	10PR	114	Q	318	10J	826	1180	2600	450	65	BSW
35×12.50R20LT	10PR	121	Q	318	10J	877	1450	3195	450	65	BSW
35×12.50R22LT	10PR	117	Q	318	10J	877	1285	2835	450	65	BSW
37×12.50R22LT	10PR	123	Q	318	10J	928	1550	3415	450	65	BSW



CATCHFORS VAN A/S M+S

PRODUCT FEATURES



Reliability in all weather conditions
The large V-shaped single-guide pattern design can ensure stable and reliable performance even on gravel, mud, grass and snow, and solve your worries on the road.



High carrying capacity
The new 3D steel sheet adopts the "two bends and straight" horizontal layout to ensure the strength of the pattern block under the conditions of high load and high wear, and improve durability and safety.



Handles slippery and snowy surfaces easily
Two wide Z-shaped vertical trenches to ensure smooth drainage in rainy days, dense small trenches, can effectively puncture the water film and easily deal with rainwater and snow-covered roads.



Super wear-resistant formula
Specially developed new four-season wear-resistant formula, effectively improve the service life of tires, bring you considerable economic benefits.



OIL




STABILITY



SILENCE



WET

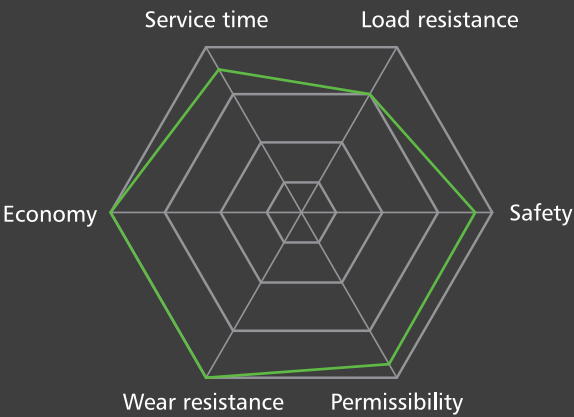

COMMERCIAL

CATCHFORS VAN A/S M+S



Size	PR	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Kg	Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
175/65R14C	6PR	90/88	T	177	5J	584	600/560	1325/1235	375	55	BSW
175/70R14C	6PR	95/93	T	177	5J	602	690/650	1520/1435	375	55	BSW
195/70R15C	8PR	104/102	R	201	6J	655	900/850	1985/1875	450	65	BSW
205/70R15C	8PR	106/104	R	209	6J	669	950/900	2095/1985	450	65	BSW
215/65R15C	6PR	104/102	T	221	6 1/2J	661	900/850	1985/1875	375	55	BSW
215/70R15C	8PR	109/107	R	221	6 1/2J	683	1030/975	2270/2150	450	65	BSW
225/70R15C	8PR	112/110	R	228	6 1/2J	697	1120/1060	2470/2335	450	65	BSW
185/75R16C	8PR	104/102	R	184	5J	684	900/850	1985/1875	475	69	BSW
195/60R16C	6PR	99/97	H	201	6J	640	775/730	1710/1610	375	55	BSW
195/65R16C	8PR	104/102	T	201	6J	660	900/850	1985/1875	475	69	BSW
195/75R16C	8PR	107/105	R	196	5 1/2J	698	975/925	2150/2040	475	69	BSW
205/65R16C	8PR	107/105	T	209	6J	672	975/925	2150/2040	475	69	BSW
205/75R16C	10PR	113/111	R	203	5 1/2J	714	1150/1090	2535/2405	525	75	BSW
215/60R16C	6PR	103/101	T	221	6 1/2J	664	875/825	1930/1820	375	55	BSW
215/65R16C	8PR	109/107	T	221	6 1/2J	686	1030/975	2270/2150	475	69	BSW
215/75R16C	8PR	113/111	R	216	6J	728	1150/1090	2535/2405	475	69	BSW
225/65R16C	8PR	112/110	R	228	6 1/2J	698	1120/106	2470/2335	475	69	BSW
225/75R16C	10PR	121/120	R	223	6J	744	1450/1400	3195/3085	575	85	BSW
235/65R16C	8PR	115/113	R	240	7J	712	1215/1150	2680/2535	475	70	BSW
215/60R17C	8PR	109/107	T	221	6 1/2J	690	1030/975	2270/2150	475	69	BSW

The labeling information is subject to change without notice




MILE max M+S

PRODUCT FEATURES



Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all of road conditiond.



Continuous tread patterns on shoulder and solid shoulder ribs provide responsive handling and even wear.



Variable pitch patterns and multi-knife-cut tread pattern reduce vibration to offer the comfort and quiet ride.



Reinforced structure and special abrasion-resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.



OIL




STABILITY



SILENCE



WET

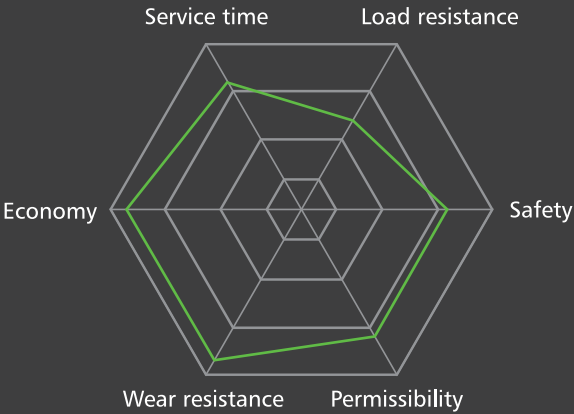

COMMERCIAL

MILE max M+S



Size	PR	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Kg	Load lbs	MAX Pressure Kpa	Psi	Sidewall Description
145R12C	8PR	86/84	Q	147	4.00B	542	530/500	1170/1100	450	65	BSW
155R12C	8PR	88/86	Q	157	4.50B	550	560/530	1235/1170	450	65	BSW
155R13C	6PR	85/83	Q	157	4.50B	578	515/487	1135/1075	350	50	BSW
155R13C	8PR	90/88	Q	157	4.50B	578	600/560	1325/1235	450	65	BSW
165R13C	6PR	91/89	R	167	4.50B	596	615/580	1355/1280	375	55	BSW
165R13C	8PR	94/93	R	167	4.50B	596	670/650	1475/1435	450	65	BSW
165/70R13C	6PR	88/86	S	170	5.00B	562	560/530	1235/1170	375	55	BSW
175R14C	8PR	99/98	R	178	5J	634	775/750	1710/1655	450	65	BSW
165/70R14C	6PR	89/87	R	170	5J	588	580/545	1280/1200	375	55	BSW
175/65R14C	6PR	90/88	T	177	5J	584	600/560	1325/1235	375	55	BSW
175/70R14C	8PR	95/93	S	177	5J	602	690/650	1520/1435	375	55	BSW
185R14C	8PR	102/100	R	188	5 1/2J	650	850/800	1875/1765	450	65	BSW
195R14C	8PR	106/104	R	198	5 1/2J	666	950/900	2095/1985	450	65	BSW
205R14C	8PR	109/107	R	208	6J	686	1030/975	2270/2150	450	65	BSW
205R14LT	8PR	107/105	R	208	6J	684	975/925	2150/2040	450	65	BSW
195/70R15C	8PR	104/102	R	201	6J	655	900/850	1985/1875	450	65	BSW
195R15C	8PR	106/104	R	196	5 1/2J	693	950/900	2095/1985	450	65	BSW
195/70R15C	8PR	99/96	R	201	6J	655	775/710	1710/1565	450	65	BSW
205/70R15C	8PR	106/104	R	209	6J	669	950/900	2095/1985	450	65	BSW
215/65R15C	6PR	104/102	R	221	6 1/2J	661	900/850	1985/1875	375	55	BSW
215/70R15C	8PR	109/107	R	221	6 1/2J	683	1030/975	2270/2150	450	65	BSW
225/70R15C	8PR	112/110	R	228	6 1/2J	697	1120/1060	2470/2335	450	65	BSW
175/75R16C	8PR	101/99	R	177	5J	668	825/775	1820/1710	475	69	BSW
185/75R16C	8PR	104/102	R	184	5J	684	900/850	1985/1875	475	69	BSW
185/75R16C	8PR	100/97	R	184	5J	684	800/730	1765/1610	450	65	BSW
195/75R16C	8PR	107/105	R	196	5 1/2J	698	975/925	2150/2040	475	69	BSW
195/65R16C	8PR	104/102	R	201	6J	660	900/850	1985/1875	475	69	BSW
195/75R16C	8PR	102/99	R	196	5 1/2J	698	850/775	1875/1710	450	65	BSW
195/65R16C	8PR	99/96	R	201	6J	660	775/710	1710/1565	450	65	BSW
205/65R16C	8PR	107/105	T	209	6J	672	975/925	2150/2040	475	69	BSW
205/65R16C	8PR	101/98	T	209	6J	672	825/750	1820/1655	450	65	BSW
205/75R16C	8PR	110/108	R	203	5 1/2J	714	1060/1000	2335/2205	475	69	BSW
215/75R16C	8PR	113/111	R	216	6J	728	1150/1090	2535/2405	475	69	BSW
215/65R16C	8PR	109/107	T	221	6 1/2J	686	1030/975	2270/2150	475	69	BSW
225/65R16C	8PR	112/110	T	228	6 1/2J	698	1120/1060	2470/2335	475	69	BSW
235/65R16C	8PR	115/113	R	240	7J	712	1215/1150	2680/2535	475	69	BSW


The labeling information is subject to change without notice

TOURING max M+S

Size	PR	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Kg	Load lbs	MAX Pressure Kpa	Psi	Sidewall Description
155R13C	6PR	85/83	R	157	4.50B	578	515/487	1135/1075	350	50	BSW
155R13C	8PR	90/88	R	157	4.50B	578	600/560	1325/1235	450	65	BSW
165R13C	6PR	91/89	R	167	4.50B	596	615/580	1355/1280	375	55	BSW
165R13C	8PR	94/93	R	167	4.50B	596	670/650	1475/1435	450	65	BSW
185R14C	8PR	102/100	R	188	5 1/2J	650	850/800	1875/1765	450	65	WR
195R14C	8PR	106/104	R	198	5 1/2J	666	950/900	2095/1985	450	65	WR
205/75R14C	8PR	109/107	R	203	5 1/2J	664	1030/975	2270/2150	475	69	WR
205/75R15C	8PR	109/107	R	203	5 1/2J	689	1030/975	2270/2150	475	69	WR
195R15C	8PR	106/104	R	196	5 1/2J	693	950/900	2095/1985	450	65	WR
185R15C	8PR	103/102	R	188	5 1/2J	674	875/850	1930/1875	450	65	WR

TOURING max
M+S

PRODUCT FEATURES



Reinforced structure and special abrasion resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.



ECONOMY



STABILITY




DRAINAGE



4 SEASON




Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all kinds of road conditions.



Continuous tread patterns on shoulder and solid shoulder ribs responsive handling and even wear.



White sidewall rib shows extraordinary appearance.

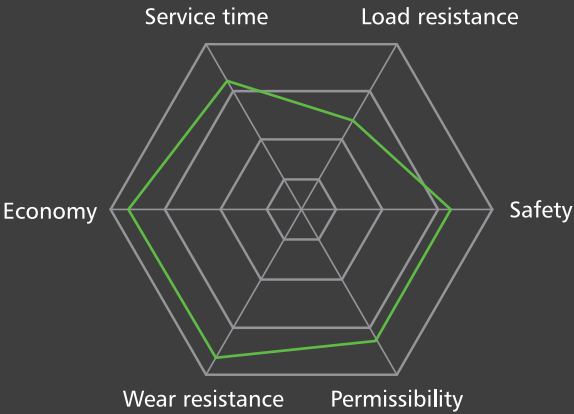

GAZILL M+S

Size	PR	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Load Kg	MAX Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
185/75R16C	8PR	104/102	R	184	5J	684	900/850	1985/1875	475	69	BSW
195/75R16C	8PR	107/105	R	196	51/2J	698	975/925	2150/2040	475	69	BSW



GAZILL
M+S

PRODUCT FEATURES



*Multi-sipe shoulder can removes water quickly and give more tire tread on road to prevent hydroplaning.



STABILITY



SILENCE



DRAINAGE




BRAKING



* Lateral blocks provide better grip performance in different road conditions.



* Vaeiable Pitch patterns can reduce road noise to offer quie tride and increase traction.

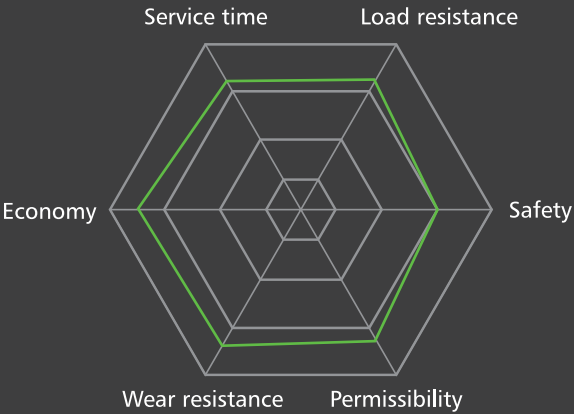



WinterGrip HP

M+S



PRODUCT FEATURES



V-shaped embedded pattern design:
The embedded pattern design has both appearance and practicality, and the sharp-angle pattern block can effectively pierce the water film to enhance the grip.



Optimized horizontal groove design:
The horizontal grooves of alternating thick and thin meet the safety of driving in the changeable snow.



Z-shaped longitudinal groove design:
The zigzag-shaped longitudinal grooves help the blocks to stabilize on the snow surface, and can effectively cooperate to ensure the snow passing ability in the forward direction.



Rotation pattern
It satisfies the comfortable driving texture while improving the driving stability, improving the passability of the snow surface, and ensuring driving safety.



DRAINAGE



COMFORT



STABILITY



SNOW&ICE

WINTER

WinterGrip HP M+S



Size	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Kg	Load lbs	MAX Pressure Kpa	Psi	Sidewall Description
155/80R13	79	T	157	4 1/2J	578	437	963	300	44	BSW
155/65R13	73	T	157	4 1/2J	532	365	805	300	44	BSW
155/70R13	75	T	157	4 1/2J	548	387	853	300	44	BSW
175/70R13	82	T	177	5J	576	475	1047	300	44	BSW
155/65R14	75	T	157	4 1/2J	558	387	853	300	44	BSW
165/60R14	75	T	170	5J	554	387	853	300	44	BSW
165/65R14	79	T	170	5J	570	437	963	300	44	BSW
165/70R14 XL	85	T	170	5J	588	515	1135	340	50	BSW
175/65R14	82	T	177	5J	584	475	1047	300	44	BSW
175/70R14 XL	88	T	177	5J	602	560	1235	340	50	BSW
185/55R14	80	T	194	6J	560	450	992	300	44	BSW
185/60R14	82	T	189	5 1/2J	578	475	1047	300	44	BSW
185/65R14	86	T	189	5 1/2J	596	530	1168	300	44	BSW
185/70R14 XL	92	T	189	5 1/2J	616	630	1389	340	50	BSW
195/70R14 XL	95	T	201	6J	630	690	1521	340	50	BSW
155/60R15	74	T	157	4 1/2J	567	375	827	300	44	BSW
165/60R15 XL	81	T	170	5J	579	462	1019	340	50	BSW
165/65R15	81	T	170	5J	595	462	1019	300	44	BSW
175/55R15	77	T	182	5 1/2J	573	412	908	300	44	BSW
175/60R15	81	T	177	5J	591	462	1019	300	44	BSW
175/65R15	84	T	177	5J	609	500	1102	300	44	BSW
185/55R15	82	H	194	6J	585	475	1047	300	44	BSW
185/60R15 XL	88	H	189	5 1/2J	603	560	1235	340	50	BSW
185/65R15	88	H	189	5 1/2J	621	560	1235	300	44	BSW
195/60R15	88	H	201	6J	615	560	1235	300	44	BSW
195/65R15 XL	95	T	201	6 J	635	690	1521	340	50	BSW
205/60R15	91	H	209	6 J	627	615	1356	300	44	BSW
205/65R15	94	H	209	6J	647	670	1477	300	44	BSW
205/70R15	96	T	209	6 J	669	710	1565	300	44	BSW
215/65R15 XL	100	H	221	6 1/2J	661	800	1764	340	50	BSW
215/70R15	98	T	221	6 1/2J	683	750	1653	300	44	BSW
195/50R16 XL	88	H	201	6 J	602	560	1235	340	50	BSW
205/55R16	91	H	214	6 1/2J	632	615	1356	300	44	BSW
205/60R16 XL	96	H	209	6J	652	710	1565	340	50	BSW
215/60R16 XL	99	H	221	6 1/2J	664	775	1709	340	50	BSW
215/65R16	98	H	221	6 1/2J	686	750	1653	300	44	BSW
215/70R16	100	T	221	6 1/2J	708	800	1764	300	44	BSW
225/60R16	98	H	228	6 1/2J	676	750	1653	300	44	BSW
225/65R16	100	H	228	6 1/2J	698	800	1764	300	44	BSW
225/70R16 XL	107	T	228	6 1/2J	722	975	2149	340	50	BSW
235/65R16	103	H	240	7J	712	875	1929	300	44	BSW
235/70R16	106	T	240	7J	736	950	2094	300	44	BSW
245/70R16 XL	111	T	248	7J	750	1090	2403	340	50	BSW
215/60R17	96	H	221	6 1/2J	690	710	1565	300	44	BSW
215/65R17	99	H	221	6 1/2J	712	775	1709	300	44	BSW
225/60R17	99	H	228	6 1/2J	702	775	1709	300	44	BSW
225/65R17	102	T	228	6 1/2J	724	850	1874	300	44	BSW
235/65R17 XL	108	T	240	7J	738	1000	2205	340	50	BSW
245/65R17 XL	111	T	248	7J	750	1090	2403	340	50	BSW



WinterGrip UHP M+S

PRODUCT FEATURES



Asymmetric pattern
Match the performance requirements of high-end sports cars.Wide inner gully design enhances drainage effect.The outside of the dense pattern block provides strong handling performance.



Blade cut angular pattern block
Provides higher grip and the ability to break through the water film, deep into the snow surface.3D wavy steel sheet design provides good grip while increasing tread hardness to meet extreme handling.



Folding groove:
It can effectively improve the fault tolerance rate in all directions, assist in controlling the vehicle attitude, and improve the ultimate controllability.



Silica formula
The special silica formula guarantees the softness on the snow while increasing the strength of the pattern blocks to meet the controllability.



DRAINAGE



STABILITY



HIGH
PERFORMANCE



SNOW&ICE

WINTER

WinterGrip UHP M+S



Size	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Load Kg	1bs	MAX Pressure Kpa	Psi	Sidewall Description
195/55R16XL	91	H	201	6J	620	615	1356	340	50	BSW
215/45R16XL	90	H	213	7J	600	600	1323	340	50	BSW
215/55R16XL	97	H	226	7J	642	730	1609	340	50	BSW
265/70R16	112	H	272	8J	778	1120	2469	300	44	BSW
265/65R17	112	T	272	8J	776	1120	2469	300	44	BSW
205/50R17XL	93	V	214	6 1/2J	638	650	1433	340	50	BSW
205/55R17XL	95	V	214	6 1/2 J	658	690	1521	340	50	BSW
215/40R17XL	87	V	218	7 1/2 J	604	545	1201	340	50	BSW
215/45R17XL	91	V	213	7J	626	615	1356	340	50	BSW
215/50R17XL	95	V	226	7J	648	690	1521	340	50	BSW
215/55R17XL	98	V	226	7J	668	750	1653	340	50	BSW
225/45R17XL	94	V	225	7 1/2J	634	670	1477	340	50	BSW
225/50R17XL	98	V	233	7J	658	750	1653	340	50	BSW
225/55R17XL	101	V	223	7J	680	825	1819	340	50	BSW
235/55R17XL	103	V	245	7 1/2J	690	875	1929	340	50	BSW
245/40R17XL	95	V	248	8 1/2 J	628	690	1521	340	50	BSW
245/45R17XL	99	V	243	8J	652	775	1709	340	50	BSW
215/45R18XL	93	V	213	7J	651	650	1433	340	50	BSW
215/55R18XL	99	V	226	7J	693	775	1709	340	50	BSW
225/40R18XL	92	V	230	8J	637	630	1389	340	50	BSW
225/45R18XL	95	V	225	7 1/2J	659	690	1521	340	50	BSW
225/55R18	98	V	233	7J	705	750	1653	300	44	BSW
235/40R18XL	95	V	241	8 1/2 J	645	690	1521	340	50	BSW
235/45R18XL	98	V	236	8J	669	750	1653	340	50	BSW
235/50R18XL	101	V	245	7 1/2 J	693	825	1819	340	50	BSW
255/40R18XL	99	V	260	9J	661	730	1609	340	50	BSW
255/45R18XL	103	V	255	8 1/2 J	687	875	1929	340	50	BSW
225/40R19XL	93	V	230	8J	663	650	1433	340	50	BSW
255/35R19XL	96	V	260	9J	661	710	1565	340	50	BSW
225/55R19XL	103	V	233	7J	728	875	1929	340	50	BSW
225/45R19XL	96	V	225	7 1/2 J	685	710	1565	340	50	BSW
235/50R19XL	103	V	245	7 1/2 J	719	875	1929	340	50	BSW
255/40R19XL	100	V	260	9J	687	800	1764	340	50	BSW
255/45R19XL	104	V	255	8 1/2 J	715	900	1984	340	50	BSW
245/40R19XL	98	V	248	8 1/2 J	679	750	1653	340	50	BSW
275/35R19XL	100	V	278	9 1/2J	675	800	1764	340	50	BSW
255/50R20XL	109	V	265	8J	764	1030	2271	340	50	BSW
275/55R20XL	117	H	284	8 1/2 J	810	1285	2833	340	50	BSW
275/60R20XL	119	H	279	8J	838	1360	2998	340	50	BSW



SnowPower

M+S



PRODUCT FEATURES



Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance. The optimized deployment of "Z" shape sipes, provide great grip on snow & ice conditions.



Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.



Special tread compound remain flexible at lower temperatures to make sure the grip on winter road conditions and reduce the rolling resistance.



Continuous outside tread blocks enhance excellent performance and precise control when cornering at highspeed. The special rib segment design optimize contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.



SNOW&ICE




COMFORT



SILENCE



HIGH
PERFORMANCE

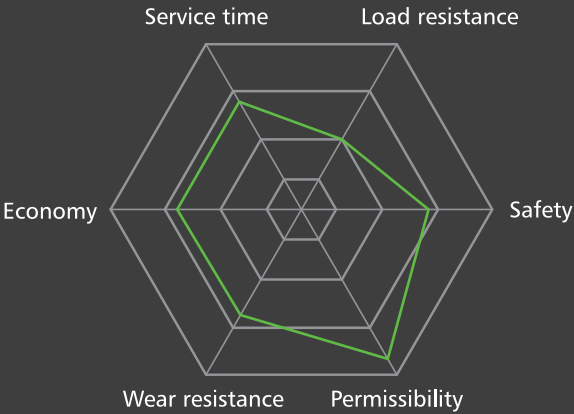

WINTER

SnowPower M+S						 D-C	 D-C	 B		
Size	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Kg	Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
165/70R13	79	T	170	5.00B	562	437	963	300	44	BSW
185/60R14	82	T	189	5 1/2J	578	475	1047	300	44	BSW
195/50R15	82	H	201	6J	577	475	1047	300	44	BSW
195/55R15	85	H	201	6J	595	515	1135	300	44	BSW
195/60R15	88	H	201	6J	615	560	1235	300	44	BSW
195/65R15	91	T	201	6J	635	615	1356	300	44	BSW
195/65R15	91	H	201	6J	635	615	1356	300	44	BSW
195/65R15 XL	95	T	201	6 J	635	690	1521	340	50	BSW
195/55R16 XL	91	H	201	6J	620	615	1356	340	50	BSW
205/55R16	91	H	214	6 1/2J	632	615	1356	300	44	BSW
205/55R16 XL	94	H	214	6 1/2J	632	670	1477	340	50	BSW
215/55R16 XL	97	H	226	7J	642	730	1609	340	50	BSW
225/55R16 XL	99	H	233	7J	654	775	1709	340	50	BSW
205/50R17 XL	93	V	214	6 1/2J	638	650	1433	340	50	BSW
215/55R17 XL	98	V	226	7J	668	750	1653	340	50	BSW
225/45R17 XL	94	V	225	7 1/2J	634	670	1477	340	50	BSW
225/50R17 XL	98	V	233	7J	658	750	1653	340	50	BSW
225/55R17 XL	101	V	223	7J	680	825	1819	340	50	BSW
235/45R17 XL	97	H	236	8J	644	730	1609	340	50	BSW
235/55R17 XL	103	H	245	7 1/2J	690	875	1929	340	50	BSW
225/40R18 XL	92	V	230	8J	637	630	1389	340	50	BSW
225/45R18 XL	95	H	225	7 1/2J	659	690	1521	340	50	BSW
235/55R18 XL	104	H	245	7 1/2J	715	900	1984	340	50	BSW
235/60R18 XL	107	H	240	7J	739	975	2149	340	50	BSW
245/40R18 XL	97	V	248	8 1/2 J	653	730	1609	340	50	BSW
245/45R18 XL	100	V	243	8J	677	800	1764	340	50	BSW
245/60R18	105	H	248	7J	751	925	2039	300	44	BSW
255/55R18 XL	109	V	265	8J	737	1030	2271	340	50	BSW
235/55R19 XL	105	H	245	7 1/2J	741	925	2039	340	50	BSW
245/45R19 XL	102	H	243	8J	703	850	1874	340	50	BSW
275/40R19 XL	105	V	278	9 1/2J	703	925	2039	340	50	BSW
255/50R19	107	H	265	8J	739	975	2149	340	50	BSW
255/55R19	111	H	265	8J	763	1090	2403	340	50	BSW
275/40R20 XL	106	H	278	9 1/2J	728	950	2094	340	50	BSW
275/45R20	110	H	273	9J	756	1060	2337	340	50	BSW
315/35R20 XL	110	V	333	11J	735	1060	2337	340	50	BSW
265/45R21 XL	108	V	277	9 1/2J	781	900	1984	340	50	BSW



WinterGrip VAN

M+S



PRODUCT FEATURES



Optimized groove
It is beneficial to improve the stability of driving on ice and improve driving safety.



Shoulder support
The Shoulder continuity pattern block can improve the strength of the tire shoulder, improve the support effect with the ground, and ensure driving safety.



Optimized structure profile
The optimized structure profile is matched with dense and robust pattern blocks to meet the better carrying capacity of the vehicle.



New steel sheet design:
The optimized steel sheet structure can meet the requirement of anti-skid performance and evenly disperse various stresses, so that the tread wear is more uniform and the wear resistance is improved.



DRAINAGE



STABILITY



WET



SNOW&ICE

WINTER

WinterGrip VAN							M+S				
Size	PR	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Kg	Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
165/70R14C	6PR	89/87	R	170	5J	588	580/545	1280/1200	375	55	BSW
175/65R14C	6PR	90/88	T	177	5J	584	600/550	1325/1235	375	55	BSW
175/70R14C	6PR	95/93	T	177	5J	602	690/650	1521/1435	375	55	BSW
175R14C	8PR	99/98	R	178	5J	634	775/750	1710/1655	450	65	BSW
185R14C	8PR	102/100	R	188	5 1/2J	650	850/800	1875/1765	450	65	BSW
195/70R15C	8PR	104/102	R	201	6J	655	900/850	1985/1875	450	65	BSW
215/65R15C	6PR	104/102	R	221	6 1/2J	661	900/850	1985/1875	375	55	BSW
205/70R15C	6PR	106/104	R	209	6J	669	950/900	2095/1985	450	65	BSW
215/70R15C	8PR	109/107	R	221	6 1/2J	683	1030/975	2270/2150	450	65	BSW
225/70R15C	8PR	112/110	R	228	6 1/2J	697	1120/1060	2470/2335	450	65	BSW
175/75R16C	8PR	101/99	R	177	5J	668	825/775	1820/1710	475	70	BSW
185/75R16C	8PR	104/102	R	184	5J	684	900/850	1985/1875	475	70	BSW
195/60R16C	6PR	99/97	T	201	6J	640	775/730	1710/1610	375	55	BSW
195/65R16C	8PR	104/102	R	201	6J	660	900/850	1985/1875	475	70	BSW
195/75R16C	8PR	107/105	R	196	5 1/2J	698	975/925	2150/2040	475	70	BSW
205/65R16C	8PR	107/105	R	209	6J	672	975/925	2150/2040	475	70	BSW
205/75R16C	8PR	110/108	R	203	5 1/2J	714	1060/1000	2335/2205	475	70	BSW
215/60R16C	6PR	103/101	R	221	6 1/2J	664	875/825	1930/1820	375	55	BSW
215/65R16C	8PR	109/107	R	221	6 1/2J	686	1030/975	2270/2150	475	70	BSW
215/75R16C	8PR	113/111	R	216	6J	728	1150/1090	2535/2405	475	70	BSW
225/65R16C	8PR	112/110	R	228	6 1/2J	698	1120/1060	2470/2335	475	70	BSW
225/75R16C	10PR	121/120	R	223	6J	744	1450/1400	3195/3085	575	85	BSW
235/65R16C	8PR	115/113	R	240	7J	712	1215/1150	2679/2535	475	70	BSW



IceLand Max

M+S



PRODUCT FEATURES




Multi-directional groove distribution design:
It is beneficial to improve the stability of driving in the ice and the safety of driving.



Diamond Angle cutting design
Can effectively pierce through the water film, stabilize on ice and improve the anti-slip effect.



High-density 3D steel sheet design
While ensuring the softness of the grounding surface of the tire, it also increases the strength of the overall pattern block to ensure super grip and reduce the feeling of driving lag.



High-score white carbon black formula design
Improve tire grip in cold environments and ensure tire safety performance at low temperatures.



DRAINAGE



STABILITY



BRAKING



SNOW&ICE

WINTER

IceLand Max M+S



Size	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Kg	Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
165/70R13	79	S	170	5J	562	437	963	300	44	BSW
175/70R13	82	S	177	5J	576	475	1047	300	44	BSW
175/65R14	82	S	177	5J	584	475	1047	300	44	BSW
175/70R14	84	S	177	5J	602	500	1102	300	44	BSW
185/60R14	82	S	189	5 1/2J	578	475	1047	300	44	BSW
185/65R14	86	S	189	5 1/2J	596	530	1168	300	44	BSW
185/70R14	88	S	189	5 1/2J	616	560	1235	300	44	BSW
185/55R15	82	S	194	6J	585	475	1047	300	44	BSW
185/60R15	84	S	189	5 1/2J	603	500	1102	300	44	BSW
185/65R15	88	S	189	5 1/2J	621	560	1235	300	44	BSW
195/50R15	82	S	201	6J	577	475	1047	300	44	BSW
195/55R15	85	S	201	6J	595	515	1135	300	44	BSW
195/60R15	88	S	201	6J	615	560	1235	300	44	BSW
195/65R15	91	S	201	6J	635	615	1356	300	44	BSW
205/60R15	91	S	209	6J	627	615	1356	300	44	BSW
205/65R15	94	S	209	6J	647	670	1477	300	44	BSW
205/70R15	96	S	209	6J	669	710	1565	300	44	BSW
185/55R16	83	S	194	6J	610	487	1074	300	44	BSW
195/55R16	87	S	201	6J	620	545	1201	300	44	BSW
205/55R16	91	S	214	6 1/2J	632	615	1356	300	44	BSW
225/55R16	95	S	233	7J	654	690	1521	300	44	BSW
195/60R16	89	S	201	6J	640	580	1279	300	44	BSW
205/60R16	92	S	209	6J	652	630	1389	300	44	BSW
215/55R16	93	S	226	7J	642	650	1433	300	44	BSW
215/60R16	95	S	221	6 1/2J	664	690	1521	300	44	BSW
215/65R16	98	S	221	6 1/2J	686	750	1653	300	44	BSW
215/70R16	100	S	221	6 1/2J	708	800	1764	300	44	BSW
225/70R16 XL	107	S	228	6 1/2J	722	975	2149	340	50	BSW
235/70R16	106	S	240	7J	736	950	2094	300	44	BSW
215/45R17	87	S	213	7J	626	545	1201	300	44	BSW
215/50R17	91	S	226	7J	648	615	1356	300	44	BSW
215/60R17	96	S	221	6 1/2J	690	710	1565	300	44	BSW
225/45R17	91	S	225	7 1/2J	634	615	1356	300	44	BSW
225/50R17	94	S	233	7J	658	670	1477	300	44	BSW
215/55R17	94	S	226	7J	668	670	1477	300	44	BSW
225/55R17	97	S	233	7J	680	730	1609	300	44	BSW
235/55R17	99	S	245	7 1/2J	690	775	1709	300	44	BSW
225/60R17	99	S	228	6 1/2J	702	775	1709	300	44	BSW
225/65R17	102	S	228	6 1/2J	724	850	1874	300	44	BSW
235/65R17 XL	108	S	240	7J	738	900	1984	340	50	BSW
245/45R17	95	S	243	8J	652	690	1521	300	44	BSW
265/65R17	112	S	272	8J	776	1120	2469	300	44	BSW
285/65R17	116	S	292	8 1/2J	802	1250	2756	300	44	BSW
185/75R16C	104/102R	R	184	5J	684	1800	3968	475	70	BSW
195/75R16C	107/105Q	Q	196	5 1/2J	698	1950	4299	475	70	BSW



ICE-SPIDER

M+S



PRODUCT FEATURES



Ideal for conditions in the region which does not require extreme snow tyres and more performance is required.



SNOW&ICE



STABILITY



BRAKING




DRAINAGE



This unique tread design also features a proven modular tread block geometry which offer a level of grip and performance which is unique in its class.



A Directional tyre that offers fantastic water dispersion and exceptional grip thanks to its unique features which includes an excessive number of sipes allowing the tread to conform to the road surface, and its extra wide channels that excavates fluids in preposition to the pressure and weight of the vehicle and road requirements.

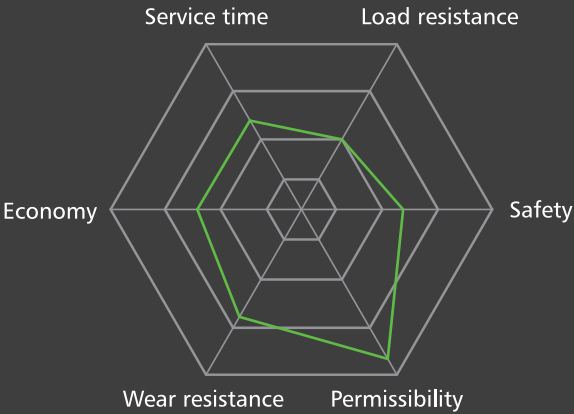

ICE-SPIDER M+S							D-C	C-B	B		
Size	PR	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Kg	Load lbs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
175/70R13	-	82	T	177	5.0J	576	475	1047	300	44	BSW
175/70R14	-	84	T	177	5.0J	602	500	1102	300	44	BSW
175/65R14 XL	-	86	T	177	5J	584	530	1168	340	50	BSW
185/65R14 XL	-	90	T	189	5 1/2J	596	600	1323	340	50	BSW
185/70R14 XL	-	92	T	189	5.5J	616	630	1389	340	50	BSW
185/55R15 XL	-	86	T	194	6.0J	585	530	1168	340	50	BSW
185/60R15 XL	-	88	T	189	5 1/2J	603	560	1235	340	50	BSW
185/65R15 XL	-	92	T	189	5 1/2J	621	630	1389	340	50	BSW
195/60R15 XL	-	92	T	201	6J	615	630	1389	340	50	BSW
195/65R15 XL	-	95	T	201	6J	635	690	1521	340	50	BSW
185/75R16C	8PR	104/102	R	184	5J	684	900/850	1985/1875	475	69	BSW
195/75R16C	8PR	107/105	R	196	5.5J	698	975/925	2150/2040	475	69	BSW
235/65R16C	8PR	115/113	R	240	7J	712	1215/1150	2680/2535	475	69	BSW
205/55R16 XL	-	94	T	214	6 1/2J	632	670	1477	340	50	BSW
205/60R16 XL	-	96	T	209	6J	652	710	1565	340	50	BSW
215/60R16 XL	-	99	T	221	6 1/2J	664	775	1709	340	50	BSW
215/65R16 XL	-	102	T	221	6 1/2J	686	850	1874	340	50	BSW
215/70R16	-	100	T	221	6 1/2J	708	800	1764	300	44	BSW
235/70R16	-	106	T	240	7J	736	950	2094	300	44	BSW
215/55R17 XL	-	98	H	226	7J	668	750	1653	340	50	BSW
215/60R17 XL	-	100	H	221	6 1/2J	690	800	1764	340	50	BSW
225/45R17 XL	-	94	H	225	7 1/2J	634	670	1477	340	50	BSW
225/50R17 XL	-	98	H	233	7J	658	750	1653	340	50	BSW
225/60R17 XL	-	103	H	228	6 1/2J	702	875	1929	340	50	BSW
225/65R17 XL	-	106	T	228	6 1/2J	724	950	2094	340	50	BSW
235/65R17 XL	-	108	T	240	7J	738	1000	2205	340	50	BSW
245/65R17 XL	-	111	T	248	7J	750	1090	2403	340	50	BSW




ICE-SPIDER II

M+S

PRODUCT FEATURES



The diamond-cut design of the tire shoulder enhances the bite with the snow and mud on the ground to avoid slipping.



The meandering horizontal grooves, ice skates and daggers are staggered and matched, which can effectively cut the ice layer, improve the grip on ice and snow, and enhance the control performance.



Through accurate calculation, the steel nails are evenly and randomly arranged horizontally and vertically, which not only ensures stable grip, but also reduces noise and vibration.



The design of multi-layer rubber with different hardness and double flange nails ensures that the tread is soft enough and can lock the nails at the same time, improving the ice performance of the tire.



SNOW&ICE




STABILITY



BRAKING



DRAINAGE

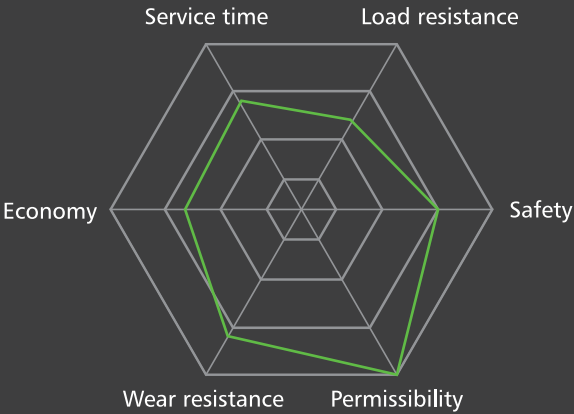

WINTER

ICE-SPIDER II M+S



D-C



C-B



B

Size	PR	Loading Index	Speed Rating	Inflatable Section Width(mm)	Standard Rim	Overall Diameter (mm)	MAX Kg	Load 1bs	MAX Pressure Kpa	MAX Pressure Psi	Sidewall Description
175/70R13	-	82	T	177	5.0J	576	475	1047	300	44	BSW
175/65R14 XL	-	86	T	177	5.0J	584	530	1168	340	50	BSW
175/70R14	-	84	T	177	5.0J	602	500	1102	300	44	BSW
185/60R14	-	82	T	189	5.5J	578	475	1047	300	44	BSW
185/65R14 XL	-	90	T	189	5.5J	596	600	1323	340	50	BSW
185/70R14 XL	-	92	T	189	5.5J	616	630	1389	340	50	BSW
185/55R15 XL	-	86	T	194	6.0J	585	530	1168	340	50	BSW
185/60R15 XL	-	88	T	189	5.5J	603	560	1235	340	50	BSW
185/65R15 XL	-	92	T	189	5.5J	621	630	1389	340	50	BSW
195/55R15	-	85	H	201	6.0J	595	515	1135	300	44	BSW
195/60R15 XL	-	92	T	201	6.0J	615	630	1389	340	50	BSW
195/65R15 XL	-	95	T	201	6.0J	635	690	1521	340	50	BSW
195/55R16	-	87	T	201	6.0J	620	545	1201	300	44	BSW
205/65R15	-	94	T	209	6.0J	647	670	1477	300	44	BSW
205/70R15	-	96	T	209	6.0J	669	710	1565	300	44	BSW
205/55R16 XL	-	94	T	214	6.5J	632	670	1477	340	50	BSW
205/60R16 XL	-	96	T	209	6.0J	652	710	1565	340	50	BSW
205/65R16	-	95	T	209	6.0J	672	690	1521	300	44	BSW
205/50R17 XL	-	93	T	214	6.5J	638	650	1433	340	50	BSW
205/55R17 XL	-	95	T	214	6 1/2J	658	690	1521	340	50	BSW
215/55R16 XL	-	97	T	226	7J	642	730	1609	340	50	BSW
215/60R16 XL	-	99	T	221	6.5J	664	775	1709	340	50	BSW
215/65R16 XL	-	102	T	221	6.5J	686	850	1874	340	50	BSW
215/70R16	-	100	T	221	6.5J	708	800	1764	300	44	BSW
215/50R17 XL	-	95	T	226	7.0J	648	690	1521	340	50	BSW
215/55R17 XL	-	98	T	226	7.0J	668	750	1653	340	50	BSW
215/60R17 XL	-	100	T	221	6.5J	690	800	1764	340	50	BSW
215/65R17 XL	-	103	T	221	6.5J	712	875	1929	340	50	BSW
215/55R18 XL	-	99	T	226	7.0J	693	775	1709	340	50	BSW
225/45R17 XL	-	94	H	225	7.5J	634	670	1477	340	50	BSW
225/50R17 XL	-	98	H	233	7.0J	658	750	1653	340	50	BSW
225/55R17 XL	-	101	H	233	7.0J	680	825	1819	340	50	BSW
225/60R17 XL	-	103	T	228	6.5J	702	875	1929	340	50	BSW
225/65R17 XL	-	106	T	228	6.5J	724	950	2094	340	50	BSW
225/45R18 XL	-	95	T	225	7.5J	659	690	1521	340	50	BSW
225/55R18 XL	-	102	T	233	7.0J	705	850	1874	340	50	BSW
225/60R18 XL	-	104	T	228	6.5J	727	900	1984	340	50	BSW
225/55R19 XL	-	103	T	233	7.0J	731	875	1929	340	50	BSW
235/70R16	-	106	T	240	7.0J	736	950	2094	300	44	BSW
235/55R17 XL	-	103	T	245	7.5J	690	875	1929	340	50	BSW
235/65R17 XL	-	108	T	240	7.0J	738	1000	2205	340	50	BSW
235/45R18 XL	-	98	T	236	8.0J	669	750	1653	340	50	BSW
235/50R18 XL	-	101	T	245	7 1/2J	693	825	1819	340	50	BSW
235/55R18 XL	-	104	T	245	7.5J	715	900	1984	340	50	BSW
235/60R18 XL	-	107	T	240	7.0J	739	975	2149	340	50	BSW
235/65R18 XL	-	110	T	240	7.0J	763	1060	2337	340	50	BSW
235/50R19 XL	-	103	T	245	7.5J	719	875	1929	340	50	BSW
235/55R19 XL	-	105	T	245	7.5J	741	925	2039	340	50	BSW
235/55R20	-	102	T	245	7.5J	766	850	1874	300	44	BSW
245/70R16 XL	-	111	T	248	7.0J	750	1090	2403	340	50	BSW
245/45R18 XL	-	100	T	243	8.0J	677	800	1764	340	50	BSW
245/60R18 XL	-	109	T	248	7J	751	1030	2271	340	50	BSW
245/45R20 XL	-	103	T	243	8.0J	728	875	1929	340	50	BSW
245/50R20 XL	-	105	T	253	7.5J	754	925	2039	340	50	BSW
255/45R20 XL	-	105	T	255	8 1/2J	738	925	2039	340	50	BSW
265/65R17 XL	-	116	T	272	8.0J	776	1250	2756	340	50	BSW
265/60R18 XL	-	114	T	272	8.0J	775	1180	2601	340	50	BSW
265/55R19 XL	-	113	T	277	8.5J	775	1150	2535	340	50	BSW
265/45R21 XL	-	108	T	266	9.0J	771	1000	2205	340	50	BSW
275/55R20 XL	-	117	T	284	8 1/2J	810	1285	2833	340	50	BSW
275/60R20 XL	-	119	T	279	8J	838	1360	2998	340	50	BSW
285/60R18	-	116	T	292	8.5J	799	1250	2756	300	44	BSW
185/75R16C	8PR	104/102	R	184	5.0J	684	900/850	1985/1875	475	69	BSW
195/75R16C	8PR	107/105	R	196	5.5J	698	975/925	2150/2040	475	69	BSW
225/65R16C	8PR	112/110	R	228	6.5J	698	1120/1060	2470/2335	475	69	BSW
235/65R16C	12PR	121/119	R	240	7.0J	712	1450/1360	3195/3000	575	83	BSW
LT225/75R16	10PR	115/112	S	223	6.0J	744	1215/1120	2680/2470	550	80	BSW
LT265/70R17	10PR	121/118	S	272	8.0J	804	1450/1320	3195/2910	550	80	BSW
LT245/75R16	10PR	120/116	Q	248	7J	774	1380/1260	3042/2778	550	80	BSW
LT275/65R18	10PR	123/120	Q	279	8J	815	1550/1400	3415/3085	550	80	BSW
LT275/70R18	10PR	125/122	Q	279	8J	843	1650/1500	3640/3305	550	80	BSW
LT275/65R20	10PR	126/123	Q	279	8J	866	1700/1550	3750/3415	550	80	BSW