



Our LED Lighting Solutions

Your Optimal Visibility and Safety



Your Expert in Parts

Our Lighting Program - Your Bright Business

HC-CARGO offers a wide range of innovative lighting products.

Innovative in regards to


- brightness
- lifetime (long lasting)
- power consumption (economical)

Products both for interior and exterior vehicle lighting fulfil the strictest legal safety regulations.

Regular product testing and supplier audits ensure the quality and durability of HC-CARGO lighting products.

The range is continuously extended with the latest state-of-the-art products in the market, for example:

- LED Bulbs
- Rotating beacons
- Rear multi-function lamps
- Work lamps
- LED lamps
- Light bars

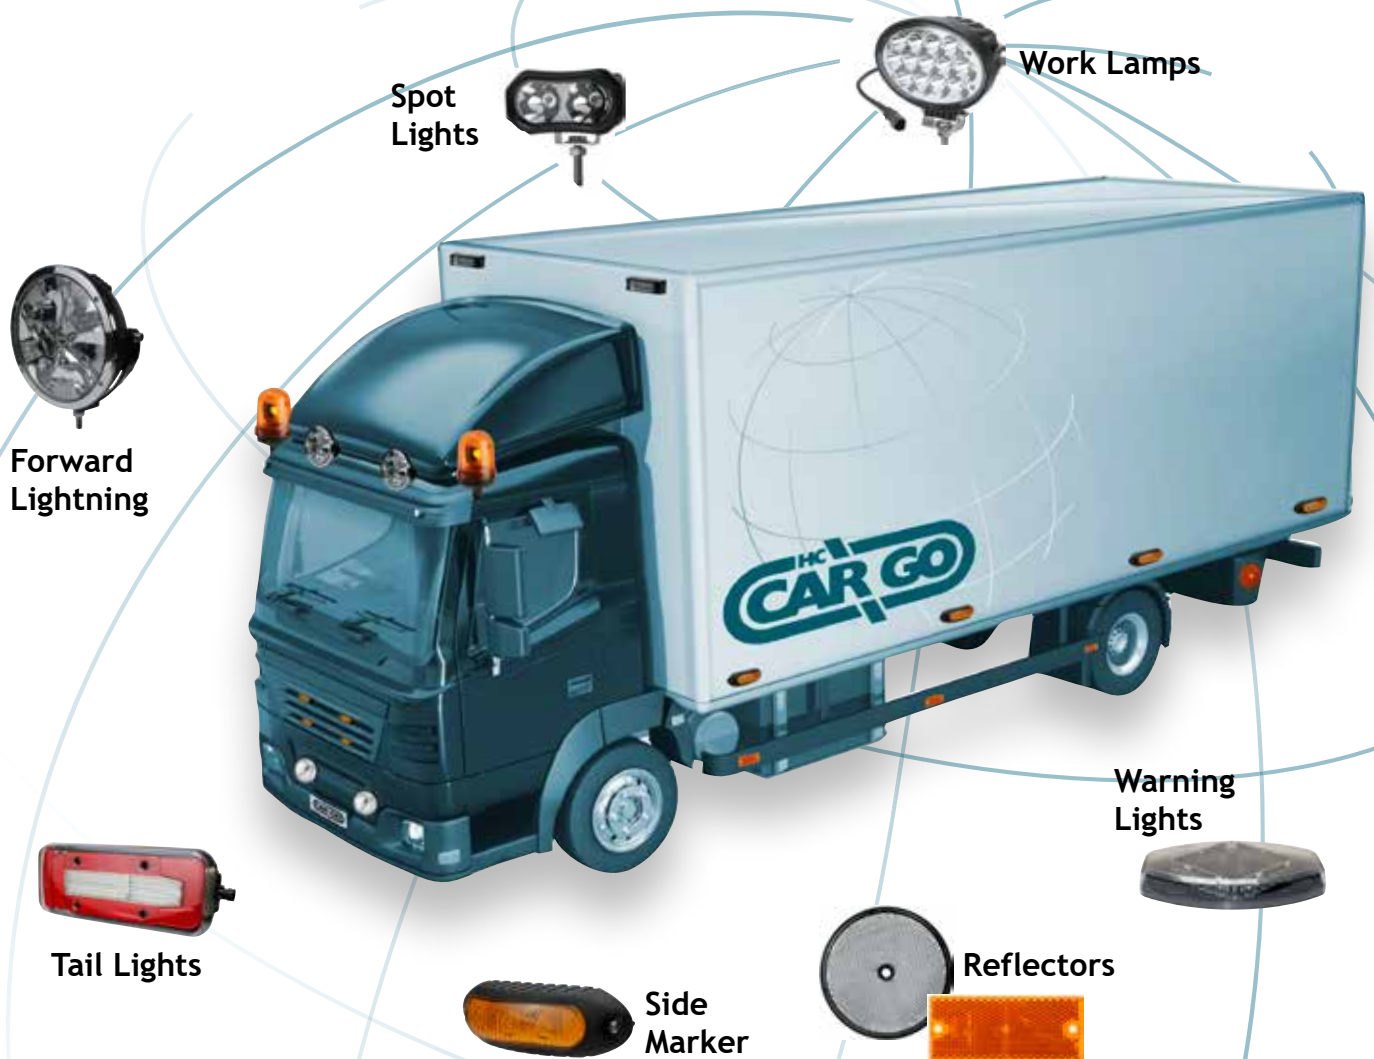



HC-CARGO 172211



HC-CARGO 172273



HC-CARGO 172308

HC-CARGO Amber LED Beacons

The essential features for road safety awareness are reliability and luminosity. This describes the HC-CARGO beacon range. HC-CARGO beacons are

available in various designs and sizes, and come with permanent or magnetic mount bases.

Amber LED Beacons

HC-CARGO no.	Voltage	Amp	Watt	Approval	Mounting	Bulb type	Cable length mm	Flash patterns	Height mm	Tightness norm
172027	10-30	1.5	18	ECE-R10/ECE-R65	Lighter Socket/Magnetic/vacuum	80 LED	200	3	195 x Ø140	IP 65
172028	10-30	1.5	18	ECE-R10/ECE-R65	Plan/Vacuum	80 LED	95	3	195 x Ø140	IP 65
172029	10-30	1.5	18	ECE-R10/ECE-R65	Standard ISO A - Rod/Rigid	80 LED		3	235 x Ø128	IP 65
172099	10-30	0.4-1.4	9	ECE-R10/ECE-R65	Standard ISO A - Rod/Flexible	40 LED		3	240 x Ø140	IP 65
172100	10-30	0.4-1.4	9	ECE-R10/ECE-R65	Plan	40 LED	95	3	150 x Ø140	IP 65
172101	10-30	0.4-1.4	9	ECE-R10/ECE-R65	Plan/Magnetic/vacuum	40 LED	180	3	150 x Ø140	IP 65
172209	10-30	0.9	24	ECE-R10/ECE-R65	Standard ISO A - Rod/Flexible	8 LED		3	143 x Ø140	IP 65
172210	10-30	0.9	24	ECE-R10/ECE-R65	Plan/Magnetic	8 LED	200	3	93 x Ø140	IP 65
172211	10-30	0.9	24	ECE-R10/ECE-R65	Plan	8 LED		3	93 x Ø140	IP 65
172271	10-30	0.4-1.0	16	ECE-R10/ECE-R65	Plan/Magnetic/vacuum	32 LED	2500	3	57 x Ø111	IP 67/IP 69K
172272	10-30	0.4-1.0	16	ECE-R10/ECE-R65	Plan	32 LED	300	3	57 x Ø111	IP 67/IP 69K
172273	10-30	0.4-1.0	16	ECE-R10/ECE-R65	Standard ISO A - Rod/Flexible	32 LED		3	117 x Ø111	IP 67/IP 69K
171931	12-36	2.9/1.8	35/44	ECE-R10/ECE-R65	Plan	12 LED	340	5	88.5 x Ø161.9	IP 67
172183	12-36		70	ECE-R10/ECE-R65	Plan	12 LED	340	5	82 x Ø161.9	IP 69K
172184	12-36		70	ECE-R10/ECE-R65	Standard ISO A - Rod	12 LED		2	130.6 x Ø121.7	IP 69K
171763	12/24	1.7/0.8	45	ECE-R10/ECE-R65	Standard ISO A - Rod/Rigid	8 LED		2	121 x Ø120	IP 66
171764	12/24	1.7/0.8	45	ECE-R10/ECE-R65	Plan	8 LED		2	74 x Ø148	IP 66
171918	12/24	1.2/2.9	37	SAE/ECE-R65, CISPR 25 Class 5	Plan	10 LED	400	11	128 x Ø142	IP 65
171919	12/24	1.2/2.9	37	SAE/ECE-R65, CISPR 25 Class 5	Lighter Socket/Magnetic	10 LED	3000	11	128 x Ø142	IP 65
171920	12/24	1.2/2.9	37	SAE/ECE-R65, CISPR 25 Class 5	Standard ISO A - Rod	10 LED		11	202 x Ø130	IP 65
171957	10-100	0.1	1.2	ECE-R10	Plan	12 LED	410	4	45 x Ø77	IP 67
172114	10-100	0.3	5.5	ECE-R10	Standard ISO B2 (and B1) - Base	9 LED		1	103 x Ø122	IP 54
171673	11-110	0.7	6	ECE-R10	Plan	6 LED	300	1	130 x Ø98	IP 66
172145	11-110	0.4	3	ECE-R10	Plan	3 LED	450	5	97.5 x Ø130	IP 63
172221					Plan/Magnetic	8 LED		1	130 x Ø95	IP 65
172253					Plan/Magnetic	8 LED		1	130 x Ø95	IP 65
172308	10-30	0.4-1.0	16	ECE-R10/ECE-R65	Plan	32 LED	300	3	57 x Ø111	IP 67/IP 69K

Exceptional Quality

HC-CARGO Amber LED Light Bars

Excellent warning light

The HC-CARGO LED light bars offer excellent warning light indications - even in bright conditions. Most of the bars also offer possibility to set arrow direction. At night you can reduce the light intensity, reducing the risk of blinding oncoming traffic.

Benefits and features

- Broad assortment with various sizes
- Easy to mount
- Proven quality - ECE R65 class I and II

Equipped with

- Multi-adjustable mounting feet or magnetic vacuum (except 172094)
- Superior 360° light dispersion
- Night and day functionality (dim functions)
- Various flash patterns, some incl. arrow functions
- Can be synchronized with other LED flash
- IP 64K/IP 66



HC-CARGO 172306



HC-CARGO 171850



HC-CARGO 172196

HC-CARGO no.	Voltage	Amp	Approval	Cable length mm	Flash patterns	Length mm	Tightness norm	Colour	Base
171849	12	5.2	SAE/ECE-R65	3600	6	634	IP 66	Orange	Flexible
171850	12	15	SAE/ECE-R65	5500	21	1087	IP 66	Orange	Flexible
171852	12	17	SAE/ECE-R65	5500	21	1387	IP 66	Orange	Flexible
171909	12	16.4	SAE/ECE-R65	5500	21	1087	IP 66	Blue	Flexible
171851	24	15	SAE/ECE-R65	5500	21	1087	IP 66	Orange	Flexible
171853	24	17	SAE/ECE-R65	5500	21	1387	IP 66	Orange	Flexible
172195	12/24	10/7.5	SAE/ECE-R65	3600	7	1087	IP 66	Orange	Flexible
172196	12/24	15/7.5	SAE/ECE-R65	3600	7	1387	IP 66	Orange	Flexible
172197	12/24	43595	SAE/ECE-R65	3600	7	935	IP 66	Orange	Flexible
172198	12/24	15/7.5	SAE/ECE-R65	3600	7	1252	IP 66	Orange	Flexible
172199	12/24	15/7.5	SAE/ECE-R65	3600	7	1537	IP 66	Orange	Flexible
172206	12/24	7.5/5	SAE/ECE-R65	3600	7	634	IP 66	Orange	Flexible
172094*	12/24	2.88/1.44	EMC-R10/ECE-R65	3000	23	355	IP 64K	Orange	2 Screws
172115*	12/24	2.88/1.44	ECE-R10/ECE-R65	3000	23	355	IP 64K	Blue	2 Screws
172306*	12/24	1.66/0.83	ECE-R10/ECE-R65	300	29	251	IP 65	Orange	2 Screws
172307*	12/24	1.66/0.83	ECE-R10/ECE-R65	2500	29	251	IP 65	Orange	Magnetic/vacuum



HC-CARGO Alley light
HC-CARGO 171781
Alley light 3 LED,
white.



HC-CARGO Switch panel
HC-CARGO 172200
HC-CARGO 171762
Switchpanel for LED
lightbar.



HC-CARGO LED flash
6 LED flash module
171856/171857 Xtreme,
amber 171915 Xtreme, blue.
172207, amber.



HC-CARGO LED corner flash
12 LED flash corner module
171858/171859 Xtreme, amber
171916 Xtreme, blue.
172208, amber.

HC-CARGO LED Flash

HC-CARGO offers a wide range of LED flash lights. As with all other HC-CARGO lighting products, regular testing and quality control ensure that all our flash lights meet high quality standards.

Features:

- EMC/ECE-R10 approved for reduction of electro magnetic noise
- IP 67 protected against water and dust
- With aluminium base for optimal heat dissipation
- With reverse polarity protection

HC-CARGO no.	Voltage	Amp	Watt	Approval	LED'S	Cable length mm	Flash patterns	Dimension mm	Tightness norm	Colour
171814	12/24	0.39/0.20	0.48	ECE-R10/ECE-R65	6 LED	970	5	127.5x27.8x17.2	IP 67	Orange
171904	12/24	0.32/0.17	4.1	ECE-R10/ECE-R65	4 LED	200	23	122x41x29.4	IP 67	Orange
171905	12/24	0.32/0.16	4.1	ECE-R10/ECE-R65	3 LED	200	12	99x41x29	IP 67	Orange
171906	12/24	0.75/0.38	9	ECE-R10/ECE-R65	12 LED	200	25	131.8x19.2x48.7	IP 67	Orange
171926	12/24	0.39/0.20	9.6	ECE-R10/ECE-R65	6 LED	3000	5	127.5x27.8x17.2	IP 67	Orange
171933	12/24	0.55/0.26	9.6	ECE-R10/ECE-R65	6 LED	970	19	107x42x24	IP 67	Orange
172011	12/24	0.5/0.25	6	ECE-R10/ECE-R65	6 LED	250	15	129.2x16.8x31.4	IP 67	Orange
172012	12/24	0.88/0.44	10.5	ECE-R10/ECE-R65	12 LED	250	15	129x50x16.8	IP 67	Orange
172013	12/24	0.25/0.125	6	ECE-R10	6 LED	200	23	130.5x30x6.6	IP 67	Orange
172076	12/24	0.75/0.38	9	ECE-R10/ECE-R65	12 LED	2000	25	131.8x19.2x48.7	IP 67	Orange
172087	12/24	0.39/0.20	9	ECE-R10/ECE-R65	3 LED	970	5	85.6x27.7x15.7	IP 67	Orange
172109	12/24	0.88/0.44	10.5	ECE-R10/ECE-R65	12 LED	250	16	132.6x10x45	IP 67	Orange
172112	12/24	0.88/0.44	10.5	ECE-R10/ECE-R65	6 LED	250	16	98.54x10x35.07	IP 68	Orange
172113	12/24	0.27-0.13	3.5	ECE-R10/ECE-R65	LED	1200	19	109x72x28	IP 67	Orange
172122	12/24	0.24/0.12	2.82	ECE-R10	3 LED	200	12	46.7x17	IP 67	Orange
172124	12/24	0.24/0.12	2.85	ECE-R10/ECE-R65	3 LED	200	16	36x39	IP 67	Orange
172137	12/24	1.14/0.57	13	ECE-R10/ECE-R65	6 LED	250	23	129.2x27.2x15.79	IP 67	Orange
172139	12/24	1.14/0.57	13	ECE-R10/ECE-R65	6 LED	200	16	96.8x35.9x34.5	IP 67	Orange
172142	12/24	1.14/0.57	13	ECE-R10/ECE-R65	6 LED	200	16	66.7x7.5x34.8	IP 67	Orange
172108	12/24	0.88/0.44	10.5	ECE-R10/ECE-R65	12 LED	250	16	132.6x10x45	IP 67	Blue/Orange
171642	12/24	0.32/0.17	6	ECE-R10/ECE-R65	3 LED	200	12	99x41x29	IP 67	White
171646	12/24	0.64/0.32	8	ECE-R10/ECE-R65	4 LED	200	19	122x41x29	IP 67	White
172203*	12/24	1.35/0.75	18	ECE-R10/ECE-R65	24 LED	250	14	132x50x18.8	IP 68	Amber/Amber
172223*	12/24	1.35/0.75	18	ECE-R10/ECE-R65	24 LED	250	14	132x50x18.8	IP 68	Blue/Orange
172224*	12/24	1.35/0.75	18	ECE-R10/ECE-R65	24 LED	250	14	132x50x18.8	IP 68	Blue/white
172225*	12/24	1.35/0.75	18	ECE-R10/ECE-R65	24 LED	250	14	132x50x18.8	IP 68	Blue/red
172204*	12/24	1.35/0.75	18	ECE-R10/ECE-R65	24 LED	250	14	132x50x18.8	IP 68	Amber/Red
172205*	12/24	1.35/0.75	18	ECE-R10/ECE-R65	24 LED	250	14	132x50x18.8	IP 68	Orange/white
172289	12/24	0.27-0.13	6.5	ECE R10	3 LED	5000	12	88x30x6.6	IP67	Orange
172290	12/24	0.32/0.17	3.9	ECE R10	4 LED	5000	23	111.2x30x6.6	IP67	Orange
172296	12/24	0.25/0.125	6	ECE R10	6 LED	5000	23	130.5x30x6.6	IP67	Orange
172330	12/24	1.14/0.57	13	ECE R10	6 LED	250	23	129.2x27.2x15.79	IP67	White



HC-CARGO 172013



HC-CARGO 172109



HC-CARGO 172137
HC-CARGO 172330



HC-CARGO 172011



HC-CARGO 172205

HC-CARGO LED Work Lamps

LED lighting is very popular within the automotive industry. Primarily because:

- LED light output has increased
- Power consumption is kept at a minimum
- Extremely long lifetime expectancy

HC-CARGO LED Work Lamps provide

- Brightness = safe work environment
- Ultra-high performance in a variety of fields. Agricultural, utility vehicles, off road, marine, road works and construction and with zero maintenance

- Up to 50.000 working hours at 100% efficiency
- Resistance to water, dust, shock and vibration

General Features

- With or without connector
- Up to IP69K protected
- Some are ADR/GGVS approved
- All are CE or/and EMC Homologated
- Various shape, style, mount and output volume
- Spot, flood and combo versions

HC-CARGO LED Work Lamps - Square

HC-CARGO no.	Voltage	Watt	Lumen	Tightness norm	Approval	Cable length mm	Dimension mm	Beam shape	Udformning	Bulb type	2 pin multiplug
171847	10-80	5	600	IP 67	ECE R10	500	52x51.9x72.3	Spot	Kvadratisk	1 LED	Without
171945	10-30	9	600	IP 67	ECE R10	400	60x110x56	Flood	Rektangulær	3 LED	Without
172127	12-36	8.4	720	IP 67	ECE R10	300	131.3x70x42.6	Flood	Kvadratisk	3 LED	With
171944	10-30	16	800	IP 67	ECE R10	400	87x80x75	Flood	Kvadratisk	4 LED	Without
171727	9-33	9	900	IP 67	ECE R10	450	106x106x59	Flood	Kvadratisk	9 LED	Without
172055	10-80	10	900	IP 69K	ECE R10	500	92.4x49.6x45.7	Flood	Rektangulær	2 LED	With
172056	10-80	10	900	IP 69K	ECE R10	500	92.4x49.6x45.7	Spot	Rektangulær	2 LED	With
171948	10-30	15	1100	IP 67	ECE R10	400	128x110x45	Flood	Kvadratisk	5 LED	Without
171949	10-30	15	1100	IP 67	ECE R10	400	128x110x45	Spot	Kvadratisk	5 LED	Without
172119	10-30	15	1100	IP 67	ECE R10	265	138x108x40	Flood	Kvadratisk	5 LED	Without
171946	10-30	18	1200	IP 67	ECE R10	400	60x110x56	Flood	Rektangulær	6 LED	Without
172105	10-30	15	1200	IP 69K	ECE R10	450	88x88x50	Flood	Kvadratisk	5 LED	With
172143	10-30	15	1426	IP 67	ECE R10	460	150x80x38	Flood	Rektangulær	10 LED	With
171955	12-24	24	1500	IP 69K	ECE R10		100x100x76	Flood	Kvadratisk	6 LED	With
172003	12-24	24	1500	IP 69K	ECE R10	500	100x100x76	Flood	Kvadratisk	6 LED	Without
172004	12-24	24	1500	IP 69K	ECE R10	500	205x110x76	Flood	Kvadratisk	6 LED	Without
171947	10-30	20	1600	IP 67	ECE R10	400	60x110x56	Flood	Rektangulær	2 LED	Without
171752	12-36	20	1800	IP 69K	ECE R10	280	125x176x60.1	Flood	Kvadratisk	9 LED	Without
171755	11-70	27	1900	IP 67	ECE R10	1200	110.4x184x67	Flood	Kvadratisk	6 LED	Without
172262	10-30	27	2100	IP 67	ECE R10	300	110x110x42	Flood	Kvadratisk	9 LED	Without
172106	10-30	27	2160	IP 69K	ECE R10	450	105x105x60	Flood	Kvadratisk	9 LED	With
172126	12-36	19.3	2160	IP 69K	ECE R10	300	126.4x99x54.2	Flood	Kvadratisk	9 LED	With
172128	12-36	22	2160	IP 69K	ECE R10	280	188.4x125x82	Flood	Kvadratisk	9 LED	With
172130	12-36	22	2160	IP 69K	ECE R10	2000	202.2x125x114.7	Flood	Kvadratisk	9 LED	Without
172088	10-30	30	2400	IP 69K	ECE R10	350	150x90x90	Flood	Rektangulær	6 LED	With
172131	10-60	30	2400	IP 69K	ECE R10	460	119x105x80	Spot	Kvadratisk	6 LED	With
172136	10-60	30	2400	IP 69K	ECE R10	460	215x40x65	Flood	Rektangulær	6 LED	With
172132	10-60	35	2800	IP 69K	ECE R10	460	119x105x80	Flood	Kvadratisk	1 LED	With
172010	12-36	40	3200	IP 69K	ECE R10	280	127.2x106.3x76.8	Flood	Kvadratisk	4 LED	Without
172232	10-80	45	3360	IP 67	ECE R10	450	109x109x48.5	Flood	Kvadratisk	16 LED	With
172001	10-80	48	3500	IP 67	ECE R10	400	164x110x72	Flood	Kvadratisk	16 LED	With
172185	10-30	45	4050	IP 67	ECE R10	460	156x126x95	Blue Spot	Rektangulær	10 LED	With
172129	12-36	40	4800	IP 69K	ECE R10	350	136.1x110x65.9	Flood	Kvadratisk	6 LED	With
172260	10-30	22.5	2850	IP67	ECE R10	450	97x78x73	Combo	Rektangulær	15 LED	With
172292	10-30	40	4000	IP 69K	ECE-R10, CISPR25 Class5	440	101x98x74	Flood	Rektangulær	4 LED	With
172329	9-30	73	9220	IP 69K	ECE R10	100	120x125.7x96.1	Flood	Kvadratisk	12 LED	With
172335	10-30	36	3380	IP69K	ECE R10	165	151x72x60	Flood	Rektangulær	12 LED	With
171751	9-36	19	1200	IP69K	ECE R10	280	104.9x162.3x54.2	Flood	Rektangulær	6 LED	Without
172135	10-60	20	1600	IP69K	ECE R10	470	150x40x65	Flood	Rektangulær	4 LED	With
172270	10-30	27	3375	IP69K	ECE R10	1000	182.5x48x101.5	Flood	Rektangulær	18 LED	Without
172053	10-80	6	540	IP69K	ECE R10	450	92.4x49.6x45.7	Blue Spot	Rektangulær	2 LED	With
172054	10-80	6	540	IP69K	ECE R10	450	92.4x49.6x45.7	Red Spot	Rektangulær	2 LED	With



HC-CARGO LED Work Lamps - Round

HC-CARGO no.	Voltage	Watt	Lumen	IP	Approval	Cable length (mm)	Dimension mm	Beam shape	Shape	Type	2 pin multiplug
171671	10-64	8.5	450	IP 66	ECE R10	2000	151.5x120x83.41	Spot	Round	4 LED	Without
171811	10-80	5	600	IP 66	ECE R10	300	72.3x52x51.87	Spot	Round	1 LED	Without
172120	10-30	15	1100	IP 67	ECE R10	265	128x116x48	Flood	Round	5 LED	Without
171950	10-30	18	1200	IP 67	ECE R10	400	128x110x45	Flood	Round	6 LED	Without
171951	10-30	18	1200	IP 67	ECE R10	400	128x110x45	Spot	Round	6 LED	Without
172263	10-30	27	2100	IP 67	ECE R10	300	116x116x43	Flood	Round	9 LED	Without
172107	10-30	27	2160	IP 69K	ECE R10	450	125x125x50	Flood	Round	9 LED	With
172269	10-30	40	4000	IP 68/69K	ECE R10	300	110x93x120	Flood	Round	4 LED	With
172321	10-30	36	4000	IP 69K	ECE R10	120	85x76	Flood	Round	12 LED	With
172324	10-30	36	4000	IP69K	ECE R10	120	85x76	Flood	Round	12 LED	With



HC-CARGO LED Work Lamps - Oval

HC-CARGO no.	Voltage	Watt	Lumen	IP	Approval	Cable length (mm)	Dimension mm	Beam shape	Shape	Type	2 pin multiplug
172228	10-80	8	640	IP 67	ECE R10	350	143x90x86	Blue Spot	Oval	2 LED	With
172134	10-30	24	1920	IP 69K	ECE R10	460	130x78x53	Flood	Oval	8 LED	Without
172032	10-80	36	2880	IP 69K	ECE R10	400	140x95x70	Flood	Oval	12 LED	With
172191	10-30	40	3200	IP 69K	ECE R10	460	170x82x80	Flood	Oval	8 LED	With
172045	10-80	65	5850	IP 69K	ECE R10	500	165x142x94.5	Flood	Oval	13 LED	With
172046	10-80	65	5850	IP 69K	ECE R10	500	165x142x94.5	Spot	Oval	13 LED	With
172322	10-30	39	3900	IP 69K	ECE R10	120	138x69x93	Flood	Oval	13 LED	With
172323	10-30	40	4000	IP 69K	ECE R10	120	171.5x80.5x81.5	Flood	Oval	8 LED	With
172309	10-80	8	640	IP 67	ECE R10	350	143x90x86	Blue Arrow	Oval	2 LED	With
172310	10-80	8	640	IP 67	ECE R10	350	143x90x86	Red Arrow	Oval	2 LED	With

HC-CARGO LED Work Light Bars - Straight

HC-CARGO no.	Voltage	Watt	Lumen	IP	Approval	Cable length (mm)	Dimension mm	Beam shape	Shape	Type	2 pin multiplug
172274	12/24	18	6480	IP 67	ECE R10	500	238x52x46	Spot	Straight	6 LED	With
172275	12/24	45	4050	IP 67	ECE R10	500	526x52x45	Spot	Straight	15 LED	With
172276	12/24	72	6480	IP 67	ECE R10	500	814x52x45	Spot	Straight	24 LED	With
172277	12/24	90	8100	IP 67	ECE R10	500	1006x52x45	Spot	Straight	30 LED	With
172278	12/24	120	10800	IP 67	ECE R10	500	563x58x78	Combo	Straight	40 LED	With
172279	12/24	180	16200	IP 67	ECE R10	500	818x58x78	Combo	Straight	60 LED	With
172280	12/24	240	21600	IP 67	ECE R10	500	1073x58x78	Combo	Straight	80 LED	With
172281	12/24	288	25920	IP 67	ECE R10	500	1277x58x78	Combo	Straight	96 LED	With



HC-CARGO no.	Voltage	Watt	Lumen	IP	Approval	Cable length (mm)	Dimension mm	Beam shape	Shape	Type	2 pin multiplug
172228	10-80	8	640	IP 67	ECE R10	350	143x90x86	Blue Spot	Oval	2 LED	With
172134	10-30	24	1920	IP 69K	ECE R10	460	130x78x53	Flood	Oval	8 LED	Without
172032	10-80	36	2880	IP 69K	ECE R10	400	140x95x70	Flood	Oval	12 LED	With
172191	10-30	40	3200	IP 69K	ECE R10	460	170x82x80	Flood	Oval	8 LED	With
172045	10-80	65	5850	IP 69K	ECE R10	500	165x142x94.5	Flood	Oval	13 LED	With
172046	10-80	65	5850	IP 69K	ECE R10	500	165x142x94.5	Spot	Oval	13 LED	With
172322	10-30	39	3900	IP 69K	ECE R10	120	138x69x93	Flood	Oval	13 LED	With
172323	10-30	40	4000	IP 69K	ECE R10	120	171.5x80.5x81.5	Flood	Oval	8 LED	With
172309	10-80	8	640	IP 67	ECE R10	350	143x90x86	Blue Arrow	Oval	2 LED	With
172310	10-80	8	640	IP 67	ECE R10	350	143x90x86	Red Arrow	Oval	2 LED	With



Our Lighting Program - Your Bright Business

Complete Lighting Program

Find the full HC-CARGO Lighting program on our website. Our web catalogue is updated continuously and here you will always be able to find the latest HC-CARGO products. You will also find links to videos of some of our lighting products, the full Accessories program in PDF catalogue and more detailed information on products and ranges.



172045



172004



172083



172191



172262



Scan the QR code
to watch the
HC-CARGO video



Holger Christiansen A/S - A Bosch Group Company
10440exen_HC-CARGO_Amber Lighting brochure_10.2021

Not all products shown on the vehicles are available at HC-CARGO.



www.hc-cargo.com