

LED LIGHT BAR


We are leading manufacturer of premium led light bars including 4x4 off-road led light bar, E-mark R10&R149 led light bar, single row slim led light bar, dual row led light bar, curved led light bar, side emitting led light bar ect...The performance quality of our led light bars surpass most of our competitors in this industry, we adopt premium material: EMC and RFI PCB, genuine Osram/Cree leds, fast heat dissipation aluminum housing, high optical efficiency reflectors, scratch-resistant PC lens materials, imported outdoor unfading powder, tough and strong mounting systems, all these makes our light bars to have extreme durability, superior visibility and great light performance. Our light bars are complied with CE, RoHS, IP67, IP68, IP69K, LVC, E-mark certification(R10, R149, R65), DOT, SAE ect...

The colorful decorative kit design is the new creative pioneering design by us, adding beautiful highlights to the normal black led light bars, cater to novelty and individualism desire of the road enthusiast. The newly launch of our side emitting light bar recently also symbolizes a great technical break though made by us. As a manufacturer, we can provide customers great led light bars with competitive price and stable quality.



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BS12	5W/Pcs Osram P9	10-30V DC	-40~+60°Celsius	DRL+Driving light beam	CE, RoHS, IP67
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent
30000+h	Polycarbonate	Aluminum	304 Stainless Steel Side Mount / Aluminum Bottom Mount	5700K	Yes

Unit:mm

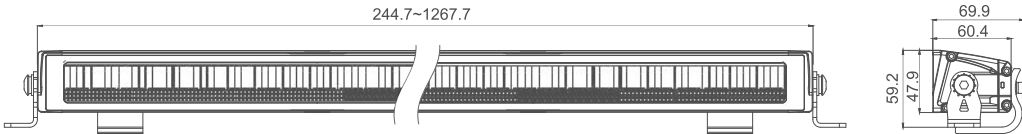


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Package Standard
GT-BS12-8L	9.63"	40W	3.33A@12V, 1.67A@24V	8PCS*5W Osram P9	5160Lm	10Pcs/CTN
GT-BS12-12L	13.66"	60W	5.00A@12V, 2.50A@24V	12PCS*5W Osram P9	7740Lm	6Pcs/CTN
GT-BS12-20L	21.71"	100W	8.33A@12V, 4.17A@24V	20PCS*5W Osram P9	12900Lm	6Pcs/CTN
GT-BS12-28L	29.77"	140W	11.67A@12V, 5.83A@24V	28PCS*5W Osram P9	18060Lm	6Pcs/CTN
GT-BS12-40L	41.85"	200W	16.67A@12V, 8.33A@24V	40PCS*5W Osram P9	25800Lm	6Pcs/CTN
GT-BS12-48L	49.91"	240W	20.00A@12V, 10.00A@24V	48PCS*5W Osram P9	30960Lm	6Pcs/CTN

LED LIGHT BAR



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BD10	5W/Pcs Osram P8	10-30V DC	-40~+60°Celsius	DRL+Driving light beam	CE, RoHS, IP67
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent
30000+h	Polycarbonate	Aluminum	304 Stainless Steel Side Mount / Aluminum Bottom Mount	5700K	Yes

Unit:mm

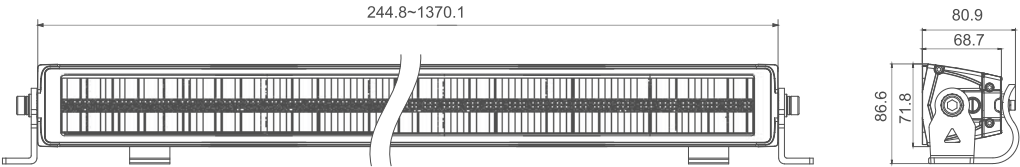


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Package Standard
GT-BD10-16L	9.64"	80W	6.67A@12V, 3.33A@24V	16PCS*5W Osram P8	7120Lm	6Pcs/CTN
GT-BD10-24L	13.67"	120W	10.00A@12V, 5.00A@24V	24PCS*5W Osram P8	10680Lm	4Pcs/CTN
GT-BD10-40L	21.72"	200W	16.67A@12V, 8.33A@24V	40PCS*5W Osram P8	17800Lm	4Pcs/CTN
GT-BD10-64L	33.80"	320W	26.67A@12V, 13.33A@24V	64PCS*5W Osram P8	28480Lm	4Pcs/CTN
GT-BD10-88L	45.89"	440W	36.67A@12V, 18.33A@24V	88PCS*5W Osram P8	39160Lm	4Pcs/CTN
GT-BD10-104L	53.94"	520W	43.33A@12V, 21.67A@24V	104PCS*5W Osram P8	46280Lm	4Pcs/CTN



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification	Reflector
GT-BS01A	12W/Pcs	10-30V DC	-40~+60°Celsius	Driving light beam	ECE R10, R149 CE, RoHS, IP67	Ultra Reflector
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent	Glue Sealing
30000+h	Polycarbonate	Aluminum	304 Stainless Steel Side Mount / Aluminum Bottom Mount	5700K	Yes	Dow Corning

Unit:mm

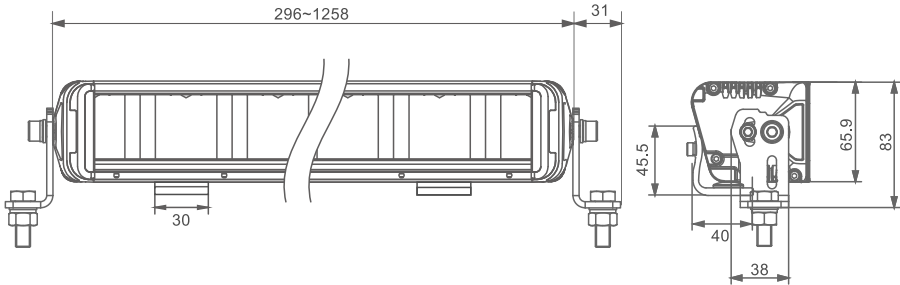


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BS01A-4L	11.60"	48W	3.34A@12V, 1.67A@24V	4PCS*12W	5200Lm	1.10Kg/Pcs	6Pcs/CTN
GT-BS01A-8L	21.03"	96W	6.67A@12V, 3.34A@24V	8PCS*12W	10400Lm	1.90Kg/Pcs	4Pcs/CTN
GT-BS01A-12L	30.49"	144W	10.00A@12V, 5.00A@24V	12PCS*12W	15600Lm	3.23Kg/Pcs	4Pcs/CTN
GT-BS01A-16L	40.08"	192W	13.33A@12V, 6.67A@24V	16PCS*12W	20800Lm	3.80Kg/Pcs	2Pcs/CTN
GT-BS01A-20L	49.53"	240W	16.60A@12V, 8.33A@24V	20PCS*12W	26000Lm	4.56Kg/Pcs	2Pcs/CTN



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification	Reflector
GT-BS02	5W/Pcs Osram P8	10-30V DC	-40~+60°Celsius	Driving light beam	ECE R10, R149 CE, RoHS, IP67	Ultra Reflector
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent	Glue Sealing
30000+h	Polycarbonate	Aluminum	304 Stainless Steel Side Mount / Aluminum Bottom Mount	5700K	Yes	Dow Corning

Unit:mm

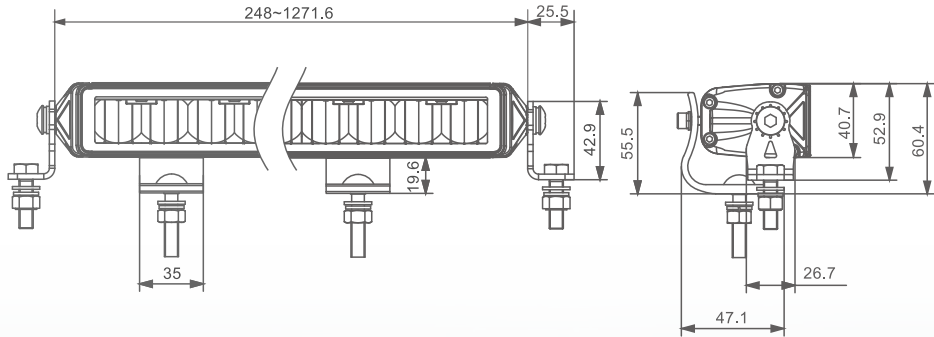


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BS02-8L	9.76"	40W	2.00A@12V, 1.00A@24V	8PCS*5W Osram P8	3565Lm	0.65Kg/Pcs	8Pcs/CTN
GT-BS02-12L	13.78"	60W	3.00A@12V, 1.50A@24V	12PCS*5W Osram P8	5340Lm	1.00Kg/Pcs	8Pcs/CTN
GT-BS02-16L	17.81"	80W	4.00A@12V, 2.00A@24V	16PCS*5W Osram P8	7120Lm	1.35Kg/Pcs	6Pcs/CTN
GT-BS02-24L	25.87"	120W	6.00A@12V, 3.00A@24V	24PCS*5W Osram P8	10680Lm	1.93Kg/Pcs	6Pcs/CTN
GT-BS02-32L	33.94"	160W	8.00A@12V, 4.00A@24V	32PCS*5W Osram P8	14240Lm	2.49Kg/Pcs	4Pcs/CTN
GT-BS02-40L	42.00"	200W	10.00A@12V, 5.00A@24V	40PCS*5W Osram P8	17800Lm	3.06Kg/Pcs	4Pcs/CTN
GT-BS02-48L	50.06"	240W	12.00A@12V, 6.00A@24V	48PCS*5W Osram P8	21360Lm	4.13Kg/Pcs	4Pcs/CTN

CURVED



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification	Reflector
GT-BS09	5W/Pcs Osram P8	10-30V DC	-40~+60°Celsius	Driving light beam	ECE R10, R149 CE, RoHS, IP67	Ultra Reflector
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent	Glue Sealing
30000+h	Polycarbonate	Aluminum	304 Stainless Steel Side Mount / Aluminum Bottom Mount	5700K	Yes	Dow Corning

Unit:mm

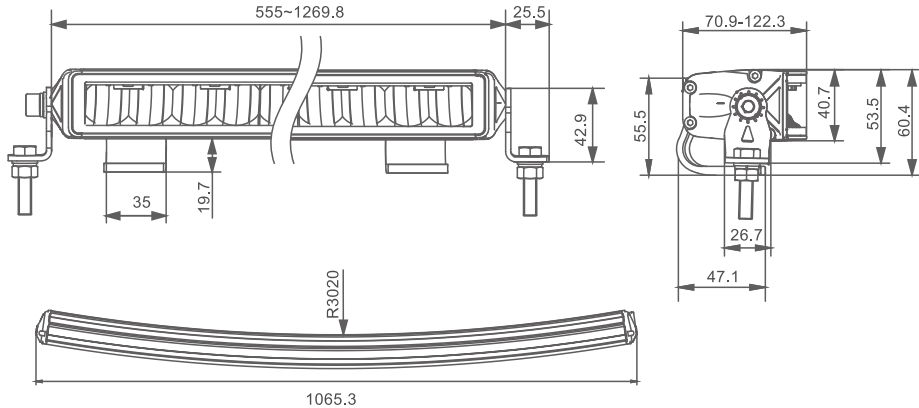


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BS09-20L	21.85"	100W	8.33A@12V, 4.17A@24V	20PCS*5W Osram P8	8900Lm	1.74Kg/Pcs	6Pcs/CTN
GT-BS09-28L	29.90"	140W	11.70A@12V, 5.80A@24V	28PCS*5W Osram P8	12460Lm	2.17Kg/Pcs	4Pcs/CTN
GT-BS09-40L	41.90"	200W	10.00A@12V, 5.00A@24V	40PCS*5W Osram P8	17800Lm	2.98Kg/Pcs	4Pcs/CTN
GT-BS09-48L	49.74"	240W	12.00A@12V, 6.00A@24V	48PCS*5W Osram P8	21360Lm	3.32Kg/Pcs	4Pcs/CTN



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BS15	10W/Pcs	10-30V DC	-40~+60°Celsius	Driving light beam	CE, RoHS, IP68
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent
30000+h	Polycarbonate	Aluminum	Stainless Steel Side Mount	6000K+3000K	Yes

Unit:mm

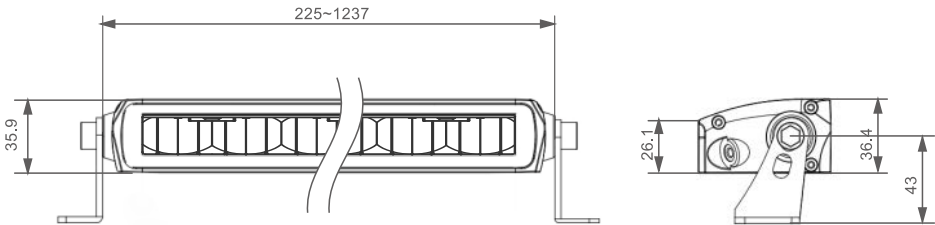


Model	Size	Watt	AMP Draw	Leds	Net Weight	Package Standard
GT-BS15-4L	8.85"	40W	3.33A@12V, 1.67A@24V	4PCS*10W	0.55Kg/Pcs	8Pcs/CTN
GT-BS15-6L	12.48"	60W	5.00A@12V, 2.50A@24V	6PCS*10W	0.90Kg/Pcs	8Pcs/CTN
GT-BS15-10L	19.72"	100W	8.33A@12V, 4.17A@24V	10PCS*10W	1.45Kg/Pcs	6Pcs/CTN
GT-BS15-16L	30.59"	160W	13.33A@12V, 6.67A@24V	16PCS*10W	2.03Kg/Pcs	6Pcs/CTN
GT-BS15-20L	37.83"	200W	16.67A@12V, 8.33A@24V	20PCS*10W	2.59Kg/Pcs	4Pcs/CTN
GT-BS15-26L	48.70"	260W	21.67A@12V, 10.83A@24V	26PCS*10W	3.16Kg/Pcs	4Pcs/CTN



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BD11	3W/Pcs Osram	10-30V DC	-40~+60°Celsius	Steady+Strobe Pattern	CE, RoHS
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent
30000+h	Polycarbonate	Aluminum	304 Stainless Steel Side Mount	5700K+1800K	Yes

Unit:mm

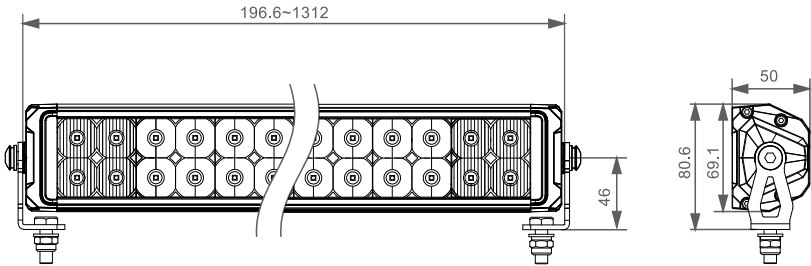


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BD11-12L	7.74"	36W	3.00A@12V, 1.50A@24V	12PCS*3W Osram	3780Lm	1.45Kg/Pcs	6Pcs/CTN
GT-BD11-20L	11.73"	60W	5.00A@12V, 2.50A@24V	20PCS*3W Osram	6300Lm	1.95Kg/Pcs	6Pcs/CTN
GT-BD11-24L	13.73"	72W	6.00A@12V, 3.00A@24V	24PCS*3W Osram	7560Lm	2.18Kg/Pcs	6Pcs/CTN
GT-BD11-40L	21.71"	120W	10.00A@12V, 5.00A@24V	40PCS*3W Osram	12600Lm	3.25Kg/Pcs	4Pcs/CTN
GT-BD11-60L	31.69"	180W	15.00A@12V, 7.50A@24V	60PCS*3W Osram	18900Lm	4.55Kg/Pcs	4Pcs/CTN
GT-BD11-80L	41.67"	240W	20.00A@12V, 10.00A@24V	80PCS*3W Osram	25200Lm	5.75Kg/Pcs	4Pcs/CTN
GT-BD11-100L	51.65"	300W	25.00A@12V, 12.50A@24V	100PCS*3W Osram	31500Lm	6.75Kg/Pcs	4Pcs/CTN



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BS08	5W/Pcs Osram P7	10-30V DC	-40~+60°Celsius	Flood, Spot, Combo	CE, RoHS, IP67
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent
30000+h	Polycarbonate	Aluminum	304 Stainless Steel Side Mount / Aluminum Bottom Mount	5700K	Yes

Unit:mm

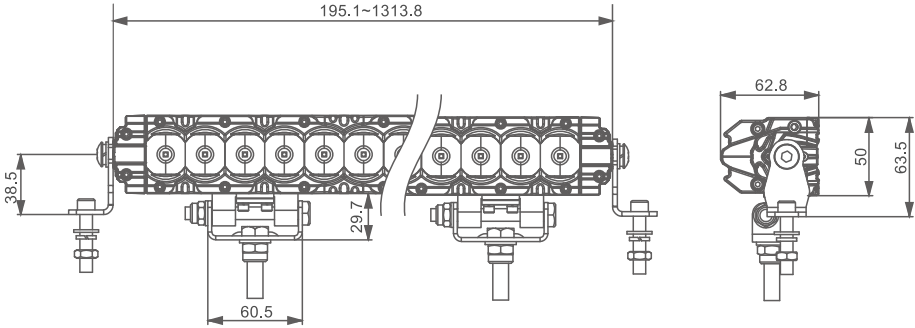


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BS08-6L	7.68"	30W	1.25A@12V, 0.63A@24V	6PCS*5W Osram P7	2610Lm	0.71Kg/Pcs	10Pcs/CTN
GT-BS08-10L	11.70"	50W	2.08A@12V, 1.04A@24V	10PCS*5W Osram P7	4350Lm	1.00Kg/Pcs	10Pcs/CTN
GT-BS08-20L	21.60"	100W	4.16A@12V, 2.08A@24V	20PCS*5W Osram P7	8700Lm	1.62Kg/Pcs	6Pcs/CTN
GT-BS08-30L	31.70"	150W	6.25A@12V, 3.13A@24V	30PCS*5W Osram P7	13050Lm	2.20Kg/Pcs	6Pcs/CTN
GT-BS08-40L	41.70"	200W	8.33A@12V, 4.17A@24V	40PCS*5W Osram P7	17400Lm	3.10Kg/Pcs	6Pcs/CTN
GT-BS08-50L	51.90"	250W	10.41A@12V, 5.20A@24V	50PCS*5W Osram P7	21750Lm	5.37Kg/Pcs	4Pcs/CTN



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BD01B	3W/Pcs Osram P7	10-30V DC	-40~+60°Celsius	Spot, Flood, Combo	ECE R10, ECE R149 CE, RoHS, IP67
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent
30000+h	Polycarbonate	Aluminum	304 Stainless Steel Side Mount / Aluminum Bottom Mount	5700K	Yes

Unit:mm

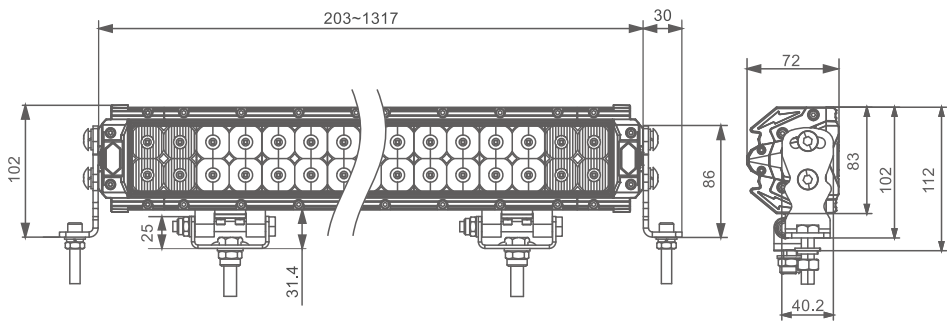


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BD01B-12L	7.99"	36W	2.50A@12V, 1.25A@24V	12PCS*3W Osram P7	4080Lm	1.10Kg/Pcs	6Pcs/CTN
GT-BD01B-20L	11.96"	60W	4.10A@12V, 2.05A@24V	20PCS*3W Osram P7	6800Lm	1.55Kg/Pcs	6Pcs/CTN
GT-BD01B-24L	13.97"	72W	5.00A@12V, 2.50A@24V	24PCS*3W Osram P7	8160Lm	1.75Kg/Pcs	6Pcs/CTN
GT-BD01B-40L	21.96"	120W	8.30A@12V, 4.15A@24V	40PCS*3W Osram P7	13600Lm	2.60Kg/Pcs	4Pcs/CTN
GT-BD01B-52L	27.91"	156W	10.80A@12V, 5.40A@24V	52PCS*3W Osram P7	17680Lm	3.20Kg/Pcs	4Pcs/CTN
GT-BD01B-60L	31.90"	180W	12.50A@12V, 6.25A@24V	60PCS*3W Osram P7	20400Lm	3.75Kg/Pcs	4Pcs/CTN
GT-BD01B-80L	41.80"	240W	16.60A@12V, 8.30A@24V	80PCS*3W Osram P7	27200Lm	4.75Kg/Pcs	4Pcs/CTN
GT-BD01B-96L	49.80"	288W	20.00A@12V, 10.00A@24V	96PCS*3W Osram P7	32640Lm	5.53Kg/Pcs	4Pcs/CTN
GT-BD01B-100L	51.85"	300W	20.80A@12V, 10.40A@24V	100PCS*3W Osram P7	34000Lm	5.75Kg/Pcs	4Pcs/CTN



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BS06B	10W/Pcs Osram P9	10-30V DC	-40~+60°Celsius	Flood, Spot, Combo	ECE R149 CE, RoHS, IP67
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent
30000+h	Polycarbonate	Aluminum	304 Stainless Steel Side Mount / Aluminum Bottom Mount	5700K	Yes

Unit:mm

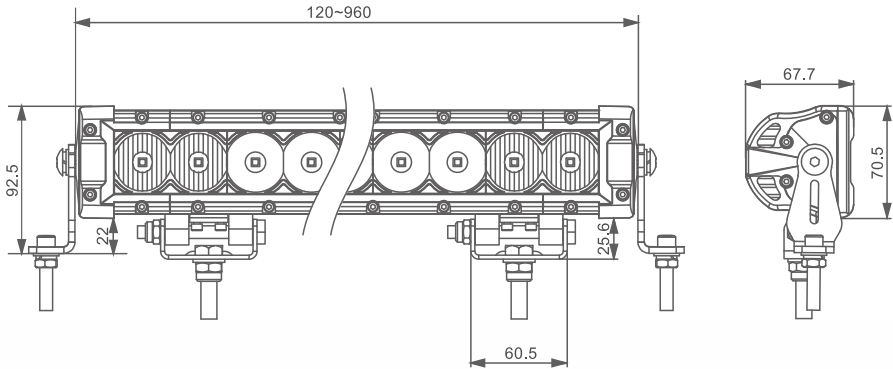


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BS06B-2L	4.70"	20W	1.16A@12V, 0.58A@24V	2PCS*10W Osram P9	1840Lm	0.58Kg/Pcs	12Pcs/CTN
GT-BS06B-6L	10.23"	60W	3.50A@12V, 1.75A@24V	6PCS*10W Osram P9	5520Lm	1.10Kg/Pcs	6Pcs/CTN
GT-BS06B-8L	12.99"	80W	4.67A@12V, 2.33A@24V	8PCS*10W Osram P9	7360Lm	1.35Kg/Pcs	6Pcs/CTN
GT-BS06B-12L	18.56"	120W	7.00A@12V, 3.50A@24V	12PCS*10W Osram P9	11040Lm	1.79Kg/Pcs	4Pcs/CTN
GT-BS06B-16L	24.11"	160W	9.33A@12V, 4.67A@24V	16PCS*10W Osram P9	14720Lm	2.28Kg/Pcs	4Pcs/CTN
GT-BS06B-20L	29.66"	200W	11.67A@12V, 5.83A@24V	20PCS*10W Osram P9	18400Lm	2.77Kg/Pcs	4Pcs/CTN
GT-BS06B-24L	35.21"	240W	14.00A@12V, 7.00A@24V	24PCS*10W Osram P9	22080Lm	3.23Kg/Pcs	2Pcs/CTN
GT-BS06B-26L	37.99"	260W	15.17A@12V, 7.58A@24V	26PCS*10W Osram P9	23920Lm	3.50Kg/Pcs	1Pcs/CTN



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BD06B	10W/Pcs Cree LED	10-30V DC	-40~+60°Celsius	Spot, Flood, Combo	ECE R10, ECE R149 CE, RoHS, IP67
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent
30000+h	Polycarbonate	Aluminum	304 Stainless Steel Side Mount / Aluminum Bottom Mount	5700K	Yes

Unit:mm

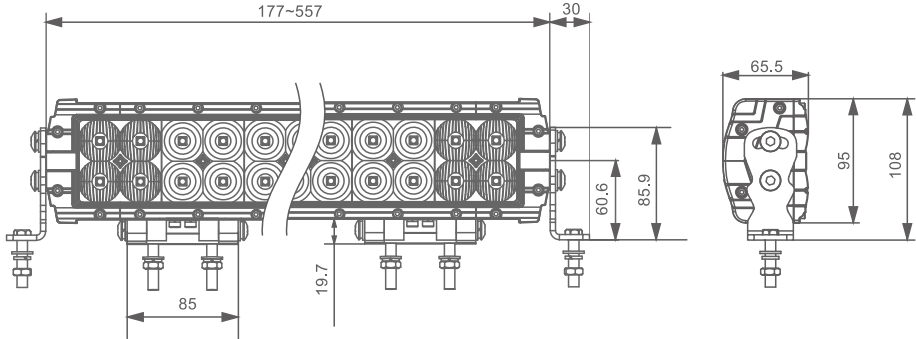


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BD06B-8L	7.00"	80W	4.67A@12V, 2.34A@24V	8PCS*10W Cree LED	7760Lm	1.20Kg/Pcs	6Pcs/CTN
GT-BD06B-12L	9.46"	120W	7.00A@12V, 3.50A@24V	12PCS*10W Cree LED	11640Lm	1.60Kg/Pcs	4Pcs/CTN
GT-BD06B-16L	12.00"	160W	9.30A@12V, 4.67A@24V	16PCS*10W Cree LED	15520Lm	1.90Kg/Pcs	4Pcs/CTN
GT-BD06B-20L	14.50"	200W	11.67A@12V, 5.83A@24V	20PCS*10W Cree LED	19400Lm	2.20Kg/Pcs	4Pcs/CTN
GT-BD06B-24L	17.00"	240W	14.00A@12V, 7.00A@24V	24PCS*10W Cree LED	23280Lm	2.50Kg/Pcs	4Pcs/CTN
GT-BD06B-28L	19.50"	280W	16.30A@12V, 8.17A@24V	28PCS*10W Cree LED	27160Lm	2.80Kg/Pcs	2Pcs/CTN
GT-BD06B-32L	22.00"	320W	18.67A@12V, 9.30A@24V	32PCS*10W Cree LED	31040Lm	3.10Kg/Pcs	2Pcs/CTN

LED LIGHT BAR



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BS03 (Former Model:GT3510)	5W/Pcs Cree LED	10-30V DC	-40~+60°Celsius	Spot, Flood, Combo	ECE R149, R10 CE, RoHS, IP67
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent
30000+h	Polycarbonate	Aluminum	304 Stainless Steel Side Mount / Aluminum Bottom Mount	5700K	Yes

Unit:mm

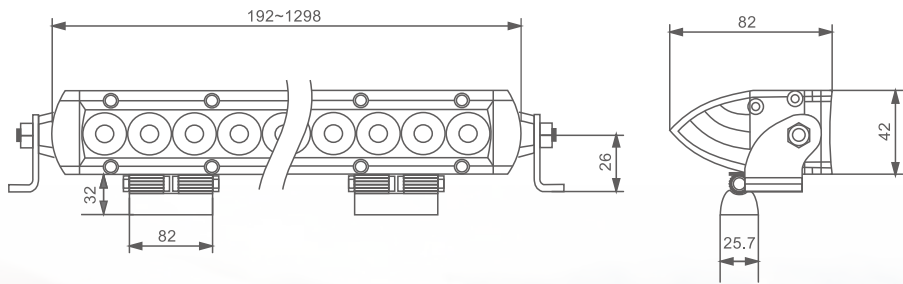


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BS03-6L	7.60"	30W	1.50A@12V, 0.75A@24V	6PCS*5W Cree LED	2200Lm	0.69Kg/Pcs	20Pcs/CTN
GT-BS03-10L	11.50"	50W	3.00A@12V, 1.50A@24V	10PCS*5W Cree LED	3666Lm	0.99Kg/Pcs	10Pcs/CTN
GT-BS03-20L	21.30"	100W	5.00A@12V, 2.50A@24V	20PCS*5W Cree LED	7333Lm	1.10Kg/Pcs	6Pcs/CTN
GT-BS03-30L	31.40"	150W	7.50A@12V, 3.75A@24V	30PCS*5W Cree LED	10980Lm	2.56Kg/Pcs	6Pcs/CTN
GT-BS03-40L	41.30"	200W	10.00A@12V, 5.00A@24V	40PCS*5W Cree LED	14640Lm	1.50Kg/Pcs	4Pcs/CTN
GT-BS03-50L	51.10"	250W	12.50A@12V, 6.25A@24V	50PCS*5W Cree LED	18300Lm	2.20Kg/Pcs	4Pcs/CTN

LED LIGHT BAR



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BS04 (Former Model:GT3520)	3W/Pcs Cree LED	10-30V DC	-40~+60°Celsius	Spot	CE, RoHS, IP67
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent
30000+h	Polycarbonate	Aluminum	304 Stainless Steel Side Mount	5700K	Yes

Unit:mm

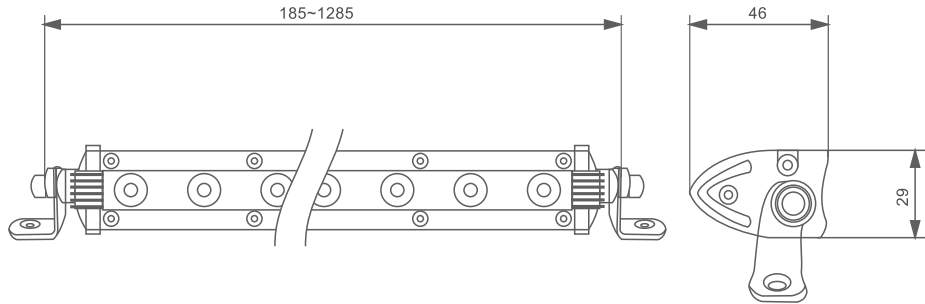


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BS04-6L	7.30"	18W	1.00A@12V, 0.50A@24V	6PCS*3W Cree LED	1560Lm	0.32Kg/Pcs	30Pcs/CTN
GT-BS04-12L	13.40"	36W	2.00A@12V, 1.00A@24V	12PCS*3W Cree LED	3120Lm	0.43Kg/Pcs	20Pcs/CTN
GT-BS04-18L	19.70"	54W	3.00A@12V, 1.50A@24V	18PCS*3W Cree LED	4680Lm	0.51Kg/Pcs	12Pcs/CTN
GT-BS04-24L	25.80"	72W	4.00A@12V, 2.00A@24V	24PCS*3W Cree LED	6240Lm	0.62Kg/Pcs	12Pcs/CTN
GT-BS04-30L	32.00"	90W	5.00A@12V, 2.50A@24V	30PCS*3W Cree LED	7800Lm	0.72Kg/Pcs	12Pcs/CTN
GT-BS04-36L	38.20"	108W	6.00A@12V, 3.00A@24V	36PCS*3W Cree LED	9360Lm	0.81Kg/Pcs	6Pcs/CTN
GT-BS04-42L	44.30"	126W	7.00A@12V, 3.50A@24V	42PCS*3W Cree LED	10920Lm	0.92Kg/Pcs	6Pcs/CTN
GT-BS04-48L	50.60"	144W	8.00A@12V, 4.00A@24V	48PCS*3W Cree LED	12480Lm	1.01Kg/Pcs	6Pcs/CTN



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BS03D	4W/Pcs	10-30V DC	-40~+60°Celsius	Flood, Spot, Combo	CE, RoHS, IP67
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent
30000+h	Polycarbonate	Aluminum	304 Stainless Steel Side Mount / Aluminum Bottom Mount	5700K	Yes

Unit:mm

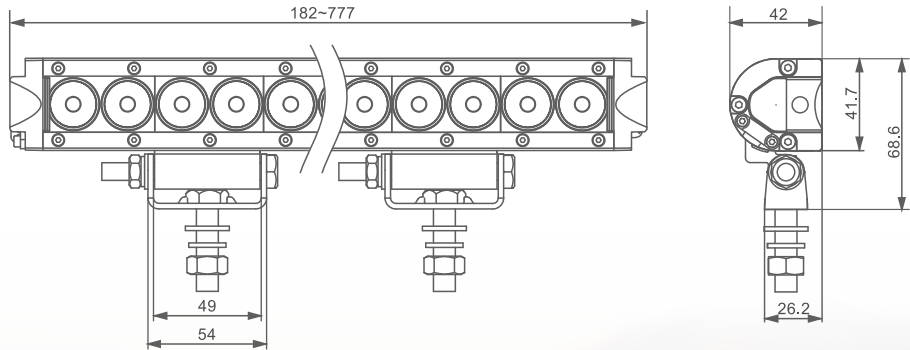


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BS03D-6L	7.20"	24W	1.50A@12V, 0.75A@24V	6PCS*4W	1732Lm	0.50Kg/Pcs	20Pcs/CTN
GT-BS03D-12L	13.00"	48W	3.00A@12V, 1.50A@24V	12PCS*4W	3465Lm	0.90Kg/Pcs	10Pcs/CTN
GT-BS03D-20L	20.80"	80W	5.00A@12V, 2.50A@24V	20PCS*4W	5775Lm	1.50Kg/Pcs	10Pcs/CTN
GT-BS03D-30L	30.60"	120W	7.50A@12V, 3.75A@24V	30PCS*4W	8662Lm	2.20Kg/Pcs	6Pcs/CTN



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BS05 (Former Model:GT3300)	10W/Pcs Cree LED	10-30V DC	-40~+60°Celsius	Spot, Flood, Combo	CE, RoHS, IP67
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent
30000+h	Polycarbonate	Aluminum	Aluminum Side Mount / Aluminum Bottom Mount	5700K	Yes

Unit:mm

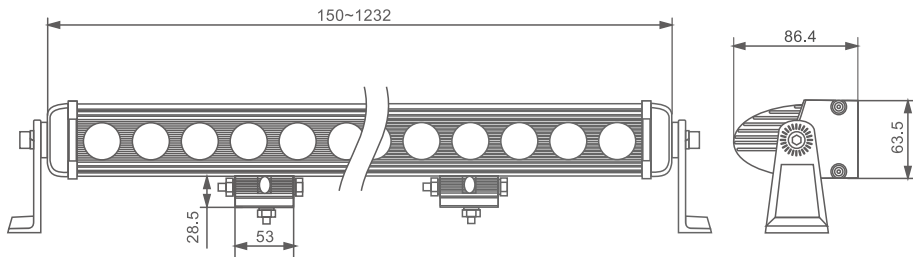


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BS05-2L	6.10"	20W	1.67A@12V, 0.83A@24V	2PCS*10W Cree LED	1940Lm	1.37Kg/Pcs	12Pcs/CTN
GT-BS05-4L	9.30"	40W	3.33A@12V, 1.67A@24V	4PCS*10W Cree LED	3880Lm	1.93Kg/Pcs	6Pcs/CTN
GT-BS05-8L	16.20"	80W	6.67A@12V, 3.33A@24V	8PCS*10W Cree LED	7760Lm	3.29Kg/Pcs	6Pcs/CTN
GT-BS05-12L	23.30"	120W	10.00A@12V, 5.00A@24V	12PCS*10W Cree LED	11640Lm	4.44Kg/Pcs	4Pcs/CTN
GT-BS05-16L	31.00"	160W	13.33A@12V, 6.67A@24V	16PCS*10W Cree LED	15520Lm	5.74Kg/Pcs	4Pcs/CTN
GT-BS05-20L	37.50"	200W	16.67A@12V, 8.33A@24V	20PCS*10W Cree LED	19400Lm	5.80Kg/Pcs	4Pcs/CTN
GT-BS05-24L	45.00"	240W	20.00A@12V, 10.00A@24V	24PCS*10W Cree LED	23280Lm	6.10Kg/Pcs	2Pcs/CTN
GT-BS05-26L	48.50"	260W	21.60A@12V, 10.83A@24V	26PCS*10W Cree LED	25220Lm	6.49Kg/Pcs	2Pcs/CTN



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BD07 (Former Model:GT3400)	3W/Pcs Cree LED	10-30V DC	-40~+60°Celsius	Spot, Flood, Combo	CE, RoHS, IP67
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent
30000+h	Polycarbonate	Aluminum	304 Stainless Steel Bottom Mount	5700K	Yes

Unit:mm

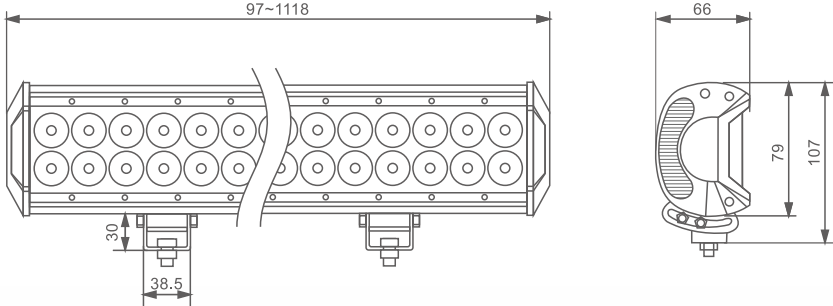


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BD07-6L	3.90"	18W	1.50A@12V, 0.75A@24V	6PCS*3W Cree LED	1560Lm	0.74Kg/Pcs	20Pcs/CTN
GT-BD07-12L	6.90"	36W	3.00A@12V, 1.50A@24V	12PCS*3W Cree LED	3120Lm	1.11Kg/Pcs	12Pcs/CTN
GT-BD07-18L	9.50"	54W	4.50A@12V, 2.25A@24V	18PCS*3W Cree LED	4680Lm	1.44Kg/Pcs	12Pcs/CTN
GT-BD07-24L	12.00"	72W	6.00A@12V, 3.00A@24V	24PCS*3W Cree LED	6240Lm	1.73Kg/Pcs	6Pcs/CTN
GT-BD07-30L	14.50"	90W	7.50A@12V, 3.75A@24V	30PCS*3W Cree LED	7800Lm	2.13Kg/Pcs	6Pcs/CTN
GT-BD07-36L	17.10"	108W	9.00A@12V, 4.524A@24V	36PCS*3W Cree LED	9360Lm	2.50Kg/Pcs	6Pcs/CTN
GT-BD07-42L	20.00"	126W	10.50A@12V, 5.25A@24V	42PCS*3W Cree LED	10920Lm	2.91Kg/Pcs	6Pcs/CTN
GT-BD07-48L	23.00"	144W	12.00A@12V, 6.00A@24V	48PCS*3W Cree LED	12480Lm	3.42Kg/Pcs	6Pcs/CTN
GT-BD07-66L	31.00"	198W	16.50A@12V, 8.25A@24V	66PCS*3W Cree LED	17160Lm	4.08Kg/Pcs	4Pcs/CTN
GT-BD07-78L	36.40"	234W	19.50A@12V, 9.75A@24V	78PCS*3W Cree LED	20280Lm	4.66Kg/Pcs	4Pcs/CTN
GT-BD07-96L	45.50"	288W	24.00A@12V, 12.00A@24V	96PCS*3W Cree LED	24960Lm	5.67Kg/Pcs	2Pcs/CTN



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BD02 (Former Model:GT3100)	3W/Pcs Epistar	10-30V DC	-40~+60°Celsius	Spot, Flood, Combo	CE, RoHS, IP67
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Sealing Way
30000+h	Polycarbonate	Aluminum	Aluminum Side Mount	5700K	By Glue

Unit:mm

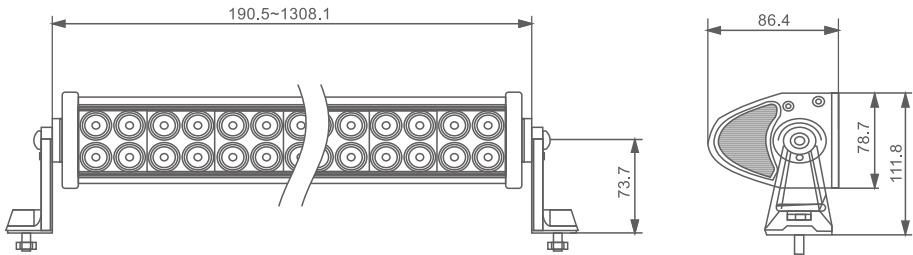


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BD02-12L	7.50"	36W	2.70A@12V, 1.35A@24V	12PCS*3W Epistar	2880Lm	1.55Kg/Pcs	6Pcs/CTN
GT-BD02-20L	11.50"	60W	4.50A@12V, 2.25A@24V	20PCS*3W Epistar	4800Lm	2.17Kg/Pcs	6Pcs/CTN
GT-BD02-24L	13.50"	72W	5.40A@12V, 2.70A@24V	24PCS*3W Epistar	5760Lm	2.32Kg/Pcs	6Pcs/CTN
GT-BD02-40L	21.50"	120W	9.00A@12V, 4.50A@24V	40PCS*3W Epistar	9600Lm	3.43Kg/Pcs	4Pcs/CTN
GT-BD02-60L	31.50"	180W	13.50A@12V, 6.75A@24V	60PCS*3W Epistar	14400Lm	4.00Kg/Pcs	4Pcs/CTN
GT-BD02-80L	41.50"	240W	18.00A@12V, 9.00A@24V	80PCS*3W Epistar	19200Lm	4.76Kg/Pcs	4Pcs/CTN
GT-BD02-100L	51.50"	300W	22.50A@12V, 11.25A@24V	100PCS*3W Epistar	24000Lm	5.97Kg/Pcs	4Pcs/CTN



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BD03(Former Model:GT31001CR)	3W/Pcs Cree LED	10-30V DC	-40~+60°Celsius	Spot, Flood, Combo	CE, RoHS, IP67
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Sealing Way
30000+h	Polycarbonate	Aluminum	Aluminum Side Bracket	5700K	By Screws

Unit:mm

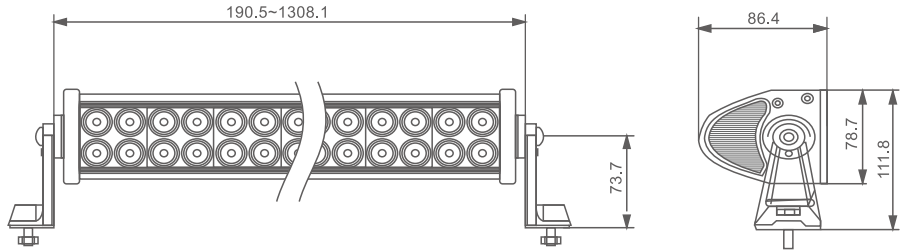


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BD03-12L	7.50"	36W	2.70A@12V, 1.35A@24V	12PCS*3W Cree LED	3120Lm	1.38Kg/Pcs	6Pcs/CTN
GT-BD03-20L	11.50"	60W	4.50A@12V, 2.25A@24V	20PCS*3W Cree LED	5200Lm	1.90Kg/Pcs	6Pcs/CTN
GT-BD03-24L	13.50"	72W	5.40A@12V, 2.70A@24V	24PCS*3W Cree LED	6240Lm	2.15Kg/Pcs	6Pcs/CTN
GT-BD03-40L	21.50"	120W	9.00A@12V, 4.50A@24V	40PCS*3W Cree LED	10400Lm	3.18Kg/Pcs	4Pcs/CTN
GT-BD03-52L	27.40"	156W	11.70A@12V, 5.85A@24V	52PCS*3W Cree LED	13520Lm	3.90Kg/Pcs	4Pcs/CTN
GT-BD03-60L	31.50"	180W	13.50A@12V, 6.75A@24V	60PCS*3W Cree LED	15600Lm	4.51Kg/Pcs	4Pcs/CTN
GT-BD03-80L	41.50"	240W	18.00A@12V, 9.00A@24V	80PCS*3W Cree LED	20800Lm	5.72Kg/Pcs	4Pcs/CTN
GT-BD03-96L	49.50"	288W	21.60A@12V, 10.80A@24V	96PCS*3W Cree LED	24960Lm	6.20Kg/Pcs	4Pcs/CTN
GT-BD03-100L	51.50"	300W	22.50A@12V, 11.25A@24V	100PCS*3W Cree LED	26000Lm	6.73Kg/Pcs	4Pcs/CTN



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BD03A(Former Model:GT31001EP)	3W/Pcs Epistar	10-30V DC	-40~+60°Celsius	Spot, Flood, Combo	CE, RoHS, IP67
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Sealing Way
30000+h	Polycarbonate	Aluminum	Aluminum Side Bracket	5700K	By Screws

Unit:mm

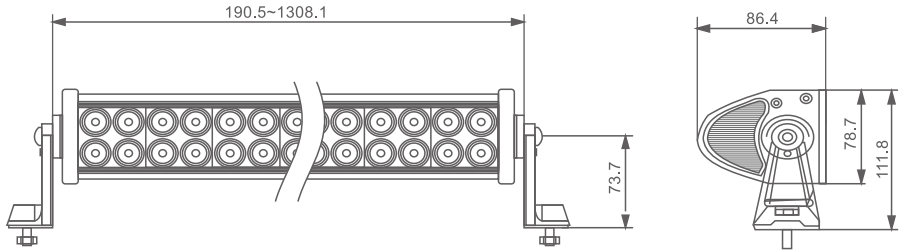


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BD03A-12L	7.50"	36W	2.70A@12V, 1.35A@24V	12PCS*3W Epistar	2880Lm	1.38Kg/Pcs	6Pcs/CTN
GT-BD03A-20L	11.50"	60W	4.50A@12V, 2.25A@24V	20PCS*3W Epistar	5200Lm	1.90Kg/Pcs	6Pcs/CTN
GT-BD03A-24L	13.50"	72W	5.40A@12V, 2.70A@24V	24PCS*3W Epistar	6240Lm	2.15Kg/Pcs	6Pcs/CTN
GT-BD03A-40L	21.50"	120W	9.00A@12V, 4.50A@24V	40PCS*3W Epistar	10400Lm	3.18Kg/Pcs	4Pcs/CTN
GT-BD03A-52L	27.40"	156W	11.70A@12V, 5.85A@24V	52PCS*3W Epistar	13520Lm	3.90Kg/Pcs	4Pcs/CTN
GT-BD03A-60L	31.50"	180W	13.50A@12V, 6.75A@24V	60PCS*3W Epistar	15600Lm	4.51Kg/Pcs	4Pcs/CTN
GT-BD03A-80L	41.50"	240W	18.00A@12V, 9.00A@24V	80PCS*3W Epistar	20800Lm	5.72Kg/Pcs	4Pcs/CTN
GT-BD03A-96L	49.50"	288W	21.60A@12V, 10.80A@24V	96PCS*3W Epistar	24960Lm	6.20Kg/Pcs	4Pcs/CTN
GT-BD03A-100L	51.50"	300W	22.50A@12V, 11.25A@24V	100PCS*3W Epistar	26000Lm	6.73Kg/Pcs	4Pcs/CTN



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BD04(Former Model:GT3102CR)	3W/Pcs Cree LED	10-30V DC	-40~+60°Celsius	Spot, Flood, Combo	CE, RoHS, IP67
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent
30000+h	Polycarbonate	Aluminum	Aulminum Side Mount	5700K	Yes

Unit:mm

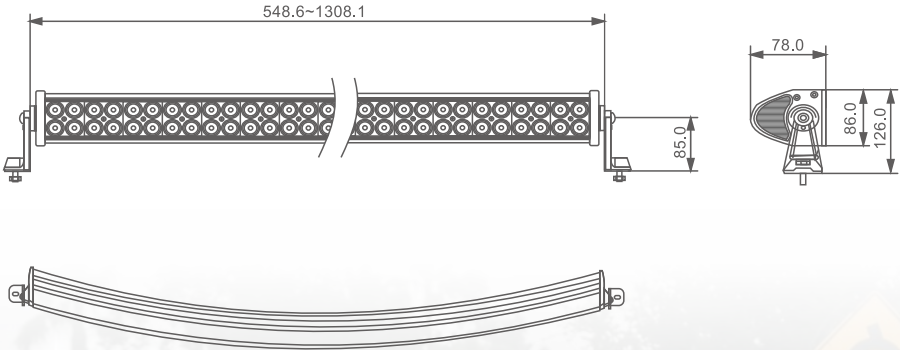


Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BD04-40L	21.60"	120W	10.00A@12V, 5.00A@24V	40PCS*3W Cree LED	10400Lm	3.20Kg/Pcs	4Pcs/CTN
GT-BD04-60L	31.50"	180W	15.00A@12V, 7.50A@24V	60PCS*3W Cree LED	15600Lm	4.20Kg/Pcs	4Pcs/CTN
GT-BD04-80L	41.50"	240W	20.00A@12V, 10.00A@24V	80PCS*3W Cree LED	20800Lm	7.00Kg/Pcs	4Pcs/CTN
GT-BD04-96L	49.50"	288W	24.00A@12V, 12.00A@24V	96PCS*3W Cree LED	24960Lm	7.88Kg/Pcs	4Pcs/CTN
GT-BD04-100L	51.50"	300W	25.00A@12V, 12.50A@24V	100PCS*3W Cree LED	26000Lm	8.38Kg/Pcs	4Pcs/CTN



Model	LED	Operating Voltage	Operating Temp	Beam Pattern	Certification
GT-BD04A(Former Model:GT3102EP)	3W/Pcs Epistar	10-30V DC	-40~+60°Celsius	Spot, Flood, Combo	CE, RoHS, IP67
Lifetime	Lens Material	Housing Material	Mounting System	Color Temperature	Pressure Equalization Vent
30000+h	Polycarbonate	Aluminum	Aulminum Side Mount	5700K	Yes

Unit:mm

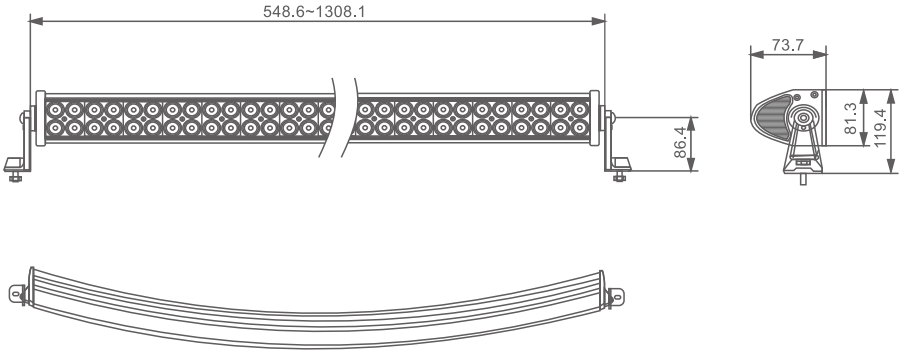

Model	Size	Watt	AMP Draw	Leds	Theoretical Lumen	Net Weight	Package Standard
GT-BD04A-40L	21.60"	120W	10.00A@12V, 5.00A@24V	40PCS*3W Epistar	9600Lm	3.20Kg/Pcs	4Pcs/CTN
GT-BD04A-60L	31.50"	180W	15.00A@12V, 7.50A@24V	60PCS*3W Epistar	14400Lm	4.20Kg/Pcs	4Pcs/CTN
GT-BD04A-80L	41.50"	240W	20.00A@12V, 10.00A@24V	80PCS*3W Epistar	19200Lm	7.00Kg/Pcs	4Pcs/CTN
GT-BD04A-96L	49.50"	288W	24.00A@12V, 12.00A@24V	96PCS*3W Epistar	23040Lm	7.88Kg/Pcs	4Pcs/CTN
GT-BD04A-100L	51.50"	300W	25.00A@12V, 12.50A@24V	100PCS*3W Epistar	24000Lm	8.38Kg/Pcs	4Pcs/CTN