



■ 系列产品 Series Product

✓ 密封系列 Sealing series

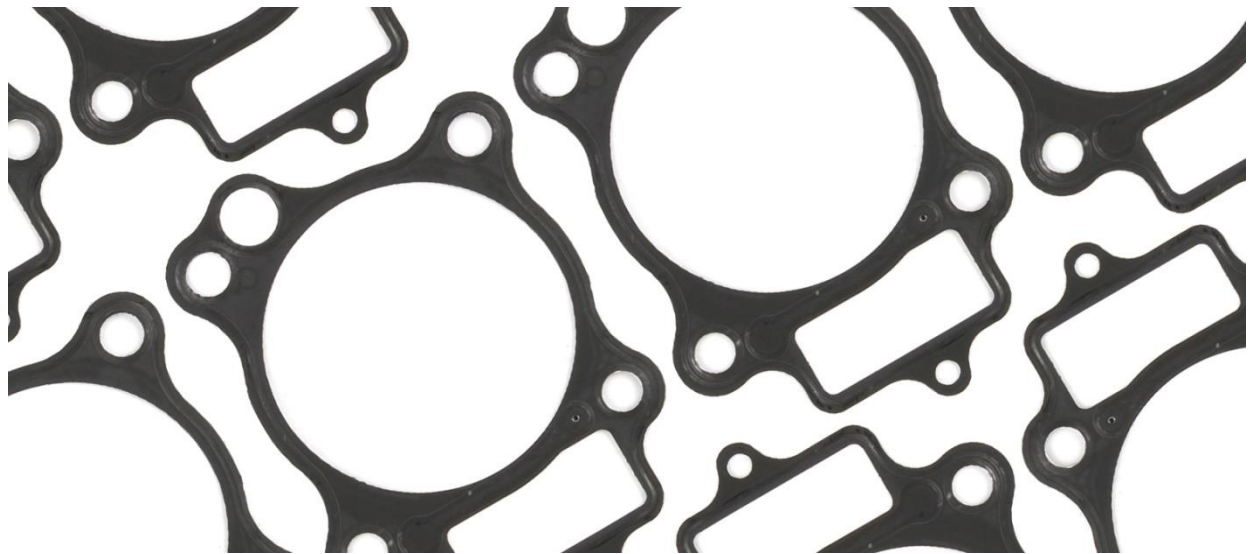

我们的涂胶板密封产品应用于发动机缸垫及附属垫片，橡胶涂层附着力高，适用于高温及机油、防冻剂、冷却剂等液体环境。

Our products are used for engine cylinder gasket and accessory gasket, with high adhesive rubber coating. Suitable for high temperature and oil, moderately resistant to antifreeze, coolant and other liquid environments.

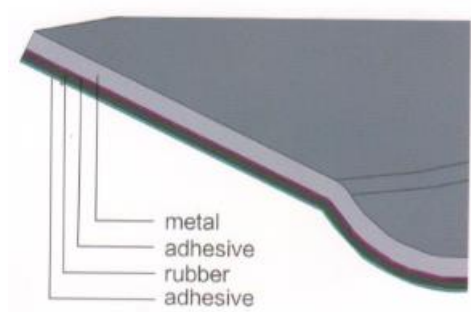

Coil width: 600-800mm

主要型号 Main type: UFM2520、UFM3025、UNM2520、UNM3025、SNM3825


| Type    | Total thickness | Rubber type | Rubber thickness(mm) | metal         |                |
|---------|-----------------|-------------|----------------------|---------------|----------------|
|         |                 |             |                      | metal type    | thickness (mm) |
| UFM2520 | 0.25            | FKM         | 0.025*2sides         | SUS301,SUS304 | 0.20           |
| SFM2520 | 0.25            | FKM         | 0.025*2sides         | SPCC          | 0.20           |
| UFM3025 | 0.30            | FKM         | 0.025*2sides         | SUS301,SUS304 | 0.25           |
| UFM3530 | 0.35            | FKM         | 0.025*2sides         | SUS301,SUS304 | 0.30           |
| UNM3825 | 0.38            | NBR         | 0.065*2sides         | SUS301,SUS304 | 0.25           |
| SNM3825 | 0.38            | NBR         | 0.065*2sides         | SPCC          | 0.25           |

✓ 消音系列 Anti-noise series



我们的消音产品具备隔离和减振作用，在制动系统中能够长久耐高温并拥有优良的降噪性能；与多种 PSA 的结合，能够满足客户不同环境高低温方面的使用。

Our anti-noise products have isolation and damping functions, which can withstand high temperature for long term and have excellent noise reduction performance in the braking system. Combined with a variety of PSA, it can meet different requirements of high or low temperature.

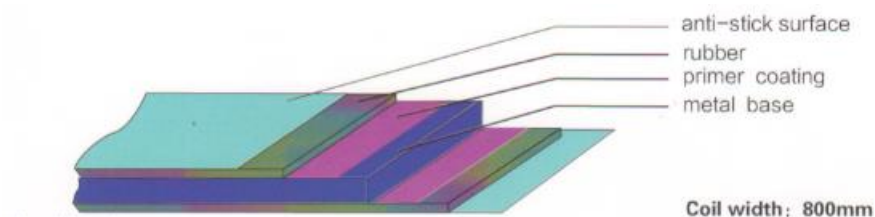

cSNX5240、SNX5240J2、SNX6440、SNX6440W、SNX6440J2


| type        | Total thickness | Coating thickness (mm)     | Rubber type | Cold adhesive (mm) | Metal base |                |
|-------------|-----------------|----------------------------|-------------|--------------------|------------|----------------|
|             |                 |                            |             |                    | type       | thickness (mm) |
| SNX4640     | 0.46            | 0.03NBR*2sides             | NBR         | without            | SPCC       | 0.40           |
| SNX4640-J   | 0.71            | 0.03NBR*2sides             | NBR         | 0.25               | SPCC       | 0.40           |
| SNX5240     | 0.52            | 0.06*2sides                | NBR         | without            | SPCC       | 0.40           |
| SNX5240-Q   | 0.50            | 0.06NBR*1side+ Paint*1side | NBR         | without            | SPCC       | 0.40           |
| SNX5240-Q-J | 0.75            | 0.06NBR*1side+ Paint*1side | NBR         | 0.25               | SPCC       | 0.40           |
| SNX5240-J   | 0.77            | 0.06NBR*2sides             | NBR         | 0.25               | SPCC       | 0.40           |
| SNX6440     | 0.64            | 0.12NBR*2sides             | NBR         | without            | SPCC       | 0.40           |
| SNX6440-J   | 0.89            | 0.12NBR*2sides             | NBR         | 0.25               | SPCC       | 0.40           |

✓ 卡簧系列 Spring series



卡簧带胶系列产品是制动系统平稳运行的关键，而且能够有效抑制滑动噪音，提高刹车系统的整体降噪性能，为提供一个舒适安静的环境创造了可能。

Abutment clips with adhesion are critical to a smooth operation of the brake system. Our products can effectively suppress the sliding noise; improve the overall noise reduction performance of the braking system. It can create the possibility of providing a comfortable and quiet drive for you.

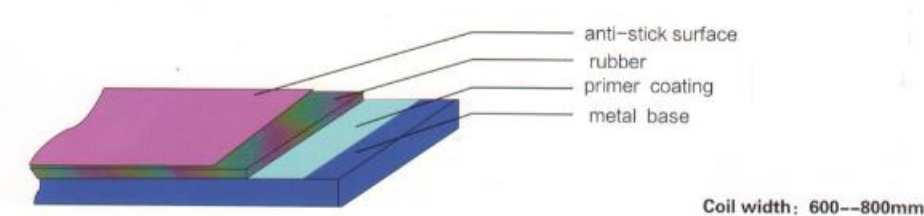

主要型号 Main type: UNX4035-1、UNX5045-1、UNX6055-1、UNX4035-F、  
UNX5045-F、UNX5040-1

| type      | Total thickness | Rubber thickness | Rubber type | Metal base |                |
|-----------|-----------------|------------------|-------------|------------|----------------|
|           |                 |                  |             | type       | Thickness (mm) |
| UNX3025-1 | 0.30            | 0.05*single side | NBR         | SUS301     | 0.25           |
| UNX4035-1 | 0.40            | 0.05*single side | NBR         | SUS301     | 0.35           |
| UNX5045-1 | 0.50            | 0.05*single side | NBR         | SUS301     | 0.45           |
| UNX6055-1 | 0.60            | 0.05*single side | NBR         | SUS301     | 0.55           |