


JS100-SP

Slim Siren Speaker

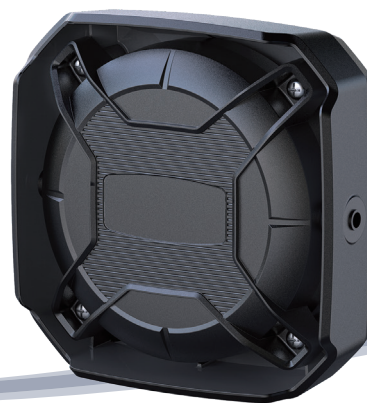

FEATURES

- 47.8mm (1.88") slim and light-weight 100 W speaker with leading technology in core design, Ultra-Thin speaker, decreased in depth, ideal solution for limited space installation or versatile mounting.
- Composite plastic housing against corrosion and maintains rigidity at harshest conditions.
- Powerful Neodymium driver that produces more than 120dBA over 3M(9.8ft) distance.
- Tested for efficiency and reliability with SAE J1849 (sound pressure, EVS2) paired with Juluen's siren.
- Standard L-Bracket and U-Bracket for various installation options.

SPECIFICATIONS

Compliance: SAE J1849 EVS2, CA Title 13

Wattage: 100W

Impedance (AC): 11 Ω

DC Resistance: 5.5 Ω

Weight: 1.48 Kg

Driver: Neodymium Magnet

Housing: Plastic Composite with glass-filled

Operating Temperature: -30°C~65°C


Storage Temperature: -40°C~75°C

Wires: White (SPK+) - 30cm (18AWG)


Black (SPK-) - 30cm (18AWG)

Sound Output: 120 dBA @ 3M (9.8')

SOUND PRESSURE LEVEL

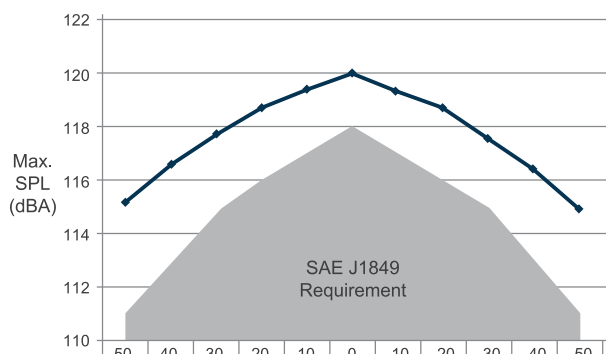

DIMENSIONS

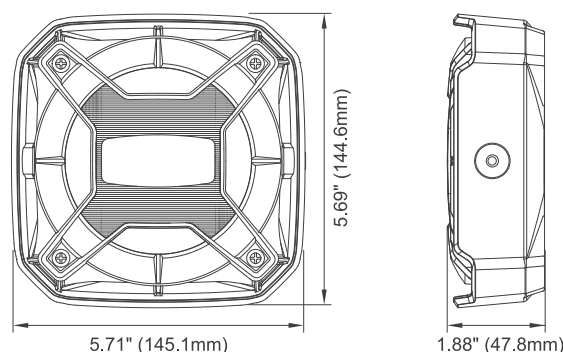

PART NO.

- H009-10110-000 (Speaker w/o Bracket)
- H009-11110-000 (Speaker w/ L-Bracket)
- H009-12110-000 (Speaker w/ U-Bracket)

ACCESSORIES

- 99-H009M00-000
L-Bracket



- 99-H009M01-000
U-Bracket

