

Ind. Full Auto Shut Off Air Open-End Wrench

Applications

Gas ramps in hobs, boiler pipes, coffee machine pipes. Compressor assembly, refrigerator pipes or automobile breaking system pipes and so on.


Features

- Extremely easy and useful to tighten things up in limited spaces.
- Variety gear socket size to fit in different assembly situations.
- Ergonomics design for easy gripping with less fatigue.
- Operate easily / smoothly and automatic release of socket back to preset open position by one-hand, two-step throttle lever.
- Fastening operations in limited spaces where angle tools and nutrunners cannot reach.
- Efficiently tighten hard-to-reach tube and hose applications, increasing productivity with fast and accurate results

New Series
POWR12
POWB12



Ind. Full Auto Shut Off Air Open-End Wrench

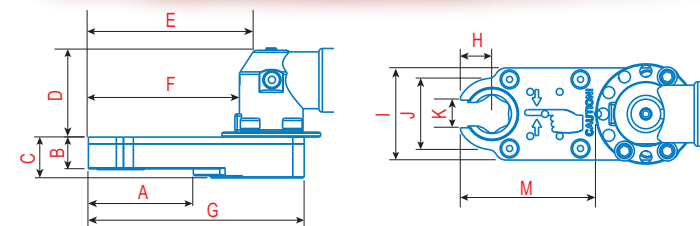

Dimension:

Unit:mm

Model No.	A	B	C	D	E	F	G	H	I	J	M
POWR(B)12	38.3	14	18	38.2	61.57	54.87	83.49	10.9	40	27	47.3
POWR(S)(B)15	46.2	14	18	39.2	73	66.5	95	13.6	40	31	58.8
POWR(S)(B)19	57.2	14	18	39.2	97.4	90.9	119.4	20.6	48	46.6	83.2
POWR(S)(B)24	71	14	18	39.2	120.9	114.4	142.9	26.6	59	59	106.6
POWR(S)28	92.1	14	18	39.2	163.5	157	185.5	39.3	86	86	149.3

Blind Type

Hex Size of Gear Socket	POWB12	POWB15	POWB19	POWB24	K (mm)	L (mm)
8mm	POWB12-08				5.6	5
10mm	POWB12-10	POWB15-10			7	6.5
11mm		POWB15-11			8.1	6.5
12mm		POWB15-12			8.5	6.5
13mm		POWB15-13			9	9
14mm		POWB15-14			10.2	9
15mm		POWB15-15			10.5	9
16mm		POWB15-16			10.9	9
17mm		POWB15-17	POWB19-17		11.3	9
18mm			POWB19-18		12	9
19mm			POWB19-19		13.1	9
20mm			POWB19-20		13.5	9
21mm			POWB19-21		15	9
22mm			POWB19-22		15.2	9
23mm			POWB19-23		15.5	9
24mm			POWB19-24	POWB24-24	16.1	9
26mm				POWB24-26	17.1	9
27mm				POWB24-27	18.1	9
29mm				POWB24-29	19.2	9
30mm				POWB24-30	20.1	9
32mm				POWB24-32	21.2	9

Specification:

*Recommend Air Pressure 6.2 bar (90psi)

Model No.	Torque Range (Nm)	Free Speed (r.p.m.)	Hex Size of Gear Socket (mm)	Overall Length		Net Weight		Air Consumption		Air Inlet (PT)	Sound Level dB(A)
				mm	in	kgs	lbs	l/min	cfm		
POWB12	6~12	300	8, 10	402	15.82	1.65	3.64	198	7	1/4	87
POWR12	6~12	300	8, 10	402	15.82	1.65	3.64	198	7	1/4	87
POWB15	7.5~15	230	10, 11, 12, 13, 14, 15, 16, 17	413	16.25	1.67	3.68	198	7	1/4	87
POWR15	7.5~15	230	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17	413	16.25	1.67	3.68	198	7	1/4	87
POWS15	7.5~15	230	7, 8, 9, 10, 11	413	16.25	1.67	3.68	198	7	1/4	87
POWB19	10~20	150	17, 18, 19, 20, 21, 22, 23, 24	438	17.24	1.84	4.05	198	7	1/4	87
POWR19	10~20	150	17, 18, 19, 20, 21, 22, 23, 24, 11/16"	438	17.24	1.84	4.05	198	7	1/4	87
POWS19	10~20	150	12, 13, 14, 15, 16	438	17.24	1.84	4.05	198	7	1/4	87
POWB24	12~24	115	24, 26, 27, 29, 30, 32	461	18.14	2.09	4.60	198	7	1/4	87
POWR24	12~24	115	24, 26, 27, 29, 30, 32	461	18.14	2.09	4.60	198	7	1/4	87
POWS24	12~24	115	17, 18, 19, 20, 21, 22	461	18.14	2.09	4.60	198	7	1/4	87
POWR28	14~28	100	36, 38, 41, 46, 50, 55	504	19.84	2.52	5.56	198	7	1/4	87
POWS28	14~28	100	36	504	19.84	2.52	5.56	198	7	1/4	87

*Custom-made is available.

SUMAKE Industrial Co., Ltd.

4F, No.351, Yangguang St., Neihs District, Taipei, Taiwan, Zip:114-91

Tel: 886-2-2659-3500

http: //www.sumake.com

Fax: 886-2-2659-3700

e-mail: sales@sumake.com.tw



Certificate TW04/02301

XPST-W19-1202(R7)

XPST-W19-1202(R7)