Compressed Air Storage Tank Irue Seamless Tank Lighter / Superior / Great looking

- -Widely used for vehicle refitting, air suspension, air horn, air storage equipment, etc.
- -In compliance with SAEJ10 and FMVSS 571.121
- -WP/BP: 200PSI/1000PSI









Features:

No welds- One piece seamless design

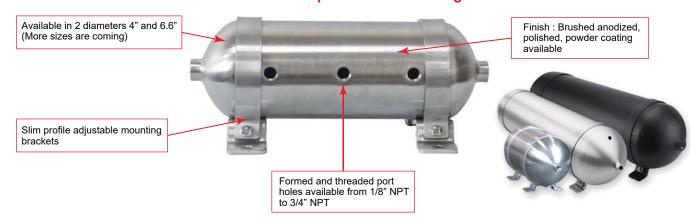


How To Order:

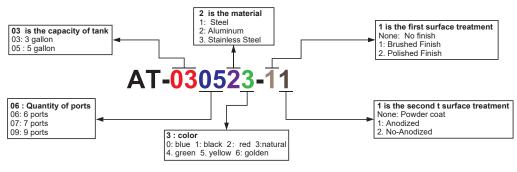





Compressed Air Storage Tank

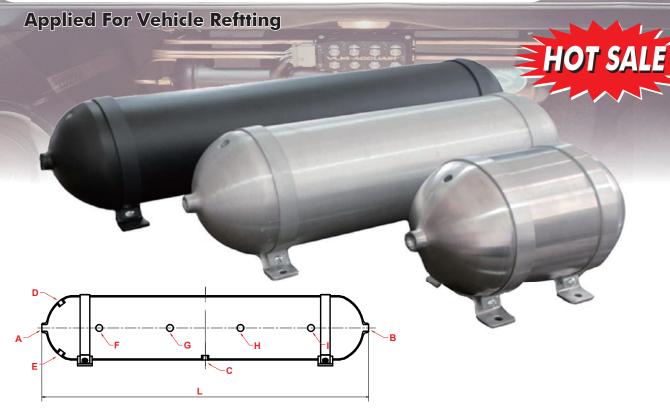

Part NO.	Material	Gallon	D(mm)	L(mm)	Port A	Port B	Port C	Port D	Port E	Port F	Port G	Port H	Port I
AT-H5	Aluminium	0.5	100	300	-	-	-	-	-	-	-	-	-
AT-01	Aluminium	1.0	168	300	-	-	-	-	-	-	-	-	-
AT-15	Aluminium	1.5	168	360	-	-	-	-	-	-	-	-	-
AT-02	Aluminium	2.0	168	500	-	-	-	-	-	-	-	-	-
AT-03	Aluminium	3.0	168	605	-	-	-	-	-	-	-	-	-
AT-04	Aluminium	4.0	168	740	-	-	-	-	-	-	-	-	-
AT-05	Aluminium	5.0	168	850	-	-	-	-	-	-	-	-	-
AT-06	Aluminium	6.0	202	850	-	-	-	-	-	-	-	-	-
AT-08	Aluminium	8.0	202	1050	-	-	-	-	-	-	-	-	-





Features:

- It is widely applied for vehicle refitting. Models of vehicle are not limited.
 They are mainly used for air suspension, air horn, air storage equipment, etc.
- 2. Alum tanks are lighter than steel and stainless steel tanks
- 3. A fresher aesthetic, Stronger resistance in rust
- 4. Seamless: better sealing
- 5. The air tanks are in compliance with SAE J10 standard
- 6. Rated working pressure: 200PSI. Burst pressure is more than 1000PSI
- 7. Finish: anodized, polished, powder coating

