



PRODUCT CATALOGUE



YouTube

RYMAX LUBRICANTS | THE NEXT GENERATION



“Our Dutch roots are synonymous with high quality and next-level service. We take pride in being from Holland and use our entrepreneurial DNA to improve in the face of every challenge.”

////////////////////



ABOUT RYMAX

Rymax is an international lubricants brand from the Netherlands. We specialize in automotive, heavy-duty and industrial lubricants. Our commitment to being an outstanding supplier of high quality lubricants has enabled us with successful representation and substantial growth in more than 60 countries worldwide. The dedication we have towards our work has allowed us to establish a brand that is able to meet and exceed customer expectations. It is through our partner focused approach and passion for excellent service, accompanied with a complete range of high quality lubricants that we are able to succeed in our industry. We take pride in our ability to go above and beyond for our partners, dealers and end-users. This is what makes us unique, this is what makes us Rymax!

OUR PROMISE

At the core of Rymax is the devotion to challenge the status quo and to amaze our customers. We aim to push ourselves to the best of our abilities, always looking to improve and continuously exceed our customer's expectations and challenges. From Rymax, you can expect quality lubricants, solid expertise, strong support and flexibility to match your market needs.

IMPROVE BY CHALLENGE.



[WWW.INSTAGRAM.COM/RYMAXLUBRICANTS](https://www.instagram.com/RYMAXLUBRICANTS)



[WWW.FACEBOOK.COM/RYMAXLUBRICANTS](https://www.facebook.com/RYMAXLUBRICANTS)



[WWW.YOUTUBE.COM/RYMAXLUBRICANTS](https://www.youtube.com/RYMAXLUBRICANTS)



[WWW.LINKEDIN.COM/COMPANY/RYMAX-LUBRICANTS](https://www.linkedin.com/company/RYMAX-LUBRICANTS)

PASSENGER CAR ENGINE OILS

> Helios	7
> Posidon	7
> Apollo	9

MOTORCYCLE OILS

> Engine oils	
/ Motrax 2T, 4T	13
> Fork oils	
/ Motrax FO	14

TRUCK ENGINE OILS

> Endurox	17
-----------	----

AGRICULTURAL OILS

> Styx	21
> Crius	22
> Hesperide	22

GEAR OILS & ATF

> Gear oils	
/ Gevitro	25
> ATF	
/ Atexio	27

RACING OILS

> Apollo R	31
> Motrax R	31
> Gevitro R	31
> Vector R	31

FLUIDS & COOLANTS

> Antifreeze & Coolants	
Dione BS, G-12+, G-12++ , HD	33
> Power Steering Fluid	
Leto MV	34
> Brake Fluids	
Vector	34

MARINE OILS

> Alpheus	37
> Marlub	37
> Marlub Sys	37
> Marlub ZF	37
> Marlub Cyn	37

INDUSTRIAL OILS

> Compressor oils	
/ Boreas	39
/ Boreas PAO	39
> Turbine oils	
/ Erato	39
> Slideway oils	
/ Themis	39
> Industrial Gear Oils	
/ Gevitro TWS	40
/ Gevitro TWS PAO	40
> Rockdrill oil	
/ Thor	40
> Heat transfer oils	
/ Themperion	40
> Railway engine oil	
/ Raillub ZF	40
> Hydraulic oils	
/ Hydra AW	41
/ Hydra HVI	41
/ Hydra HT ECO	41
/ Hydra HD	41
/ Hydra ZF	41
/ Hydra XL	41

GREASES 43

MISCELLANEOUS 47

TECHNICAL SPRAYS 48

ADDITIVES 50

LIMITED PERFORMANCE WARRANTY 52

OIL ADVISOR 54



acea
DRIVING MOBILITY FOR EUROPE



American
Petroleum
Institute

THE PRODUCT CATALOGUE

In this Product Catalogue you will find our product assortment for the most common applications, segments and industries. Our company and production facilities are organized in such a way that we can produce almost every desired product or specification. Do you have any questions or requirements? Please don't hesitate to contact us.

HEADQUARTERS

Rymax B.V.
Delweg 8
6902 PJ Zevenaar
The Netherlands
info@rymax-lubricants.com
Tel. +31 (0) 316 740 856
www.rymax-lubricants.com

COLOR INDICATIONS

> ● Bronze

> ● Silver

> ● Gold

> ● Black (Rival)

> eco

> ● Platinum /  series

> ● Orange

EXPLANATION

Mineral base oil

Synthetic Blend base oil

Full Synthetic base oil

Attractively priced, non-approved formulation product (Mineral/Synthetic/Full Synthetic)

Environmental friendly and sustainable products

Products suited specifically for racing applications

Fluids and Coolants

**CLEAN FLOW
TECHNOLOGY**

Rymax CleanFlow Technology unlocks engine purity. Experience impeccable cleanliness, optimal combustion, and unrivalled oil flow for peak performance.

**MULTI GUARD
TECHNOLOGY**

Rymax MultiGuard Technology empowers sustainability. Embrace modern demands with innovative combustion efficiency, safeguarding equipment's longevity while advancing sustainability.

**TOP SHIELD
TECHNOLOGY**

Rymax TopShield Technology ignites cleaner combustion, amplifies fuel economy, reduces emissions, and extends equipment lifespan with unparalleled efficiency.

**ECO SECURE
TECHNOLOGY**

Rymax EcoSecure Technology optimizes environmental preservation with economic advantages, ensuring supreme protection with a sustainable edge.

PASSENGER CAR ENGINE OILS

The Rymax Passenger Car assortment of engine oils is designed to meet internationally accepted standards and has several OEM and API approvals. Rymax Lubricants ensures that your engine and other key components receive the optimum level of protection while lengthening component lifetime and keeping down your costs of ownership. Our corporation with racers, motorsport teams and many professionals working with lubricants every day, has helped us to create the perfect product for any engine. Our ECO-line products are developed for the latest engine technology and offer many environmental conscious elements required today.

RYMAX PRODUCT	SAE														
	40	50	0W-8	0W-16	0W-20	0W-30	0W-40	5W-20	5W-30	5W-40	5W-50	10W-30	10W-40	15W-40	20W-50
Helios	●	●												●	●
Helios XR													●	●	●
Helios XT														●	●
Posidon					●			●	●	●	●	●	●		
Posidon XP								●	●	●		●	●		
Posidon XR							●			●		●	●		
Posidon XT									●						
Posidon C3 LL Rival								RIVAL							
Apollo C1									●						
Apollo C2						●			●						
Apollo C2 C3									●						
Apollo C3									●	●					
Apollo LL					●										
Apollo C3 LL									●						
Apollo C4									●						
Apollo FE			●		●	●		●	●						
Apollo FE-RC					●	●		●	●			●			
Apollo FE-F						●									
Apollo FE Xtra					●										
Apollo VV					●	●									
Apollo ECO				eco	eco	eco									
Apollo XR										●		●	●		




HELIOS ENGINE OIL		CLEAN FLOW TECHNOLOGY
MINERAL	MINERAL	
 40 PERFORMANCE LEVELS API SF/CD, CCMC G2/D1, MIL-L-2104B, MIL-L-46152B	 50 PERFORMANCE LEVELS API SF/CD, CCMC G2/D1, MIL-L-2104B, MIL-L-46152B	
 SUITABLE FOR: PETROL, DIESEL		

HELIOS ENGINE OIL		TECHNOLOGY
MINERAL	MINERAL	
 15W-40 PERFORMANCE LEVELS API SF/CD	 20W-50 PERFORMANCE LEVELS API SF/CD, MIL-L-2104D, MIL-L-46152C	
 SUITABLE FOR: PETROL, DIESEL	 SUITABLE FOR: PETROL, DIESEL, LPG	

HELIOS XR ENGINE OIL		CLEAN FLOW TECHNOLOGY
MINERAL	MINERAL	
 15W-40 PERFORMANCE LEVELS API SG/CF-4, MIL-L-46152E/2104D	 20W-50 PERFORMANCE LEVELS API SG/CF-4, MIL-L-46152E/2104D	
 SUITABLE FOR: PETROL, DIESEL, LPG		

HELIOS XR 10W-40 ENGINE OIL
 SYNTHETIC BLEND PERFORMANCE LEVELS API SL/CF, MB 229.1, VW 501.01
 SUITABLE FOR: PETROL, DIESEL, LPG

HELIOS XT ENGINE OIL		CLEAN FLOW TECHNOLOGY
MINERAL	MINERAL	
 15W-40 PERFORMANCE LEVELS ACEA A3/B3, API SL/CF, MB 229.1, VW 505.00	 20W-50 PERFORMANCE LEVELS ACEA A3/B3, API SL/CF, MB 229.1, VW 501.01, VW 505.00	
 SUITABLE FOR: PETROL, DIESEL, LPG		

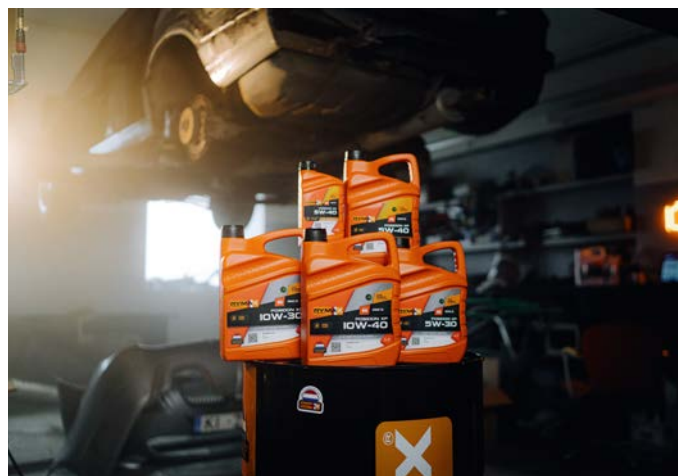

POSIDON ENGINE OIL			MULTI GUARD TECHNOLOGY
SYNTHETIC BLEND	SYNTHETIC BLEND	SYNTHETIC BLEND	
 0W-20 PERFORMANCE LEVELS API SN	 10W-30 PERFORMANCE LEVELS ACEA A3/B3, API SL/CF, MB 229.1, VW 501.01, VW 505.00	 10W-40 PERFORMANCE LEVELS ACEA A3/B3, API SL/CF, MB 229.1, VW 501.01, VW 505.00	
 SUITABLE FOR: PETROL, LPG	 SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID		



POSIDON

ENGINE OIL

MULTI
GUARD
TECHNOLOGY

FULL SYNTHETIC



5W-30

PERFORMANCE LEVELS

ACEA A3/B4, API SN/CF, MB 229.3, Renault RN 0700, Renault RN 0710, VW 502.00, VW 505.00

FULL SYNTHETIC



5W-40

PERFORMANCE LEVELS

ACEA A3/B4, API SN/CF, MB 229.3, GM-LL-B-025, Porsche A40, PSA B71 2296, Renault RN 0700, Renault RN 0710, VW 502.00, VW 505.00

FULL SYNTHETIC



5W-50

PERFORMANCE LEVELS

ACEA A3/B4, API SN/CF, BMW LL-01, MB 229.3, Renault RN 0700, Renault RN 0710, VW 502.00, VW 505.00

SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID

POSIDON XR

ENGINE OIL

MULTI
GUARD
TECHNOLOGY

SYNTHETIC BLEND



10W-30

PERFORMANCE LEVELS

ACEA A3/B4, API SN/CF, MB 229.1, VW 501.01, VW 505.00

SYNTHETIC BLEND



10W-40

PERFORMANCE LEVELS

ACEA A3/B4, API SN/CF, MB 229.1, MB 229.3, Renault RN 0700, Renault RN 0710, VW 501.01, VW 505.00

SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID

POSIDON XR

ENGINE OIL

MULTI
GUARD
TECHNOLOGY

FULL SYNTHETIC



0W-40

PERFORMANCE LEVELS

ACEA A3/B4, API SN, BMW LL-01, MB 229.5, MB 229.3, Ford WSS-M2C937-A, Porsche A40, Renault RN 0700, Renault RN 0710, VW 502.00, VW 505.00

FULL SYNTHETIC



5W-40

PERFORMANCE LEVELS

ACEA A3/B4, API SN/CF, BMW LL-01, MB 229.5, MB 226.5, PSA B71 2296, Renault RN 0700, Renault RN 0710, VW 502.00, VW 505.00

SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID

POSIDON XP

ENGINE OIL

TOP
SHIELD
TECHNOLOGY

SYNTHETIC BLEND



5W-20

PERFORMANCE LEVELS

API SP, API SN/SM/SL, ILSAC GF-6A

SYNTHETIC BLEND



5W-30

PERFORMANCE LEVELS

API SP, API SN/SM/SL, ILSAC GF-6A, Chrysler MS-6395, Chrysler MS-10725, Ford WSS-M2C930-A, Ford WSS-M2C946-A, GM 4718M, GM 6094M

FULL SYNTHETIC



5W-40

PERFORMANCE LEVELS

API SP, API SN/SM/SL, ILSAC GF-6A, Chrysler MS-6395, Chrysler MS-10725, Ford WSS-M2C930-A, Ford WSS-M2C946-A, GM 4718M, GM 6094M

SYNTHETIC BLEND



10W-30

PERFORMANCE LEVELS

API SP, API SN/SM/SL, ILSAC GF-6A, Chrysler MS-6395, Chrysler MS-10725, Ford WSS-M2C930-A, Ford WSS-M2C946-A, GM 4718M, GM 6094M

SUITABLE FOR: PETROL, HYBRID



POSIDON XP

10W-40

ENGINE OIL

SYNTHETIC BLEND

PERFORMANCE LEVELS

API SP, API SN/SM/SL, ILSAC GF-6A, Chrysler MS-6395, Chrysler MS-10725, Ford WSS-M2C930-A, Ford WSS-M2C946-A, GM 4718M, GM 6094M

SUITABLE FOR: PETROL, HYBRID

TOP
SHIELD
TECHNOLOGY



POSIDON XT

5W-30

ENGINE OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

ACEA A3/B4, API SN/CF, BMW LL-01, MB 229.5, GM-LL-B-025, Renault RN 0700, Renault RN 0710, VW 502.00, VW 505.00

SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID

MULTI
GUARD
TECHNOLOGY




APOLLO C1
5W-30
ENGINE OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

ACEA C1, FORD WSS-M2C934-B, JASO DL-1, STJLR 03.5005

TOP SHIELD TECHNOLOGY

 SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID



APOLLO C2 C3
5W-30
ENGINE OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

ACEA C2/C3, API SP, BMW LL-04, GM Dexos 2, MB 229.31, MB 229.51, MB 229.52, OV0401547, Renault RN0700, Renault RN0710, VW 505.00, VW 505.01

TOP SHIELD TECHNOLOGY

 SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID

APOLLO C3 ENGINE OIL		TOP SHIELD TECHNOLOGY	
FULL SYNTHETIC	FULL SYNTHETIC	FULL SYNTHETIC	FULL SYNTHETIC
 0W-40 PERFORMANCE LEVELS ACEA C3, API SP, Chrysler MS 10725, Chrysler MS-12633, Fiat 9.55535-S2, GM Dexos 2, MB 229.52, Porsche C40, Renault RN0700, Renault RN0710, VW 511 00	 5W-30 PERFORMANCE LEVELS ACEA C3, API SP, BMW LL-04, GM Dexos 2, GM-LL-A-025, GM-LL-B-025, MB 229.51, MB 229.52, MB 229.31, OV0401547 -G30, OV0401547 -D30, VW 502.00, VW 505.00, VW 505.01	 5W-40 PERFORMANCE LEVELS ACEA C3, API SN/CF, BMW LL-04, Ford WSS-M2C917-A, GM Dexos 2, MB 229.31, MB 226.5, Porsche A40, Renault RN 0700, Renault RN 0710, VW 502.00, VW 505.00, VW 505.01	
 SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID			

APOLLO C2 ENGINE OIL		TOP SHIELD TECHNOLOGY	
FULL SYNTHETIC	FULL SYNTHETIC	FULL SYNTHETIC	FULL SYNTHETIC
 0W-30 PERFORMANCE LEVELS ACEA C2, ACEA C5, API SP, PSA B71 2312, Fiat 9.55535-GS1, Fiat 9.55535-DS1	 5W-30 PERFORMANCE LEVELS ACEA C2, ACEA A5/B5, API SP, IVECO 18-1811 SC1, PSA B71 2290, Renault RN17, Renault RN0700		
 SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID			



POSIDON C3 LL
5W-30
ENGINE OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

ACEA C3, API SN, BMW LL-04, MB 229.51, VW 504.00, VW 507.00

RIVAL

 SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID



APOLLO FE
0W-8
ENGINE OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

API SP-RC, ILSAC GF-6B

TOP SHIELD TECHNOLOGY

 SUITABLE FOR: PETROL, HYBRID

“This ultra-low viscosity is a proof of the technical sophistication of our R&D”







APOLLO C4
5W-30
ENGINE OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

ACEA C4, MB 229.51, MB 226.51, Renault RN 0720

TOP SHIELD TECHNOLOGY

 SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID



APOLLO C3 LL
5W-30
ENGINE OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

API SP, ACEA C3, BMW LL-04, MB 229.51, MB 229.52, MB 229.31, Opel OV0401547 - G30, Opel OV0401547 - D30, Porsche C30, VW 504.00, VW 507.00

TOP SHIELD TECHNOLOGY

 SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID

APOLLO FE
ENGINE OIL

TOP SHIELD TECHNOLOGY

FULL SYNTHETIC	FULL SYNTHETIC	FULL SYNTHETIC	FULL SYNTHETIC
 0W-20 PERFORMANCE LEVELS API SP, API SP-RC, ILSAC GF-6A, Chrysler MS-6395, Ford WSS-M2C-947A, GM Dexos 1 Gen 2	 0W-30 PERFORMANCE LEVELS ACEA C3, VW 504.00, VW 507.00, BMW Longlife-04, MB 229.52, Porsche C30, VW 503.00, VW 506.01	 5W-20 PERFORMANCE LEVELS API SN, ACEA C5, STJLR 03.5004, Ford WSS-M2C948-B	 5W-30 PERFORMANCE LEVELS API SL, ACEA A5/B5, Ford WSS-M2C913-D, STJLR.03.5003, Renault RN0700, VVC 53036

 SUITABLE FOR: PETROL, LPG, HYBRID



APOLLO FE-F
0W-30
ENGINE OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

API SP, ACEA C2, Ford WSS M2C-950A, STJLR 03.5007, PSA B71 2312, VVC 53035

TOP SHIELD TECHNOLOGY

 SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID

APOLLO FE-RC
ENGINE OIL

TOP SHIELD TECHNOLOGY

FULL SYNTHETIC	FULL SYNTHETIC
 0W-20 PERFORMANCE LEVELS API SP, API SP-RC, ILSAC GF-6A, Chrysler MS-6395, Ford WSS-M2C962-A1, GM Dexos 1 Gen 3, GM 4718M	 0W-30 PERFORMANCE LEVELS API SP, API SP-RC, ILSAC GF-6A, API CF

 SUITABLE FOR: PETROL, LPG, HYBRID

APOLLO FE-RC
ENGINE OIL

TOP SHIELD TECHNOLOGY

FULL SYNTHETIC	FULL SYNTHETIC	FULL SYNTHETIC
 5W-20 PERFORMANCE LEVELS API SP, API SP-RC, ILSAC GF-6A, Chrysler MS 6395, Ford WSS-M2C960-A1, GM dexos 1 Gen 3, GM 4718M	 5W-30 PERFORMANCE LEVELS API SP, API SP-RC, ILSAC GF-6A, Chrysler MS-6395, Chrysler MS-13340, Ford WSS-M2C961-A1, GM Dexos 1 Gen 3, GM 6094M, GM 4718M	 10W-30 PERFORMANCE LEVELS API SP, API SP-RC, ILSAC GF-6A, Chrysler MS 6395, Ford WSS-M2C946-A, GM 6049-M, GM 6094-M

 SUITABLE FOR: PETROL, LPG, HYBRID



APOLLO XR

ENGINE OIL

TOP
SHIELD
TECHNOLOGY

FULL SYNTHETIC

SYNTHETIC BLEND

SYNTHETIC BLEND

5W-40



PERFORMANCE LEVELS

API SP, API SN/CF, ACEA C3, BMW LL-04, Dexos 2, MB 229.31, MB 229.51

10W-30



PERFORMANCE LEVELS

API SP, API SL, ACEA A3/B4, MB 229.3

10W-40



PERFORMANCE LEVELS

API SP, ACEA A3/B4, MB 229.3, MB 226.5, RN 0700/0710, VW 501.01, VW 505.00

SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID

APOLLO LL 0W-20

ENGINE OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

VW 508.00/509.00, ACEA C5, Ford WSS-M2C956-A1, Porsche C20, VW TL 52577



TOP
SHIELD
TECHNOLOGY

SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID

APOLLO VV

ENGINE OIL

TOP
SHIELD
TECHNOLOGY

FULL SYNTHETIC

FULL SYNTHETIC

0W-20



PERFORMANCE LEVELS

ACEA C5, API SN, Volvo VCC RBS0-2AE

0W-30



PERFORMANCE LEVELS

ACEA A5/B5, API SL/CF, Volvo VCC 95200377

SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID

APOLLO FE XXTRA 0W-20

ENGINE OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

API SP, API SP-RC, ILSAC GF-6A, ACEA C6, ACEA C5, BMW Longlife 17FE+, BMW Longlife 14FE+, Chrysler MS-12145, Ford WSS-M2C947-B1, Ford WSS-M2C962-A1, Fiat 9.55535-GSX, Jaguar Land Rover STJLR.03.5006, Jaguar Land Rover STJLR.51.5122, MB 229.72, MB 229.71, OV 040 1547 - A20



TOP
SHIELD
TECHNOLOGY

SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID

APOLLO eco

0W-16

ENGINE OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

API SP, API SN Plus, API SP-RC, ILSAC GF-6B



TOP
SHIELD
TECHNOLOGY

SUITABLE FOR: PETROL, LPG, HYBRID

APOLLO eco

ENGINE OIL

TOP
SHIELD
TECHNOLOGY

FULL SYNTHETIC

FULL SYNTHETIC

0W-20



PERFORMANCE LEVELS

API SP, API SP-RC, ILSAC GF-6A, Chrysler MS-6395, Ford WSS-M2C-947A, GM Dexos 1 Gen 2

0W-30



PERFORMANCE LEVELS

API SP, API SP-RC, ILSAC GF-6A, API CF

SUITABLE FOR: PETROL, LPG, HYBRID

“Rymax ECO bottles are made of recycled plastics, and we plant a tree for every box sold”



MOTORCYCLE OILS

The Rymax motorcycle oil range covers all requirements for 2-stroke and 4-stroke engines. The 2-stroke oils are suitable for (small) motorcycle engines, lawn mowers, outboard engines, and snow mobiles. The 4-stroke range is especially developed for mechanically high performing 4-stroke motorcycle engines. They allow the engine, clutch, and gearbox to maintain both power and performance. Through our many corporations with on- and offroad racers and teams in events like the Dutch Superbike Championship and Dakar, we have optimized the performance of our products into this top-quality assortment. All Rymax small engine oils are available in mineral, synthetic blend and full synthetic grades and are designed to meet the latest international standards prescribed by API and JASO.

RYMAX PRODUCT	SAE									
	TSC-1	TSC-2	TSC-3	5W-40	5W-50	10W-40	10W-50	10W-60	15W-50	20W-50
Motrax 2T	●	●	●							
Motrax 2T SS			●							
Motrax 2T FS			●							
Motrax 4T										●
Motrax 4T SS						●			●	
Motrax 4T FS				●	●	●	●	●	●	●



MOTRAX 2T

ENGINE OIL

POWER
FLOW
TECHNOLOGY

MINERAL

MINERAL

MINERAL

TSC-1



PERFORMANCE LEVELS

API TA (TSC-1), JASO FB

TSC-2



PERFORMANCE LEVELS

API TB (TSC-2), JASO FB

TSC-3



PERFORMANCE LEVELS

API TC (TSC-3), JASO FB



POWER
FLOW
TECHNOLOGY

MOTRAX 2T SS

TSC-3

ENGINE OIL

SYNTHETIC BLEND

PERFORMANCE LEVELS

API TC, JASO FD, ISO-L-EGD



POWER
FLOW
TECHNOLOGY

MOTRAX 2T FS

TSC-3

ENGINE OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

API TC, JASO FD, Husqvarna 346/372, ISO-L-EGD, ISO 6743-15, Rotax 253



POWER
FLOW
TECHNOLOGY

MOTRAX 4T

20W-50

ENGINE OIL

MINERAL

PERFORMANCE LEVELS

API SL, JASO MA/MA2

MOTRAX 4T SS

ENGINE OIL

POWER
FLOW
TECHNOLOGY

SYNTHETIC BLEND

SYNTHETIC BLEND

10W-40



PERFORMANCE LEVELS

API SL, JASO MA2

15W-50



PERFORMANCE LEVELS

API SL, JASO MA2





MOTRAX 4T FS

ENGINE OIL

POWER
FLOW
TECHNOLOGY

FULL SYNTHETIC

FULL SYNTHETIC

FULL SYNTHETIC

FULL SYNTHETIC

5W-40



PERFORMANCE LEVELS

API SN, JASO MA/MA2

5W-50



PERFORMANCE LEVELS

API SN, JASO MA/MA2

10W-40



PERFORMANCE LEVELS

API SN, JASO MA/MA2

15W-50



PERFORMANCE LEVELS

API SN, JASO MA/MA2

MOTRAX 4T FS

ENGINE OIL

POWER
FLOW
TECHNOLOGY

FULL SYNTHETIC

FULL SYNTHETIC

FULL SYNTHETIC

10W-50



PERFORMANCE LEVELS

API SN, JASO MA/MA2

10W-60



PERFORMANCE LEVELS

API SN, JASO MA/MA2

20W-50



PERFORMANCE LEVELS

API SN, JASO MA/MA2



MOTRAX FO

FORK OIL AND SUSPENSION FLUID

POWER
FLOW
TECHNOLOGY

MINERAL

MINERAL

2.5



5



DESCRIPTION

Rymax Motrax FO helps to reduce friction and dissipates heat, and also helps to control the movement of the fork for optimal riding in any circumstances.

MOTRAX FO

FORK OIL AND SUSPENSION FLUID

POWER
FLOW
TECHNOLOGY

MINERAL

MINERAL

MINERAL

10



15



20



DESCRIPTION

Rymax Motrax FO helps to reduce friction and dissipates heat, and also helps to control the movement of the fork for optimal riding in any circumstances.



ACTIVE DEFENSE TECHNOLOGY

Rymax ActiveDefense Technology ensures optimal performance for heavy-duty equipment with advanced additives, providing unbeatable protection and reliability.

TRUCK ENGINE OILS

Rymax offers an extensive range of heavy-duty lubricants. The Rymax Commercial Transport range is designed to meet the latest ACEA and API specifications and the requirements demanded by heavy-duty engine manufactures. Specially formulated for on highway and off highway vehicle applications, our heavy-duty lubricants are available in a variety of grades suitable for normal and severe circumstances. Approved by several leading manufacturers such as Mercedes Benz/Daimler, MAN, Volvo and Renault, Rymax heavy-duty oils will not only lubricate and protect your commercial fleet but will also provide the extra muscle it needs to preserve durability.

RYMAX PRODUCT	SAE									
	10W	30	40	50	5W-30	10W-30	10W-40	15W-40	20W-50	25W-60
Endurox HD	●	●	●	●						●
Endurox HD Xtra								●		
Endurox LD							●	●	●	
Endurox LD Xtra								●		
Endurox FLD					●	●	●	●		
Endurox XLF					●		●			
Endurox XLD					●		●			
Endurox XHD								●		
Endurox XLE							●			



ENDUROX HD

HEAVY-DUTY ENGINE OIL

ACTIVE
DEFENSE
TECHNOLOGY

MINERAL

MINERAL

MINERAL

MINERAL

10W




30



40



50



PERFORMANCE LEVELS

API CF/SG, CAT TO-2, CCMC G2/D2, MIL-L-2104D, MIL-L-46152D, MTU Type 2

PERFORMANCE LEVELS

API CF/SG, CAT TO-2, CCMC G2/D2, MIL-L-2104D, MIL-L-46152D, MTU Type 2

PERFORMANCE LEVELS

API CF/SG, CAT TO-2, CCMC G2/D2, MIL-L-2104D, MIL-L-46152D, MTU Type 2

PERFORMANCE LEVELS

API CF/SG, CAT TO-2, CCMC G2/D2, MIL-L-2104D, MIL-L-46152D, MTU Type 2

SUITABLE FOR: PETROL, DIESEL



ENDUROX HD 25W-60

HEAVY-DUTY ENGINE OIL

MINERAL

PERFORMANCE LEVELS

API CI-4/SL, ACEA E7, CAT ECF-1A, Cummins CES 20078, Cummins CES 20077, DDC 93K215, Deutz DQC-III, DTFR 15B110 (MB 228.3), Global DHD-1, JASO DH-1, Mack EO-N, MAN M 3275, MTU Type 2, Renault RLD-2, Volvo VDS-3

ACTIVE
DEFENSE
TECHNOLOGY

SUITABLE FOR: PETROL, DIESEL, LPG



ENDUROX LD 15W-40

HEAVY-DUTY ENGINE OIL

MINERAL

PERFORMANCE LEVELS

API CI-4/SL, ACEA E7, ACEA A3/B4, Allison C-4, CAT ECF-2, CAT ECF-1A, Cummins CES 20078, Cummins CES 20077, Detroit Diesel DDC 93K215, Deutz DQC III-10, DTFR 15B110 (MB 228.3), Global DHD-1, JASO DH-1, Mack EO-N, MACK EO-M Plus, MAN M 3275, MTU type 2, Renault RLD-2, Renault RLD, Voith Class A, Volvo VDS-3

ACTIVE
DEFENSE
TECHNOLOGY

SUITABLE FOR: PETROL, DIESEL, LPG



ENDUROX HD XXTRA 15W-40

HEAVY-DUTY ENGINE OIL

MINERAL

PERFORMANCE LEVELS

API CI-4

ACTIVE
DEFENSE
TECHNOLOGY

SUITABLE FOR: DIESEL

“This heavy-duty engine oil has it all. Performance that goes beyond CI-4 and worldwide OEM approvals”



ENDUROX LD

HEAVY-DUTY ENGINE OIL

ACTIVE
DEFENSE
TECHNOLOGY

MINERAL

SYNTHETIC BLEND

20W-50



10W-40



PERFORMANCE LEVELS

API CI-4/SL, ACEA E7, ACEA A3/B4, Allison C-4, CAT ECF-2, CAT ECF-1A, Cummins CES 20078, Cummins CES 20077, Detroit Diesel DDC 93K215, Deutz DQC III-10, DTFR 15B110 (MB 228.3), Global DHD-1, JASO DH-1, Mack EO-N, MACK EO-M Plus, MAN M 3275, MB 228.3, MTU type 2, Renault RLD-2, Renault RLD, Voith Class A, Volvo VDS-3

PERFORMANCE LEVELS

API CI-4/SL, ACEA E7, ACEA A3/B4, Allison C-4, CAT ECF-2, CAT ECF-1A, Cummins CES 20078, Cummins CES 20077, Detroit Diesel DDC 93K215, Deutz DQC III-10, DTFR 15B110 (MB 228.3), Global DHD-1, JASO DH-1, Mack EO-N, MAN M 3275, MAN M3271, MTU type 2, Renault RLD-2, Renault RLD, Voith Class A, Volvo VDS-3

SUITABLE FOR: PETROL, DIESEL, LPG



ENDUROX LD XXTRA 15W-40

HEAVY-DUTY ENGINE OIL

MINERAL

PERFORMANCE LEVELS

API CI-4/SL, ACEA E7, CAT ECF-2, CAT ECF-1A, Cummins CES 20078, Cummins CES 20077, Detroit Diesel DDC 93K215, Deutz DQC III-18, DTFR 15B110 (MB 228.3), Global DHD-1, JASO DH-1, Mack EO-N, MACK EO-M Plus, MAN M 3275-1, MTU type 2, Renault RLD-2, Volvo VDS-3, ZF 04C / 04P / 07C / 07D / 21K

ACTIVE
DEFENSE
TECHNOLOGY

SUITABLE FOR: PETROL, DIESEL, LPG



ENDUROX FLD

HEAVY-DUTY ENGINE OIL

ACTIVE
DEFENSE
TECHNOLOGY

SYNTHETIC BLEND

FULL SYNTHETIC

FULL SYNTHETIC

FULL SYNTHETIC

15W-40



PERFORMANCE LEVELS

API CK-4/SN, ACEA E11, ACEA E7, Allison TES439, CAT ECF-3, CAT ECF-2, CAT ECF-1A, Cummins CES 20086, Cummins CES 20081, Detroit Diesel DDC 93K222, Detroit Diesel DDC 93K218, Deutz DQC III-18 LA, Deutz DQC III-10 LA, DTFR 15C100 (MB 228.31), Global DHD-1, JASO DH-2, Mack EOS-4.5, Mack EO-O PP, MAN M 3775, MAN M 3575, MTU type 2.1, Renault RLD-3, Volvo VDS 4.5, Suitable also for ACEA E9

5W-30



PERFORMANCE LEVELS

API CK-4/SN, ACEA E11, ACEA E8, ACEA E7, CAT ECF-3, Cummins CES 20086, DAF PSQL 2.1 E LD, DAF Extended Drain, Detroit Diesel DFS 93K222, Deutz DQC IV-18 LA, DTFR 15C110 (MB 228.51), IVECO, JASO DH-2, Mack EOS-4.5, MAN M 3677, MAN M 3777, MAN M 3775, MTU type 3.1, Renault RLD-3, Scania LDF-4, Volvo VDS 4.5, Suitable also for ACEA E6 and E9

10W-30



PERFORMANCE LEVELS

API CK-4/SN, ACEA E11, ACEA E8, ACEA E7, CAT ECF-3, CAT ECF-2, CAT ECF-1A, Cummins CES 20086, Cummins CES 20081, DAF PSQL 2.1 E, DAF PSQL 2.1 E LD, Detroit Diesel DDC 93K222, Deutz DQC III-18 LA, Deutz DQC III-10 LA, DTFR 15C110 (MB 228.51), DTFR 10C100 (MB 228.31), Mack EOS-4.5, Mack EO-O PP, MAN M 3775, MAN M 3575, MTU type 2.1, Renault RLD-3, Volvo VDS 4.5, Suitable also for ACEA E6 and E9

10W-40



PERFORMANCE LEVELS

API CK-4/SN, ACEA E7, ACEA E8, ACEA E11, Allison TES439, CAT ECF-3, CAT ECF-2, CAT ECF-1A, Cummins CES 20086, Cummins CES 20081, DAF, Detroit Diesel DDC 93K222, Detroit Diesel DDC 93K218, Deutz DQC IV-18 LA, Deutz DQC III-10 LA, DTFR 15C110 (MB 228.51), DTFR 15C100 (MB 228.31), IVECO, JASO DH-2, Mack EOS-4.5, Mack EO-O PP, MAN M 3477, MAN M 3575, MTU Type 3.1, MTU Type 2.1, Renault RLD-3, Volvo VDS 4.5, Suitable also for ACEA E6 and E9

SUITABLE FOR: PETROL, DIESEL, LPG

ENDUROX XHD

15W-40

HEAVY-DUTY ENGINE OIL

SYNTHETIC BLEND

PERFORMANCE LEVELS

API CK-4

ACTIVE DEFENSE TECHNOLOGY

SUITABLE FOR: DIESEL

ENDUROX XLE

10W-40

HEAVY-DUTY ENGINE OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

API CK-4, API CI-4, ACEA E7, ACEA E8, ACEA E11, CAT ECF-3, Cummins CES 20086, DAF, Detroit Diesel DDC 93K222, Deutz DQC IV-10LA, Deutz DQC IV-18 LA, DTFR 15C110 (MB 228.51), IVECO, JASO DH-2, Mack EOS-4.5, Mack EO-N, MAN M 3775, MAN M 3477, MAN M 3271-1, MTU Type 3.1, Renault RLD-3, Renault RLD-2, Volvo VDS-4.5, Volvo VDS-3, Suitable also for ACEA E6 and E9

ACTIVE DEFENSE TECHNOLOGY

SUITABLE FOR: DIESEL

ENDUROX XLF

HEAVY-DUTY ENGINE OIL

ACTIVE
DEFENSE
TECHNOLOGY

FULL SYNTHETIC

FULL SYNTHETIC

5W-30



PERFORMANCE LEVELS

API CK-4/CJ-4, ACEA E4, ACEA E7, ACEA E8, ACEA E11, CAT ECF-3, Cummins CES 20086, Cummins CES 20081, DAF, Detroit Diesel DDC 93K222, Detroit Diesel DDC 93K218, Deutz DQC IV-18-LA, Deutz DQC IV-10-LA, DTFR 15C120 (MB 228.52), DTFR 15C110 (MB 228.51), DTFR 15C100 (MB 228.31), IVECO, JASO DH-2, Mack EOS-4.5, Mack EO-O PP, MAN M 3691, MAN M 3677, MAN M 3575, MAN M 3477, MAN M 3271-1, MTU Type 3.1, MTU Type 2.1, Renault RLD-4, Renault RLD-3, Scania LDF-4, Volvo VDS-4.5, Volvo VDS-4, Suitable also for ACEA E6 and E9

10W-40



PERFORMANCE LEVELS

API CK-4/CJ-4, ACEA E4, ACEA E7, ACEA E8, ACEA E11, Caterpillar ECF-3, Cummins CES 20086, Cummins CES 20081, DAF PSQL 2.1E-LD, Detroit Diesel DDC 93K222, Deutz DQC IV-10-LA, DTFR 15C120 (MB 228.52), DTFR 15C110 (MB 228.51), DTFR 15C100 (MB 228.31), JASO DH-2, Mack EOS-4.5, Mack EO-O PP, Mack EO-N PP, MAN M 3691, MAN M 3677, MAN M 3575, MAN M 3477, MAN M 3271-1, MTU Type 3.1, MTU Type 2.1, Renault RLD-4, Renault RLD-3, Renault RLD-2, Scania low Ash, Volvo VDS-4.5, Volvo VDS-4, Suitable also for ACEA E6 and E9

SUITABLE FOR: PETROL, DIESEL, LPG

ENDUROX XLD

HEAVY-DUTY ENGINE OIL

ACTIVE
DEFENSE
TECHNOLOGY

FULL SYNTHETIC

FULL SYNTHETIC

5W-30



PERFORMANCE LEVELS

ACEA E4, ACEA E7, Cummins 20077, DAF, Deutz DQC IV-10, DTFR 15B120 (MB 228.5), Global DHD-1, Mack EO-N, MAN M 3277, MTU Type 3, Renault RLD-2, Volvo VDS-3

10W-40



PERFORMANCE LEVELS

API CI-4, ACEA E4, ACEA E7, Cummins CES 20078, Cummins CES 20077, Deutz DQC IV-18, Deutz DQC III-10, DTFR 15B120 (MB 228.5), Mack EO-N, MAN M 3377, MAN M 3277, MTU Type 3, Renault RLD-2, Renault RXD, Volvo VDS-3

SUITABLE FOR: DIESEL, LPG

SUITABLE FOR: PETROL, DIESEL, LPG



**GREEN
SECURE
TECHNOLOGY**

Rymax GreenSecure Technology masters' advantages for multi-purpose usage, secure environmental sustainability, unlocking a new era of maintenance.

**ECO SECURE
TECHNOLOGY**



Rymax EcoSecure Technology optimizes environmental preservation with economic advantages, ensuring supreme protection with a sustainable edge.

AGRICULTURE OILS

Agricultural machines are developed to operate in harsh environmental conditions under high- and low temperatures and with extreme dirt, dust, and water contamination. Also, these expensive, sophisticated, high-powered machines operate at maximum load and endure great forces. This puts our lubricants to the extreme test, and we love that. These big challenges help us to always improve our assortment. Rymax offers products to service all applications, no matter what conditions it needs to face. Our range of products consists of both mineral and synthetic lubricants and greases developed to minimize downtime and maximize performance. A range of products that you can trust.



STYX STOU

TRACTOR ENGINE AND TRANSMISSION OIL

GREEN
SECURE
TECHNOLOGY

MINERAL

MINERAL

MINERAL

MINERAL

10W-30



PERFORMANCE LEVELS

Engine Applications: ACEA E3, API CG-4/CF-4/CE, API SF, MB 227.1, Transmission Applications: Allison C-4, API GL-4, Case MS 1206, Case MS 1207, Case MS 1209, Caterpillar TO-2, CNH MAT 3525/3526, Ford M2C159B/C, Ford M2C86B/C, Ford M2C134D, John Deere J20C/J20D, John Deere J27, MF M 1145/1144/1143, MF M 1139/ 1135, NH 030C/024C/410B/420A, NH 82009201, ZF TE ML 06B/06C/06R/07B, Hydraulic Applications: Danfoss, Eaton M-2950S, Eaton I-280-S

10W-40



PERFORMANCE LEVELS

Engine Applications: ACEA E3, API CG-4/CF-4/CE, API SF, MB 228.1, Transmission Applications: Allison C-4, API GL-4, Case MS 1206, Case MS 1207, Case MS 1209, Caterpillar TO-2, CNH MAT 3525/3505, Ford M2C159B/C, Ford M2C86B/C, Ford M2C134D, John Deere J20C/J20D, John Deere J27, MF M 1145/1144/1143, MF M 1139/ 1135, NH 030C/024C/410B/420A, NH 82009201, NH 82009202, NH 82009203, ZF TE ML 06B/06C/06R/07B, Hydraulic Applications: Danfoss, Eaton M-2950S, Eaton I-280-S

15W-30



PERFORMANCE LEVELS

Engine Applications: ACEA E3, API CG-4/CF-4/CE, API SF, MB 227.1, Transmission Applications: Allison C-4, API GL-4, Case MS 1206, Case MS 1209, Caterpillar TO-2, CNH MAT 3525/3505, Ford M2C159B/C, Ford M2C134D, John Deere J20C, John Deere J21A, John Deere J27, MF M 1145/1144/1143, MF M 1139/ 1135, NH 030C/024C, NH 410B/420A, NH 82009201, NH 82009202, NH 82009203, ZF TE ML 06B/06C/06R/07B/07D

15W-40



PERFORMANCE LEVELS

Engine Applications: ACEA E3, API CG-4/CF-4/CE, API SF, MB 227.1, Transmission Applications: Allison C-4, API GL-4, Case MS 1206, Case MS 1207, Case MS 1209, Caterpillar TO-2, CNH MAT 3525/3505, Ford M2C159B/C, Ford M2C86B/C, Ford M2C134D, John Deere J20C/J20D, John Deere J27, MF M 1145/1144/1143, MF M 1139/ 1135, NH 030C/024C/410B/420A, NH 82009201, ZF TE ML 06B/06C/06R/07B, Hydraulic Applications: Danfoss, Eaton M-2950S, Eaton I-280-S

SUITABLE FOR: PETROL, DIESEL, LPG (STYX STOU IS NOT APPLICABLE IN DIESEL ENGINES EQUIPPED WITH DIESEL PARTICLE FILTERS (DPF))

STYX STOU SS

10W-40

TRACTOR ENGINE AND TRANSMISSION OIL

SYNTHETIC BLEND

PERFORMANCE LEVELS

Engine Applications: ACEA E3, API CG-4/CF-4/CE, API SF, MB 228.1, Transmission Applications: Allison C-4, API GL-4, Case MS 1206, Case MS 1207, Case MS 1209, Caterpillar TO-2, CNH MAT 3525/3505, Ford M2C159B/C, Ford M2C86B/C, Ford M2C134D, John Deere J20C/J20D, John Deere J27, MF M 1145/1144/1143, MF M 1139/ 1135, NH 030C/024C/410B/420A, NH 82009201, NH 82009202, NH 82009203, ZF TE ML 06B/06C/06R/07B, Hydraulic Applications: Danfoss, Eaton M-2950S, Eaton I-280-S

GREEN
SECURE
TECHNOLOGY

SUITABLE FOR: PETROL, DIESEL, LPG

STYX UTTO

UNIVERSAL TRACTOR OIL

GREEN
SECURE
TECHNOLOGY

MINERAL

MINERAL

80W



PERFORMANCE LEVELS

API GL-4, Allison C-4, Caterpillar TO-2, Case MS 1206, Case MS 1207, Case MS 1209, Case MS 1210, CNH MAT 3525/3526, Denison HF (-0-2), DIN 51524-3, Eaton M2950S/I-280-S, Ford M2C134D, Ford M2C86B/M2C86A, JCB 4000/0500 - JCB 4000/2200, JCMAS HK P-041, John Deere J20C/J20A, Kubota: UDT fluid, MF M1135/M1143/M1145, NH410B/420A, Sauer Sundstrand/ Danfoss, Volvo WB101 (97303), Valtra G2-08/G2-B10, White: Q-1826, ZF TE-ML 03E/05F/06K/17E/21F

85W



PERFORMANCE LEVELS

API GL-4, Allison C-4, Case MS 1204, Case MS 1206, Case MS 1207, Case MS 1209, Caterpillar TO-2, CNH MAT 3540, Ford M2C86A/B, John Deere J20C, MF M1135/1143/1145, Volvo WB101 (97303), Eaton M2950S, Eaton I-280-S, Sauer Danfoss

SUITABLE FOR: PETROL, DIESEL, LPG (STYX UTTO IS NOT AN ENGINE OIL)

STYX UTTO FS

UNIVERSAL TRACTOR OIL

GREEN
SECURE
TECHNOLOGY

FULL SYNTHETIC

FULL SYNTHETIC

75W



PERFORMANCE LEVELS

Allison C-4, API GL-4, Case MS 1210, Case MS 1209, Case MS 1206, Caterpillar TO-2, CNH MAT 3525, Ford WSS-M2C134-D, John Deere J20A, John Deere J20C, MF M1145, MF M1143, MF M1141, MF M1135, Volvo WB 101, Volvo WB 102, ZF TE-ML 03E/05F/06K

80W



PERFORMANCE LEVELS

API GL-4, Allison C-4, AGCO CVT ML200, Caterpillar TO-2, Case MS 1204, Case MS 1206, Case MS 1207, Case MS 1209, Claas CVT MAT 3540 (CVT), CNH MAT 3525/3526, Denison HF(-0-2), DIN 51524-3, Eaton I-280-S/M2950S, Fendt Vario, Ford M2C134D, Ford M2C86A/B, I.H.C: B-5 & B-6 Hydran, JCMAS HK P-041, John Deere J20C, John Deere J20D, Kubota: UDT fluid, MF M1145, New Holland 82948718, NH410B, NH420A, Oliver: Type 55/Type 5J, Sauer Sundstrand/Danfoss, Valtra G2-08 (XT-60), Valtra G2-10 (XT-60+), Volvo WB101 (97303), White: Q-1705/1722/1766B, White: Q-1802/1826, ZF TE ML-06B/D/E/F/H/M

SUITABLE FOR: PETROL, DIESEL, LPG (STYX UTTO IS NOT AN ENGINE OIL)





CRIUS

CHAINSAW OIL

GREEN
SECURE
TECHNOLOGY

MINERAL

MINERAL

100

DESCRIPTION



220

DESCRIPTION



Rymax Crius Chainsaw oil is especially developed to lubricate engine driven, as well as for electrically driven chainsaws. Rymax Crius settles deeply between links and bushes, sticks without dripping or flinging off and prevents dirt, sand and dust build up. Also, the chain is well protected from corrosion.

CRIUS ECO

CHAINSAW OIL

MINERAL

DESCRIPTION

The same high quality chainsaw lubricant, but this time fully biodegradable. When working in certain outdoor areas, this is an obligatory feature.



GREEN
SECURE
TECHNOLOGY



HESPERIDE

30

LAWN MOWER OIL

MINERAL

PERFORMANCE LEVELS

API SG/CF



GREEN
SECURE
TECHNOLOGY



**TRIPLE
PROTECTION
TECHNOLOGY**

Rymax Triple Protection Technology provides excellent wear and rust protection, high viscosity index and outstanding oxidative technology ensuring optimal protection for heavily used gear-boxes.

**PURE SHIELD
TECHNOLOGY**

Rymax Pure Shield Technology ensures optimal protection for Automatic Transmissions against wear and rust, providing a high viscosity index and outstanding oxidative stability.

GEAR OILS AND ATF

Rymax has a complete range of fluids for automatic and manual gearboxes suitable for industrial, automotive, heavy duty trucks and off-road applications. All our products provide excellent protection against wear and promote longer machine life and smoother gear changes, meeting the highest quality standards. Our manual gear oils are designed to meet international requirements like API GL-4 & GL-5. Rymax Automatic Transmission Fluids (ATF) are available in mineral and full synthetic mixtures with additive packages from the world's leading chemical companies. They meet the demands of leading automotive and equipment manufacturers like GM (Dexron) and Ford (Mercon), MAN and ZF. Next, we also provide a range of specialties suitable for Double Clutch Transmissions (DTC), Continuously Variable Transmissions (CVT) and Total Drive Line (TDL) systems or with special specifications for multiple car brands.

GEVITRO GL-4

GEAR OIL

TRIPLE
PROTECTION
TECHNOLOGY

MINERAL	MINERAL
 80W-90 PERFORMANCE LEVELS API GL-4, MIL-L-2105	 85W-140 PERFORMANCE LEVELS API GL-4, MIL-L-2105

GEVITRO GL-5 LS

GEAR OIL

TRIPLE
PROTECTION
TECHNOLOGY

MINERAL	MINERAL
 80W-90 PERFORMANCE LEVELS API GL-5, Arvin Meritor, MAN 342 Type M1/M2, MIL-L-2105D, Volvo 1273.10, ZF TE-ML 05C, ZF TE-ML 07A, ZF TE-ML 08, ZF TE-ML 12E, ZF TE-ML 16E, ZF TE-ML 17B, ZF TE-ML 19B, ZF TE-ML 21C	 85W-140 PERFORMANCE LEVELS API GL-5, MAN 342 Type M1/M2, DTFR 12B100 (MB 235.0), MIL-L-2105D, ZF TE-ML 05C, ZF TE-ML 12C, ZF TE-ML 16E

GEVITRO GL-5

GEAR OIL

TRIPLE
PROTECTION
TECHNOLOGY

MINERAL	MINERAL
 80W-90 PERFORMANCE LEVELS API GL-5, MAN 342 M1/M2, Mack GO-G, DTFR 12B100 (MB 235.0), MIL-L-2105D, Volvo 1273.10, ZF TE-ML 05A/7A/16B/16C/16D/17B/19B/21A	 85W-140 PERFORMANCE LEVELS API GL-5, MIL-L-2105D, ZF TE-ML 05A, ZF TE-ML 07A, ZF TE-ML 12E, ZF TE-ML 16B, ZF TE-ML 16C, ZF TE-ML 16D

GEVITRO GL-5 HD

85W-90

GEAR OIL

MINERAL

PERFORMANCE LEVELS

API GL-5, MAN 342 Type M1, MAN 342 Type M2, DTFR 12B130 (MB 235.6), MIL-L-2105D, Arvin Meritor 0-76-D, SAE J2360, Scania ST0 1.0, Volvo 97310, Volvo 97316, ZF TE-ML 05A, ZF TE-ML 07A, ZF TE-ML 08, ZF TE-ML 12M, ZF TE-ML 16B, ZF TE-ML 16C, ZF TE-ML 16D, ZF TE-ML 17B, ZF TE-ML 19B, ZF TE-ML 21A



TRIPLE
PROTECTION
TECHNOLOGY

GEVITRO GL-4 FS

75W-80

GEAR OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

API GL-4, BMW MTF LT-2, BMW MTF LT-3, BMW MTF LT-4, Ford WSD-M2C200-C, Ford WSS-M2C200-D2, GM 1940182, GM 1940764, GM 1940768, GM 1940004, GM 19259104, Honda MTF II, Honda MTF III, MTF94 Honda MTF, MB 235.10, Nissan MT-XZ, Nissan MT-XZ TL, PSA B71 2330, Renault (NFI/NFP/TRJ/TRT/TRZ), Volvo 97308, Volvo 97309, VW G50 (VW 501 50), VW G 052 171, VW G 052 178, VW G 052 512, VW G 052 726, VW G 052 527, VW G 070 726, VW G 060 726



TRIPLE
PROTECTION
TECHNOLOGY

GEVITRO GL-5 FS LS

GEAR OIL

TRIPLE
PROTECTION
TECHNOLOGY

FULL SYNTHETIC	FULL SYNTHETIC
 75W-90 PERFORMANCE LEVELS API GL-5 (LS), SAE J2360, Ford M2C192-A, Mack GO-J, MIL-PRF-2105-E, Scania ST0 1:0, Scania ST0 1:1G, ZF TE-ML 05D, ZF TE-ML 21D	 75W-140 PERFORMANCE LEVELS API GL-5 (LS), BMW LS Axle, BMW MSP/A, GM/Opel GM 12346140, Ford WSS-M2C192-A, MB 235.61, Scania ST0 1:0

GEVITRO GL-4 TXZ

75W-80

GEAR OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

API GL-4, DAF, MAN 341 Type Z4, MAN 341 Type E3, MB 235.4, Eaton Europe (300,000 km or 3 years), IVECO, Renault B0032/2, Volvo 97305, Volvo 97307, ZF TE-ML 01L, ZF TE-ML 02L, ZF TE-ML 08, ZF TE-ML 13, ZF TE-ML 16K



TRIPLE
PROTECTION
TECHNOLOGY

“Our high quality, hypoid type gear oil, specifically developed for limited slip differentials fitted to modern, high performance passenger cars, heavy duty applications and off-road leisure vehicles.”





GEVITRO TDL

TOTAL DRIVE LINE GEAR OIL

TRIPLE
PROTECTION
TECHNOLOGY

MINERAL

80W-90



PERFORMANCE LEVELS

API GL-4, API GL-5, API MT-1, Arvin Meritor 076-N, DAF, IVECO, Mack GO-J, MAN 341 Type E2, MAN 241 Type Z2, MAN 342 Type M2, DTFR 12B100 (MB 235.0), MIL-PRF-2105E, Renault B0032/2, SAE J2360, Scania STO 1:0, Volvo 97310, ZF TE-ML 02B, ZF TE-ML 05A, ZF TE-ML 07A, ZF TE-ML 08, ZF TE-ML 12E, ZF TE-ML 12L, ZF TE-ML 12M, ZF TE-ML 16B, ZF TE-ML 16C, ZF TE-ML 16D, ZF TE-ML 17B, ZF TE-ML 19B, ZF TE-ML 21A

SYNTHETIC BLEND

75W-90



PERFORMANCE LEVELS

API GL-4, API GL-5, API MT-1, Arvin Meritor 076-N, DAF, IVECO, Mack GO-J, MAN M 3343 Type M, MAN 342 Type M2, MAN 341 Type Z2, DTFR 12B100 (MB 235.0), DTFR 13B100 (MB 235.1), MIL-L-2105 B, MIL-L-2105 C, MIL-L-2105 D, MIL-PRF-2105E, SAE J2360, Scania STO 1:0, Volvo 97310, ZF TE-ML 02B, ZF TE-ML 05A, ZF TE-ML 07A, ZF TE-ML 08, ZF TE-ML 12E, ZF TE-ML 16B, ZF TE-ML 17B, ZF TE-ML 19B, ZF TE-ML 21A

FULL SYNTHETIC

75W-90



PERFORMANCE LEVELS

API GL-4, API GL-5, API MT-1, Arvin Meritor 076-N, DAF, IVECO, Mack GO-J, MAN 342 Type M3, MAN 341 Type E2, MAN 341 Type Z2, DTFR 12B140 (MB 235.8), MIL-PRF-2105E, Renault B0032/2, SAE J2360, Scania STO 1:0, Volvo 97312, ZF TE-ML 02B, ZF TE-ML 05B, ZF TE-ML 07A, ZF TE-ML 12B, ZF TE-ML 12L, ZF TE-ML 12N, ZF TE-ML 16F, ZF TE-ML 17B, ZF TE-ML 19C, ZF TE-ML 21B

THIS LUBRICANT IS NOT SUITABLE FOR USE IN LIMITED SLIP SYSTEMS.

GEVITRO TO-4

TRANSMISSION FLUID

TRIPLE
PROTECTION
TECHNOLOGY

MINERAL

10W



PERFORMANCE LEVELS

Allison C-4, API CF/CF-2, CAT TO-4, DANA Powershift transmissions, Komatsu KES 07.868.1, Komatsu Dresser, Vickers 35VQ25, ZF TE-ML 03C

MINERAL

30



PERFORMANCE LEVELS

Allison C-4, API CF/CF-2, CAT TO-4, DANA Powershift transmissions, Komatsu KES 07.868.1, Komatsu Dresser, ZF TE-ML 03C, ZF TE-ML 07F

MINERAL

50



PERFORMANCE LEVELS

Allison C-4, API CF/CF-2, CAT TO-4, Komatsu KES 07.868.1, Tremac/ TTC





ATEXIO II
AUTOMATIC TRANSMISSION FLUID
MINERAL

PERFORMANCE LEVELS

Allison C-4, Dexron II D, CAT TO-2, Ford ESP-M2C166-H, Ford M2C138-CJ, MAN 339 type V1, MAN 339 type Z1, DTFR 13C170 (MB 236.9), Voith H55.6335.xx, ZF TE-ML 03D, ZF TE-ML 04D, ZF TE-ML 14A, ZF TE-ML 17C

PURE SHIELD TECHNOLOGY



ATEXIO III
AUTOMATIC TRANSMISSION FLUID
MINERAL

PERFORMANCE LEVELS

Allison C-4, Dexron III F, Dexron III G, Dexron III H, CAT TO-2, Ford Mercon, MAN 339 Z1/Z2, MAN 339 V1/V2, MB 236.10, DTFR 13C170 (MB 236.9), DTFR 13C140 (MB 236.7), MB 236.5, DTFR 13C100 (MB 236.1), Voith 55.6335, Volvo 97341, ZF 02F/03D/04D, ZF 11A/11B/14B/16L

PURE SHIELD TECHNOLOGY



ATEXIO ULV
AUTOMATIC TRANSMISSION FLUID
FULL SYNTHETIC

PERFORMANCE LEVELS

Aisin Warner AW-2, BMW 83 22 2 413 477 (ATF 7), Ford Mercon ULV, Ford XT-12-ULV, GM Dexron ULV, Mazda ATF A7, MB 236.15/MB 236.16/MB 236.17, Nissan Matic P, PSA 16 350 560 80, Volvo 31 492 172/31 492 173, VW/Audi G 053 001, VW/Audi G 060 540

PURE SHIELD TECHNOLOGY



ATEXIO III FS
AUTOMATIC TRANSMISSION FLUID
FULL SYNTHETIC

PERFORMANCE LEVELS

Allison C-4, Allison TES 295, Allison TES 389, ATF LT 71141, Dexron III H, Dexron III, Dexron IID, CAT TO-2, ETL 7045E, Ford Mercon, Ford Mercon V, Ford WSS-M2C138-CJ, Ford WSS-M2C166-H, Ford WSS-M2C202-B, Honda Z1 (except CVT), Hyundai/Mitsubishi SP, SP-II, SP-III, DiaQueen J2, Idemitsu K17, Isuzu besco ATF-II, ATF-III, JASO M 315 1A, JATCO 3100 PL 085, JWS 3309/3314/3317, MAN 339 Type V1, MAN 339 Type Z1/Z2, Mazda M-III, M-5, DTFR 13C100 (MB 236.1), DTFR 13C110 (MB 236.11), Mopar ATF +3 (MS 7176E), Mopar ATF +4 (MS-9602), Nissan Matic D, J, K, Subaru KO410Y0700, Toyota/Lexus T, T-II, T-III, T-IV, Voith G607/G1363, Volvo 1161540, VW G 052 162, VW G 052 990, VW G 055 025, Volvo 97341, ZF TE ML 03D/04D/09X/11B/14B/17C

PURE SHIELD TECHNOLOGY



ATEXIO VI
AUTOMATIC TRANSMISSION FLUID
FULL SYNTHETIC

PERFORMANCE LEVELS

BMW 83 22 0 397 114, Dexron VI, Dexron III, MB 236.41, Ford Mercon LV, Ford Mercon SP, Toyota Type WS (JWS 3324)

PURE SHIELD TECHNOLOGY



ATEXIO VI MV
AUTOMATIC TRANSMISSION FLUID
FULL SYNTHETIC

PERFORMANCE LEVELS

Aisin Warner AW-1, Dexron VI, Bentley Oil PY112995PA, Chrysler 68157995AA, DSI H 6-SPEED TRANSMISSION (AT 3292), Fiat 9.55550-AV2, Fiat 9.55550-AV5, Ford WSS-M2C924-A, Honda ATF DW-1, Hyundai NWS-9638, Hyundai SP IV, SPH-IV, Jaguar 02JDE26444, Jaguar Fluid 8432, JWS 3324 (ATF WS), Land Rover LR023288, Land Rover TYK 500050, M-1375.4, Maserati 231603, Mazda FZ, MB 236.12, MB 236.41, Ford Mercon LV, Ford Mercon SP, Mitsubishi SP-IV & ATF J-2, Nissan Matic S, SAAB 93 165 147, Toyota Type WS (JWS 3324), VW G 055 005, VW G 055 162, VW G 055 540, VW G 060 162, ZF Lifeguardfluid8

PURE SHIELD TECHNOLOGY



PURE
SHIELD
TECHNOLOGY

ATEXIO 134

AUTOMATIC TRANSMISSION FLUID

FULL SYNTHETIC

PERFORMANCE LEVELS

MB 236.14



PURE
SHIELD
TECHNOLOGY


ATEXIO 135

AUTOMATIC TRANSMISSION FLUID

FULL SYNTHETIC

PERFORMANCE LEVELS

MB 236.15



PURE
SHIELD
TECHNOLOGY

ATEXIO EV

AUTOMATIC TRANSMISSION FLUID

FULL SYNTHETIC

PERFORMANCE LEVELS

BMW 83222413512, BMW 83222295 532, BOT 448, BOT 350M3, Ford M2C949-A, GM 955999825, MB 236.24, PSA 1618078480, SL2808, Tesla ATF-9, EDF-2, KAF-1, Volvo 31280771, VW G 060190, BEV & PHEV: ATF SP III, ATF WS, Dexron VI, Honda ATF DW-1, Mazda FZ, MB 235.73, Nissan Matic S, Renault NFP, Renault TRJ, VW G 052 527

“With proven quality, we expand into EVs with a high-quality fluid specially formulated for electric and hybrid vehicles, covering leading OEMs like Tesla & BMW.”



PURE
SHIELD
TECHNOLOGY

ATEXIO +4

AUTOMATIC TRANSMISSION FLUID

FULL SYNTHETIC

PERFORMANCE LEVELS

Mopar ATF +4 (MS-9602), Mopar ATF +3 (MS 7176E), Mopar ATF +2 (MS 7176D), Mopar ATF+ (MS 7176), MS-9602





PURE
SHIELD
TECHNOLOGY

ATEXIO I37

AUTOMATIC TRANSMISSION FLUID

FULL SYNTHETIC

PERFORMANCE LEVELS

Aisin Warner AW-1, BMW 83 220 142 516, DSIH 6p805, Honda ATF DW-1, Hyundai NWS-9638, Hyundai SP IV, SPH-IV, JASO 1-A-LV, MB 236.12, MB 236.14, MB 236.15, MB 236.17, MB 236.41, Mitsubishi ATF-PA, Mitsubishi ATF-J3, Mitsubishi SP-IV, Nissan Matic S, Nissan Matic W, SAAB 93 165 147, Toyota Type WS (JWS 3324), VW G 055 162, VW G 055 190, VW G 055 540, ZF Lifeguardfluid 6



PURE
SHIELD
TECHNOLOGY

ATEXIO 8HP

AUTOMATIC TRANSMISSION FLUID

FULL SYNTHETIC

PERFORMANCE LEVELS

BMW 83 22 2 152 426/ 83 22 2 305 397/ 83 22 2 289 720, VW G 060 162/ G 055 540, ATF SP-IV-RR. Suitable also for: Acura ATF-Z1 Aisin Warner JWS 3309, JWS 3314, JWS 3324, AW-1, AW-2 Allison C-3, C-4, TES-389 Audi 5 HP LT71141 (ZF 5 HP 18FL/19FL/24A) Audi/VW G 052 025 A2, G 052 055, G 052 990, G 052 162 A1/A2, G 053 025 A2 Audi/VW G 055 005 A/A1/A2/A6, G 055 025 A2, G 055 162 A2/A6, G 055 540 A2, G 060 162 Bentley PY112995PA BMW LA2634, LT71141, ZF 5HP18FL/5HP24/5HP30, 7045E, ETL 8072B, ATF 2/3+/6/7 BMW 83 22 2 152 426, 83 22 2 305 397, 83 22 2 289 720 Bosch TE-ML 09 CAT T0-2 Chrysler ATF+/+2/+3, MS7176E Chrysler/Dodge MOPAR AS 68 RC, AS 69 RC Chrysler/Dodge/Jeep 05127382AA, 68043742AA, 68157995AA, 68157995AB, 68049954AA Chrysler/Dodge/Jeep 68218925AA, 68218925AB Chrysler/Dodge/Jeep MOPAR SP IV, 68171866AA/68171869AA Daewoo LT 71141 Daihatsu AMMIX ATF D-II, AMMIX ATF D-III SP FIAT T-IV type, 9.55550-AV5, 9.55550-AV6 Ford MERCON®, MERCON® LV, ATF C-ML5, FNR5 Ford 138CJ, 166H, 922A1, 924A Ford/Lincoln/Mercury XT-6-QSP or -DSP, XT-2-QDX, XT-2-QSM, XL-12 Fuso ATF-II, ATF-SPIII, ATF-A4 GM TASA, DEXRON®-II/IIID/IIIE/IIIG/IIH/VI, AutoTrak II GM 1940700, 1940767, 21005966, 22717466, 88900925, 9986195, 93160393 GM/GMC/Opel/Saturn AW1, Saturn VI, 88863400, 88863401 Hino Blue ribbon ATF Honda ATF-Z1, ATF Ultra II, DW-1, Type 3.0, Type 3.1 Hyundai/Kia SP-IV, SP-IV M, SPH-IV, SP-IV-RR, SP-III, Dex-II/ SP-II, NWS 9638, 040000C90SG ISUZU ATF WSI ISUZU BESCO ATF-II, ATF-III, ATF SP, SCS Fluid, 08200-9001 Jaguar ATF 3403 M115, ATF 3403-M115, ATF LT71141, ZF 5HP24, JLM20238, JLM 20292, K17, 8432 Jaguar 02JDE26444 JASO M315-2013 1A, 1A-LV, 2A JEEP ATF+3 KIA ATF SP-II, SP-III, SP-IV, SP-IVM Land Rover TYK500050, LR0022460, LR023288 Lexus JWS 3309 M 1375.4 MAN 339A Maserati 231603 Mazda ATF D-II, M-III, M-V, FZ, A7, F-1, S-1, N-1, 3317 MB ZF 4HP20 MB 236.3, 236.5, 236.6, 236.7, 236.8, 236.9, 236.11, 236.12, 236.14, 236.15, 236.17 MINI COOPER T-IV Mitsubishi Diaqueen SK, SP-II, SP-III, SP-IV, AW, J2, J3, ATF-MA1, ATF PA Nissan Matic Fluid C, D, J, K, P, S, W Opel/ GM 19 40 700, 19 40 767, 21005966, 22 17466, 88900925, 9986195 Porsche ZF 5HP19FL, ZF 5HP20, LT71141, ATF 3403-M115, T-IV, 000 043 205 09, 000 043 205 28 Porsche 999 917 547 00, Z 000169756 PSA B71 2340, Z 000169756 Renault DPO/AL4, Matic D2 Renault Samsung SATF-D Saab T-IV, 93 165 147, 93 160 393 Saab Power Steering Fluid 2634, 45 30 09 800, 93160548 Ssang yong DSIH 5M-66 Subaru ATF, ATF 5AT, ATF HP, K0140Y0700 Suzuki AT OIL 5D06, ATF 2326, ATF 2384K, ATF 3314, ATF 3317 Toyota ATF D-II, ATF D-III, ATF T-III, ATF T-IV, ATF WS Vickers M2950-S, I-286-S Voith 55.6335.xx (6607) Volvo 97325, 97335, CE 97340, CE 97341, CE 97342, PN 1161521, PN 1161540/1161640, PN 31256774/31256675 Volvo PN 161621 ZF 3, 4, 6, 8 & 9 speed transmission ZF TE-ML 05L, 09, 11A, 11B, 21L



PURE
SHIELD
TECHNOLOGY

ATEXIO CVT

AUTOMATIC TRANSMISSION FLUID

FULL SYNTHETIC

PERFORMANCE LEVELS

BMW 83 22 0 136 376, BMW 83 22 0 429 154, Chrysler/Jeep CVTF+4, DAIHATSU AMIX CVTF-DC, Daihatsu CVTF DFE, Daihatsu/Suzuki TC, GM DEX-CVT, Dia Queen CVTF J1, Dia Queen CVTF J4, Elf Matic CVT, EZL-799/799A, Ford CVT23, Ford WSS-M2C928-A, Honda HCF-2, Honda HMMF, MB 236.20, Nissan NS-3, Nissan NS-2, Nissan NS-1, Subaru Lineartronic CVTF, Suzuki CVT Green 1, Suzuki CVTF Green 2, Suzuki NS-2, Toyota CVT FE, Toyota CVT TC, VW G 052 180, VW G 052 516



PURE
SHIELD
TECHNOLOGY

ATEXIO DCT

AUTOMATIC TRANSMISSION FLUID

FULL SYNTHETIC

PERFORMANCE LEVELS

BMW Drivelogic 7-speed (Getrag)/DCTF-1, BMW DCTF-1+, BMW DCTF-2, BMW 6-speed DCT, BMW 83 22 2 167 666/ MTF LT-5, Borg Warner, Bugatti Veyron, BYD DCTs, Q/ BYD-A1909.0058-2013, Castrol BOT 341, Castrol BOT 351 C4, Castrol BOT 450, Changan DCTF, Chrysler 68044345 EA & GA, Chrysler Powershift 6-speed (Getrag), Eaton PS-278, Ferrari 7-speed (Getrag)/TF DCT-3, Ford/Nissan Powershift 6-speed (GFT) / Ford WSS-M2C936A part 1490763/1490761, Ford WSS-M2C200-D2/ XT-11-QDC, Ford WSS-M2C218-A1, Ford F-DC, part KU7J M2C218AA, Geely 7 speed, Great Wall DCT, MB 236.21, MB 236.24, MB 236.25, Mitsubishi TC-SST 6-speed (GFT) / MZ320065 DiaQueen SSTF-1, Peugeot/ Citroen DCS 6-speed (GFT)/9734.S2, Porsche 999.917.080.01, 7-speed PDK, Renault EDC 6-speed (Getrag), Renault EDC-7, Renault DC4 (BOT 450), Renault DW5, Renault DW6, Volvo Powershift 6-speed (GFT)/1161838/1161839, VW G 052 182, VW G 052 536, VW G 055 536, VW Audi G 052 512, VW (Audi, Seat, Skoda) 6-speed, VW/Audi TL 52529 (spec) / G 052 529 A2 or A6 (fluid)/ DSG7 = S-Tronic 7/ 7 speed VW (Audi, Seat, Skoda), VW/Audi G 055 529, VW/Audi TL 521 82 (spec) / G 052 182 A2 or A6 (fluid), e-Mobility Claims : VW Golf GTE DQ400E, ZF/Porsche Oil #999.917.080.00



EXTREME PERFORMANCE TECHNOLOGY

Rymax Extreme Performance Technology elevates the performance of different components to the next level. Thanks to the finest base oils and additives, this technology guarantees unparalleled results.



RACING OILS

The Rymax Lubricants R products are for all racing applications, on- and off-road. These oils provide an extremely rapid and stable lubricant film at cold start and maintains its strong lubricating film even when the components are stressed to the limits. Our R products are extensively tested by professionals in the field through our many partnerships in for example Dakar, Gatebil, the Morocco Desert Challenge, the Dutch Superbike Championship and the MX Championship. In these extreme circumstances, we have developed our products to generate maximum horsepower and ultimate protection of the racing components like engine, gearbox and brakes. The Extreme Performance Technologies developed together with our partners eventually finds its way to our products used in your daily driver or machine.

RYMAX[®]
LUBRICANTS





APOLLO R

10W-60

RACING ENGINE OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

API SN/CF, ACEA A3/B4

EXTREME
PERFORMANCE
TECHNOLOGY



SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID

“Whether you’re driving a turbocharged petrol or diesel-fueled vehicle, our Apollo R engine oils are the perfect fit for passenger cars that require ultimate performance.”



APOLLO R

5W-50

RACING ENGINE OIL

FULL SYNTHETIC


PERFORMANCE LEVELS

API SN/CF, ACEA A3/B4

TECHNOLOGY



SUITABLE FOR: PETROL, DIESEL, LPG, HYBRID

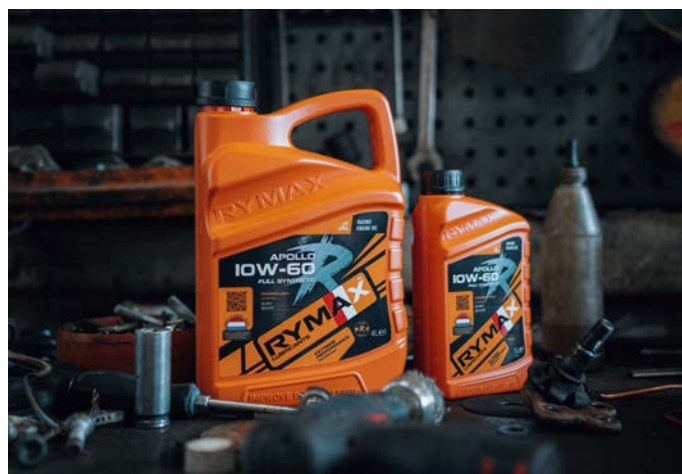

MOTRAX R

RACING ENGINE OIL

FULL SYNTHETIC

5W-50

PERFORMANCE LEVELS

API SN, JASO MA/MA2



FULL SYNTHETIC

10W-60

PERFORMANCE LEVELS

API SN, JASO MA/MA2



SUITABLE FOR: PETROL

EXTREME
PERFORMANCE
TECHNOLOGY



EXTREME
PERFORMANCE
TECHNOLOGY

MOTRAX 2T R

RACING ENGINE OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

GEVITRO LS R

75W-140

RACING GEAR OIL

FULL SYNTHETIC

PERFORMANCE LEVELS

API GL4/ GL-5(LS), API MT-1, Arvin Meritor O-76-N, SAE J2360, DAF, IVECO, MAN 342 E3, MAN 341 Z2, DTFR 12B140 (MB 235.8), MIL-PRF-2105E, Scania STO 1:0, Scania STO 2:0A, Scania STO 1:1G, MACK GO-J, Volvo 97312, ZF TE-ML 02B, ZF TE-ML 05C, ZF TE-ML 07A, ZF TE-ML 08, ZF TE-ML 12C, ZF TE-ML 12L, ZF TE-ML 12N, ZF TE-ML 16F, ZF TE-ML 17B, ZF TE-ML 19C, ZF TE-ML 21C

EXTREME
PERFORMANCE
TECHNOLOGY

GEVITRO R

RACING GEAR OIL

FULL SYNTHETIC

75W-90

PERFORMANCE LEVELS

API GL-4, API GL-5, API MT-1, Arvin Meritor O-76-N, DAF, IVECO, Mack GO-J, MAN 341 Type E3, MAN 341 Type Z2, MAN 342 Type S1, DTFR 12B140 (MB 235.8), DTFR 13B110 (MB 235.11), MIL-PRF-2105E, SAE J2360, Scania STO 1:1G, Scania STO 1:0, Scania STO 2:0A FS, Volvo 97312, ZF TE-ML 02B/05A/07A/12L/12N/16F/17B/19C/21A

FULL SYNTHETIC

75W-140

PERFORMANCE LEVELS

API GL-4, API GL-5, API MT-1, Arvin Meritor O-76-N, DAF, IVECO, MAN M3343S, MAN 341 Type E3, MAN 341 Type Z2, MAN 342 Type M3, DTFR 12B140 (MB 235.8), MIL-PRF-2105E, Renault B0032/2 annex 3, SAE J2360, Scania STO 1:0, ZF TE-ML 02B/05B/07A/12B/12L/12N/16F/17B/19C/21B

EXTREME
PERFORMANCE
TECHNOLOGY

**COOL GUARD
TECHNOLOGY**

Rymax CoolGuard Technology ensures excellent antifreeze and coolant performance based on different technologies for every application.

**POWER FORCE
TECHNOLOGY**

Rymax PowerForce Technology unlocks the best performance for hydraulic systems, power steering and levelling systems to optimize performance.

**SAFE SHIELD
TECHNOLOGY**

Rymax SafeShield Technology ensures optimal brake fluid quality and performance in the most demanding circumstances to keep you safe.

FLUIDS AND COOLANTS

The Coolants range from Rymax Lubricants features high-performance antifreeze coolants renowned for their exceptional heat transfer characteristics, ensuring prolonged engine protection. Formulated based on OEM performance standards, these fluids provide assurance against boiling and freezing. Rigorously tested on fleets encompassing both heavy-duty and automotive vehicles, as well as validated through our extreme sports collaborations, they are compatible with all combustion engines. Leveraging advanced SOAT (Silicate Organic Acid Technology), these coolants consistently deliver outstanding results in diverse conditions.

As for Rymax Lubricants Brake fluids, they boast synthetic technology for extended life and are recommended for all hydraulic-actuated brake systems. Tailored for optimal performance in Anti-locking Brake Systems (ABS), they excel in ensuring secure braking in any situation. Our fluid selection extends to a Multi Vehicle full synthetic hydraulic power steering fluid, suitable not only for leveling systems but also for highly stressed centralized hydraulic systems and shock absorbers. The comprehensive range is designed to cater to various automotive needs with utmost efficiency.



DIONE BS

ANTIFREEZE & ENGINE COOLANT

COOL
GUARD
TECHNOLOGY

CONCENTRATED



READY TO USE



50/50



READY TO USE



30/70



PERFORMANCE LEVELS

AFNOR NF R15-601, ASTM D 3306, ASTM D 4985, BS 6580, SAE J 1034

PERFORMANCE LEVELS

AFNOR NF R15-601, ASTM D 3306, ASTM D 4985, BS 6580, SAE J 1034

PERFORMANCE LEVELS

AFNOR NF R15-601, ASTM D 3306, ASTM D 4985, BS 6580, SAE J 1034

DIONE G-12

ANTIFREEZE & ENGINE COOLANT

COOL
GUARD
TECHNOLOGY

CONCENTRATED



READY TO USE



50/50



PERFORMANCE LEVELS

AFNOR NF R15-601, ASTM D 3306, ASTM D 4985, SAE J 1034, BS 6580, FFV Heft R443, CUNA NC 956-16, UNE 26361-88, JIS K2234, NATO S 759, Chrysler MS 9176, Cummins 85T8-2 & 90T8-4, DAF 74002, Ford ESE M97B49-A/WSS-M97B44-D/ESD M97 B49-A, GM 1899 M, John Deere H 24 B1 & C1, Leyland Trucks, LTS22AF10, Mack 014GS 17004, DTFR 29C110 (MB 325.3), MAN 248/324 (SNF) & B&W D36 5600, OPEL GM QL130100, Renault 41-01-001, SEAT TL 774 D & F, Skoda TL 774 D & F, US 6277M, Volvo, Volkswagen VAG TL 774 D & F

PERFORMANCE LEVELS

AFNOR NF R15-601, ASTM D 3306, ASTM D 4985, SAE J 1034, BS 6580, FFV Heft R443, CUNA NC 956-16, UNE 26361-88, JIS K2234, NATO S 759, Chrysler MS 9176, Cummins 85T8-2 & 90T8-4, DAF 74002, Ford ESE M97B49-A/WSS-M97B44-D/ESD M97 B49-A, GM 1899 M, John Deere H 24 B1 & C1, Leyland Trucks, LTS22AF10, Mack 014GS 17004, DTFR 29C110 (MB 325.3), MAN 248/324 (SNF) & B&W D36 5600, OPEL GM QL130100, Renault 41-01-001, SEAT TL 774 D & F, Skoda TL 774 D & F, US 6277M, Volvo, Volkswagen VAG TL 774 D & F

DIONE G-12

ANTIFREEZE & ENGINE COOLANT

COOL
GUARD
TECHNOLOGY

CONCENTRATED



READY TO USE



50/50



PERFORMANCE LEVELS

AFNOR NF R15-601, ASTM D 3306, ASTM D 4985, SAE J 1034, BS 6580, FFV Heft R443, CUNA NC 956-16, UNE 26361-88, JIS K2234, NATO S 759 KSM 2142, EMPA, E/L 1415C (MIL Italy), Audi TL 774 G, Bentley TL 774 G, Bugatti TL 774 G, Lamborghini TL 774 G, Porsche, Scania, Seat TL 774 G, Skoda TL 774 G, VW TL 774 G

PERFORMANCE LEVELS

AFNOR NF R15-601, ASTM D 3306, ASTM D 4985, SAE J 1034, BS 6580, FFV Heft R443, CUNA NC 956-16, UNE 26361-88, JIS K2234, NATO S 759 KSM 2142, EMPA, E/L 1415C (MIL Italy), Audi TL 774 G, Bentley TL 774 G, Bugatti TL 774 G, Lamborghini TL 774 G, Porsche, Scania, Seat TL 774 G, Skoda TL 774 G, VW TL 774 G

DIONE HD

ANTIFREEZE & ENGINE COOLANT

COOL
GUARD
TECHNOLOGY

CONCENTRATED



READY TO USE



50/50



PERFORMANCE LEVELS

AFNOR NF R15-601, ASTM D6210, ASTM D3306, ASTM D4656, ASTM D4985, BS 6580, CAT EC-1, SAE J1034

PERFORMANCE LEVELS

AFNOR NF R15-601, ASTM D6210, ASTM D3306, ASTM D4656, ASTM D4985, CAT EC-1, CES 14603





> POWER STEERING FLUID



**POWER
FORCE
TECHNOLOGY**


LETO MV

POWER STEERING FLUID

FULL SYNTHETIC

PERFORMANCE LEVELS

Acura/Honda PN 08206-9002, American Motors Corporation C4124, Audi PN G002000, Bentley JNV862564F, BMW ZF TE-ML 09, Chrysler MS-11655B, DaimlerChrysler MS1872, DaimlerChrysler MS5931F&G, DaimlerChrysler MS9602, DaimlerChrysler MS9933A, DaimlerChrysler MS1872, Fendt X 902 011 622, Ford M2C195A, Ford M2C33F, Ford ESW-M2C128 C&D, Ford M2C128D, Ford MS2195A, Ford M2C138C, Ford M2C138CJ, Ford WSS M2C204A, GM 9985010, GM 9985835, GM 89021184, Hyundai/Kia PSF-3, Hyundai 00232-19017, Iveco 18-1823, Land Rover LR003401, MAN M3289, Massey Ferguson, DTFR 31B120 (MB 345.0), Mitsubishi PS Fluid/Diamond SP III Navistar TMS 6810, NH 610A, Nissan PSF-II, Opel B 040 0070, Opel B 040 2012, Porsche 000 043 206 56, Porsche 000 043 203 33, PSA B71 2710 PSA S71 2710, Saab 93160548, Saab 3032 380, Saab PSF 2634, Saab PSF 45 30 09 800, Saab PSF 93160548, Saab PN 30 09 800, SDFG OF1611S, Subaru PN K0209A0080, Volkswagen VW-TL-570-26, Volkswagen VW-TL-52 146.01, VW G 004 012, Volvo 1161529, Volvo 30741424

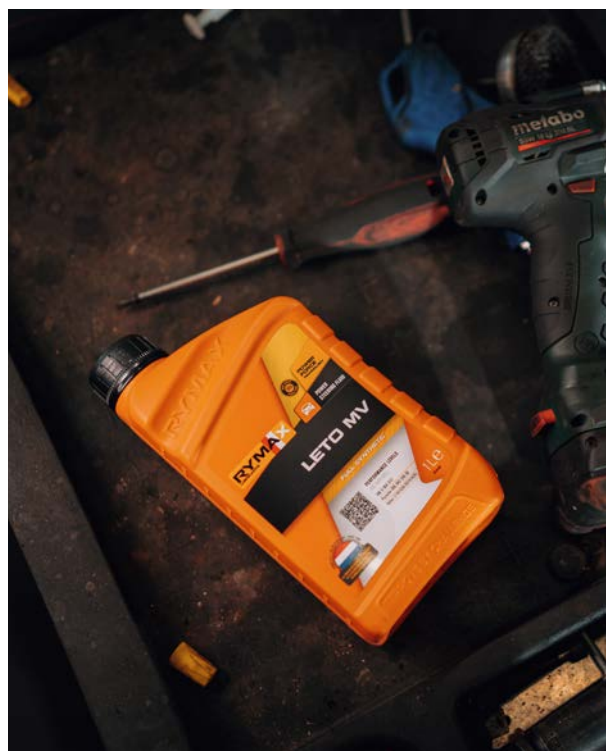

> HYDRAULIC BRAKE FLUIDS



**SAFE
SHIELD
TECHNOLOGY**

VECTOR 3

DOT 3

HYDRAULIC BRAKE FLUID

PERFORMANCE LEVELS

FMVSS No 116 DOT3, SAE J1703, ISO4925 Class 3 and JIS K2233.



**SAFE
SHIELD
TECHNOLOGY**

VECTOR 4

DOT 4

HYDRAULIC BRAKE FLUID

PERFORMANCE LEVELS

FMVSS No 116 DOT4, SAE J1704, ISO4925 Class 4 and JIS K2233



**SAFE
SHIELD
TECHNOLOGY**

VECTOR 4+

DOT 4+

HYDRAULIC BRAKE FLUID

PERFORMANCE LEVELS

FMVSS No 116 DOT 4, SAE J1704, ISO4925 Class 6, BMW QV 34 001, Ford WSS-M6C65-A2, GM Europa GMW 3356, PSA S71 2114, VW 50 114(TL 766-Z)



**SAFE
SHIELD
TECHNOLOGY**

VECTOR 5.1

DOT 5.1

HYDRAULIC BRAKE FLUID

PERFORMANCE LEVELS

FMVSS No 116 DOT5.1, ISO 4925 and JIS K2233



MARINE OILS

Rymax provides different lubricants for the marine segment. From smaller recreational boats, up to the biggest ships, we provide a well-balanced and carefully selected product line.

The Alpheus products are intended for smaller 2- and 4-stroke outboard engines, while our Marlub range is developed to meet the requirements of big ships. They are recommended for all high-output, medium speed trunk piston marine diesel engines. The advanced fuel oil has been formulated to help shipping companies undertake their day-to-day operations in the most safe and cost-efficient way. All our marine oils offer outstanding resistance to oxidation and thermal degradation, making them ideal for the severe operating conditions of the maritime environment.

Our marine oils consistently surpass industry benchmarks, aligning with the latest specifications from equipment builders and renowned organizations like ASTM and ISO. Choose Rymax for high-performance marine lubricants that set the standard for excellence.




ALPHEUS VR-3
2-STROKE OUTBOARD ENGINE OIL

MINERAL

PERFORMANCE LEVELS

NMMA TC-W3

**AQUA
TEC
INSIDE**

ALPHEUS XL-4
4-STROKE OUTBOARD ENGINE OIL

MINERAL

MINERAL

10W-30

PERFORMANCE LEVELS

NMMA FC-W®, API SL

10W-40

PERFORMANCE LEVELS

NMMA FC-W®, API SL

**AQUA
TEC
INSIDE**



MARLUB 12 **MARLUB 15** **MARLUB 20** **MARLUB 30** **MARLUB 40** **MARLUB 50**

MEDIUM SPEED DIESEL ENGINE OIL

MINERAL **MINERAL** **MINERAL** **MINERAL** **MINERAL** **MINERAL**

40 **40** **40** **40** **40** **40**

PERFORMANCE LEVELS

API CF, Daihatsu, Yanmar

API CF, Caterpillar, Daihatsu, Yanmar

API CF, Daihatsu

API CF, Daihatsu, MAN Diesel & Turbo, Wärtsilä, Yanmar

API CF, Daihatsu, MAN Diesel & Turbo, Wärtsilä, Yanmar

API CF, MAN Diesel & Turbo, Wärtsilä

**AQUA
TEC
INSIDE**



MARLUB SYS 6
30
MARINE SYSTEM OIL

MINERAL

PERFORMANCE LEVELS

MAN ES , Winterthur Gas & Diesel (WIN GD)

**AQUA
TEC
INSIDE**



MARLUB ZF
40
ZINC FREE MEDIUM SPEED DIESEL ENGINE OIL

MINERAL

PERFORMANCE LEVELS

API CF / CF-2

**AQUA
TEC
INSIDE**



MARLUB CYN 40 **MARLUB CYN 70** **MARLUB CYN 100**

MARINE CYLINDER OIL

MINERAL **MINERAL** **MINERAL**

50 **50** **50**

PERFORMANCE LEVELS

MAN ES (CAT II)

MAN ES, Winterthur Gas & Diesel (WIN GD), Mitsubishi Heavy Industries two-stroke (MHI 2T)

MAN ES, Winterthur Gas & Diesel (WIN GD), Mitsubishi Heavy Industries two-stroke (MHI 2T)

**AQUA
TEC
INSIDE**

SMART GUARD TECHNOLOGY

Rymax SmartGuard Technology cleverly combines the most modern technologies to guard the performance of your industrial equipment.

ECO SECURE TECHNOLOGY



Rymax EcoSecure Technology optimizes environmental preservation with economic advantages, ensuring supreme protection with a sustainable edge.



INDUSTRIAL AND HYDRAULIC OILS

Achieving success in industrial operations hinges on productivity and reliability, both dependent on high-quality products. Rymax ensures product excellence through rigorous testing in both laboratory and real industrial settings. Our advanced technologies offer exceptional equipment protection, resulting in extended service life and reduced maintenance time, ultimately lowering total ownership costs. Recognizing the crucial role of industrial energy efficiency, even minor energy savings contribute to substantial financial and resource benefits.

Our range includes compressor oils, hydraulic oils, industrial gear oils, turbine oils, and more, meticulously formulated to meet the latest equipment manufacturer requirements and international standards.

As hydraulic systems evolve with increased performance, higher pressures, temperatures, and lower volumes, Rymax hydraulic oils are engineered to enhance system efficiency. They safeguard, lubricate, and optimize power transmission effectively. Tailored to address diverse hydraulic equipment, machines, and applications, our products enhance productivity, cut maintenance expenses, and minimize overall consumption and waste.



> COMPRESSOR OILS

	BOREAS					SMART GUARD TECHNOLOGY	
	COMPRESSOR OIL						
	MINERAL	MINERAL	MINERAL	MINERAL	MINERAL		MINERAL
	32	46	68	100	150		220
	PERFORMANCE LEVELS						
DIN 51506: VBL/VCL/ VDL,DIN 51524/2(HLP), ISO 6743/4: HM, ISO 11158: HM, ISO-L-DAA, ISO-L-DAB, ISO-L-DAG, ISO-L-DAH, AFNOR NF E 48-603 (HM,HV)	DIN 51506: VBL/VCL/ VDL,DIN 51524/2(HLP), ISO 6743/4: HM, ISO 11158: HM, ISO-L-DAA, ISO-L-DAB, ISO-L-DAG, ISO-L-DAH, AFNOR NF E 48-603 (HM.HV)	DIN 51506: VBL/VCL/ VDL, DIN 51524/2(HLP), ISO 6743/4: HM, ISO 11158: HM, ISO-L-DAA, ISO-L-DAB, ISO-L-DAG, ISO-L-DAH, AFNOR NF E 48-603 (HM.HV)	DIN 51506: VBL/VCL/ VDL, DIN 51524/2(HLP), ISO 6743/4: HM, ISO 11158: HM, ISO-L-DAA, ISO-L-DAB, ISO-L-DAG, ISO-L-DAH, AFNOR NF E 48-603 (HM.HV)	DIN 51506: VBL/VCL/ VDL, DIN 51524/2(HLP), ISO 6743/4: HM, ISO 11158: HM, ISO-L-DAA, ISO-L-DAB, ISO-L-DAG, ISO-L-DAH, AFNOR NF E 48-603 (HM.HV)	DIN 51506: VBL/VCL/VDL, DIN 51503-1 KAA/KE, ISO/DP 6521 DAA/DAB/ DAG/DAH		

	BOREAS PAO			SMART GUARD TECHNOLOGY
	COMPRESSOR OIL			
	FULL SYNTHETIC	FULL SYNTHETIC	FULL SYNTHETIC	FULL SYNTHETIC
	32	46	68	100
	PERFORMANCE LEVELS			
DIN 51506 VBL/VCL/VDL, ISO/DP 6521 DAA/DAB/DAG/DAH, DIN 51503-1 KAA/ KE	DIN 51506 VBL/VCL/VDL, ISO/DP 6521 DAA/DAB/DAG/DAH, DIN 51503-1 KAA/ KE	DIN 51506 VBL/VCL/VDL, ISO/DP 6521 DAA/DAB/DAG/DAH, DIN 51503-1 KAA/ KE	DIN 51506 VBL/VCL/VDL, ISO/DP 6521 DAA/DAB/DAG/DAH, DIN 51503-1 KAA/ KE	

> TURBINE OILS

ERATO

TURBINE OIL

SMART
GUARD
TECHNOLOGY

MINERAL

32

MINERAL

46

MINERAL

68

PERFORMANCE LEVELS

ASTM D4304 Type I, ISO 8068:2006(E) L-TSA/L-TGA, ALSTOM HTGD 90117 Z, BS 489:1999, DIN 51515-1/2 TD/TG, GB 11120-2011 L-TSA/L-TGA, GEK 107395A/27070/28143A/32568J/46506E, Siemens TLV 9013 05 (EP), Solar ES 9-224

ASTM D4304 Type I, ISO 8068:2006(E) L-TSA, ISO 8068:2006(E) L-TGA, ALSTOM HTGD 90117 Z, BS 489:1999, DIN 51515-1/2 TD/TG, GB 11120-2011 L-TSA/L-TGA, GEK 107395A/27070/28143A/32568J/46506E, Siemens TLV 9013 05 (EP), Solar ES 9-224

ASTM D4304 Type I, ISO 8068:2006(E) L-TSA, ISO 8068:2006(E) L-TGA, ALSTOM HTGD 90117W, BS 489:1999, DIN 51515-1/2 TD/TG, GB 11120-2011 L-TSA/L-TGA, GEK 107395A/27070/28143A/32568J/46506E, Siemens TLV 9013 05 (EP), Solar ES 9-224

> SLIDEWAY OILS

	THEMIS			SMART GUARD TECHNOLOGY
	SLIDEWAY OIL			
	MINERAL	MINERAL	MINERAL	
	32	68	220	
	PERFORMANCE LEVELS			
DIN 51502: CGLP, DIN 51517 part III, DIN 51524 part II, ISO 11158 HG, ISO 19378 GA & GB, AGMA 9005 E02 (EP), AIST 224, FZG 12, General Motors LS2	DIN 51502: CGLP, DIN 51517 part III, DIN 51524 part II, ISO 11158 HG, ISO 19378 GA & GB, AGMA 9005 E02 (EP), AIST 224, FZG 12, General Motors LS2	DIN 51502: CGLP, DIN 51517 part III, DIN 51524 part II, ISO 11158 HG, ISO 19378 GA & GB, AGMA 9005 E02 (EP), AIST 224, FZG 12, General Motors LS2		



> INDUSTRIAL GEAR OILS

	GEVITRO TWS						SMART GUARD TECHNOLOGY
	INDUSTRIAL GEAR OIL						
	MINERAL	MINERAL	MINERAL	MINERAL	MINERAL	MINERAL	
	68	100	150	220	320	460	
	PERFORMANCE LEVELS						
AGMA 9005 E-02, DIN 51517-3 CLP, ISO 12925-1 CKD, David Brown S1.53.101, US Steel 224	AGMA 9005 E-02, DIN 51517-3 CLP, ISO 12925-1 CKD, David Brown S1.53.101, US Steel 224	AGMA 9005 E-02, DIN 51517-3 CLP, ISO 12925-1 CKD, David Brown S1.53.101, US Steel 224	AGMA 9005 E-02, DIN 51517-3 CLP, ISO 12925-1 CKD, David Brown S1.53.101, US Steel 224	AGMA 9005 E-02, DIN 51517-3 CLP, ISO 12925-1 CKD, David Brown S1.53.101, US Steel 224	AGMA 9005 E-02, DIN 51517-3 CLP, ISO 12925-1 CKD, David Brown S1.53.101, US Steel 224	AGMA 9005 E-02, DIN 51517-3 CLP, ISO 12925-1 CKD, David Brown S1.53.101, US Steel 224	



GEVITRO TWS PAO

INDUSTRIAL GEAR OIL

FULL SYNTHETIC

FULL SYNTHETIC

FULL SYNTHETIC

FULL SYNTHETIC

FULL SYNTHETIC

ISO

220

320

460

680

PERFORMANCE LEVELS

DIN 51517-3 CLP, ISO 12925-1
CKC, ISO 12925-1 CKD, AGMA
9005-F16 Antiscuff, Siemens
MD (Flender), Cincinnati
Milacron P-74, David Brown
S1.53.106, US Steel 224

DIN 51517-3 CLP, ISO 12925-1
CKC, ISO 12925-1 CKD, AGMA
9005-F16 Antiscuff, Siemens
MD (Flender), Cincinnati
Milacron P-74, David Brown
S1.53.106, US Steel 224

DIN 51517-3 CLP, ISO 12925-1
CKC, ISO 12925-1 CKD, AGMA
9005-F16 Antiscuff, Siemens
MD (Flender), Cincinnati
Milacron P-74, David Brown
S1.53.106, US Steel 224

DIN 51517-3 CLP, ISO 12925-1
CKC, ISO 12925-1 CKD, AGMA
9005-F16 Antiscuff, Siemens
MD (Flender), Cincinnati
Milacron P-74, David Brown
S1.53.106, US Steel 224

DIN 51517-3 CLP, ISO 12925-1
CKC, ISO 12925-1 CKD, AGMA
9005-F16 Antiscuff, Siemens
MD (Flender), Cincinnati
Milacron P-74, David Brown
S1.53.106, US Steel 224

SMART
GUARD
TECHNOLOGY

> ROCK DRILL OILS

	THOR		SMART GUARD TECHNOLOGY
	ROCK DRILL OIL		
	MINERAL	MINERAL	
	100	320	
	PERFORMANCE LEVELS		
	Gardner-Denver, Ingersoll-Rand, Siderurgie Francaise, Chicago Pneumatics, Joy Manufacturing	Gardner-Denver, Ingersoll-Rand, Siderurgie Francaise, Chicago Pneumatics, Joy Manufacturing	

> HEAT TRANSFER OILS

	THEMPERION		SMART GUARD TECHNOLOGY
	HEAT TRANSFER OIL		
	MINERAL	MINERAL	
	32	46	
	PERFORMANCE LEVELS		
	DIN 51522, ISO 6743-12 - Family Q	DIN 51522, ISO 6743-12 - Family Q	

> INHIBITED TRANSFORMER OIL

	CRATOS IA	
	INHIBITED TRANSFORMER OIL	
	MINERAL	
	PERFORMANCE LEVELS	
	ASTM D 1275B, IEC 62535, DIN 51353	

> RAILWAY ENGINE OILS

	RAILLUB ZF		SMART GUARD TECHNOLOGY
	ZINC FREE MEDIUM SPEED DIESEL ENGINE OIL		
	MINERAL	MINERAL	
	40	20W-40	
	PERFORMANCE LEVELS		
	LMOA Gen 7, Wabtec (formerly GE) Tier 4 engines, Progress Rail (formerly EMD) Tier 4 engines	LMOA Gen 7, Wabtec (formerly GE) Tier 4 engines, Progress Rail (formerly EMD) Tier 4 engines	



> HYDRAULIC OILS



HYDRA AW

ANTI WEAR HYDRAULIC OIL HLP

SMART GUARD TECHNOLOGY

MINERAL	MINERAL	MINERAL	MINERAL
10	15	22	32

PERFORMANCE LEVELS

ISO 11158 HM, DIN 51524/2 HLP, AFNOR NFE 48-603 HM, Eaton (Vickers) I-286-S, US Steel 126, US Steel 127	ISO 11158 HM, DIN 51524/2 HLP, AFNOR NFE 48-603 HM, Eaton (Vickers) I-286-S, US Steel 126, US Steel 127	ISO 11158 HM, DIN 51524/2 HLP, AFNOR NFE 48-603 HM, Eaton (Vickers) I-286-S, US Steel 126, US Steel 127	ISO 11158 HM, DIN 51524/2 HLP, AFNOR NFE 48-603 HM, Eaton (Vickers) M-2950-S/I-286-S, US Steel 126, US Steel 127
---	---	---	--



HYDRA AW

ANTI WEAR HYDRAULIC OIL HLP

SMART GUARD TECHNOLOGY

MINERAL	MINERAL	MINERAL	MINERAL
46	68	100	150

PERFORMANCE LEVELS

ISO 11158 HM, DIN 51524/2 HLP, AFNOR NFE 48-603 HM, Cincinnati P-70, Eaton (Vickers) M-2950-S/I-286-S, US Steel 126, US Steel 127	ISO 11158 HM, DIN 51524/2 HLP, AFNOR NFE 48-603 HM, Cincinnati P-69, Eaton (Vickers) M-2950-S/I-286-S, US Steel 126, US Steel 127	ISO 11158 HM, DIN 51524/2 HLP, AFNOR NFE 48-603 HM, Cincinnati P-69, Eaton (Vickers) M-2950-S/I-286-S, US Steel 126, US Steel 127	ISO 11158 HM, DIN 51524/2 HLP, AFNOR NFE 48-603 HM, Eaton (Vickers) M-2950-S/I-286-S, US Steel 126, US Steel 127
---	---	---	--



HYDRA HVI

HIGH VISCOSITY HYDRAULIC OIL HVLP

SMART GUARD TECHNOLOGY

MINERAL	MINERAL	MINERAL	MINERAL	MINERAL	MINERAL
15	22	32	46	68	100

PERFORMANCE LEVELS

ISO 11158 HV, DIN 51524/3 HVLP, AFNOR NFE 48-603 HV, Eaton (Vickers) I-286-S, Sauer Danfoss 520L0463, US Steel 126, US Steel 127	ISO 11158 HV, DIN 51524/3 HVLP, AFNOR NFE 48-603 HV, Eaton (Vickers) I-286-S, Sauer Danfoss 520L0463, US Steel 126, US Steel 127	ISO 11158 HV, DIN 51524/3 HVLP, AFNOR NFE 48-603 HV, Cincinnati P-68, Eaton (Vickers) M-2950-S/I-286-S, Sauer Danfoss 520L0463, US Steel 126, US Steel 127	ISO 11158 HV, DIN 51524/3 HVLP, AFNOR NFE 48-603 HV, Cincinnati P-70, Eaton (Vickers) M-2950-S/I-286-S, Sauer Danfoss 520L0463, US Steel 126, US Steel 127	ISO 11158 HV, DIN 51524/3 HVLP, AFNOR NFE 48-603 HV, Cincinnati P-68, Eaton (Vickers) M-2950-S/I-286-S, Sauer Danfoss 520L0463, US Steel 126, US Steel 127	ISO 11158 HV, DIN 51524/3 HVLP, AFNOR NFE 48-603 HV, Cincinnati P-69, Eaton (Vickers) M-2950-S/I-286-S, Sauer Danfoss 520L0463, US Steel 126, US Steel 127
--	--	--	--	--	--



ECO SECURE TECHNOLOGY

HYDRA HT ECO

46

BIODEGRADABLE HYDROTREATED HYDRAULIC OIL

PERFORMANCE LEVELS

ISO 6743-4 HV, DIN 51524 HVLP, Denison HF-0, Eaton Vickers M-2950 S, Eaton Vickers I-286-S, Bosch Rexroth DIN 515244 Part 3, VDMA HEPR



HYDRA ZF

ZINC FREE HYDRAULIC OIL

SMART GUARD TECHNOLOGY

MINERAL	MINERAL	MINERAL
32	46	68

PERFORMANCE LEVELS

DIN 51524/2 (HLP), AFNOR NFE 48-603 HM, Cincinnati P-70, Denison HF-1, Eaton (Vickers) M-2950-S/I-286-S	DIN 51524/2 (HLP), AFNOR NFE 48-603 HM, Cincinnati P-70, Denison HF-1, Eaton (Vickers) M-2950-S/I-286-S	DIN 51524/2 (HLP), AFNOR NFE 48-603 HM, Cincinnati P-70, Denison HF-1, Eaton (Vickers) M-2950-S/I-286-S
---	---	---



SMART GUARD TECHNOLOGY

HYDRA HD

10W

HEAVY-DUTY HYDRAULIC OIL

MINERAL

PERFORMANCE LEVELS

ACEA E3, API SF/CG-4, Allison C-4, CAT TO-2

HITACHI



SMART GUARD TECHNOLOGY

HYDRA XL


10W

HEAVY-DUTY HYDRAULIC OIL

MINERAL

PERFORMANCE LEVELS

API CF/SF, CAT TO-2, CCMC G2/D2, MIL-L-2104D, MIL-L-46152D, MTU Type 2

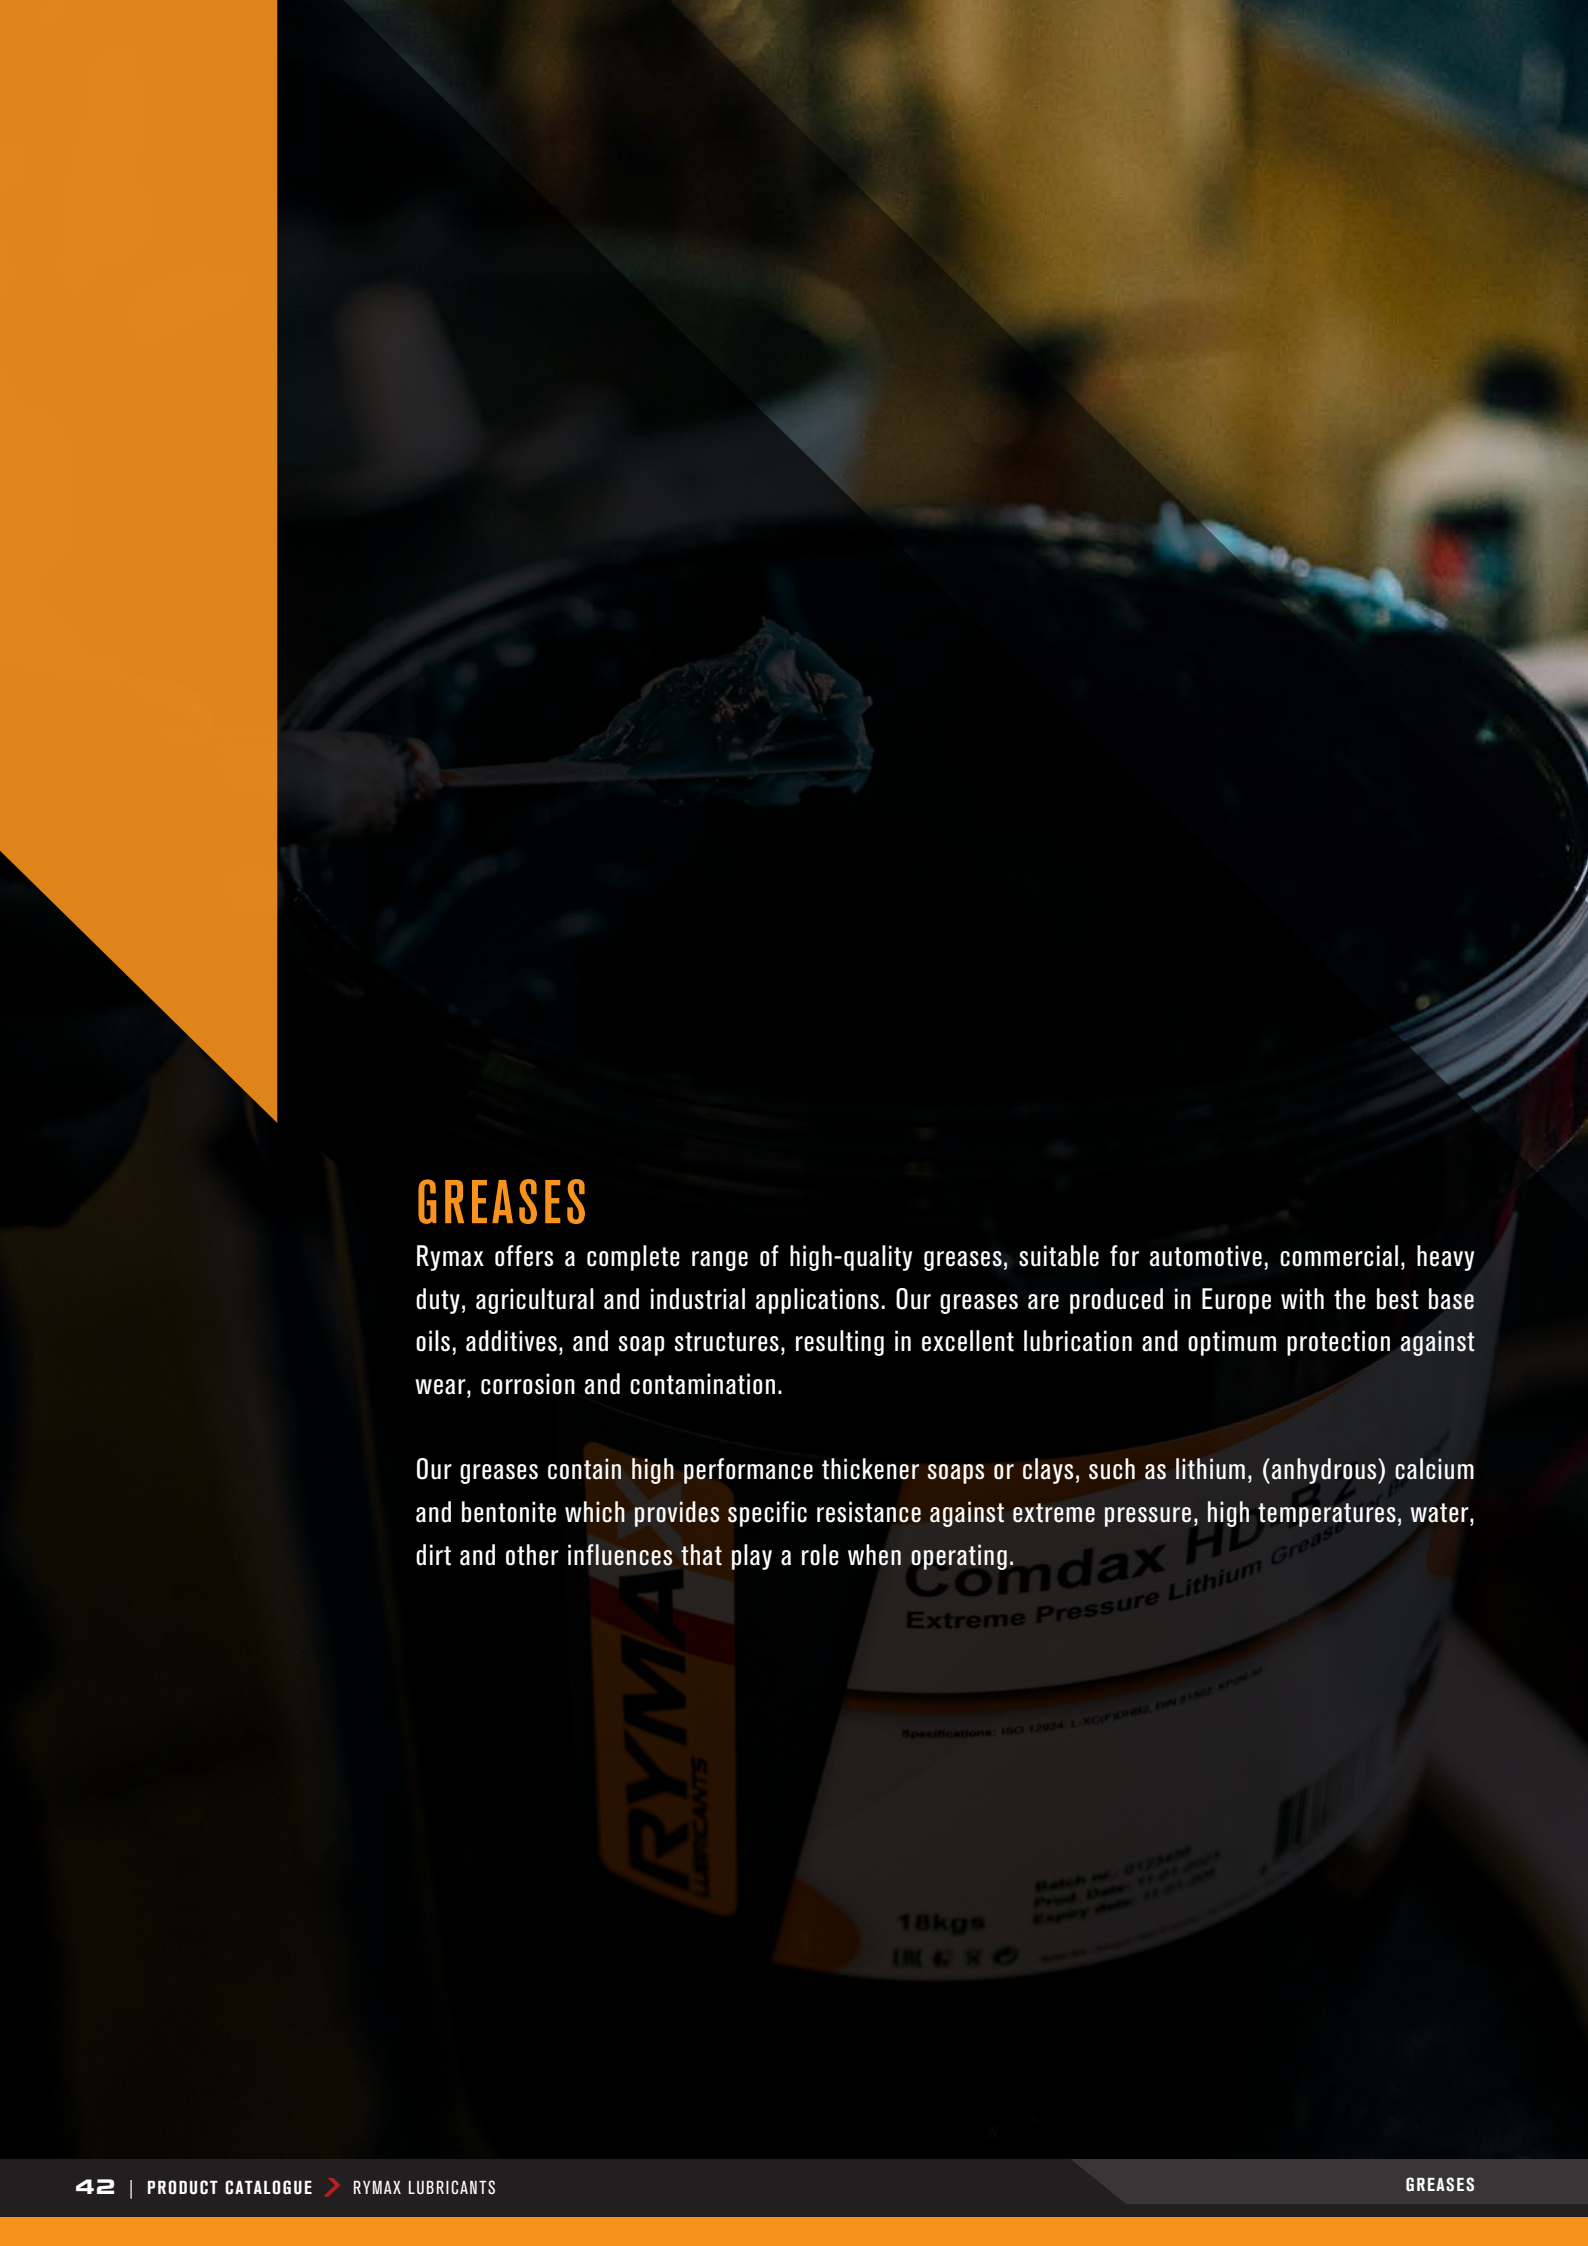

GREASES

Rymax offers a complete range of high-quality greases, suitable for automotive, commercial, heavy duty, agricultural and industrial applications. Our greases are produced in Europe with the best base oils, additives, and soap structures, resulting in excellent lubrication and optimum protection against wear, corrosion and contamination.

Our greases contain high performance thickener soaps or clays, such as lithium, (anhydrous) calcium and bentonite which provides specific resistance against extreme pressure, high temperatures, water, dirt and other influences that play a role when operating.



LINDAX MP

MULTIPURPOSE LITHIUM GREASE

MINERAL

2

3

PERFORMANCE LEVELS

ISO 12924: L-XC(F)CAA2, DIN 51502: K2K-30

ISO 12924: L-XC(F)CHA3, DIN 51502: K3K-30



MOLDAX MOS2 XXTRA

EXTREME PRESSURE & MULTIPURPOSE LITHIUM GREASE WITH MOS2

MINERAL

2

PERFORMANCE LEVELS

ISO 12924: L-XC(F)CHB2, DIN 51502: KPF2K-30



LINDAX EP

EXTREME PRESSURE AND MULTIPURPOSE LITHIUM GREASE

MINERAL

0

00

00/000

1

2

3

PERFORMANCE LEVELS

ISO 12924: L-XC(F)CIB0, DIN 51502: KP0K-30

ISO 6743: L-XCCHB00, DIN 51502: KP00K-30

ISO 6743-9 ISO-L-XEBBB00, DIN 51825 KP00 G-50

ISO 6743: L-XCCFB1, DIN 51502 KP1K-30

ISO 12924: L-XC(F)CAB2, DIN 51502: KP2K-30

ISO 12924: L-XC(F)CHB3, DIN 51502: KP3K-30



ANCAL EP

EXTREME PRESSURE ANHYDROUS CALCIUM GREASE

MINERAL

0

00

1

2

3

PERFORMANCE LEVELS

ISO 12924: L-XC(F)CCB0, DIN 51502: KP0K-30

ISO 12924: L-XC(F)CCB00, DIN 51502: KP00K-30

ISO 12924: L-XC(F)CCB1, DIN 51502: KP1K-30

ISO 12924: L-XC(F)CIB2, DIN 51502: KP2K-30

ISO 12924: L-XB(F)CIB3, DIN 51502: KP3K-20



ANCAL EPP

EXTREME PRESSURE POLYMER ANHYDROUS CALCIUM GREASE

MINERAL

2

PERFORMANCE LEVELS

ISO 12924: L-XC(F)CIB2, DIN 51502: KP2K-30



ANCAL MOS2-G

EXTREME PRESSURE ANHYDROUS CALCIUM WITH MOS2-G GREASE

MINERAL

2

PERFORMANCE LEVELS

ISO 12924: L-XC(F)CIB2, DIN 51502: KPF2K-30



COMDAX HD-B

LITHIUM COMPLEX GREASE

MINERAL

2

PERFORMANCE LEVELS

ISO 12924: L-XC(F)DHB2, DIN 51502: KP2N-30



CALINDAX

LITHIUM CALCIUM GREASE

MINERAL

2

PERFORMANCE LEVELS

ISO 12924: L-XB(F)CIB2, DIN 51502 KP2K-20



COMDAX EP

LITHIUM COMPLEX GREASE

MINERAL

0.5

PERFORMANCE LEVELS

ISO 6743: ISO-L-XCBIB0.5, DIN 51502: KPO.5G-35



COMPOL OGM

HEAVY DUTY OPEN GEAR LUBRICANT

MINERAL

0.5

PERFORMANCE LEVELS

ISO L-XB(F)DIB0.5, DIN OGP0.5N-20



CALDAX

CALCIUM GREASE

MINERAL

3

PERFORMANCE LEVELS

ISO 6743 ISO-L-XBAAA3, DIN 51502 K3C-25



CASDAX LL

CALCIUM SULFONATE COMPLEX GREASE

MINERAL

2

PERFORMANCE LEVELS

ISO 12924: L-XC(F)DIB2, DIN 51502: K2K-30



BENDAX

BENTONITE GREASE

MINERAL

2

PERFORMANCE LEVELS

ISO 12924: L-XB(F)CAA2, DIN 51502: K2K-30



BENDAX MOS2-G

BENTONITE GREASE WITH MOS2 & GRAPHITE

MINERAL

1

PERFORMANCE LEVELS

ISO 12924: L-XA(F)CHB1, DIN 51502: OGF1K-10



POLYDAX EP

SYNTHETIC EXTREME PRESSURE POLYPROPYLENE GREASE

SYNTHETIC

2

PERFORMANCE LEVELS

ISO 12924: L-XC(F)CIB2, DIN 51502: KPHC2K-30



BISDAX EP

SYNTHETIC LITHIUM BISMUTH COMPLEX GREASE

SYNTHETIC

1.5

PERFORMANCE LEVELS

ISO 12924: L-XD(F)DIB1.5, DIN 51502: KPHC1.5N-40



COMDAX BT


SYNTHETIC LITHIUM COMPLEX GREASE

SYNTHETIC

2

PERFORMANCE LEVELS

ISO 12924: L-XD(F)DIB2, DIN 51502: KPHC2N-40

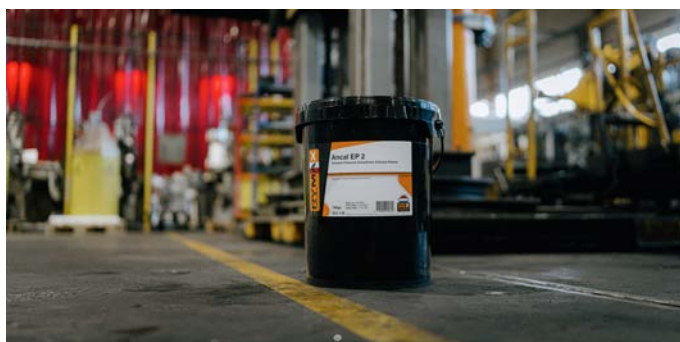





> MISCELLANEOUS



HYGEA UNIVERSAL DEGREASER

DESCRIPTION

Rymax Hygea is a universal degreaser that can be used for cleaning and degreasing machine and motor parts, engine rooms, tanks, floors and any other dirty parts.

SMART
GUARD
TECHNOLOGY



ZELUS SOL SOLUBLE CUTTING OIL MINERAL

DESCRIPTION

Rymax Zelus Sol is a soluble oil that forms a milky emulsion with high anti-corrosive properties, thanks to the high oil content, to protect elements and ways of the metalworking machines. It is suitable for most metalworking operations and materials.

SMART
GUARD
TECHNOLOGY



ADBLUE EURO 4 AND LATER WITH SCR TECHNOLOGY

PERFORMANCE LEVELS

ISO 22241

SMART
GUARD
TECHNOLOGY



HAND CLEANER BIODEGRADABLE SOLVENT-FREE HAND CLEANER

BENEFITS

Formulated with natural silica scrub to be used in garages, workshops, marine and off-shore applications.



POWER WIPES HAND CLEANING SCRUB WIPES

BENEFITS

Two-sided cleaning wipes, formulated to clean hands, tools, machinery, equipment components, workspaces, and various other surfaces. One side scrub, the other side soft.





> TECHNICAL SPRAYS



NOTUS A-40

MULTIPURPOSE PENETRATING OIL

APPLICATIONS

- > Fastenings Tools
- > Screw Connections
- > Rails
- > Gear wheels Chains
- > Locks Garden tools
- > Fasteners (screws, bolts etc) Reels



COPPER GREASE

PREVENTS WEAR & STICKING AT HIGH TEMPERATURES

APPLICATIONS

- > Brake parts
- > Exhaust parts
- > Battery Poles
- > Thread of Spark Plugs



CARBURETOR CLEANER

INTERIOR & EXTERIOR CARBURETOR CLEANER

APPLICATIONS

- > Carburetors
- > Valves



BRAKE CLEANER

HIGH QUALITY BRAKE CLEANER

APPLICATIONS

- > Drum Brakes
- > Disc Brakes
- > Brake Linings
- > Brake Callipers
- > Brake Shoes
- > General Cleaning Properties



CONTACT CLEANER

HIGH QUALITY CONTACT CLEANER

APPLICATIONS

- > Switches
- > Batteries
- > Contact Points
- > Printed Circuit Board Switches
- > Multiple Sockets



WHITE GREASE

PREVENTS WEAR & STICKING OF SCREWED CONNECTIONS

APPLICATIONS

- > Sliding bearings - Metal to plastic connections
- > Roller Bearings - Metal to metal connections
- > Ball Bearings Door Hinges
- > Shock absorbers
- > Worm wheels



PTFE SPRAY

LUBRICATION FOR METAL OR PLASTIC PARTS

APPLICATIONS

- > Chains Gear wheels
- > Door hinges Industrial vacuum pumps
- > Rails Conveyors
- > Sliding door guides Fastenings
- > (Agricultural) Machinery Rubber Seals



SILICONE SPRAY

LUBRICATE, SHINE AND PROTECT

APPLICATIONS

- > Lubricate and protect rubber and plastics
- > Water repellent
- > Quick shine effect





> TECHNICAL SPRAYS



CHAIN LUBE ON ROAD

FOR THE LUBRICATION OF CHAINS

APPLICATIONS

- > Chains
- > Chain driven transmissions, liable to heavy load
- > Conveyors
- > Excellent for use on motorcycles, bikes and mopeds
- > Sticky characteristics for longer lubricating effects



CHAIN LUBE OFF ROAD

FOR THE LUBRICATION OF CHAINS

APPLICATIONS

- > Non-tacky characteristics to prevent dust and dirt contamination
- > Ideal for chains operating in dirty environments
- > Water repellent to prevent rust



FOAM CLEANER

MULTIPURPOSE CLEANING FOAM

APPLICATIONS

- > Ideal for quick clean of lightly contaminated parts and surfaces
- > Foam ensures extended contact time for better cleaning
- > Non-drip for vertical surfaces



“The Rymax Off Road Chain Lube gives protection in the most extreme circumstances. This non-tacky lube is especially formulated for motocross, enduro and off-road use.”





> ADDITIVES



DIESEL PERFORMANCE IMPROVER

IMPROVER, REDUCER, CLEANER, LUBRICATOR, PREVENTER, ELIMINATOR, PROTECTOR

TO MIX WITH DIESEL

DOSAGE

- > Pour the contents of one bottle in the fuel tank before filling it with diesel fuel. This Performance Improver is suitable for all diesel engines (incl. common rail) with or without turbochargers running on low or normal sulphur level diesel fuel.



GASOLINE PERFORMANCE IMPROVER

IMPROVER, REDUCER, CLEANER, LUBRICATOR, PREVENTER, ELIMINATOR, PROTECTOR

TO MIX WITH GASOLINE

DOSAGE

- > One bottle treats 40 to 60 litres of gasoline. Normal use: one bottle every 2.000 km. Intensive or sportive use: one bottle for each tank filling.



DIESEL COLD FLOW IMPROVER

PREVENTS CLOGGING OF FUEL FILTERS

TO MIX WITH DIESEL

DOSAGE

- > We recommend to use 1 bottle of 250 ml for 60-65 litres of diesel fuel. Use for each tank filling before initial wax crystals build-up.



DIESEL SMOKE REDUCER

REDUCES DIESEL ENGINE SMOKE EMISSIONS

TO MIX WITH DIESEL

DOSAGE

- > Pour the contents of one bottle into the fuel tank before filling with diesel fuel.



OIL LEAK PREVENTER

STOPS AND PREVENTS OIL LEAKAGES THROUGH SEALS

TO MIX WITH ENGINE OIL

DOSAGE

- > Add the contents of one bottle Oil Leak Preventer to the warm motor oil, preferably shortly after oil change. The Rymax bottle of 250 ml Oil Leak Preventer treats 3 to 6 litres of motor oil.



RADIATOR LEAK PROTECTOR

SUITABLE FOR ALL ALUMINIUM, PLASTIC AND STEEL RADIATORS

TO MIX WITH COOLANT

DOSAGE

- > One bottle is sufficient for cooling systems with a volume of up to 12 litres.



CATALYST CLEANER

CLEANS AND REDUCES DEPOSIT BUILD-UP CATALYST EQUIPPED ENGINES

TO MIX WITH GASOLINE

DOSAGE

- > Each bottle of Rymax Catalyst cleaner is designed to treat a range of 40 to 60 liters of petrol.



RADIATOR CLEANER

CLEANER, IMPROVER, REDUCER

TO MIX WITH COOLANT

DOSAGE

- > Before use, shake the product well. Pour the entire contents of one bottle into the radiator. Drive for approximately 30 minutes. Drain the cooling system. Flush the system with water and refill with the recommended coolant.



> ADDITIVES



ENGINE PROTECTOR

FOR GASOLINE, DIESEL AND LPG ENGINE PROTECTION

TO MIX WITH ENGINE OIL

DOSAGE

> One bottle treats 4 to 6 litres of motor oil.



ENGINE PERFORMANCE BOOSTER

FOR ULTIMATE ENGINE POWER PERFORMANCE

TO MIX WITH ENGINE OIL

DOSAGE

> One bottle treats 4 to 6 litres of motor oil. Recommended use: every oil change.



ENGINE FLUSH

CLEANS THE ENGINE BEFORE EACH OIL DRAIN

TO MIX WITH ENGINE OIL

DOSAGE

> One bottle treats a crankcase of 3 to 6 litres.



OCTANE BOOSTER

GASOLINE PERFORMANCE IMPROVER

TO MIX WITH GASOLINE

DOSAGE

> One bottle treats 40 to 60 litres of gasoline. Recommended use: one bottle every (gasoline) tank filling.



DPF CLEANER

CLEANER, PREVENTOR, REDUCER, IMPROVER

TO MIX WITH DIESEL

DOSAGE

> One bottle treats 40-60 litres of diesel fuel.



AUTOMATIC TRANSMISSION FLUSH

CLEANS THE AUTOMATIC TRANSMISSION (AT) SYSTEM

DOSAGE

> One bottle of 500ml treats 8-12 litres of ATF. Recommended for use at 5% by volume.



DEF ADDITIVE

PREVENTS CRYSTAL FORMATION
AND PROTECTS ADBLUE® SYSTEMS

TO MIX WITH ADBLUE

DOSAGE

> A 250 ml dosing bottle treats 100 L of AdBlue® fluid. Use 25 ml of additive for every 10 L of AdBlue® fluid. Avoid overdosing.



ATF TREATMENT & STOP LEAK

STOPS AND PREVENTS AUTOMATIC TRANSMISSION FLUID LEAKAGE

TO MIX WITH ATF

DOSAGE

> One bottle treats 6 liters of ATF (recommended at 5% by volume).





LIMITED PERFORMANCE WARRANTY

As Rymax Lubricants, we stand by the quality of our products. We put much effort and attention into the development and production of our products and that is why we are confident to provide a warranty on our assortment. We dare to say that if a vehicle or piece of equipment breaks down because of a failure in our oil, we will pay for the costs. Please read our Limited Warranty program because it proves that you can always trust our products.



> LIMITED PERFORMANCE WARRANTY

Rymax Lubricants guarantees that all engine oil products will meet or exceed the performance needs of petrol and diesel engines. Regardless of operating hours or covered distance, Rymax Lubricants will take financial responsibility for any damages in parts and labor to your machines's engine, caused by oil failure as long as:

- > Analysis is done on the concerning oil based on a sample taken from the engine.
- > The oil used is confirmed to be an unadulterated and non-contaminated Rymax Lubricants original product.
- > The Rymax oil meets the engine manufacturer's specifications for the service and application.
- > The engine is used under normal operating conditions and maintained according to the manufacturer's recommendation.

To ensure usage of our Warranty Service report the product failure to an authorized Rymax Lubricants distributor. To make a claim under this warranty it is necessary to provide the following as part of the technical investigation:

- > Records showing that the engine was serviced according to the OEM's recommendations.
- > Deliver the used Rymax engine oil, along with detailed information of machine and fluid hours, dates, and an oil sample for the failed engine for analysis to determine if the oil is defective.
- > Make the failed engine available for investigation if necessary.

Rymax Lubricants does not accept liability for indirect or consequential damages. Your rights and remedies pertaining to this warranty are limited as set forth herein.



HOW TO CHOOSE THE RIGHT OIL

Choosing the right oil is not as simple as it used to be. There are many aspects that need to be considered. For instance, the weather conditions have a big influence on the type of oil that is needed for an engine to run properly. Or the requirements that OEM's put on the service and maintenance of their machines, vehicles and equipment. On top of this, regulations regarding emissions differ per country, and therefore, oblige for different products to be used. Keeping up with all this information and technical know-how can be a daunting task. For this reason, we have developed the Online Oil Advisor tool to help with choosing the right oil.

ONLINE OIL ADVISOR

The **Online Oil Advisor** tool is free and easy to use. Find the right lubricant by simply selecting the brand, model and vehicle type. In the tool, all these fields are already provided. Once the information is submitted, you will be presented with a number of options, advising you on the correct lubricant. Visit our website: www.rymax-lubricants.com to use our Online Oil Advisor tool.



RYMAX-LUBRICANTS.LUBRICANTADVISOR.COM



IMPROVE BY CHALLENGE.



For more detailed information about our products please refer to our Technical Product Data (TDS) sheets available at www.rymax-lubricants.com/products

For technical advice contact your Rymax contact person or dial +31 (0)316 - 740 856. You can also e-mail us with all your inquiries: info@rymax-lubricants.com

The information in this publication is accurate and complete at the moment of printing. All possible effort has been taken to ensure the correct contents of this brochure. However, this information is subject to change. Please visit www.rymax-lubricants.com for the latest product information. Please consider personal advice by your Rymax contact person when choosing products from this publication. Rymax Lubricants accepts no liability for any reliance on this publication's content.

WWW.RYMAX-LUBRICANTS.COM