

DirectCover 2S

Up to 6.000 Rpm, 6.500 Tw/mt




Capabilities

- ✓ ✓ ✓ Cotton/Wool/Acrylic
- ✓ ✓ ✓ Polyester/Elastane
- ✓ ✓ ✓ Nylon/Polypropylene
- ✓ ✓ ✓ Aramid
- ✓ ✓ ✓ Glass/Carbon
- ✓ ✓ ✓ Fine Metal Wire

Fine Covering for Technical Yarns

To cover any yarn type material tightly for protection and durability.

Layout

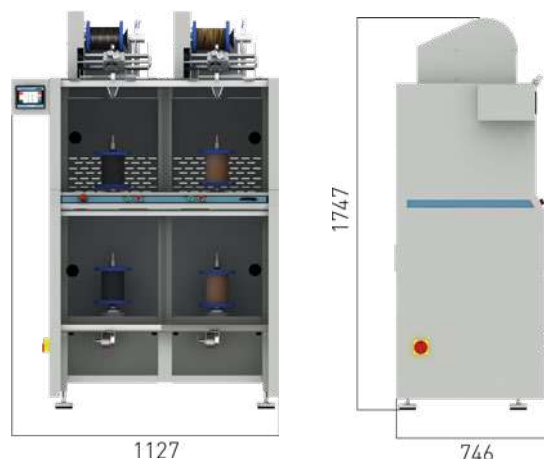

Technical Data

Take-up speed	Up to 20 meters/minute
Mains Voltage	200-240V 1 Phase-3 Phase or 380 V 3-Phase (with neutral)
Max. power/spindle	0.75 kW
Take-up cone size	160 mm - 250 mm lenght double flanged cone
Max. yarn plies for core yarn	Unlimited
Bobbin Size	Up to 95 mm inner, 310 mm outer diameter, 290 mm lenght
Lenght Control	Individual operation for each spindle feedback from encoder
Automatic stop	Yarn break, emergency, overload.