



Learn more
about our
new IDF 3



Options

Can diameter Ø	400 mm, 450 mm, 500 mm, 600 mm, 1.000 mm, 1.200 mm
Empty can feed	Can track
Full can delivery	Delivery track Delivery onto floor Can carriage (only for 400 mm, 450 mm, 500 mm)
Can changer above floor	400 mm, 450 mm, 500 mm, 600 mm, 1.000 mm, 1.200 mm
Can changer below floor	1.000 mm, 1.200 mm

Legal disclaimer:
This brochure has been compiled to the best of our knowledge and in good faith, with the utmost care. However, it may be subject to typing errors or technical changes for which we assume no liability. We provide no guarantee as to the current nature, correctness, completeness or quality of the information provided. The provided data is non-binding.





THE
NEW
IDF

IDF 3

TRÜTZSCHLER SPINNING

New generation: **The IDF 3**

The IDF 3 offers a range of innovative features that give customers even better quality, efficiency and handling – as well as accelerated can changing times and improved productivity.

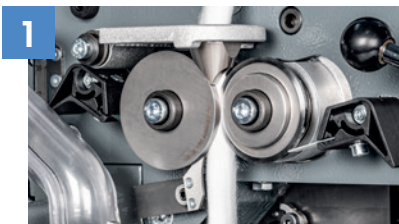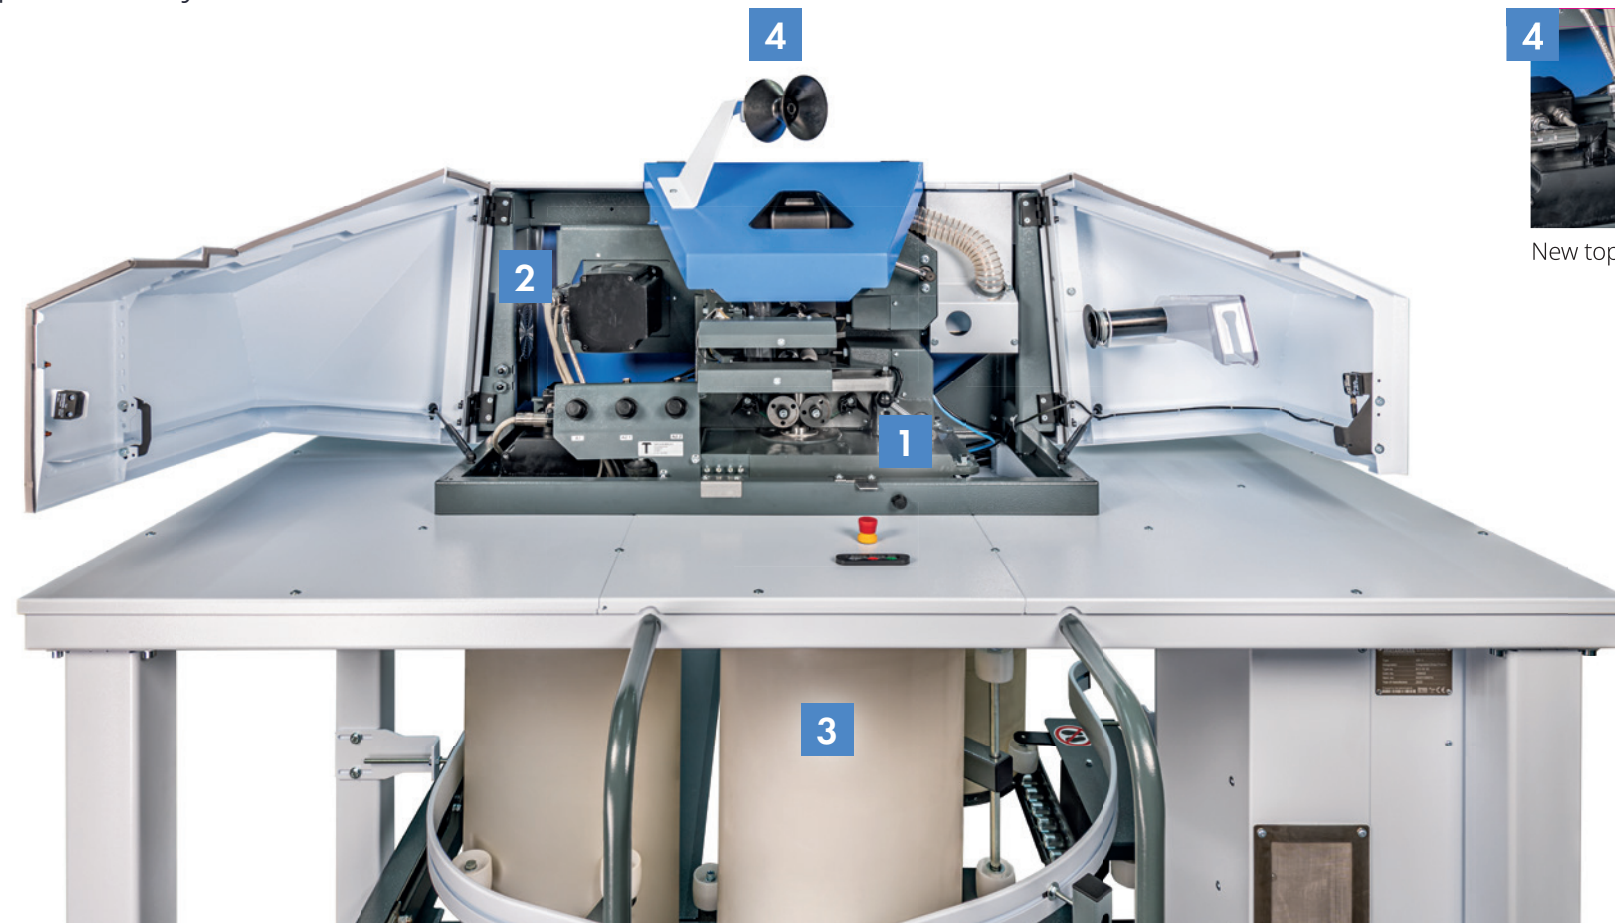

The new measuring system



Easy access to every part



Can changer becomes a game-changer



New top roller pressure monitoring

The shortest path to perfect yarn quality

With its gentle and secure fiber guidance while drafting, the IDF 3 delivers perfectly homogeneous sliver. This further stabilizes the drafting process and significantly reduces yarn imperfections.

Higher productivity, lower costs

Can changing speeds stay at the high level of 300 m/min – resulting in four-times faster delivery speed during can change and 3 % efficiency increase. Operating costs are reduced due to decreased consumption of compressed air.

Easier than ever to operate

Save time for the things that matter: QUICK START the IDF 3 after sliver breaks. The user-focused new design allows easy access to every part because the IDF opens up fully.

QUICK START

Saves valuable time during automatic piecing

