


### **ABOUT US**

Gül Branda, which started its professional journey in 1974 in a small workshop in Mercan, has managed to be included in the list of well-known producers on national and global platform by bringing 3 generations of sectoral experience with high-technology technological facilities.

Production journey of our company, which has taken production as basis since its foundation, within its own body dates back to 1992.

Its production facility being based in Arnavutköy on an area of 9000 m2, our company has 4 main production lines and an annual production capacity of 15.000.000 m2.



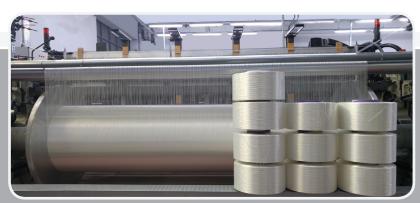





Gül Branda has its own fabric weaving facility in order to take production quality under control in contrast to its competitors in the sector and carry it to the best level apart from PVC Coating.

Gül Branda provides special production opportunities that can comply with the needs and demands of customers apart from mass production through the experiences it has gained and its advanced technological production facility.




With its strong, experienced and dynamic cadre, our company has managed to be one step ahead by following the innovative and technological innovations, play an active role in shaping sectoral formations and applications and therefore found itself in a respectable position in global market by exporting to over 40 countries in addition to its recognition in the national market.





Our company and brands are known for their broad product range, quality, flexible production ability, fast adaptation and good service in both national and global markets.





## **GÜL BRANDA**

GÜL BRANDA can appeal to a remarkable part of the total distribution network through a good segmentation with ÇİFT TAVŞANLI and DERBY brands it incorporates within its body.















We mainly focus on market diversification to promote our products in the most competitive means and maintain our reputation in the international markets.











# APPLICATION AREAS

Tensile sunshade systems for architectural designs

Sunshade, umbrella, sun-protection systems

Trucks, containers and lorries

Protective covers for marine industry

Steel structured buildings, hangars, courts and various site coverings

Industrial doors

Tents for military, leisure and common usage purposes

Protective swimming pool covers











## APPLICATION AREAS





Medical applications for hospital, first-aid and rescue units

High resistant items for different climate conditions

Agricultural irrigation, greenhouse, water storage, waste water and drainage systems

Ventilation ducts

Flame retardant items for hazardous applications

Camouflage type canvas for military usage

Inflatable items

Open-air playgrounds for children entertainment








### SPECIAL TREATMENTS

- High resistance to tearing
- High resistance to UV lights
- Flame retardancy
- Anti-fracture
- Anti-peel strength
- Anti-fungal
- Fade proof
- Lacquering



We offer a wide range of PVC coated polyester fabrics for various applications. Our products are submitted in widths from 140 cm up to 320 cm in international RAL colour scale according to the required characteristics to meet our customers expectations. Wen can provide our costumers with certifications of applied treatments alternatively in mat and glossy surface finishes.



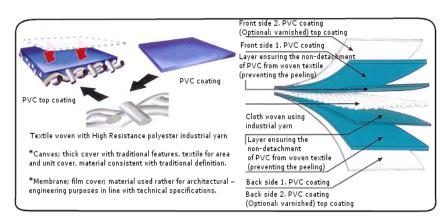





### **COLOUR CHART**



PRODUCT RANGE						
PRODUCT TYPE	YARN	WEFT / WARP	GRAM / SQM	ROLL LENGHT	WIDTH	
ONE SIDE COTAED	450 DNY	12 x 12	280 gr / 350 gr	30mt - 100 mt	1400 mm - 3200 mm	
	1100 DTEX	12 X 12 (6*2 X 6*2) DOUBLE WEAVE	500 gr	30mt - 100 mt	1500 mm - 3200 mm	
430 GR	450 DNY	12 X 12	410 gr / 460 gr	30mt - 100 mt	1400 mm - 3200 mm	
480 GR	450 DNY / 1100 DTEX	12 X 8	480 gr / 540 gr	30mt - 100 mt	1400 mm - 3200 mm	
550 GR	1100 DTEX / 1100 DTEX	8 X 8	550 gr / 580 gr	30mt - 100 mt	1500 mm - 3200 mm	
600 GR	1100 DTEX / 1100 DTEX	8 X 8	600 gr / 650 gr	30mt - 100 mt	1500 mm - 3200 mm	
650 GR	1100 DTEX / 1100 DTEX	9 X 9	650 gr / 750 gr	30mt - 100 mt	1500 mm - 3200 mm	
PANAMA	1100 DTEX / 1100 DTEX	12 X 12	800 gr / 1300 gr	30mt - 100 mt	1500 mm - 3200 mm	
BLACK OUT	1100 DTEX / 1100 DTEX	9 X 9	700 gr / 800 gr	30mt - 100 mt	1500 mm - 3200 mm	
MATT EMBOSSED SURFACE - EACH PRODUCT / COLOUR / WIDTH / LENGHT						

TEST REPORTS & CERTIFICATES						
	Complies	TS EN ISO 2286	WEIGHT			
		TS EN ISO 4121	TENSILE STRENGHT			
		TS EN ISO 4674	TEAR RESISTANCE			
TSE		TS EN ISO 2411	ADHESION			
ISO 9001 : 2008		TS EN ISO 105 / B02	COLOUR FASTNESS			
		TS EN ISO 1876	HANDLING TEMPRATURE RANGE			
		TS EN ISO 811	WATERPROOF			
		TS EN ISO 7854	WRENCH / DEHISCENCE			
FLAMMABILITY	Complies	BS EN ISO 6941 : 2003	FLAME RETARDANT			

