



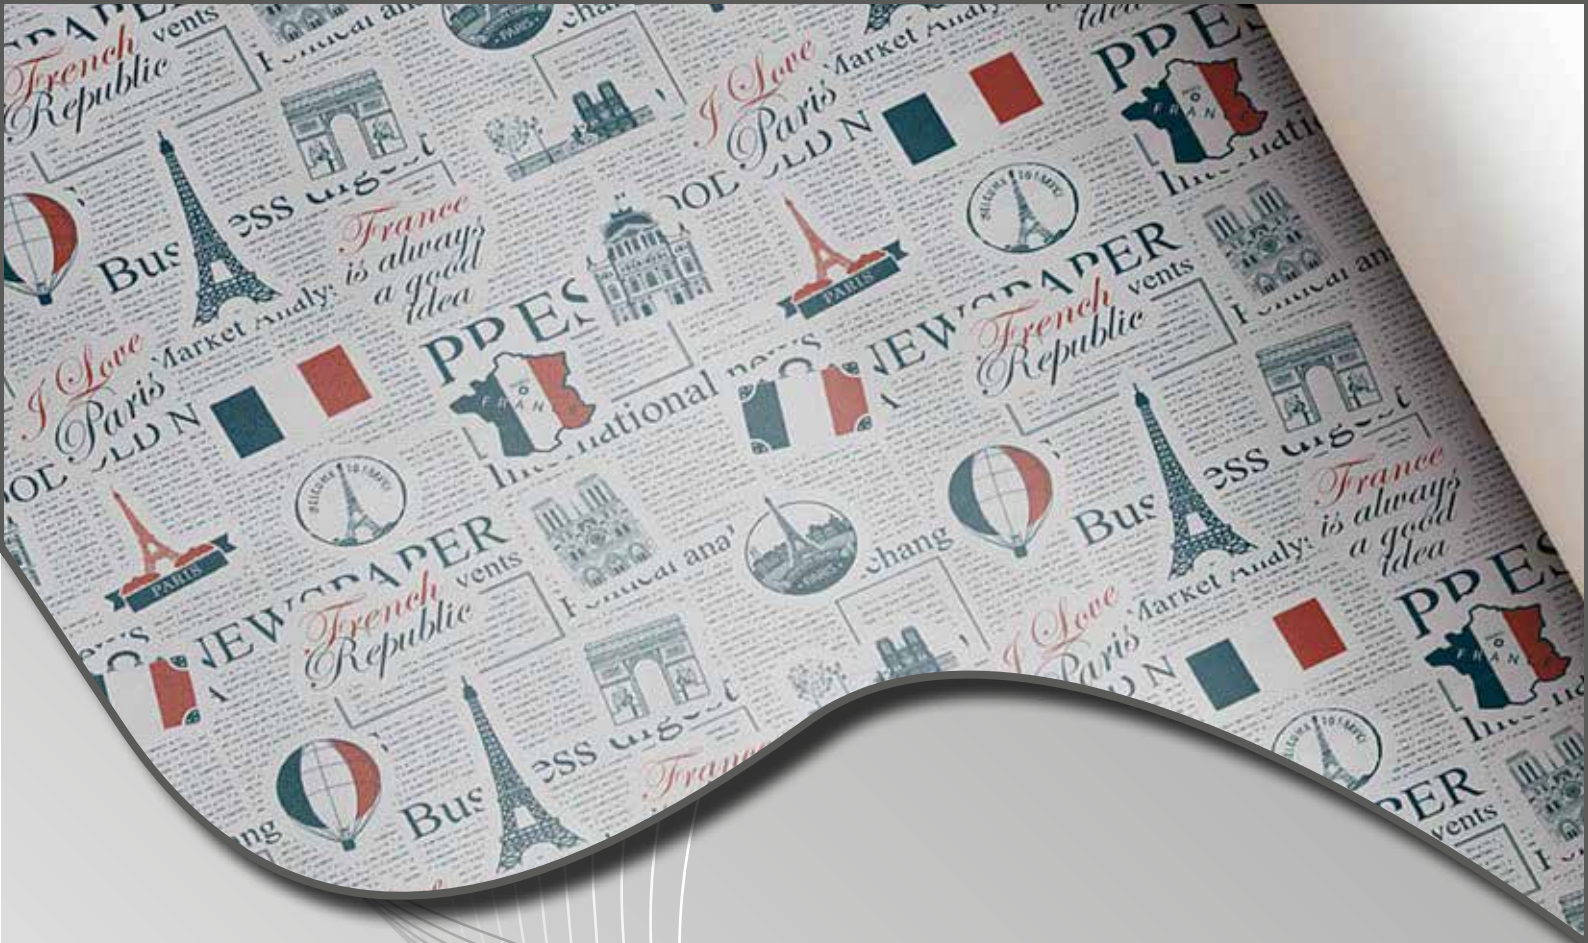

ARTIFICIAL LEATHER

CITY



IST101



IST102



IST103



IST104




IST105



IST106



IST107

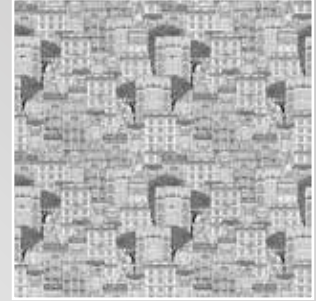

IST108



IST109



IST110



IST111



IST112



LON101



LON102



LON103



LON104



LON105



LON106



LON107



LON108



Confidence in coated fabrics.
Tested for harmful
substances.



Flame Retardant



Ecological, Does not
contain DOP, DINP, DIDP
type Phthalate containing
toxic chemicals



Waterproof



Tear Resistance



Easy Clean

The colour shades of online version are simply indicative and colours may be faded due to the device variety.
Online katalogdaki renk tonları tamamen referans amaçlı olup, renkler kullanılan ekran görüntülerine göre farklılık gösterebilir.



LON109



LON110



LON111



LON112



NYC101



NYC102



NYC103



NYC104



NYC105



NYC106



NYC107



NYC108



NYC109



NYC110



NYC111



PAR101



PAR102



PAR103



PAR104



PAR105



Confidence in coated fabrics.
Tested for harmful
substances.



Flame Retardant



Ecological, Does not
contain DOP, DINP, DIDP
type Phthalate containing
toxic chemicals



Waterproof



Tear Resistance



Easy Clean

The colour shades of online version are simply indicative and colours may be faded due to the device variety.
Online katalogdaki renk tonları tamamen referans amaçlı olup, renkler kullanılan ekran görüntülerine göre farklılık gösterebilir.



PAR106



PAR107



PAR108



PAR109



PAR110



PAR111



PAR112



PAR113



PAR114



PAR115



PAR116



PAR117



PAR118



PAR119



PAR120



PAR121



PAR122



PAR123



PAR124



PAR125



PAR126

The colour shades of online version are simply indicative and colours may be faded due to the device variety.
Online katalogdaki renk tonları tamamen referans amaçlı olup, renkler kullanılan ekran görüntülerine göre farklılık gösterebilir.

TEKNİK ÖZELLİKLER Technical Data	ANALİZ DEĞERİ Analysis Value
KOMPOZİSYON / Composition	%18 PES %82 PVC
AĞIRLIK / Weight	400 gr/ m ² (TS ISO 1534 - ZEN 2286-2)
EN / Width	140 cm
YIRTILMA MUKAVEMETİ / Tear Strenght	30/25 N (TS EN ISO 4674-1 METOD-A)
KOPMA MUKAVEMETİ / Tensile Strenght	250/220 N /5 cm (TS 2008 EN ISO 1421 METOD-1)
ABRASYON / Abrasion	>25.00 (ISO 105 B02:2014-METOD 3)
IŞIK HASLIĞI / Light Fastnees	5-6 (ISO 105 B02:2014-METOD 3)
FİNİSAJ / Finishing	UV BASKI / UV Print
ALEV GECİKTİRİCİ / Flame Retardant	OPSİYONEL / Optional



Head Office

Kaleiçi Mah. Asaf Sok. No:4 Çatalca / İstanbul / Turkey

Telephone: +90 (212) 789 44 50 Pbx

Fax : +90 (212) 789 26 21

E-Mail: hakteks@hakteks.com.tr

www.hakteks.com.tr