



420G/2000N




VT2-24242M


500G/2300N




VT2-25031M

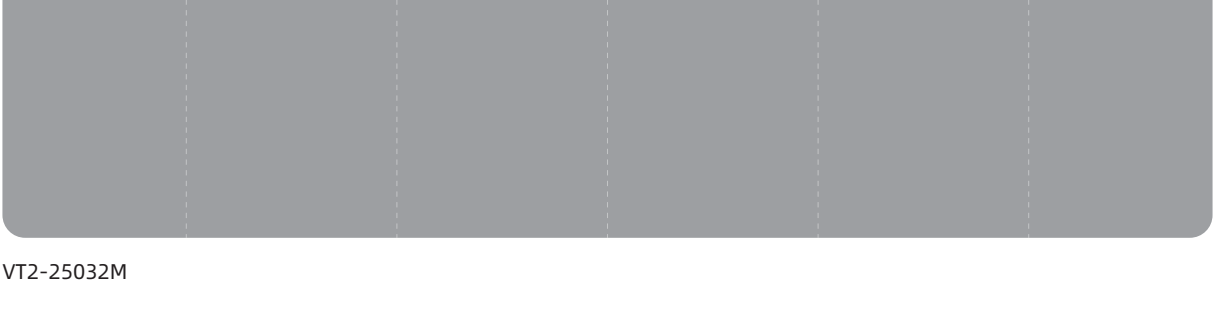


VT2-25032M

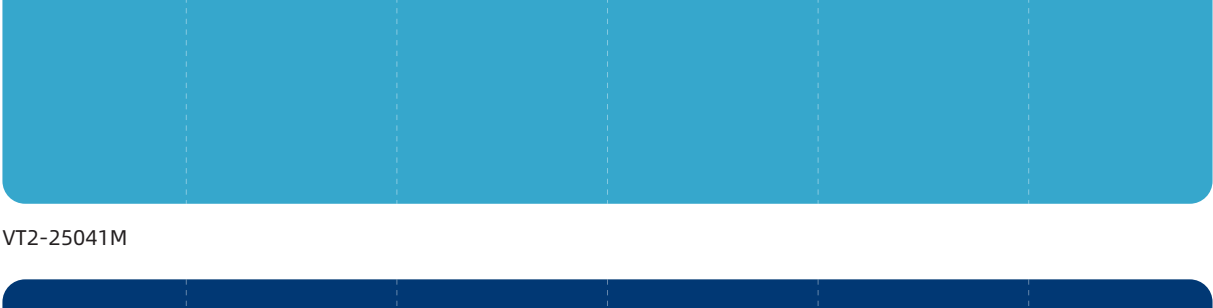


VT2-25041M

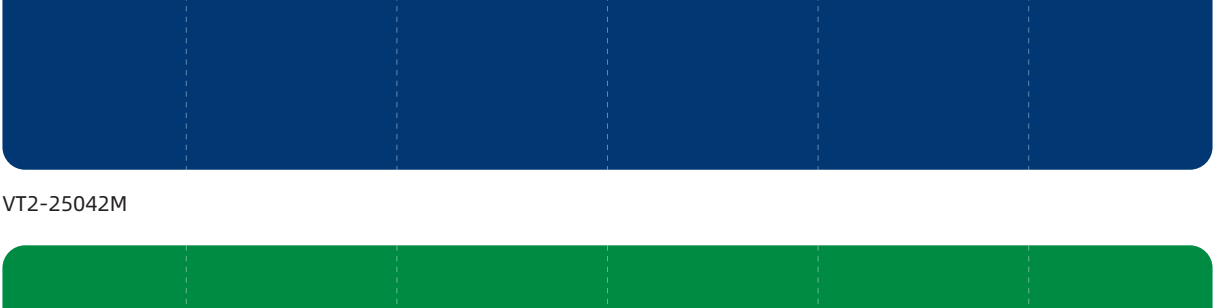


VT2-25042M

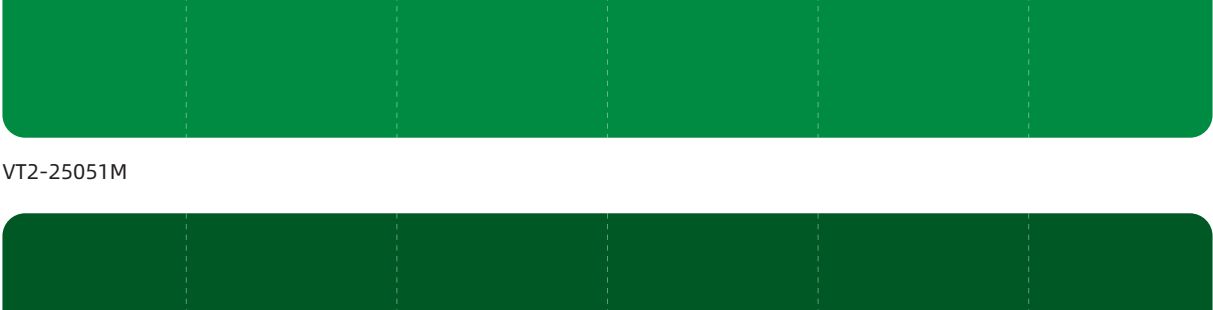

VT2-25051M

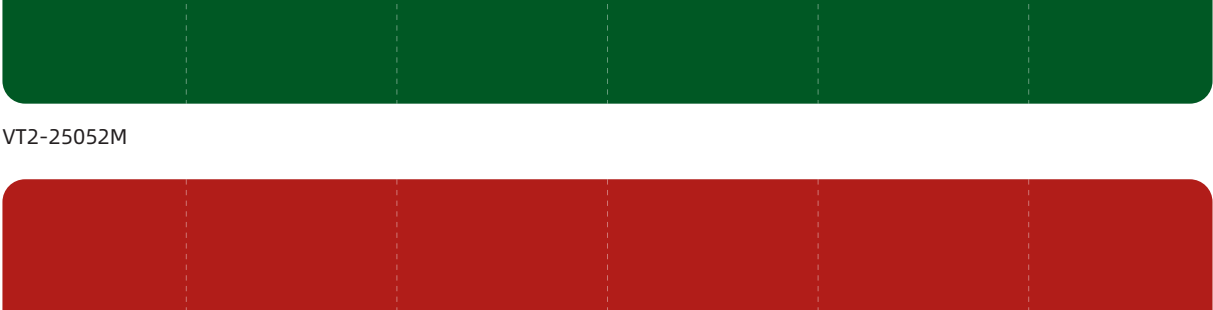


VT2-25052M

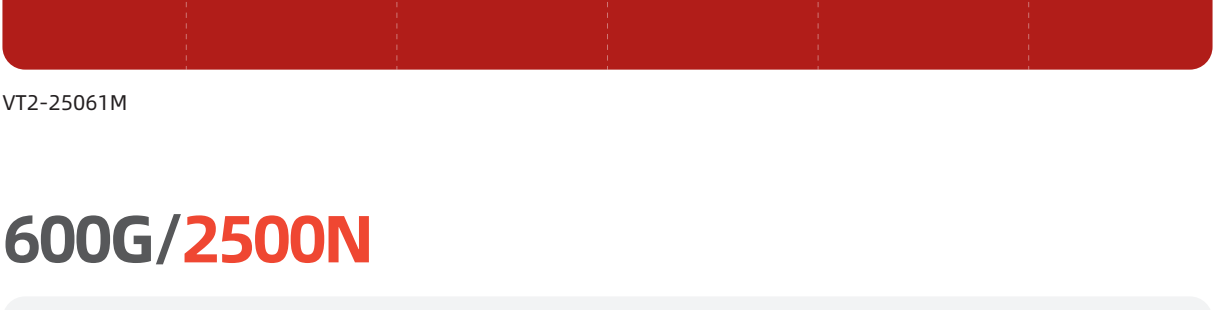

VT2-25061M

600G/2500N

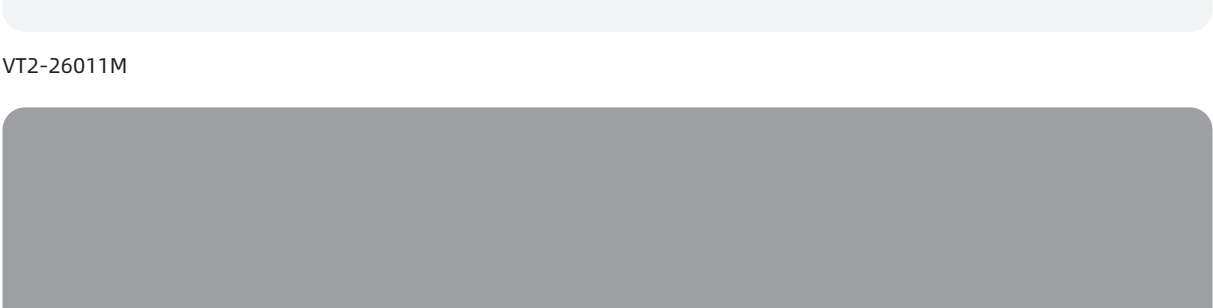

VT2-26011M



VT2-26032M



VT2-26042M



VT2-26053M

680G/3000N



VT3-36811M



VT3-36832M



VT3-36842M

- Ultrahigh tear & tensile strength
- High bending resistance
- High color fastness



Yuma Vantex Superior Tent Cover Membrane covers a variety of categories, a wide range of application scenarios:

- Truck Tarp
- Roof Tarp
- Tent Cover
- Truck Side Curtain

• Technical properties

Product	VT2-24242M	VT2-25031M VT2-25032M VT2-25041M VT2-25051M VT2-25052M VT2-25061M	VT2-26011M VT2-26032M VT2-26042M VT2-26053M	VT2-36811M VT2-36832M VT2-36842M	
Width	300/200cm	300/200cm	300cm	300cm	DIN EN ISO 2286-1
Thickness	0.34mm	0.40mm	0.48mm	0.53mm	DIN EN ISO 2286-3
Total Weight	420g/m ²	500g/m ²	600g/m ²	680g/m ²	DIN EN ISO 2286-2
Roll length	50/100 m/roll	50/100 m/roll	50/100 m/roll	50/100 m/roll	-

• Physical properties

Tensile strength	Warp 2000N/5CM Weft 1800N/5CM	Warp 2300N/5CM Weft 1900N/5CM	Warp 2500N/5CM Weft 2300N/5CM	Warp 3000N/5CM Weft 2800N/5CM	EN ISO 1421
Tear strength	Warp 220N/5CM Weft 200N/5CM	Warp 280N/5CM Weft 280N/5CM	Warp 280N/5CM Weft 250N/5CM	Warp 320N/5CM Weft 300N/5CM	DIN 53363
Adhesion	>75N/5CM	>75N/5CM	>100N/5CM	>100N/5CM	EN ISO 2411
Temperature resistance	-30~70°C				DIN EN 1876-1

• Flame retardancy

Flame retardancy	-	-	B2	B2	DIN 4102
------------------	---	---	----	----	----------

• Surface treatment

Surface treatment	-				-
-------------------	---	--	--	--	---

• Solar optical values

Color fastness	7-8				EN ISO 105-B02
----------------	-----	--	--	--	----------------

• Eco friendly

Heavy metal test (Cd/Pb/Hg)	None				GB/T 26125-2011
Odor test	None				GB 18401-2010.6.7
PH test	Pass				GB/T 7573-2009
Formaldehyde content test	None				GB/T 29121-2009
Mouldproof test	None				ASTM G 21-15 (2021)

• Certifications, labels, guarantees

China Environmental Labelling	Pass				-
BSCI	Pass				-
System certification	ISO 9001 / ISO 14001 / ISO 45001				DIN EN

The technical data here above are average values with +/- 5% tolerance.