

AST-5600NJ/L/FLP

Üniversal Programlanabilir Kapaklı / Kapaksız Cep Takma Otomatı (30 x 30 cm)
Universal Programmable Pocket Setting Automat with or without Flap (30 x 30 cm)




Özellikler

- Dokunmatik IPC kontrol ekranı sayesinde kolay programlama ve kişiselleştirme özelliği
- Kablosuz internet erişim özelliği sayesinde uzaktan destek ve programlama yapabilme imkânı
- Özel aparat sistemi sayesinde kapaklı / kapaksız cep dikebilme özelliği
- X - Y servo motor sistemi
- Max. 5 dakikada kolay kalıp değiştirme imkânı
- Çalışma alanı 300 mm x 300 mm
- 200 farklı desen kayıt etme özelliği
- Direct Drive servo motor teknolojisi • 4.000 dev./dak.

Specifications

- Easy programming and customization feature thanks to the touch IPC control screen
- Ability to provide remote support and programming thanks to wireless internet access feature
- Ability to sew pockets with or without flaps thanks to the special mould system
- X - Y servo motor system
- Easy mold changing in max. 5 minutes
- Working area 300 mm x 300 mm
- 200 different pattern recording feature
- Direct Drive servo motor technology • 4.000 rpm

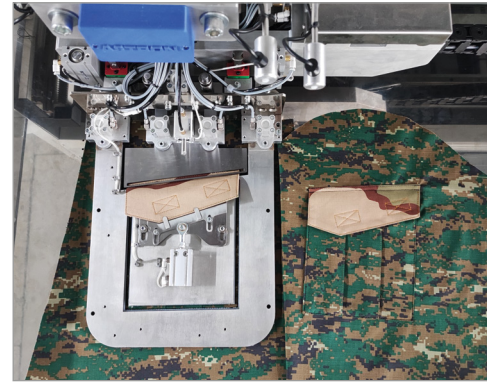

AST-5600NJ/XL

Üniversal Programlanabilir (45 x 35 cm) Patch Dikimi için Özel Kalıp Sistemli Dikiş Otomatı
Universal Programmable Patch Sewing Automat with Special Mould System (45 x 35 cm)




Özellikler

- Dokunmatik IPC kontrol ekranı sayesinde kolay programlama ve kişiselleştirme özelliği
- Kablosuz internet erişim özelliği sayesinde uzaktan destek ve programlama yapabilme imkânı
- Özel tasarım kalıplar sayesinde match, pantolon ağ güçlendirme ve büyük ebatlarda 3 ve 4 köşe kapama özelliği
- X - Y servo motor sistemi
- Max. 5 dakikada kolay kalıp değiştirme imkânı
- Çalışma alanı 450 mm x 350 mm
- 200 farklı desen kayıt etme özelliği
- Direct Drive servo motor teknolojisi
- 4.000 dev./dak.


Specifications

- Easy programming and customization feature thanks to the touch IPC control screen
- Ability to provide remote support and programming thanks to wireless internet access feature
- Thanks to specially designed molds, different types of patches, trouser crotch reinforcement and 3 and 4 sides closing feature in large sizes
- X - Y servo motor system
- Easy mold changing in max. 5 minutes
- Working area 450 mm x 350 mm
- 200 different pattern recording feature
- Direct Drive servo motor technology
- 4.000 rpm


Patch Kalıbı / Patch Clamp

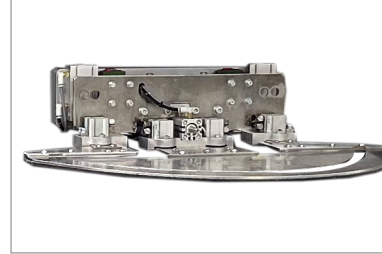

Patch Kalıpları / Patch Clamp



3 Kenar / 3 Sides



4 Kenar / 4 Sides