

AUTOMATIC SEQUIN PUNCH PRESS MACHINE SERIES





MAIN PERFORMANCE CHARACTERISTICS

- **Electric control system:**
industrial grade arm architecture A8 processor; full touch true color industrial display screen; storage capacity of 100 million needles;
- **Color-changing structure:**
high precision and fast color-changing with closed-loop motor and ball screw;
- **Head structure:**
balanced head structure to reduce vibration.Positioning pin available to ensure installion accuracy;
- **Punch components:**
 - (1) Modular design, any combinations of sizes can be switched;
 - (2) Independent motorto feed sequins, specifications accordance anddistance control;
 - (3) Double guide and high concentricity, also long service life of the punch press heads;
 - (4) High precision of the punch head assembly.
- **Embroidery frame:**
 - (1) High-precision lightweight independent suspension frames, stable and consistent height of the needle drop;
 - (2) Pneumatic connection for easy unloading;
 - (3) Electrostatic film design: high viscosity and precision.Easy to switch between stickers;
 - (4) Infrared cross-positioning marker, humanized design for easy operation and error reduction.

APPLICATIONS

Widely used in clothing , footwear, bags, bedding and handicrafts industries.While combined with processes of embroidery,laser and sequin punch press, it enriches personalized design.

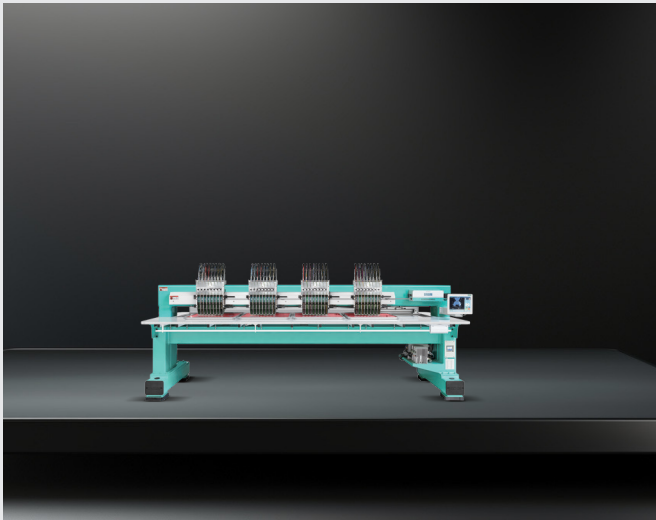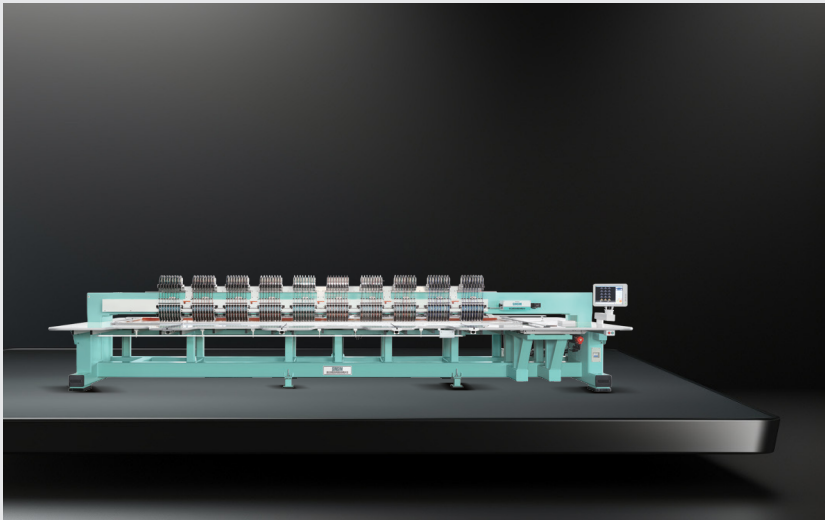

AUTOMATIC SEQUIN PUNCH PRESS MACHINE SERIES




Rich colors , Various Shapes



Rich colors : single head reach to 12 colors, multi head with 8 color .
Various shapes: Minimum size 0.4mm , other size 0.6/0.8/1.0/1.2/1.5/2.0/3.0/4.0/5.0 and special shaped option.

Color Overlap Accuracy

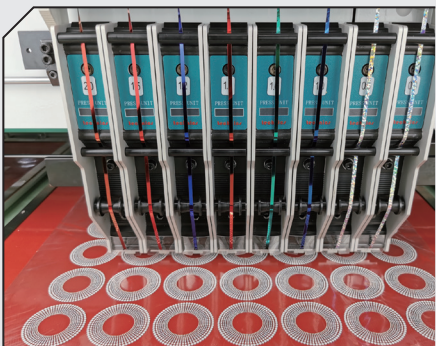

High precision sequin feeding , sequin gap reach to 0.1mm, color overlap accuracy, minimum gap reach to 0.05mm, not easy missing sequin and turn over sequin.


Value-added Services

One-stop product solutions provided, including free design-making training and eco-friendly sequins supply also auxiliary equipments accessible.

GENERAL MACHINE SPECIFICATIONS

Model	Color	Head	Head interval	Frame Area (mm)	Work area (mm)	Machine Size (mm)	Standard Size (mm)
SINSIM-ASH1201	12	1	0	510*450	460*410	1210*1020	0.8*3+1.0*2+1.2*2+1.5*2+2.0*2+3.0*1
SINSIM-ASH804	8	4	600	530*590	490*550	3450*1417	0.8*2+1.0*2+1.2*2+1.5*1+2.0*1
SINSIM-ASH810	8	10	550	600*750	600*650	7950*2057	0.8*2+1.0*2+1.2*2+1.5*1+2.0*1

High speed sequin punching , stable and urable.

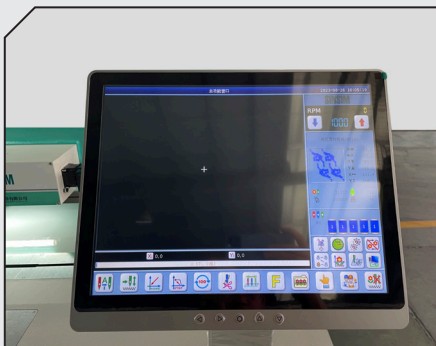

Dedicated industrial grade custom electronic control, work speed up to 1000rpm , stable and durable.

Exclusive Korean Technology



Exclusive Korean technology , modular design for punch components, and punch needle use special anti-friction material .

Humanized design with multi function



Sequin missing detection function , threading sequin and output sequin by one button , film pulling automatic , humanized residual material collection system .