

CHOICE®
HIGH TECHNOLOGY

Embroidery & Sewing Machine

TAIZHOU ROSEW MACHINERY CO.LTD.

Add: No.188 Developing road, Jiaojiang, Taizhou city, China

Tel/Fax: 0086-576-88800987

Email: info@golden-choice.net

Website: www.golden-choice.net




WhatsApp




WeChat



Facebook

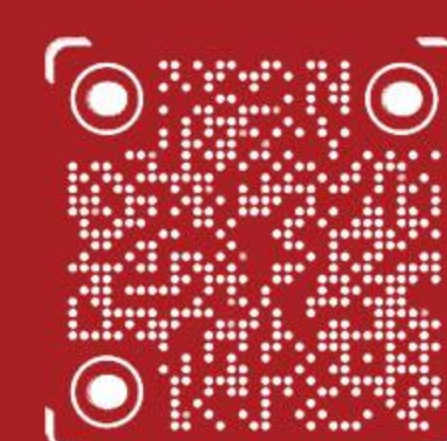

Tik Tok

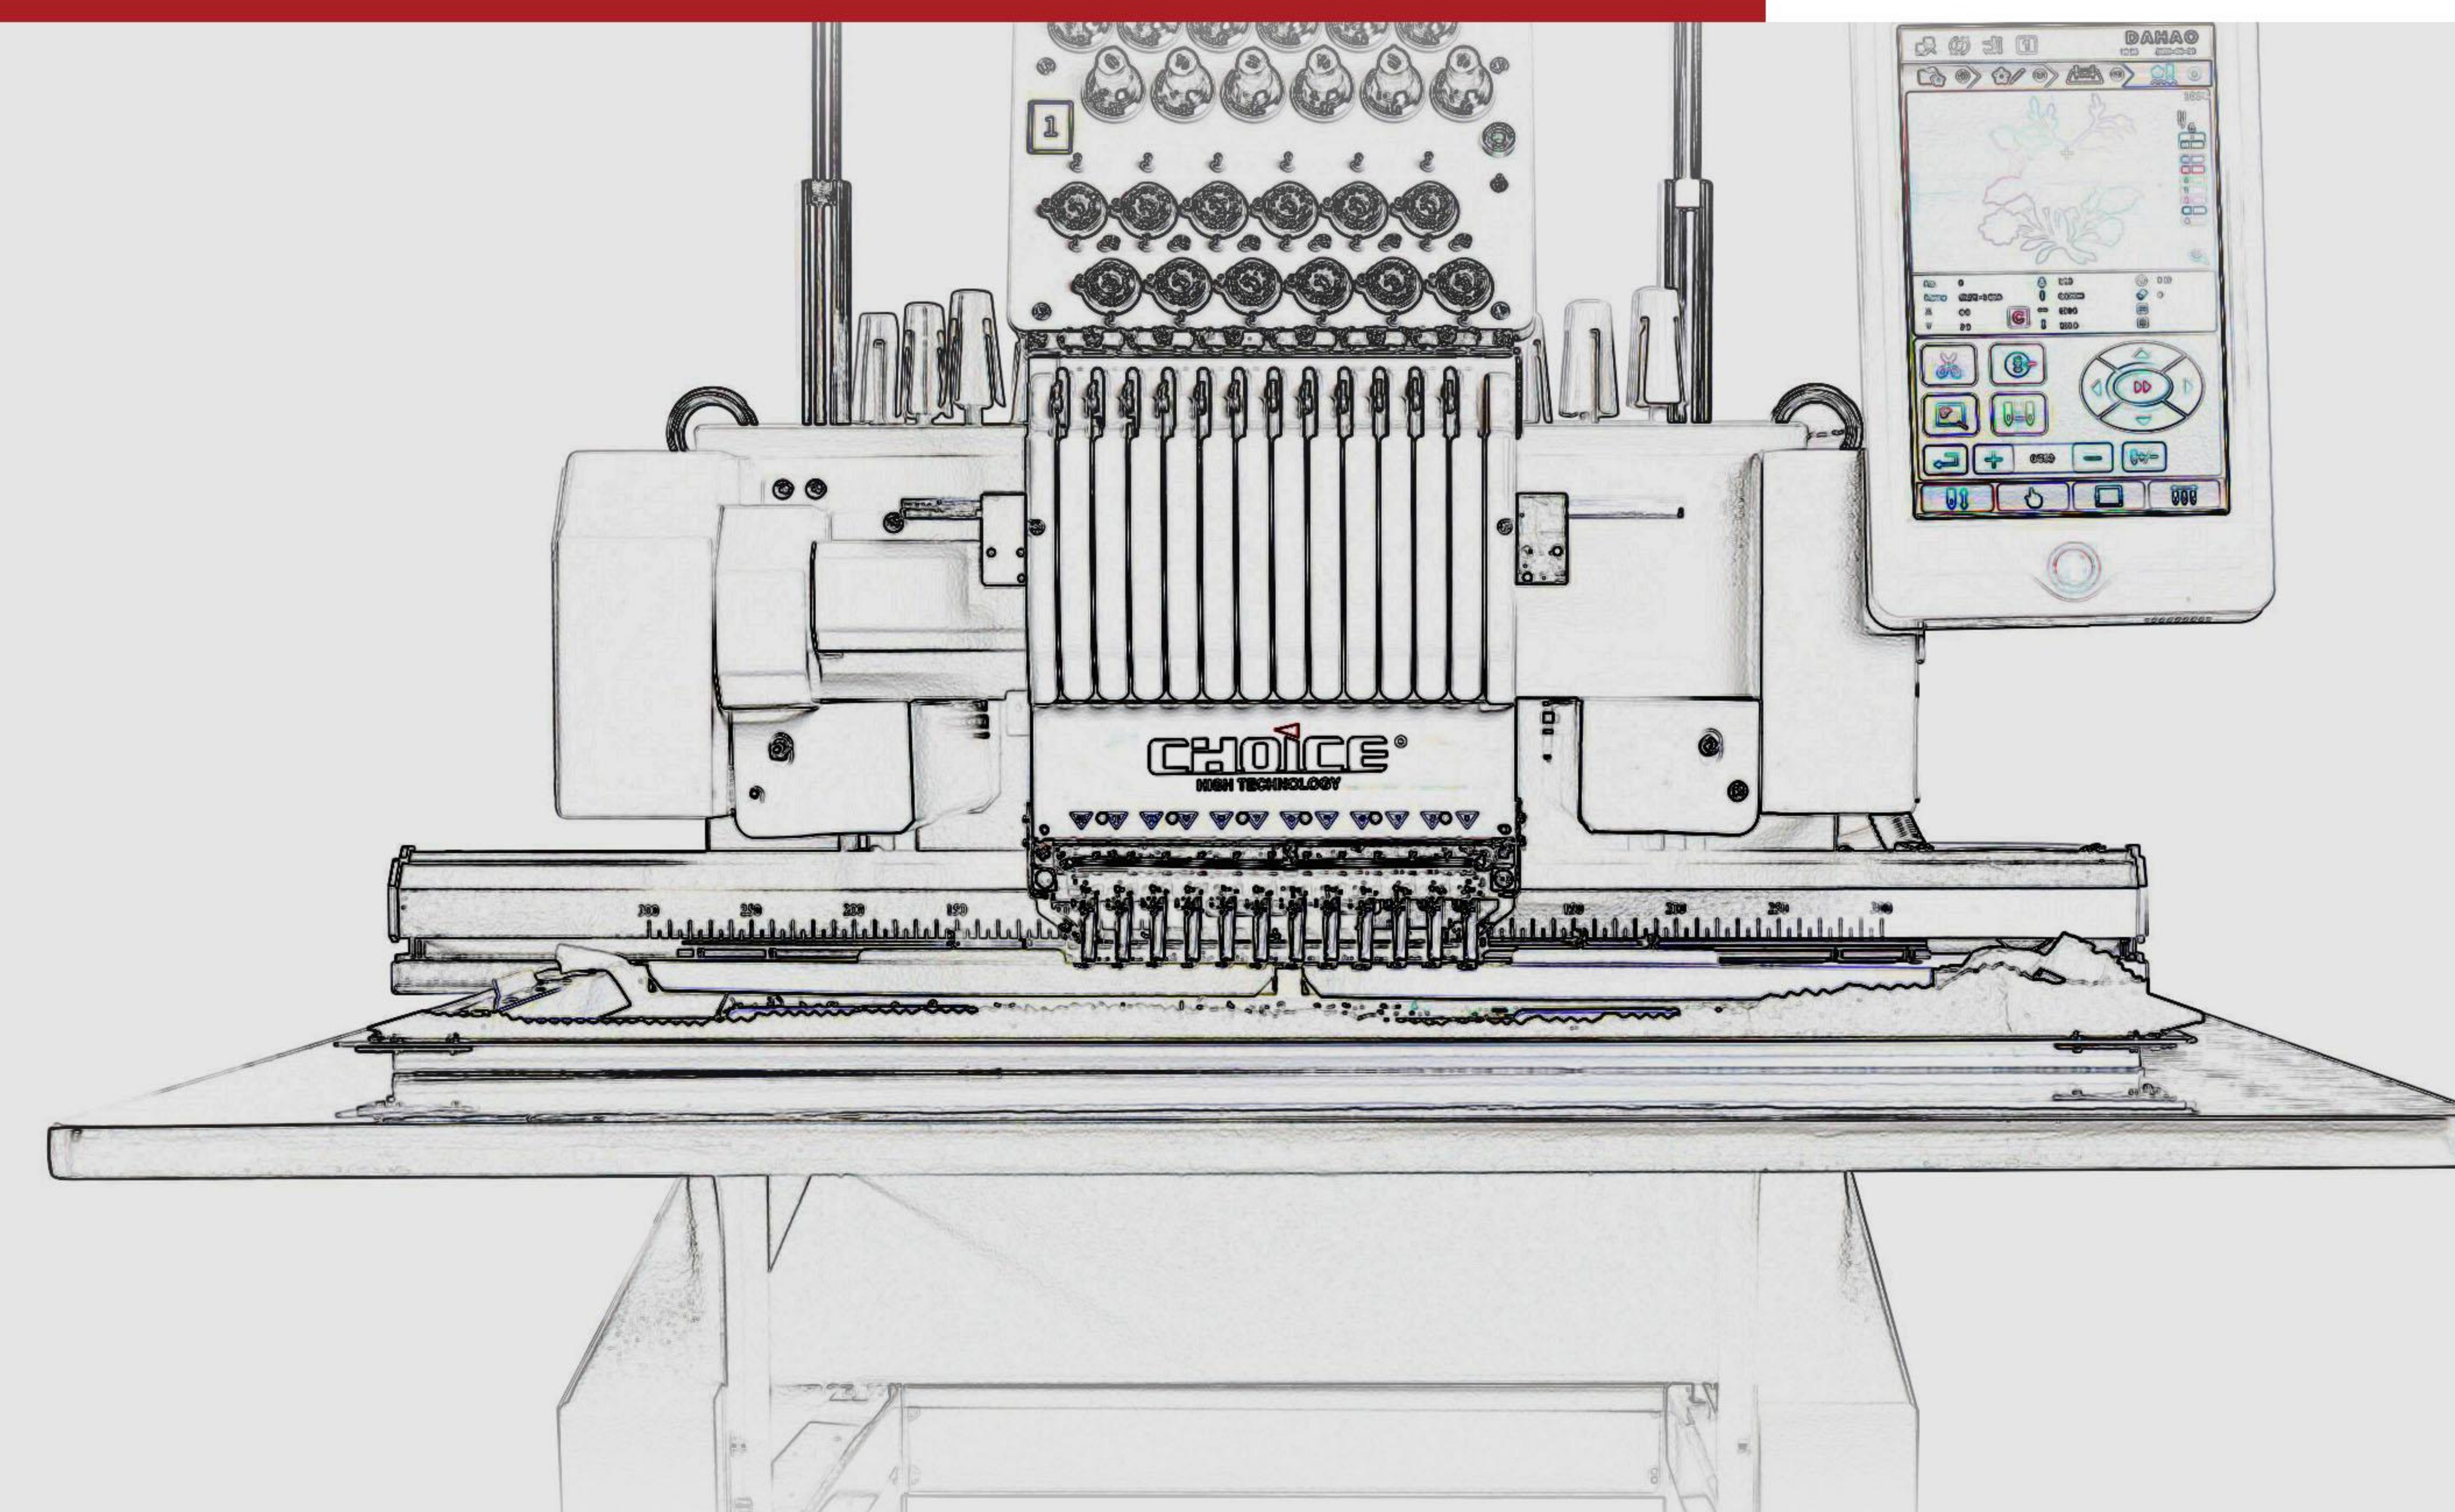

BETTER CHOICE, BETTER CLOTHING

GC-MINI1201

Single head 12 needle mini embroidery machine



SPECIFICATION

- Emb.Area 200mmX350mm
 - Intelligent full color touch screen. Slide mode for switching details, and the button will change as the screen change.
 - 9 kinds of embroidery frame visualization options.
 - U disk or network mode input.
 - Supported batch mode for pattern input, output, and delete.
 - 600,000,000 needle storage capacity, support up to 20,000 patterns, and 250 times color change.
 - Perfect supported sequin embroidery, cording embroidery, Rhine stone hot fix and other special functional devices.(Optional)
- Pad, PC control the machine directly.
 - Finished garment embroidery speed up to 1200rpm, cap embroidery 600rpm, support 15 needles color change.
 - Chinese, English, French, Spanish, Turkish, Portuguese, Russian, Arabic, Thai, Dutch, German, Italian, Vietnamese and other 13 kinds of language well supported.
 - AC80-AC260V input voltage adapted
 - 34V working power protect the operator safety.

Heads	Single	Machine Size	76*70*150cm
Needles	12	Package Size	83*74*100cm
Embroidery Area	200*350mm	N.W/G.W	90/110KGS
Max Speed	1000RPM	Built-in Universal power supply	80-260V
Computer	Dahao 285A 8 inch touch screen		
Languages	Chinese, English, Spanish, Turkish, Italian, Dutch, French, Portuguese, German, Thai, polish, Russian.		

MACHINE DISPLAY



ACCESSORIES



GC-1201E/GC-1501E/GC-0901E


Single head embroidery machine



SPECIFICATION

- Suitable for flat bed embroidery, cap embroidery, and finished garments embroidery
- Automatic thread trimmer, automatic color change
- Pattern auto rotation with 1800 after changing cap frame unit
- 270° wide cap frame unit
- Convenient power failure recovery embroidery function, prevent embroidery half-way-off cause misalignment
- Maximum speed: 1200rpm
- LCD display showing real stitches
- Memory size 2,000,000 stitches matched with 200 patterns
- USB and network transmission support
- Full screen preview design trace capable
- Emergency stop, prevent accident
- Thread break detection and prevention
- Electricity AC86-240V input available
- Machine Max. power consumption: 150W
- Automatic external thread winding device
- Language supported: Chinese, English, French, Russian, Dutch, Spanish, portuguese, Turkish, Arabic, Thai, Vietnamese

Heads	Single	Machine Size	76*70*150cm
Needles	12/15/9	Package Size	113*85*90cm
Embroidery Area	360*510mm	N.W/G.W	150/170KGS
Max Speed	1200RPM	Built-in Unversal power supply	110-220V
Computer	Dahao 285A 8 inch touch screen		
Languages	Chinese, English, Spanish, Turkish, Italian, Dutch, French, Portuguese, German, Thai, polish, Russian.		

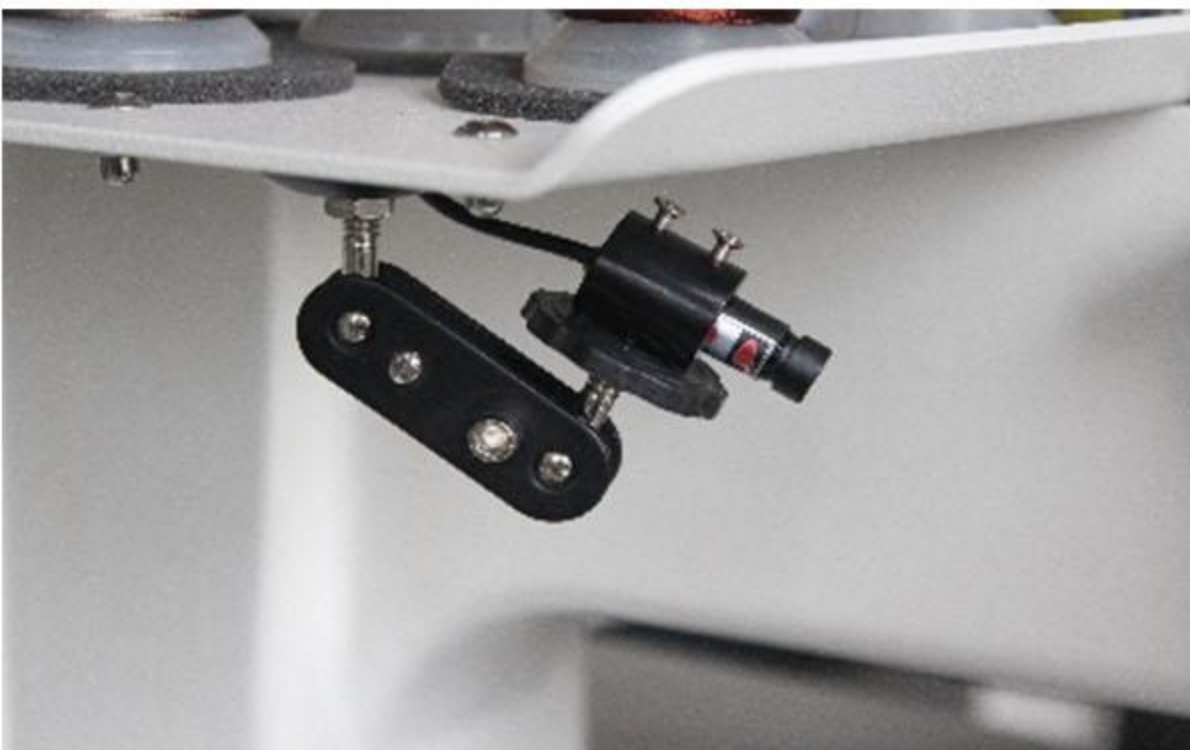

Laser system



Laser system



Jump motor



Cap embroidery



Flat embroidery



Garments embroidery

HOOPS/FRAMES INCLUDED



Shirt Front Oval Hoop 36x54cm



Shirt Front Square Hoop 30x30cm



Shirt Front Round Hoop 15cm



Shirt Front Round Hoop 12cm



Shirt Front Round Hoop 9cm



Shirt Front Round Hoop 20cm

CAP ATTACHMENT INCLUDED

- hoop cap Clamp
- cap rings per head
- cap driver per head




ACCESSORIES INCLUDED

- Tool Kit
- Operation Manual
- Table and stand with wheels



GC-1201EL/GC-1501EL/GC-0901EL


Single head flat embroidery machine with extended style

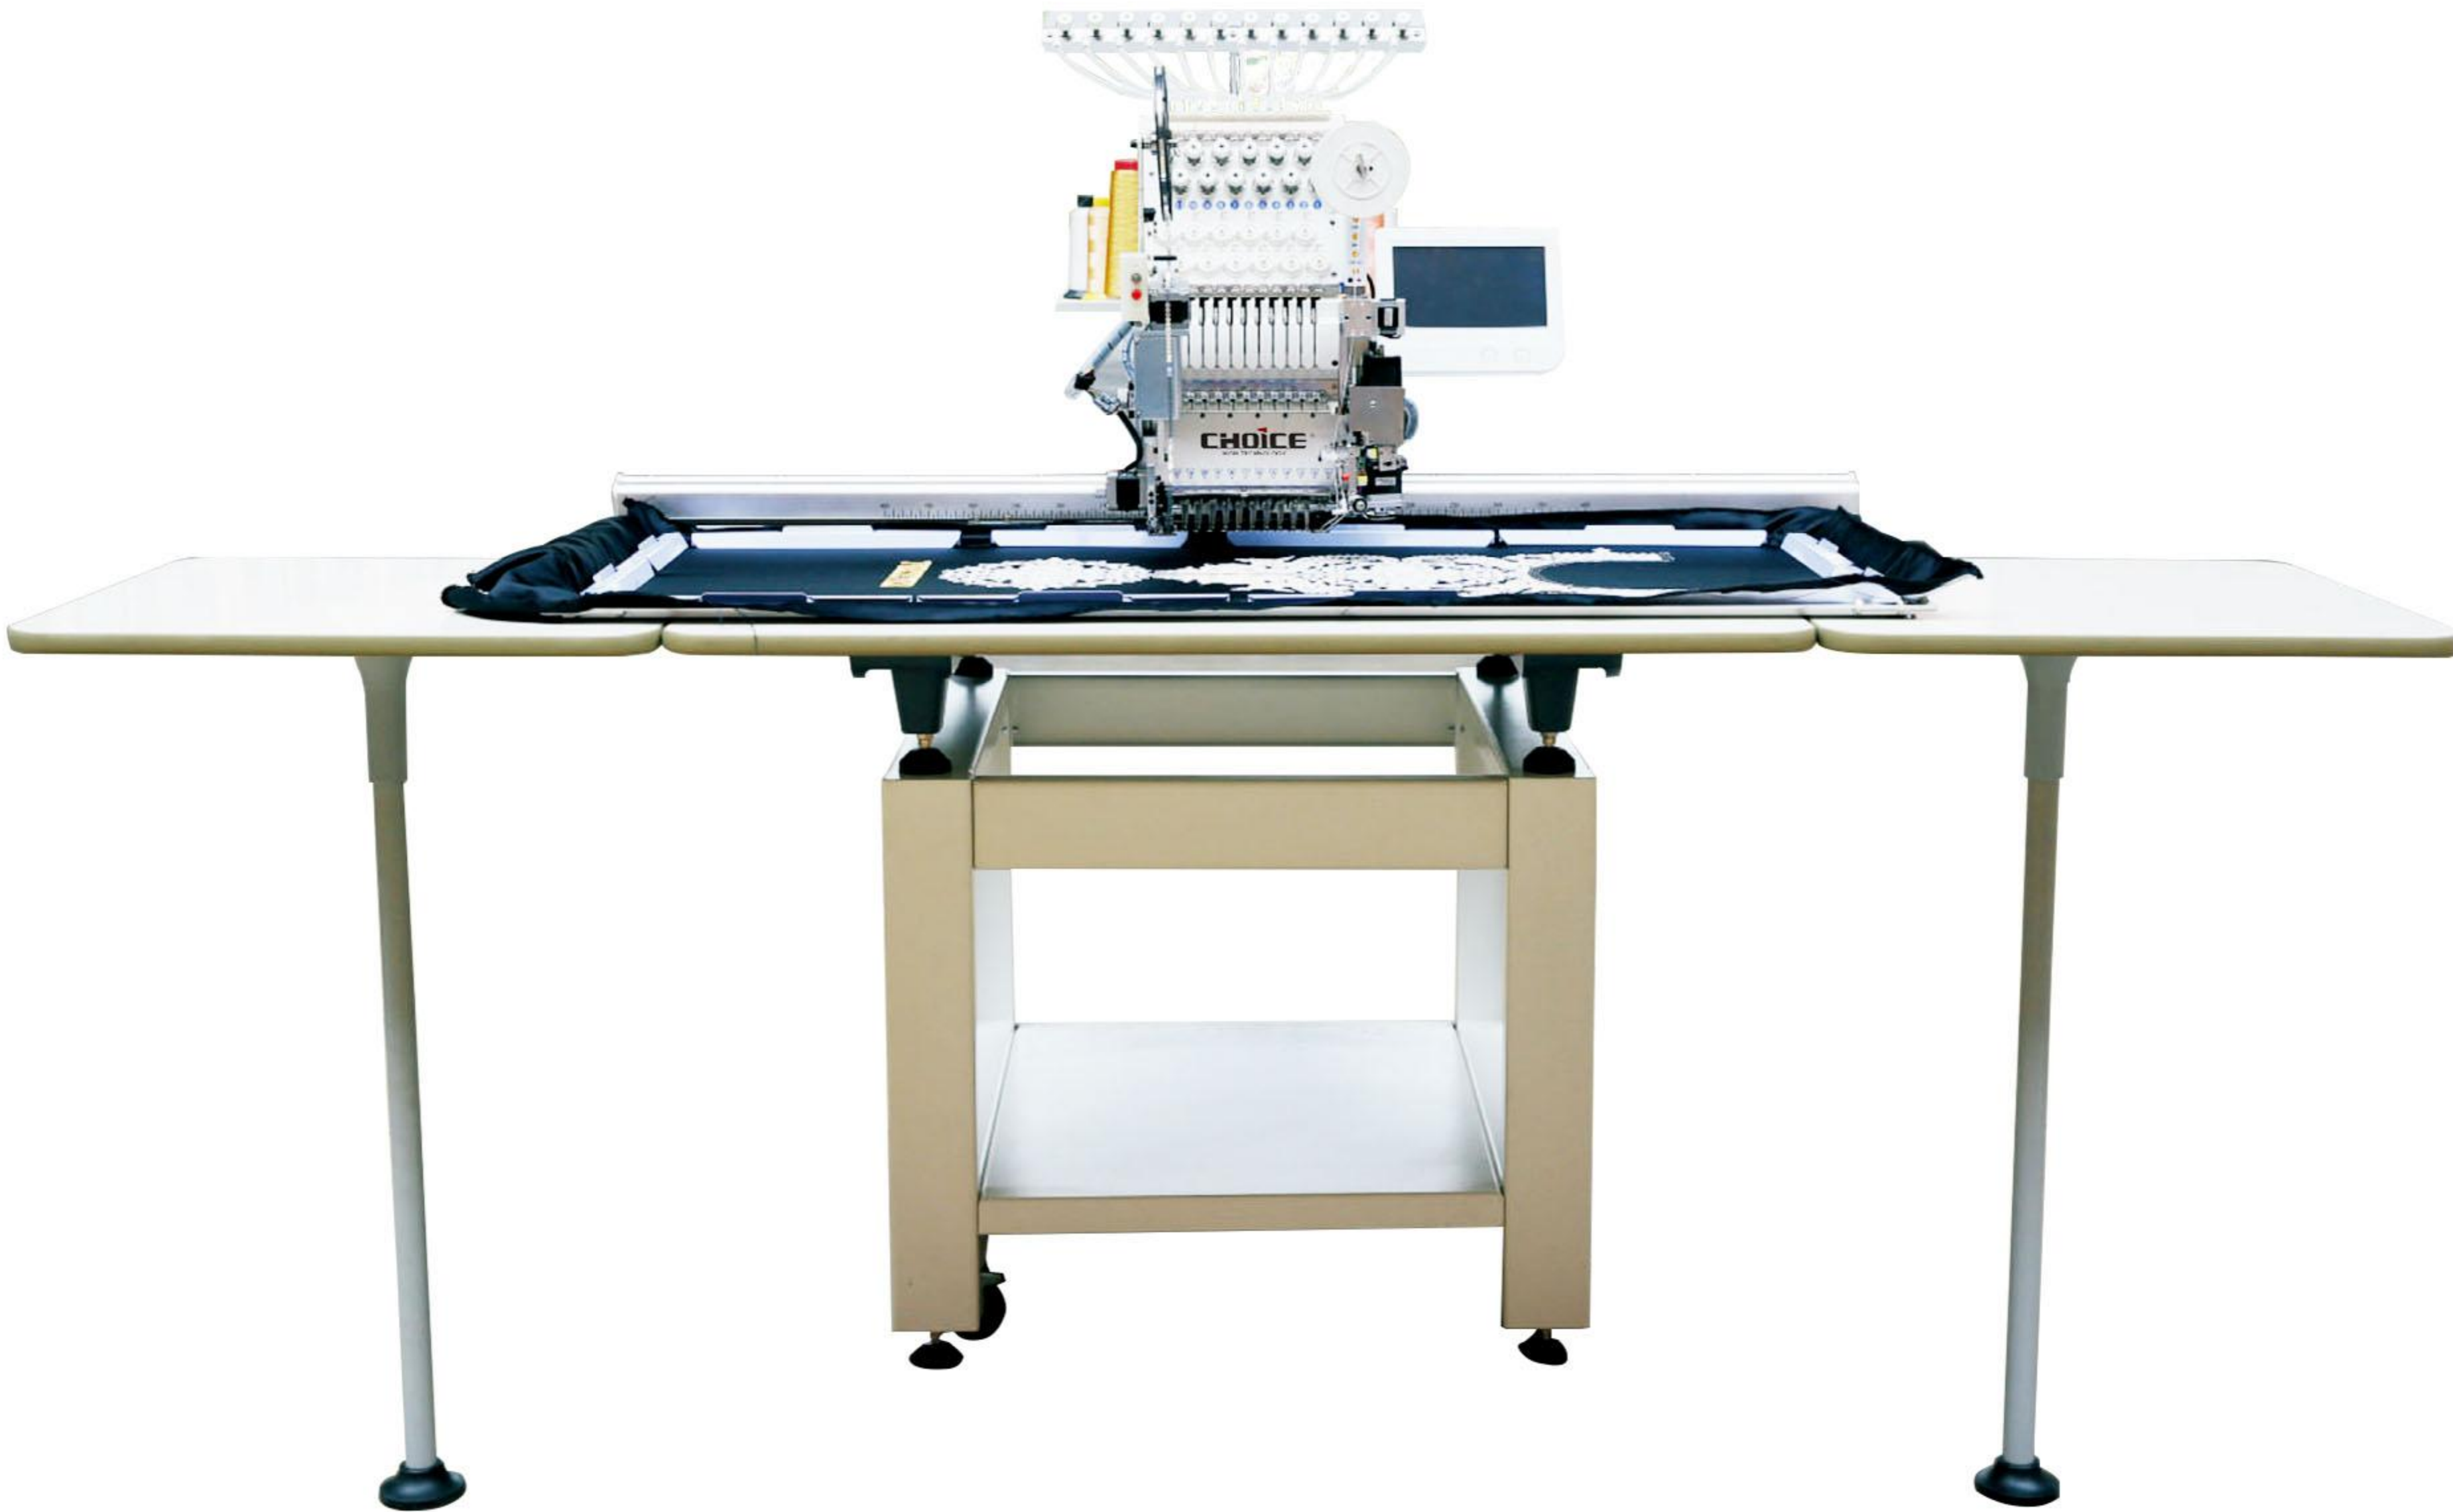

SPECIFICATION

- Embroidery area: 500x1200mm
 - Suitable for flat bed embroidery, cap embroidery, finished garments embroidery
 - Convenient power failure recovery embroidery function, prevent embroidery half-way-off cause misalignment
 - 270° wide cap frame unit
 - LCD display showing real stitches
 - USB and network transmission support
- Full screen preview design trace capable
 - Emergency stop, prevent accident
 - Thread break detection and prevention
 - Electricity AC86-240V input available
 - Machine Max. power consumption: 150W
 - Automatic external thread winding device
 - Language supported: Chinese, English, French, Russian, Dutch, Spanish, portuguese, Turkish, Arabic, Thai, Vietnamese

Heads	Single	Machine Size	130*113*90cm
Needles	12/15/9	Package Size	146*113*87cm
Embroidery Area	500*1200mm	N.W/G.W	260/280KGS
Max Speed	1200RPM	Built-in Universal power supply	110-220V
Computer	Dahao 285A 8 inch touch screen		
Languages	Chinese, English, Spanish, Turkish, Italian, Dutch, French, Portuguese, German, Thai, polish, Russian.		

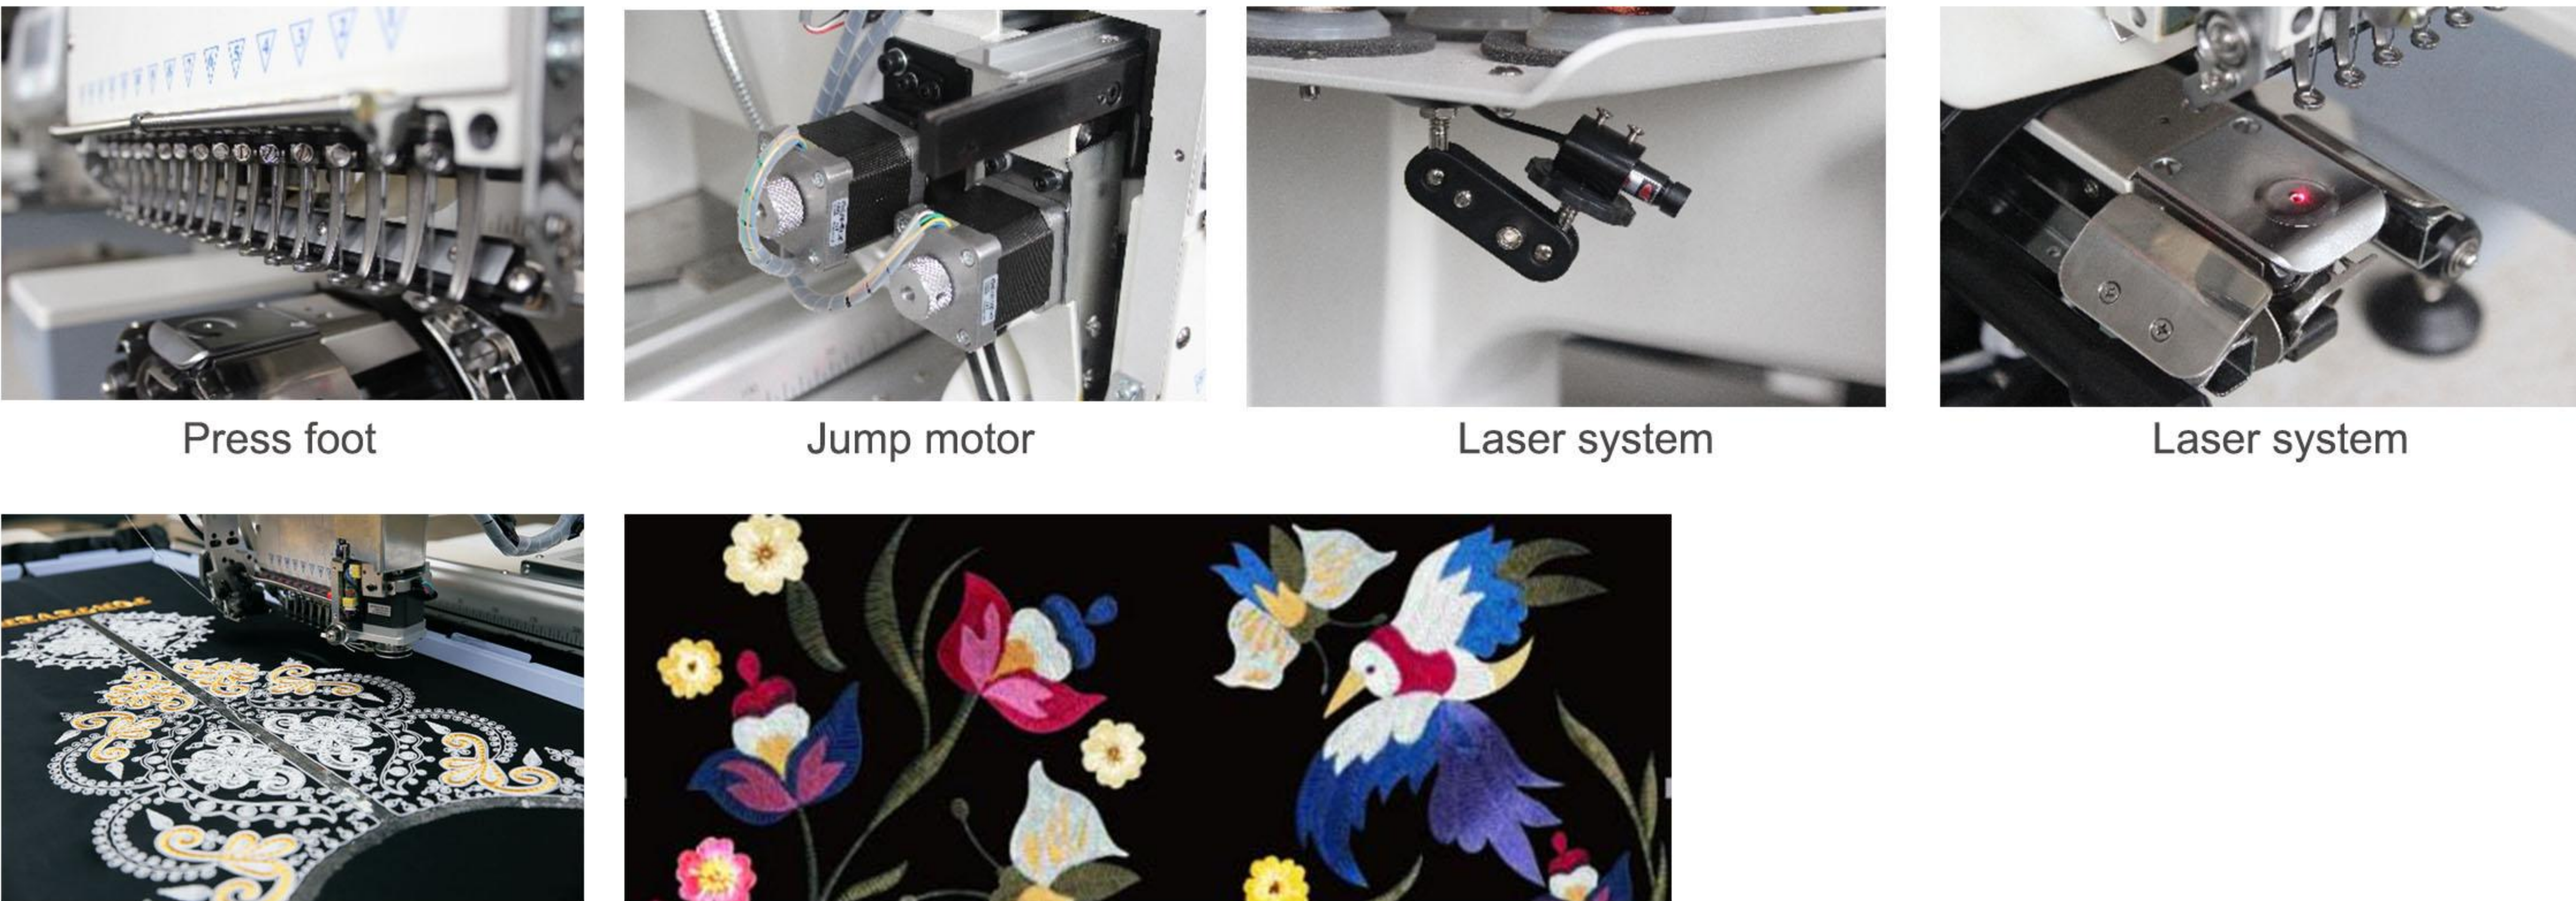

HOOPS/FRAMES INCLUDED



CAP ATTACHMENT INCLUDED

- hoop cap Clamp
 - cap rings per head
 - cap driver per head



ACCESSORIES INCLUDED

- Tool Kit
 - Operation Manual
 - Table and stand with wheels



GC-1201E+1PD

Single head flat embroidery machine with coiling device



SPECIFICATION

- Suitable for flat bed embroidery, cap embroidery, and finished garments embroidery, rhinestone embroidery, beads embroidery, cording embroidery and tape embroidery etc
 - 270° wide cap frame unit
 - Convenient power failure recovery embroidery function, prevent embroidery half-way-off cause misalignment
 - Maximum speed: 1200rpm
 - LCD display showing real stitches
 - USB and network transmission support
- Full screen preview design trace capable
 - Emergency stop, prevent accident
 - Thread break detection and prevention
 - Electricity AC86-240V input available
 - Machine Max. power consumption: 150W
 - Automatic external thread winding device
 - Language supported: Chinese, English, French, Russian, Dutch, Spanish, portuguese, Turkish, Arabic, Thai, Vietnamese



Heads	1+1	Machine Size	203*130*160cm
Needles	12/15/9	Package Size	-
Embroidery Area	560*1200mm	N.W/G.W	820/540KGS
Max Speed	1200RPM	Built-in Universal power supply	110-220V
Computer	Dahao 285A 8 inch touch screen		
Languages	Chinese, English, Spanish, Turkish, Italian, Dutch, French, Portuguese, German, Thai, polish, Russian.		

GC-1201E+1CT

Single head flat embroidery machine with chenille & chainstitch



SPECIFICATION

- Suitable for flat embroidery, finished garments, and chenille & chainstitch embroidery
 - Maximum speed 1200RPM, Flat embroidery speed: 850rpm
 - Embroidery area: 400x500x350mm
400x560x1200mm
 - Flat head with upper thread holding device
 - LCD display showing real time stitching
 - Full screen pre-view design trace capable
- Memory size: 20,000,000 stitches matched with 200 patterns
 - thread break detection and prevention
 - Machine maximum power consumption:150W
 - Automatic external thread winding device
 - Multi language supported, it involves Chinese, English, French, Russian, Dutch, Spanish, Portuguese, Turkish, German, Arabic, Thai, and Vietnamese.



Heads	1+1	Machine Size	203*130*160cm
Needles	12/15/9	Max Speed	1200rpm Flat embroidery speed: 850rpm
Embroidery Area	400x500x350mm 400x560x1200mm	N.W/G.W	820/540KGS
		Built-in Universal power supply	110-220V
Computer	Dahao 285A 8 inch touch screen		
Languages	Chinese, English, Spanish, Turkish, Italian, Dutch, French, Portuguese, German, Thai, polish, Russian.		

GC-0902E/GC-1202E/GC-1502E

Double-head embroidery machine



SPECIFICATION

- Suitable for flat bed embroidery, cap embroidery and finished garments embroidery
 - Free changing between finished garments frame and cap frame pattern auto rotation with 180°after changing cap frame unit
 - 270°wide cap frame unit
 - Convenient power failure recovery embroidery function, prevent embroidery half-way off cause misalignment
 - LCD display showing real time stitching
- Full screen pre-view design trace capable
 - Auto start and color change, maximum 200 times color change supported
 - Thread break detection and prevention
 - Wide voltage AC80-260V input, adapt to any unstable electricity environment
 - The machine adopts DC36V power switch, eminently safe
 - Automatic external thread winding device



Heads	Double	Machine Size	120*77*150cm
Needles	12/15/9	Package Size	130*113*90cm
Embroidery Area	400*450mm	N.W/G.W	270/300KGS
Max Speed	1200RPM	Built-in Universal power supply	110-220V
Computer	Dahao 285A 8 inch touch screen		
Languages	Chinese, English, Spanish, Turkish, Italian, Dutch, French, Portuguese, German, Thai, polish, Russian.		

GC-1202E+PD

Double head falt embroidery machine wiht coiling device



SPECIFICATION

- It integrates many embroidery methods such as flat embroidery, sequin and cording, etc. thus making embroidery methods flexible and variable.
 - The automatic -conversion between normal embroidery head and cording head makes normal embroidery and cording embroidery converted at random.
 - The spacing between the lowest position to where the presser foot falls and the needle board as well as the working height of the presser foot can be adjusted according to the thickness of the embroidery drapery and the embroidery matter on computer.
- When cording head finished work, the presser foot raises automatically and the material tray automatically returns to the original position to get into the wait state, thus facilitating frame and material changes.
 - Many embroidery effects such as cording embroidery, tapping embroidery, cording embroidery, frill embroidery and zig-zag sewing embroidery can be realized by choosing attachments and computer parameters.



Heads	Double	Machine Size	120*77*150cm
Needles	12/15/9	Package Size	130*113*90cm
Embroidery Area	800*360mm(Customizable)	N.W/G.W	270/300KGS
Max Speed	1200RPM	Built-in Universal power supply	110-220V
Computer	Dahao 285A 8 inch touch screen		
Languages	Chinese, English, Spanish, Turkish, Italian, Dutch, French, Portuguese, German, Thai, polish, Russian.		

GC-1203E

Three-head embroidery machine



SPECIFICATION

- Suitable for flat, cap and finished garments embroidery
- Auto thread trimmer, auto color change
- 270° wide cap frame
- Max speed 1200RPM.
- Memory size: 2000,000stithes(200 designs).
- Multiple languages supported,Chinese, English, French, Russian, Dutch, Spanish,Portuguese, Turkish, German, Arabic, Thai, Vietnamese
- LCD display showing real time stitching
- Full screen pre-view design function support
- Auto start and color change, 200 times color change
- Wide voltage AC80-260V input, adapt to any unstable electricity
- DC36 safe voltage output
- Machine max power consumption:150W
- Automatic external thread winding device
- Devices could be matched(Cording,Sequins,Beads,Rhinestone)



Heads	Three	Machine Size	151*80*169cm
Needles	12	Package Size	180*113*100cm
Embroidery Area	400*450mm	N.W/G.W	680/760KGS
Max Speed	1200RPM	Built-in Universal power supply	110-220V
Computer	Dahao 285A 8 inch touch screen		
Languages	Chinese, English, Spanish, Turkish, Italian, Dutch, French, Portuguese, German, Thai, polish, Russian.		

GC-1204E

Four-head embroidery machine



SPECIFICATION

- Suitable for flat bed embroidery, cap embroidery, and finished garments embroidery.
- Free changing between finished garments frame and cap frame
- 270° wide cap frame unit
- LCD display showing real stitches.
- USB and network transmission support
- Full screen preview design trace capable
- Electricity AC86-240V input available
- Thread break detection and prevention
- Main shaft support shutdown with axle and without axle, it could be adjusted anytime.
- Memory size:20,000,000 stitches matched with 200 patterns
- U disk patten preview function supported
- Auto start and color change,200 times color change betted
- Full color control panel
- 8" high definition color LCD display and touch screen showing real time stitching
- Simple HCI and operation mode
- Main interface monitoring machine condition any time
- Quick manual trimming. color changing and main shaft inching operation



Heads	Four	Machine Size	264*90*140cm
Needles	12	Package Size	267*112*170cm
Embroidery Area	400*450mm	N.W	550KGS
Max Speed	1000RPM	Built-in Universal power supply	110-220V
Computer	Dahao 285A 8 inch touch screen		
Languages	Chinese, English, Spanish, Turkish, Italian, Dutch, French, Portuguese, German, Thai, polish, Russian.		

GC-1206E

Six-head embroidery machine



SPECIFICATION

- Suitable for flat bed embroidery, cap embroidery, and finished garments embroidery.
- Free changing between finished garments frame and cap frame
- 270° wide cap frame unit
- LCD display showing real stitches.
- USB and network transmission support
- Full screen preview design trace capable
- Electricity AC86-240V input available
- Thread break detection and prevention
- Main shaft support shutdown with axle and without axle, it could be adjusted anytime.
- Memory size:20,000,000 stitches matched with 200 patterns
- U disk pattern preview function supported
- Auto start and color change,200 times color change betted
- Full color control panel
- 8" high definition color LCD display and touch screen showing real time stitching
- Simple HCI and operation mode
- Main interface monitoring machine condition any time
- Quick manual trimming. color changing and main shaft inching operation



Heads	Six	Machine Size	264*90*140cm
Needles	12	Package Size	343*123*150cm
Embroidery Area	400*450mm	N.W	1200KGS
Max Speed	1200RPM	Built-in Unversal power supply	110-220V
Computer	Dahao 285A 8 inch touch screen		
Languages	Chinese, English, Spanish, Turkish, Italian, Dutch, French, Portuguese, German, Thai, polish, Russian.		

GC-1208E

Eight-head embroidery machine



SPECIFICATION

- Automatic thread trimmer, automatic color change, Automatic external thread winding device.
- Convenient power failure recovery embroidery function, prevent embroidery half-way-off cause misalignment
- Memory size 2,000,000 stitches matched with 200 patterns
- Auto start and color change,200 times color change
- Emergency stop, prevent accident Thread break detection and prevention

Heads	Eight	Machine Size	414*115*172cm
Needles	12	Package Size	-
Embroidery Area	400*450mm	N.W/G.W	1200/1260KGS
Max Speed	1000RPM	Built-in Unversal power supply	110-220V
Computer	Dahao 285A 8 inch touch screen		
Languages	Chinese, English, Spanish, Turkish, Italian, Dutch, French, Portuguese, German, Thai, polish, Russian.		

GC-1212E

Twenty-head embroidery machine




SPECIFICATION

- Needles,heads,Embroidery Area could be done according to exact needs.
- Finished garments frame could be matched.
- Free changing from Finished garments and big flat Embroidery working.
- Convenient power failure recovery function
- Big LCD display showing real time stitching
- Full screen pre-view design trace capable
- Auto start and color change
- Thread break detection and prevention
- Device could be choosed,as Rhinestone,beads,Single sequins(double sequins), Easy Cording



GC-0920E

9 Needle 20 high speed embroidery machine

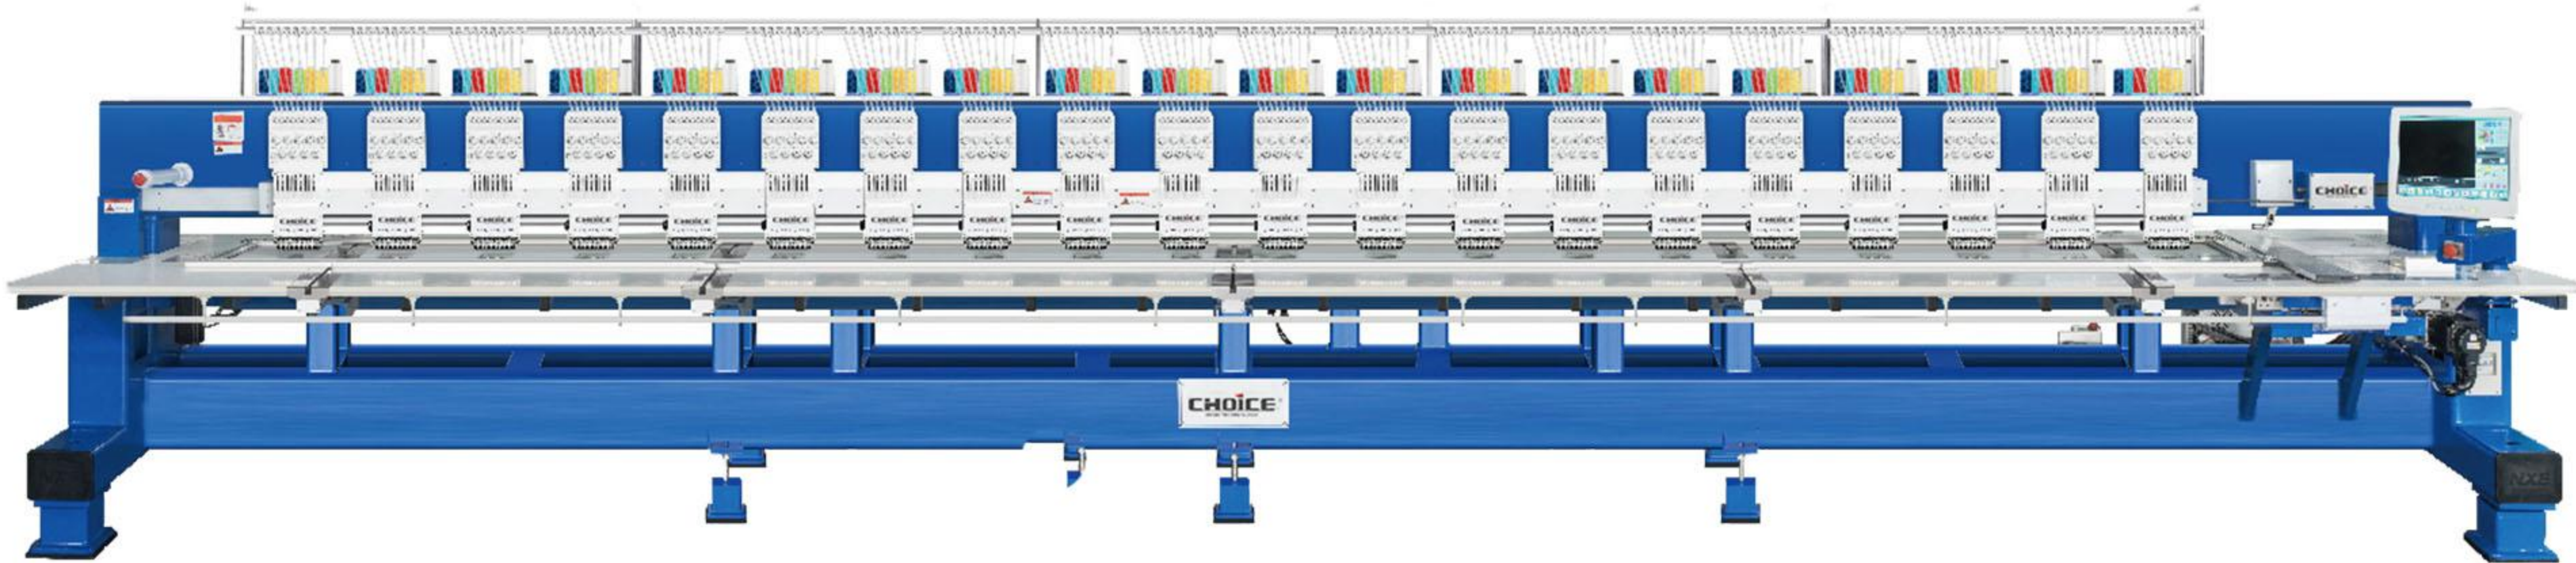

GC-0938E

9 Needle 38 high speed embroidery machine



GC-0476E

4 Needle 76 high speed embroidery machine



Model	Needles no.	Head no.	Head interval(mm)	Emb.area(mm)	Inner frame size(mm)	Machine Size(mm)
GC-0908E	9	8	400	400x600	3240x640	4370x1727
GC-0615E	6	15	250	500x1300	4040x1340	5390x3117
GC-0918E	9	18	400	800x1200	3240x640	7640x1270
GC-0924E	9	24	330	700x1300	8330x1340	9790x3127
GC-0625E	6	25	250	500x1300	6610x1370	6610x1370
GC-0927E	6	27	250	500x1300	7110x1370	8690x3217
GC-0928E	9	28	330	700x1300	9720x1370	11350x3187
GC-0930E	9	30	330	700x1300	10310x1340	11960x3157
GC-0634E	6	34	330	700x1550	11770x1620	13400x3710
GC-0636E	6	36	250	500x1300	9360x1370	10810x3217
GC-1238E	12	38	330	750x1000	13000x1040	14700x2557
GC-1525E	15	25	400	950x950	10590x990	12760x2457

OPTIONAL ACCESSORIES



Simple cording device

User only needs to install the device of simple taping, like the device of sequin, on the first /last needle position of the lockstitch machine to realize the function of cording.

- Simple, structure, flexible installation and high cost-effective ratio
- Compatible to the traditional taping pattern, easy to use
- Easy and simple operation
- With the max speed at 1000RPM
- Support zig-zag embroidery



OPTIONAL ACCESSORIES



Intelligence beads device


Product characteristic

Bead specification: 2.0mm and 2.5mm

Bead number: 8000 bead/plate

Productive efficiency: 16000 bead/hour

Maximum Speed: 800rpm

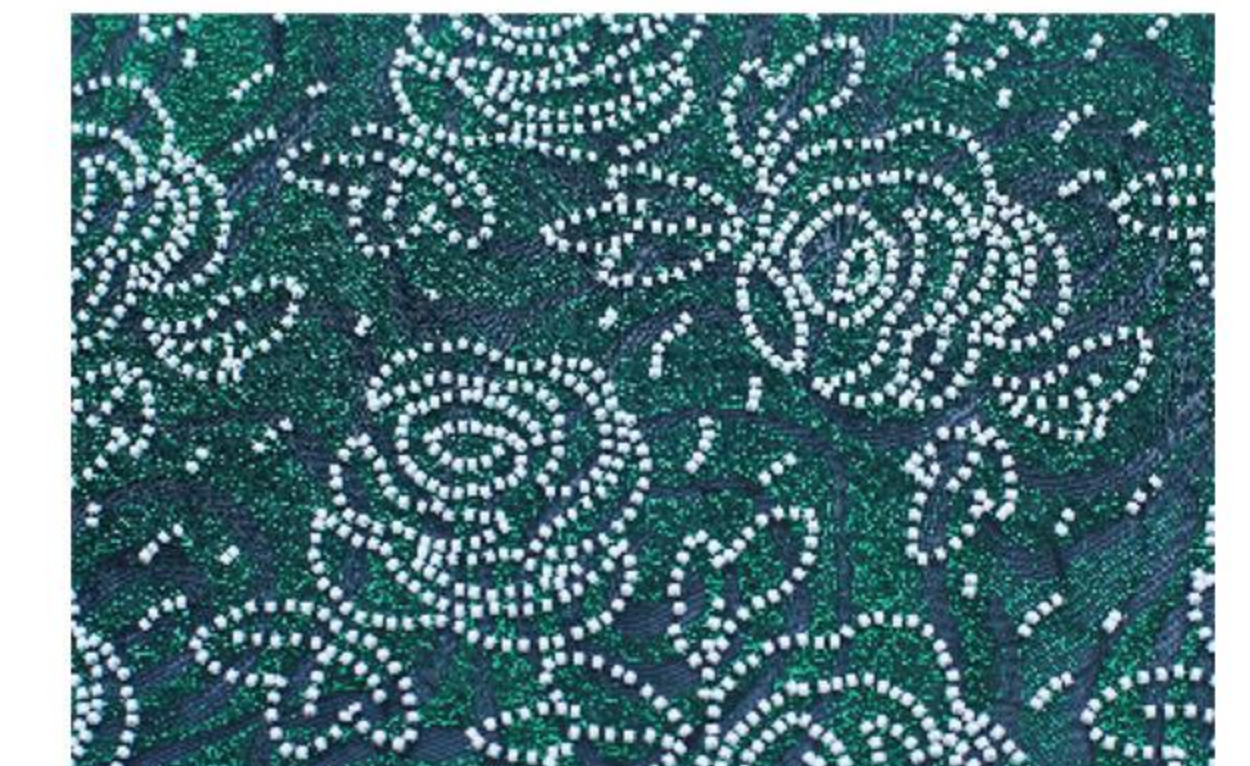

Sequin device

Sequin in diameter of 2-22mm are applicable! Wide range of sequins from small to large size or in various shapes like noncircular or eccentric type are applicable for creation of your designs as needed, depending on your applications.

- Embroidery of 2 types of sequins in random sequence as desired.
- Embroidery of 2 types of neighboring sequin in partially overlapping fish-scale pattern.
- Superimposed embroidery of 2 types of sequins.
- Superimposed embroidery of 2 types of sequins in partially overlapping fish-scale pattern.



CO2 Laser Optical Fiber

Laser cutting and embroidery perfect integration as one of the high-tech products, laser fiber transmission flexible transmission and more stable and stable, easy to operate, fast operation, can be completed once the embroidery and cutting process, including local hollow, patch embroidered layer cutting Etc., to complete the embroidery finished more perfect, more refined and innovative, widely used in lace embroidery, patch embroidery, home embroidery and other markets.



Simple towel device


The simple towel device adjusts the relative position of the pendulum through the lifting of the valve. Pendulum with the presser foot and needle bar movements to form a simple towel stitch. Installation simple and convenient, cost-effective simple towel models are widely used in clothing, shoes and hats, decoration and other processing areas. It has a broad market prospects, expanding the range of the combination of chainstitch embroidery, opening the imagination of the space for the pattern design.




8 in 1 frame



Pants device

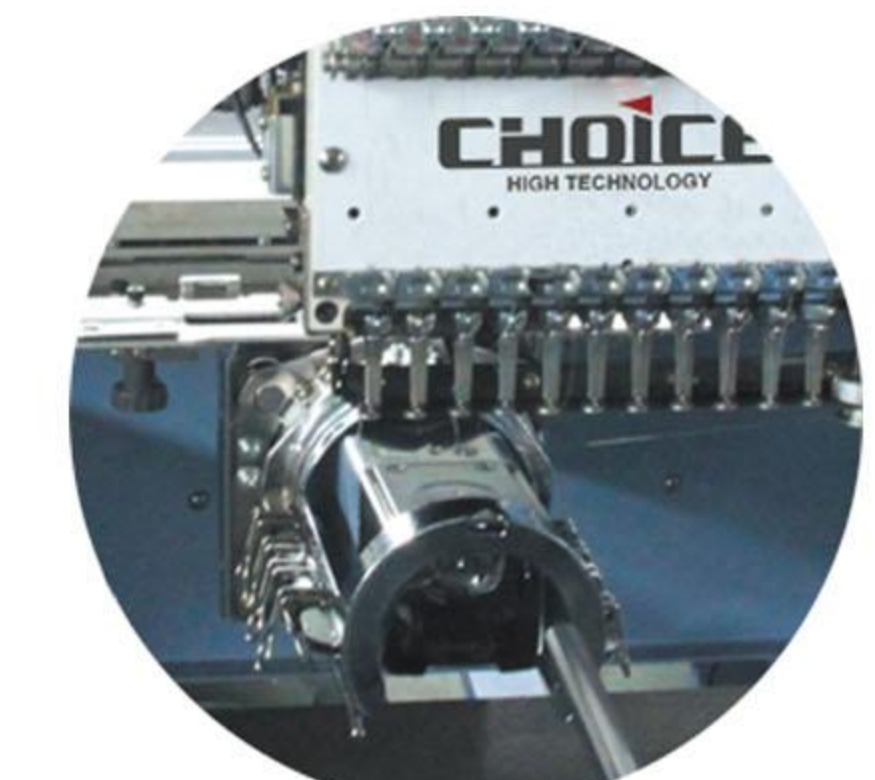

Shoes device

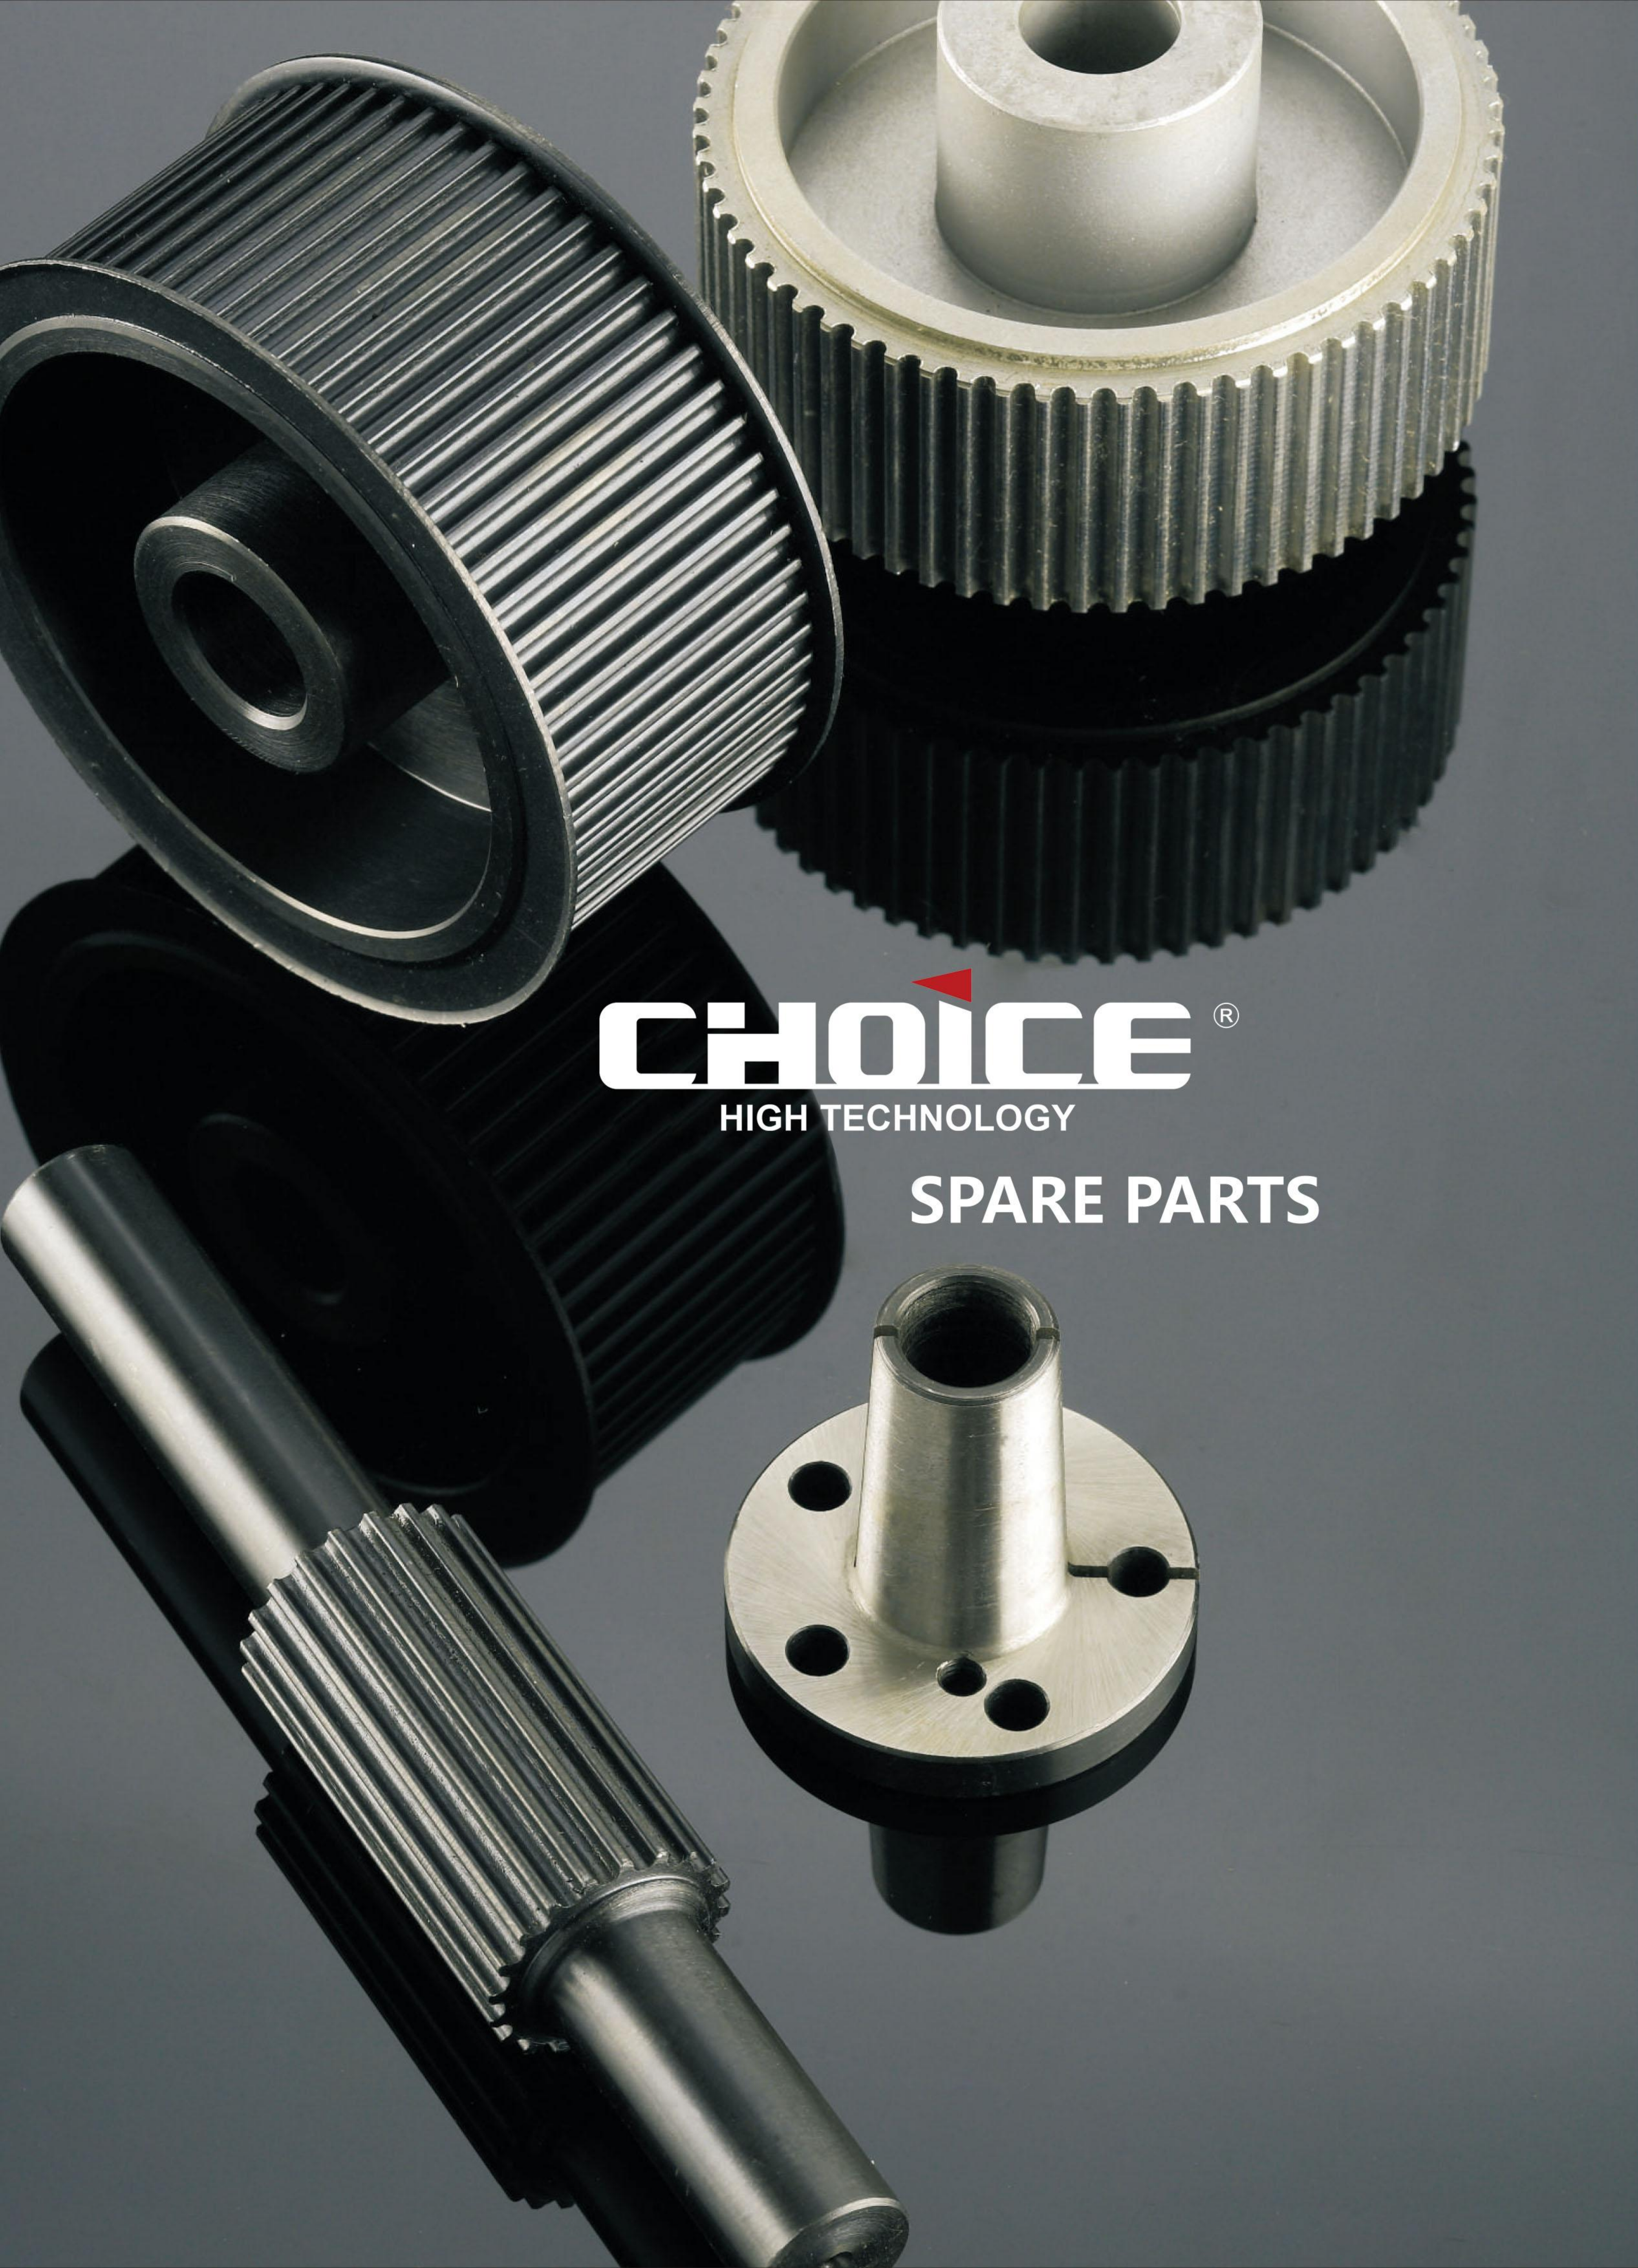

CHOICE®
HIGH TECHNOLOGY
SPARE PARTS





SPARE PARTS







ES6

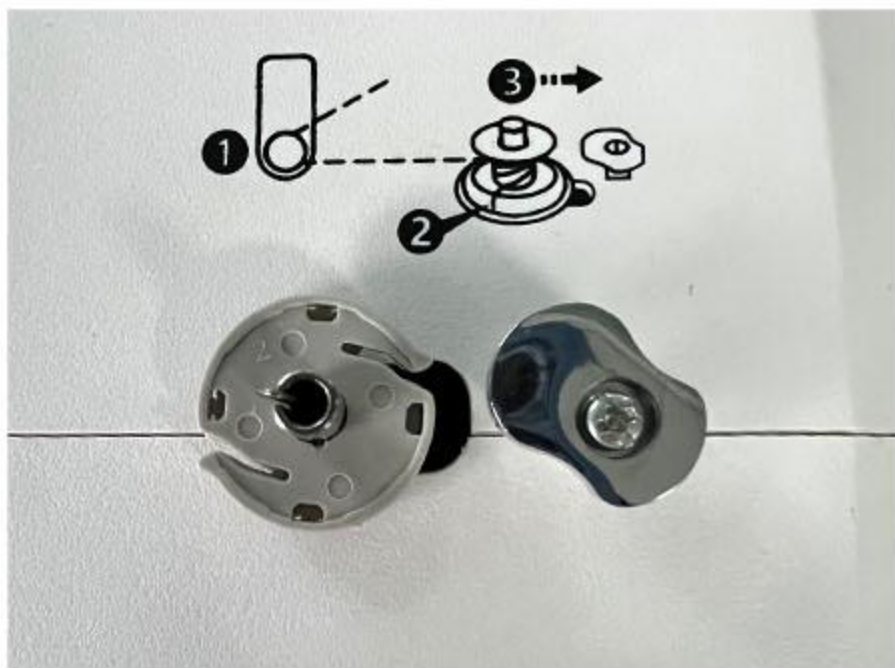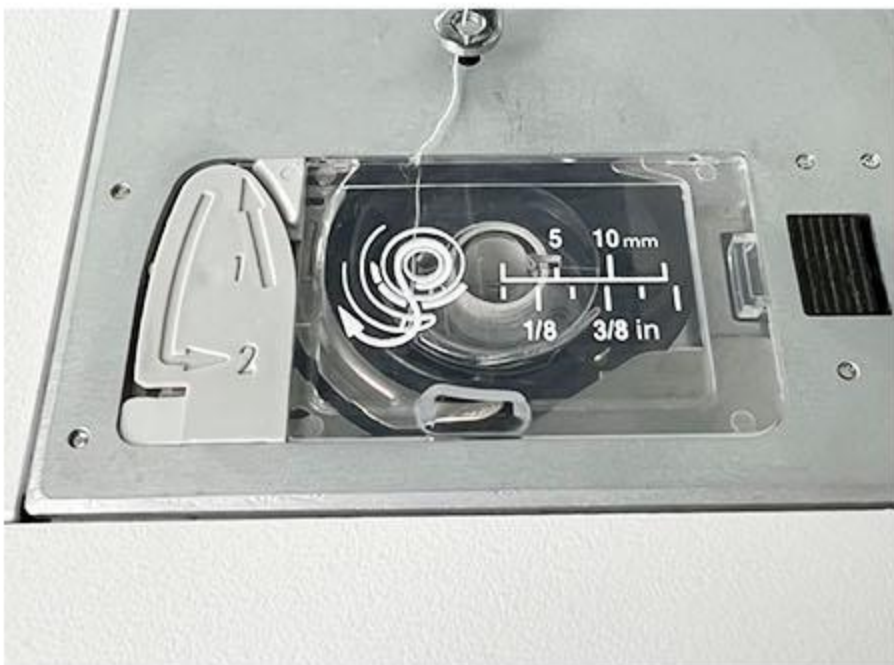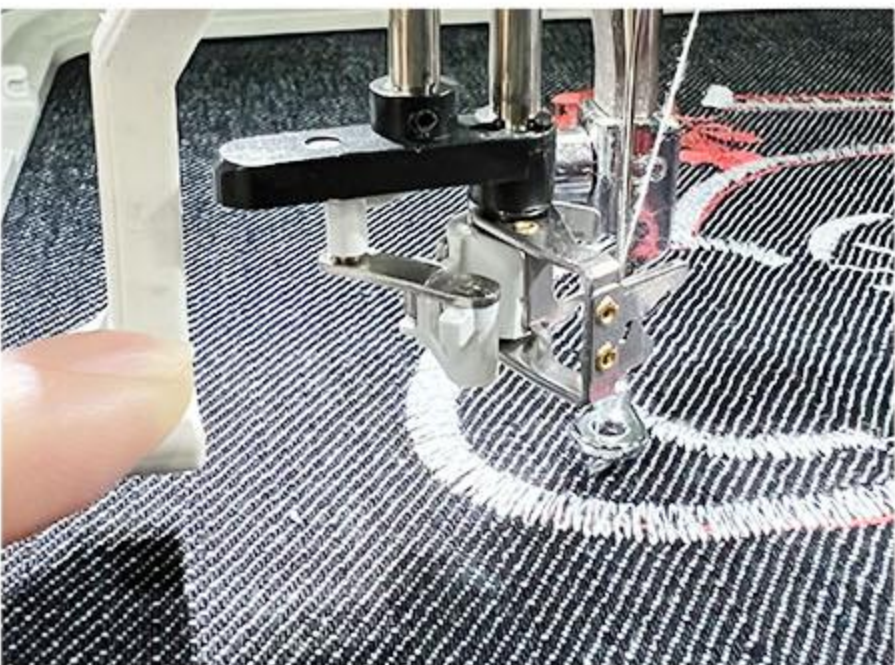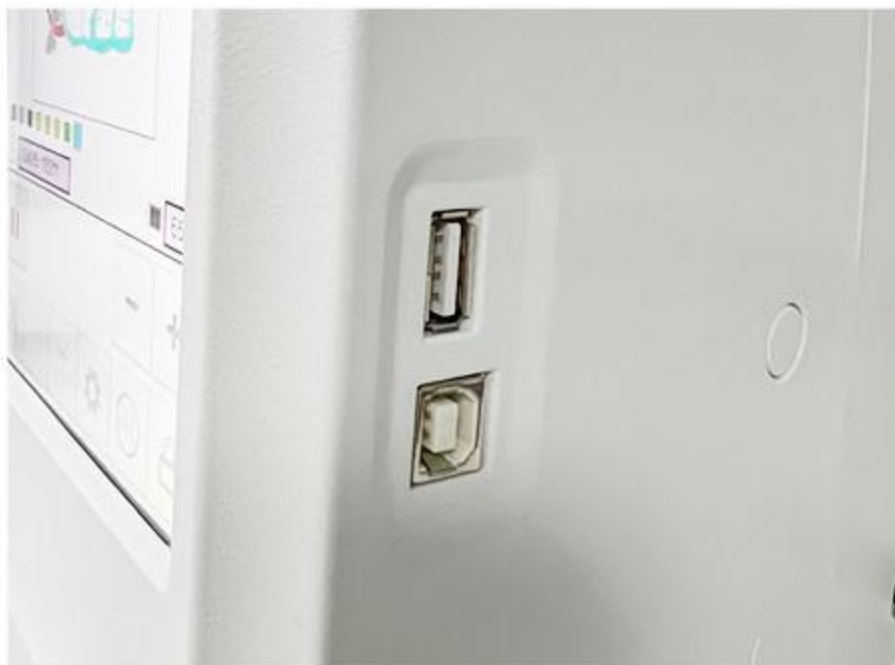


Specification


绣花速度 Speed	最大绣花范围 Embroidery area (Max)	内置花样 Build-in embroidery design	字母/花样组合 Letters/pattern combination	内置字母/ 数字/边框 Built-in letters/ figures/borders	自定义花样 输入(USB) Custom Pattern Input (USB)	快速穿线/ 自动剪线 Fast threading/ Auto thread cutter	自动绕线(梭芯) Automatic winding (spindle)	极速导入绣花花样 Quickly imported embroidery patterns	花样缩放/旋转/镜像/ 平移 Pattern zoom/rotate/ mirror/pan
0-860rpm	200*280mm	312	Support	Yes	Support	Yes	Yes	Yes	Support
绣线颜色显示 Thread color display	花样背景/ 配色效果编辑 Pattern background/ coloring effect editing	刺绣文件格式 Embro dery file format	绣花进度 Embroidery progress	快进/后退补绣 Oneration software	速度调节 Adjust speed	圆弧形排列字母 Circular arc arrangement of letters	屏幕触控 Touch Panel LCD	底线线量检测 Detection bottom thread	自动补针 Automatic compensation embroidery
Support	Support	DST、DSB	Real-time tracking	Support	Yes	Yes	Yes	Yes	Yes
断线检测 Break thread detection	锁屏功能 Screen lock function	屏幕 The screen	存储功能 button hole/ button sewing	照明 Sewing light	语言 Operation language	适用电源 Power supply	包装尺寸 Packing size	包装尺寸 Packing size	净重/毛重 NW/GW
Yes	Yes	7 "LCD screen	Support 30 million stitches of patterns storage	LED灯	11	100-240V 50HZ/60HZ	55W	670 x 545 x 555mm	14.5kg/18.5kg




side view

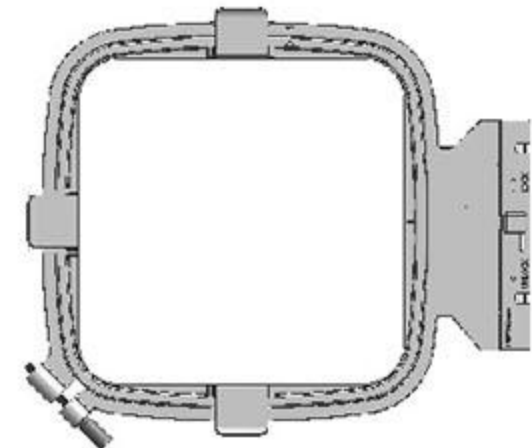


140×140mm

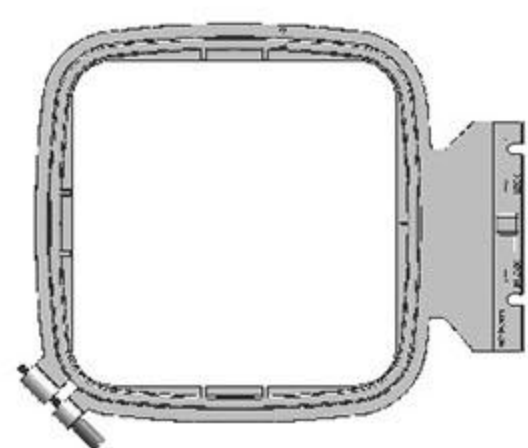

140×140mm

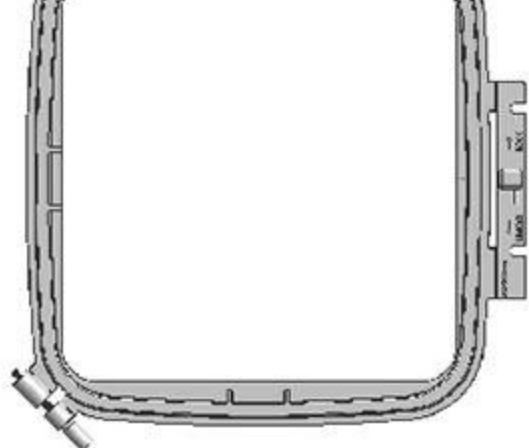

200×200mm

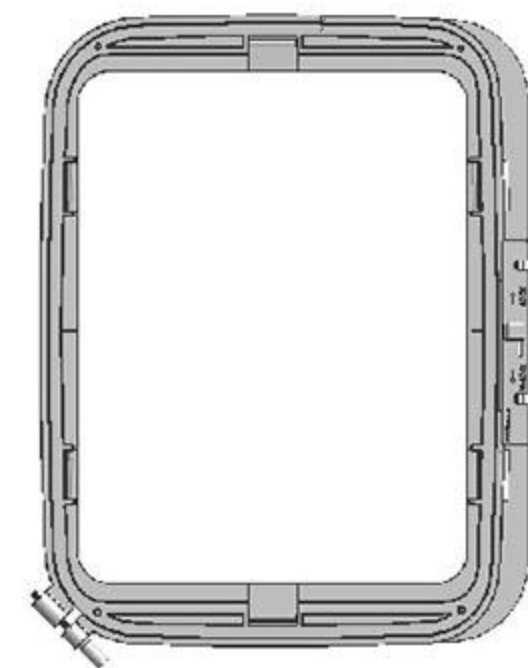

200×280mm

ES5



White



Expand Table



White side view



Blue



Expand Table



Pink




Pink side view

Specification

ES5		功率 Power	45w	净重 Net weight	8.5kg	毛重 Gross weight	12kg	包装尺寸 Packing size	445*365 *385mm
缝纫速度 Sewing speed	针距范围 Scope of stitch	针幅范围 The needle of range	缝纫线迹 Build-in sewing design	倒缝功能 Reverse sewing function	双针双线 Double needle double thread	锁眼 buttonhole	线迹镜像/组合 Stitch mirror/ combo	最大刺绣尺寸 Embroidery Area (MAX)	内置花样 Built-in Embro idery design
0-650rpm	0-4mm	0-7mm	160types	Support	Support	Yes	Yes	100*235mm	96types
内置字母/数字/边框 Built-in letters/figures/ borders	自定义花样输入 (USB) Custom pattern input (USB)	花样缩放/旋转/ 镜像/平移 Pattern zoom/ rotate/mirror/pan	字母/花样组合 Letter/pattern combination	刺绣文件格式 Embroidery file format	花样背景/配色 效果编辑 Pattern background/ coloring effect editing	绣花进度 Embroidery progress	快进/后退补绣 Fast forward/back off embroidery	快速穿线/ 自动剪线 Fast threading/ Automatic trimming	自动绕线(梭芯) Automatic winding (spindle)
Yes	Support	Support	Support	DST	Support	Real-time tracking	Support	Yes	Yes
点动上下停针 Click and hold the needle up and down	速度调节/ 脚踏控制器 Adjust speed/Foot controller	屏幕触控/ 底线线量检测 Touch Panel LCD/Det ection botton thread	自动补针 Automatic compensa tion embroidery	断线检测 Break thread detection	屏幕 The screen	存储功能 Storage capabilities	照明 Sewing light	语言 Operation language	适用电源 Power supply
Yes	Yes	Yes	Yes	Yes	7 "LCD Screen	Supported 700 pattern stores	LED	11	100V-240V 50HZ/60HZ

LCD screen function interface

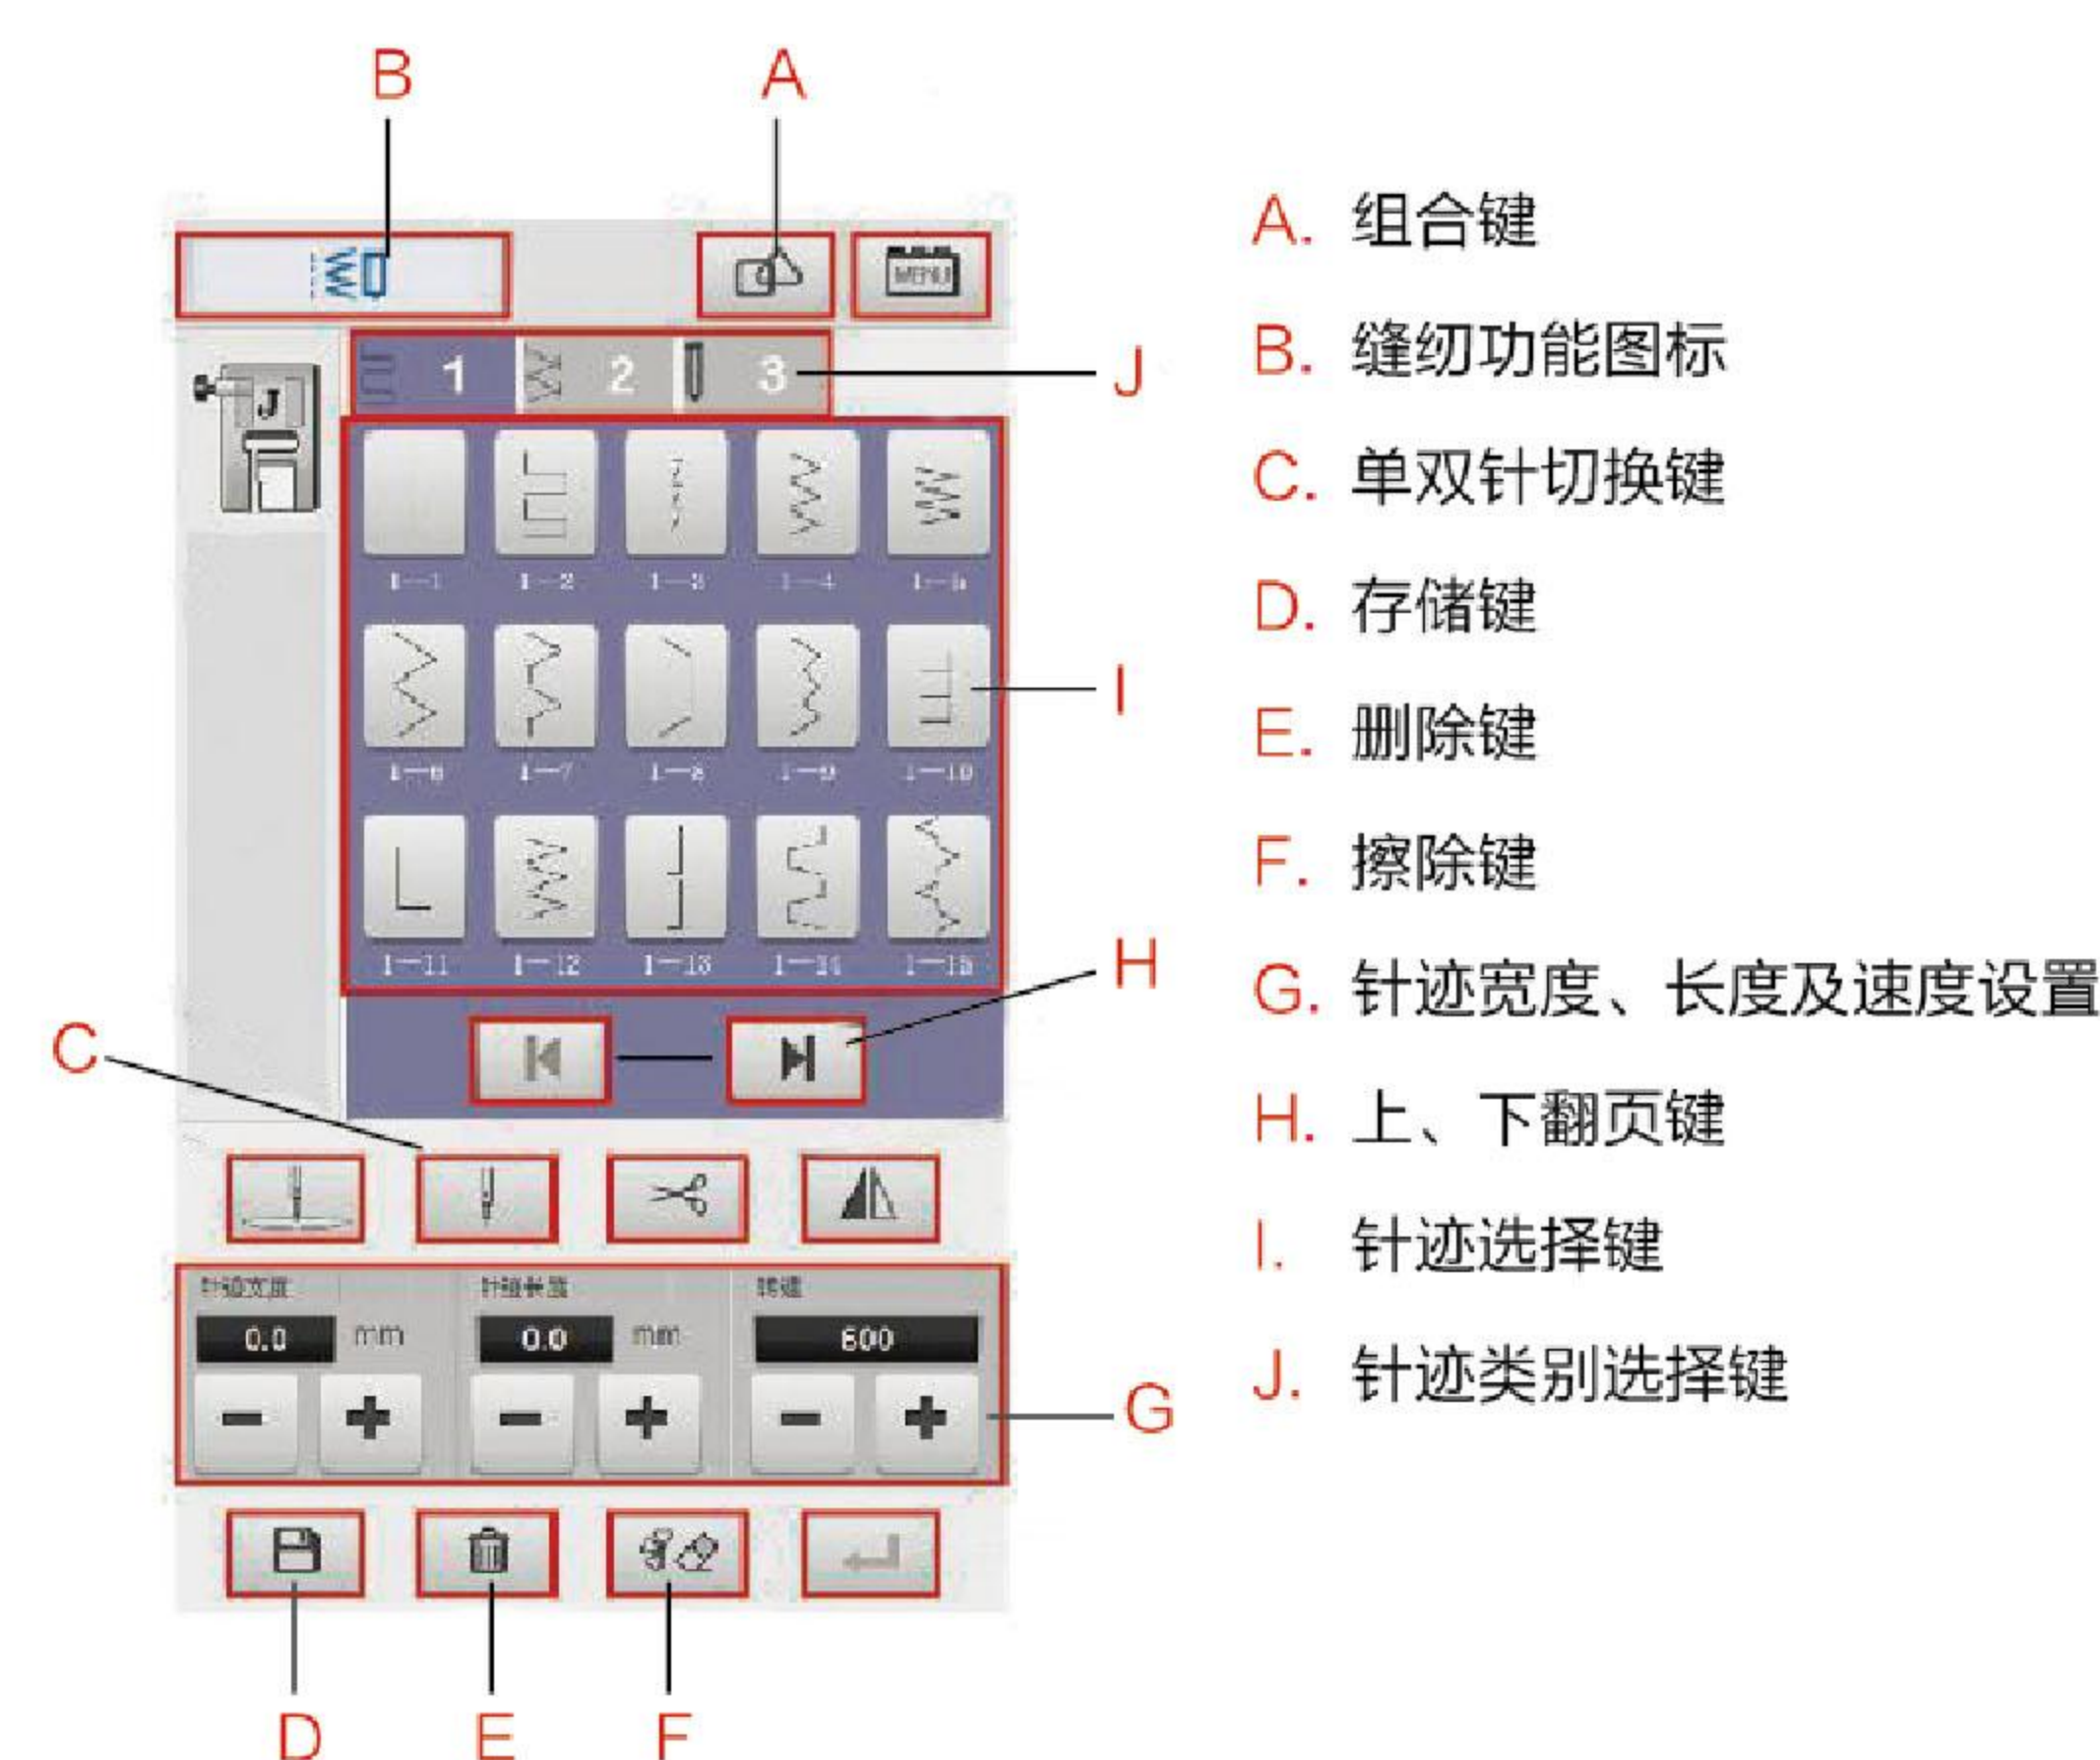

- A. Combination key
- B. Sewing function icon
- C. Single or double needle switch
- D. Storage key
- E. Delete key
- F. Erase key
- G. Stitch width, length and speed setting
- H. Top, bottom turn key
- I. Stitch selection key
- J. Stitch type selection key

- 1. Setting Key
- 2. Combination Key
- 3. Pattern edit key
- 4. Embroidery function icon
- 5. Built-in embroidery pattern
- 6. Hollow letters, Numbers
- 7. The type of Usb input
- 8. Delete key
- 9. Erase key
- 10. Border pattern
- 11. Letters, Numbers, symbols
- 12. Return to the main interface
- 13. Fancy letters


Function introduction

- Seven inch color touch screen
- Patterns, colors, sizes, directions can be edited freely
- Embroidery status can be monitored in real time
- Easy to use, one will learn
- Sewing stitches can be edited in combination
- Multiple lock eyes

Special feature



快速放置梭芯
Quick-set bobbin

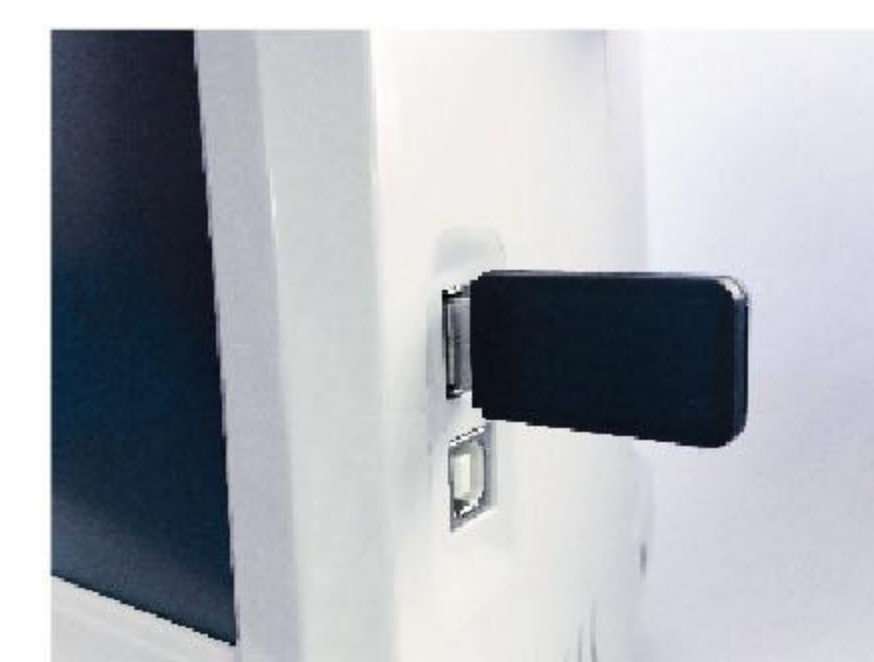


USB接口
USB interface



快速穿线
Fast threading




最大绣花范围
100*235mm
Embroidery area(max)
100*235MM

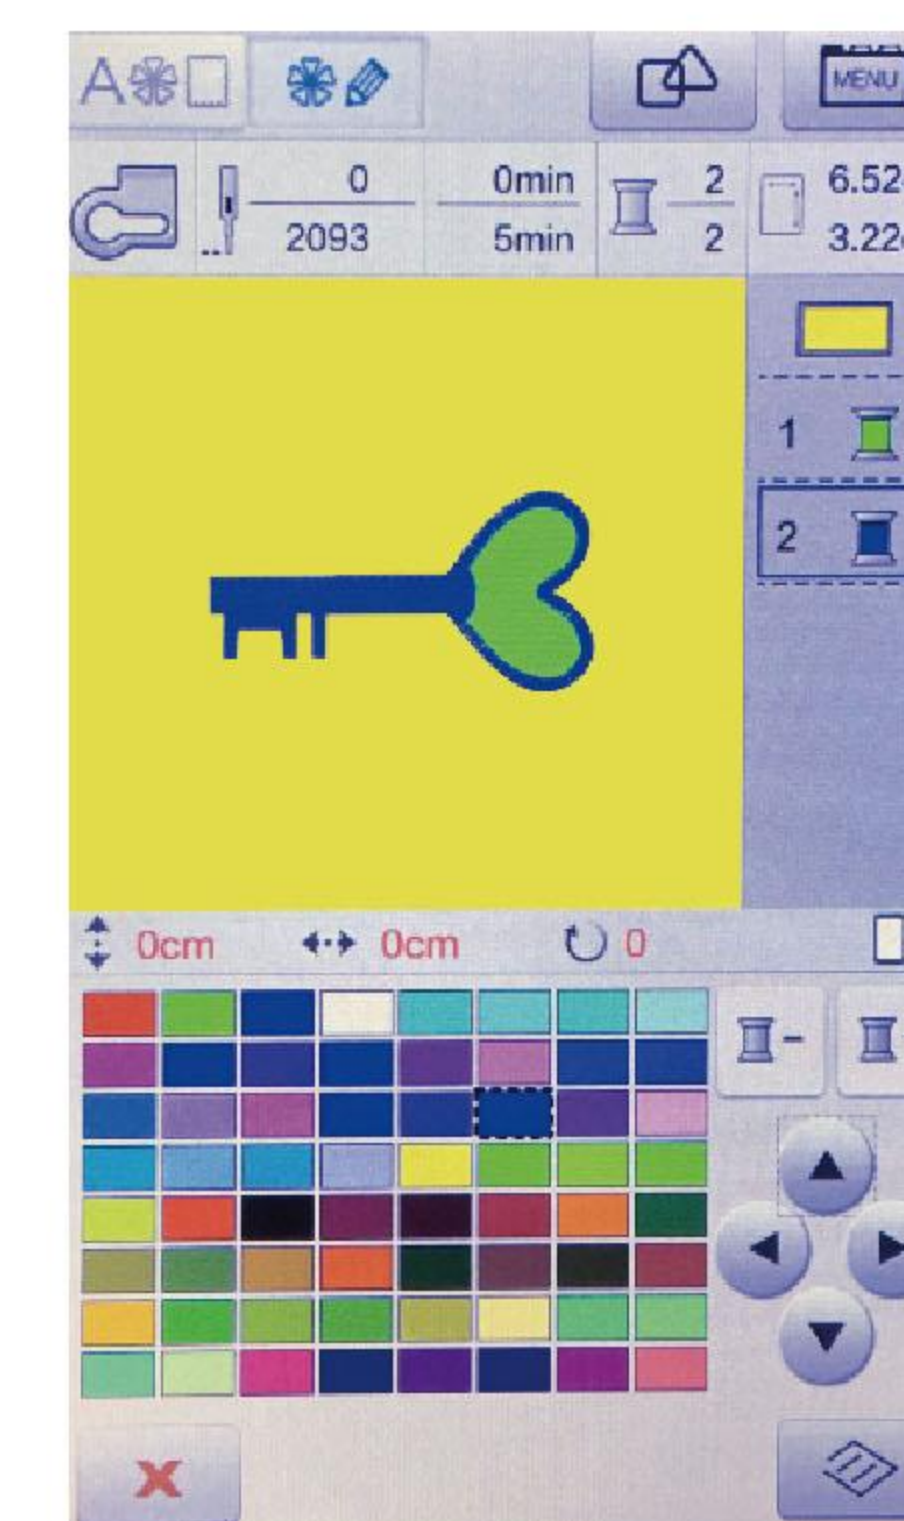


模拟配色
Simulation
match colors



针迹组合
Stitch combo

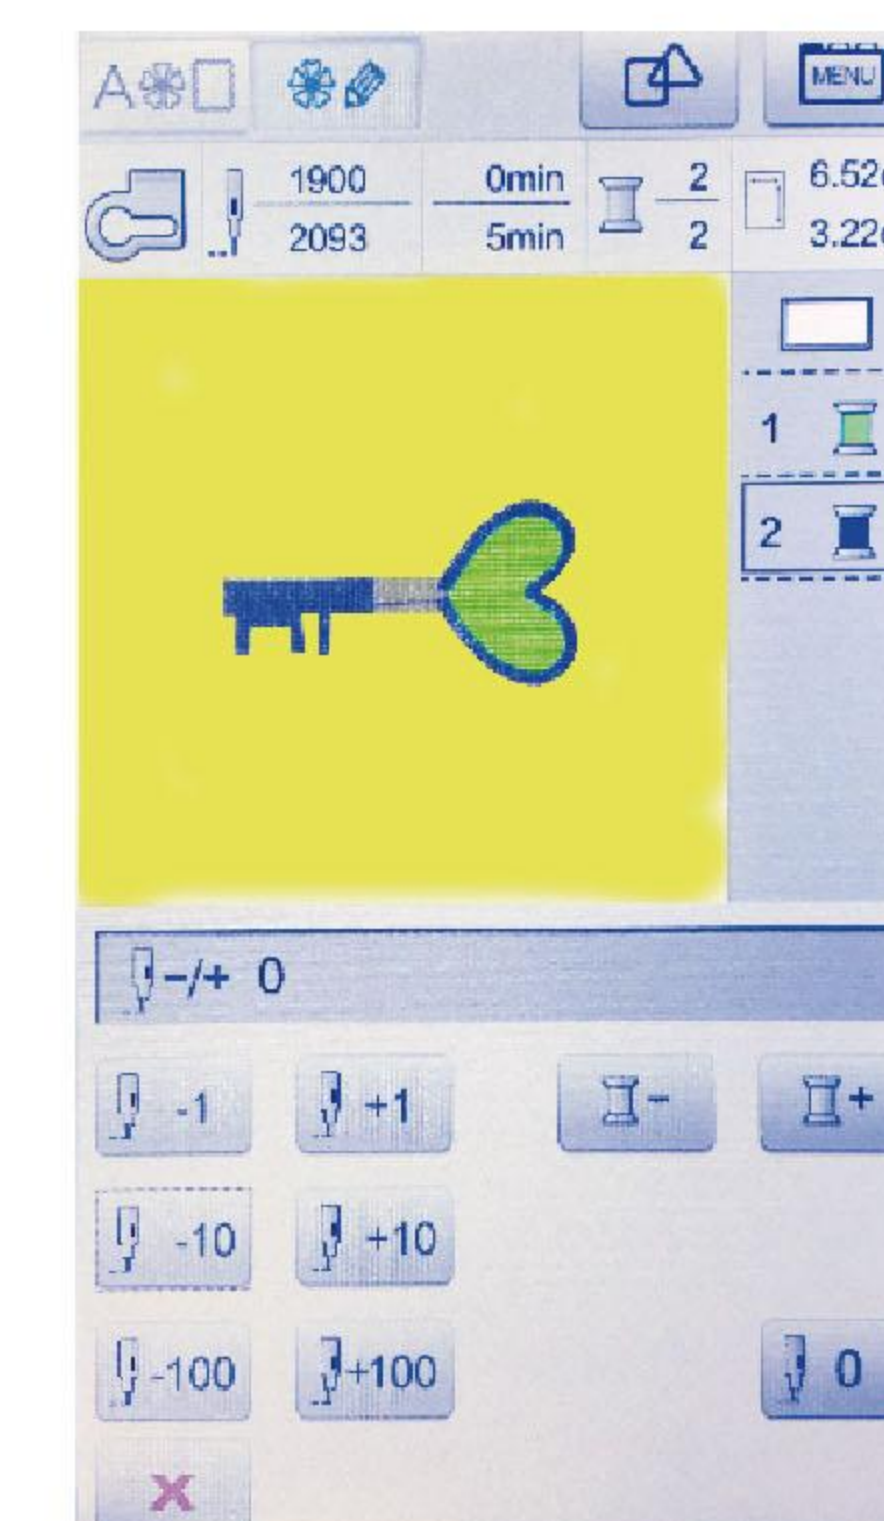

自动补针
Automatic compensa
tion embroidery

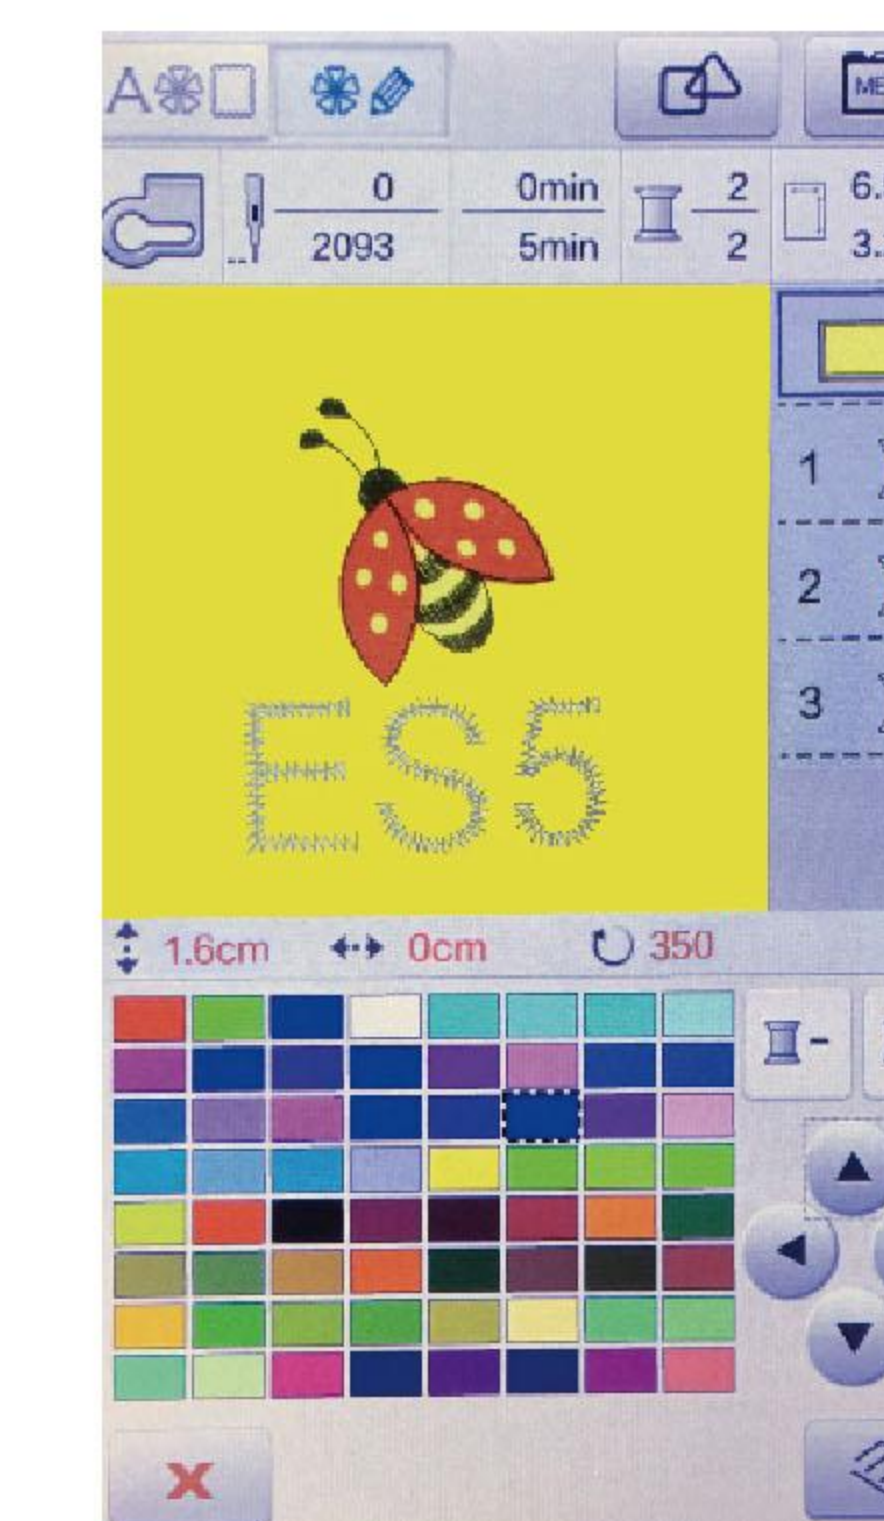


字母花样组合
Letter pattern
combination

| Sewing embroidery machine structure



Construction description

1. Liquid crystal display screen
2. The handwheel
3. Bobbin winder
4. Upper line tensor adjustment button Embroidery unit
5. Wire hook
6. Winding tension guide plate
7. Cutter
8. Lock rod
9. Embroidery uni
10. Quick threading device
11. Presser foot
12. Foot lifting lever
13. Start/Stop key
14. Cutting key
15. Pointingkey(Needle up and down)
16. Back seam key
17. USB interface

18. Debug interface (User forbidden)
19. Vents
20. Power line socket.
21. Foot controller socket
22. Power switch

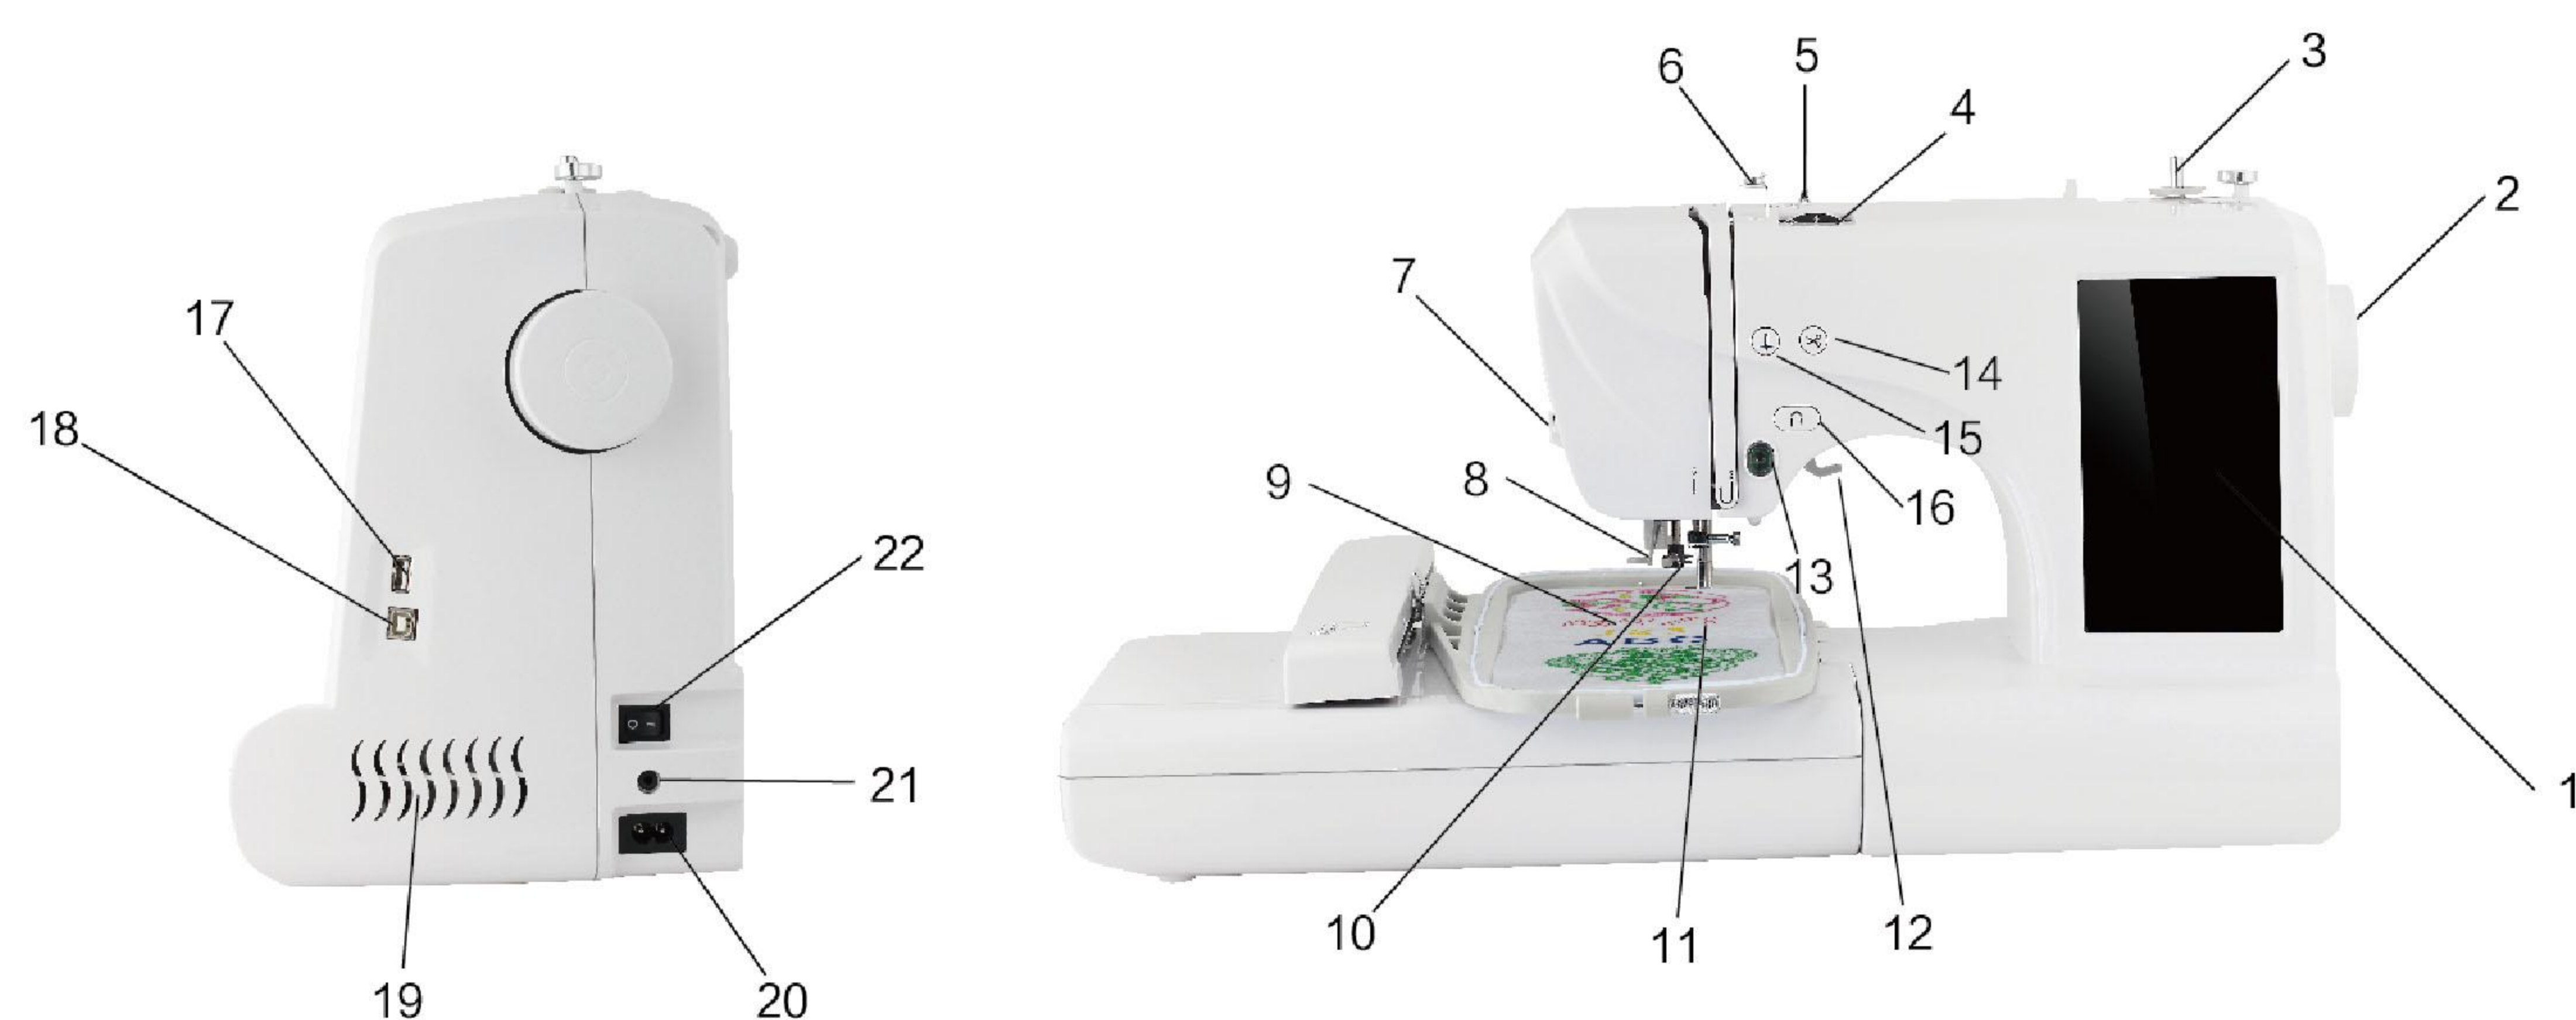

| Upper threading

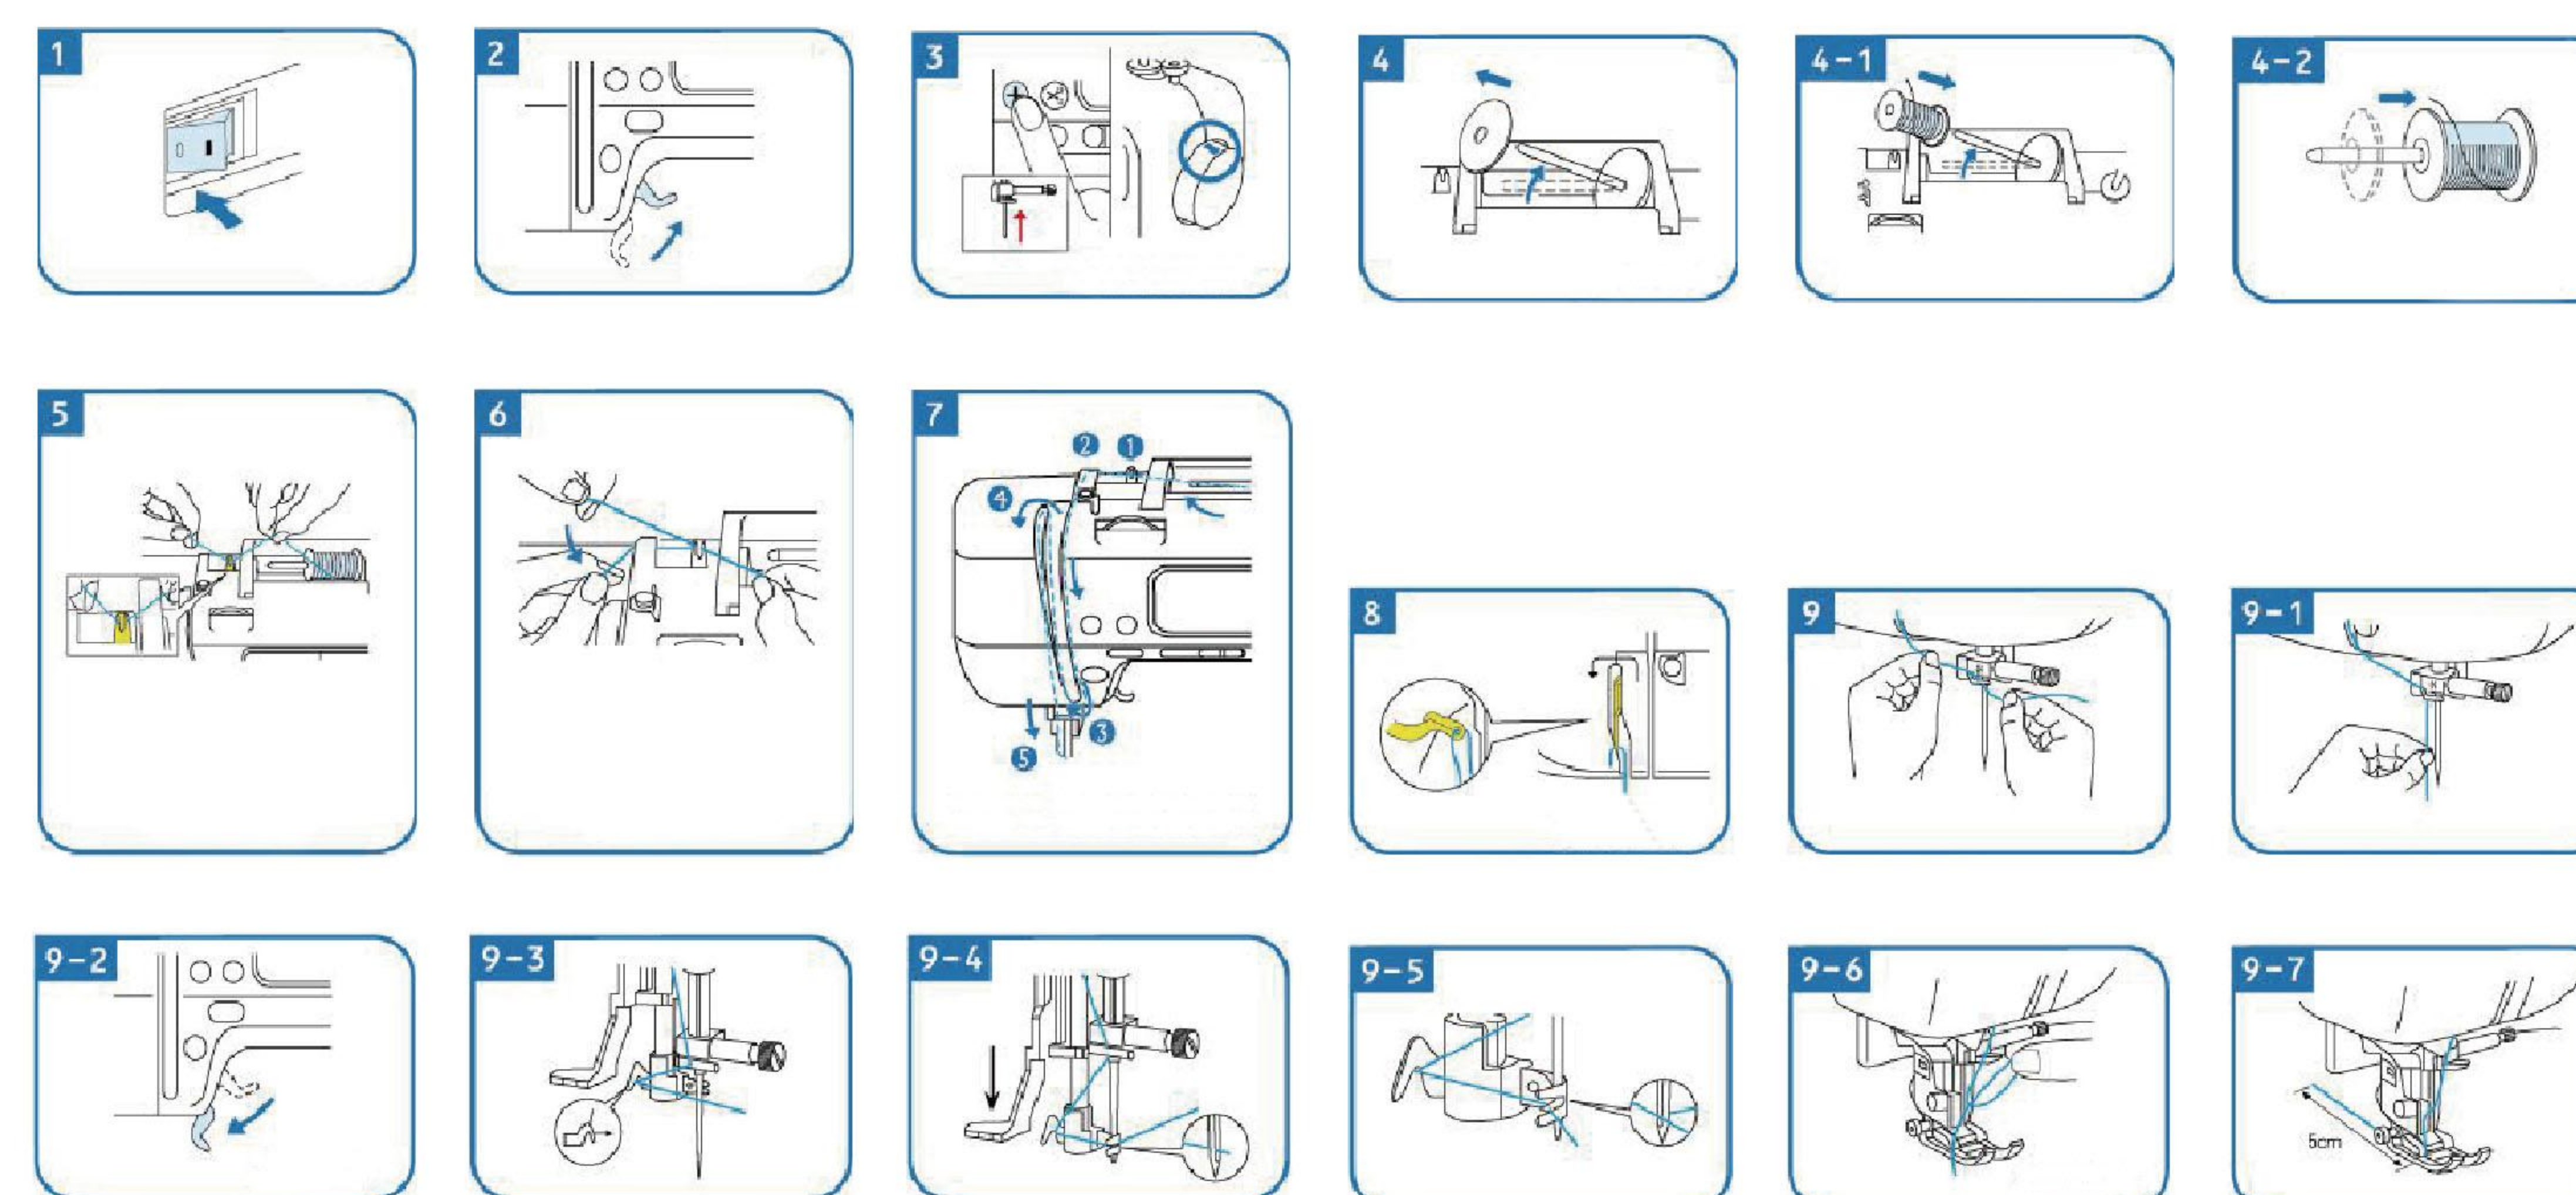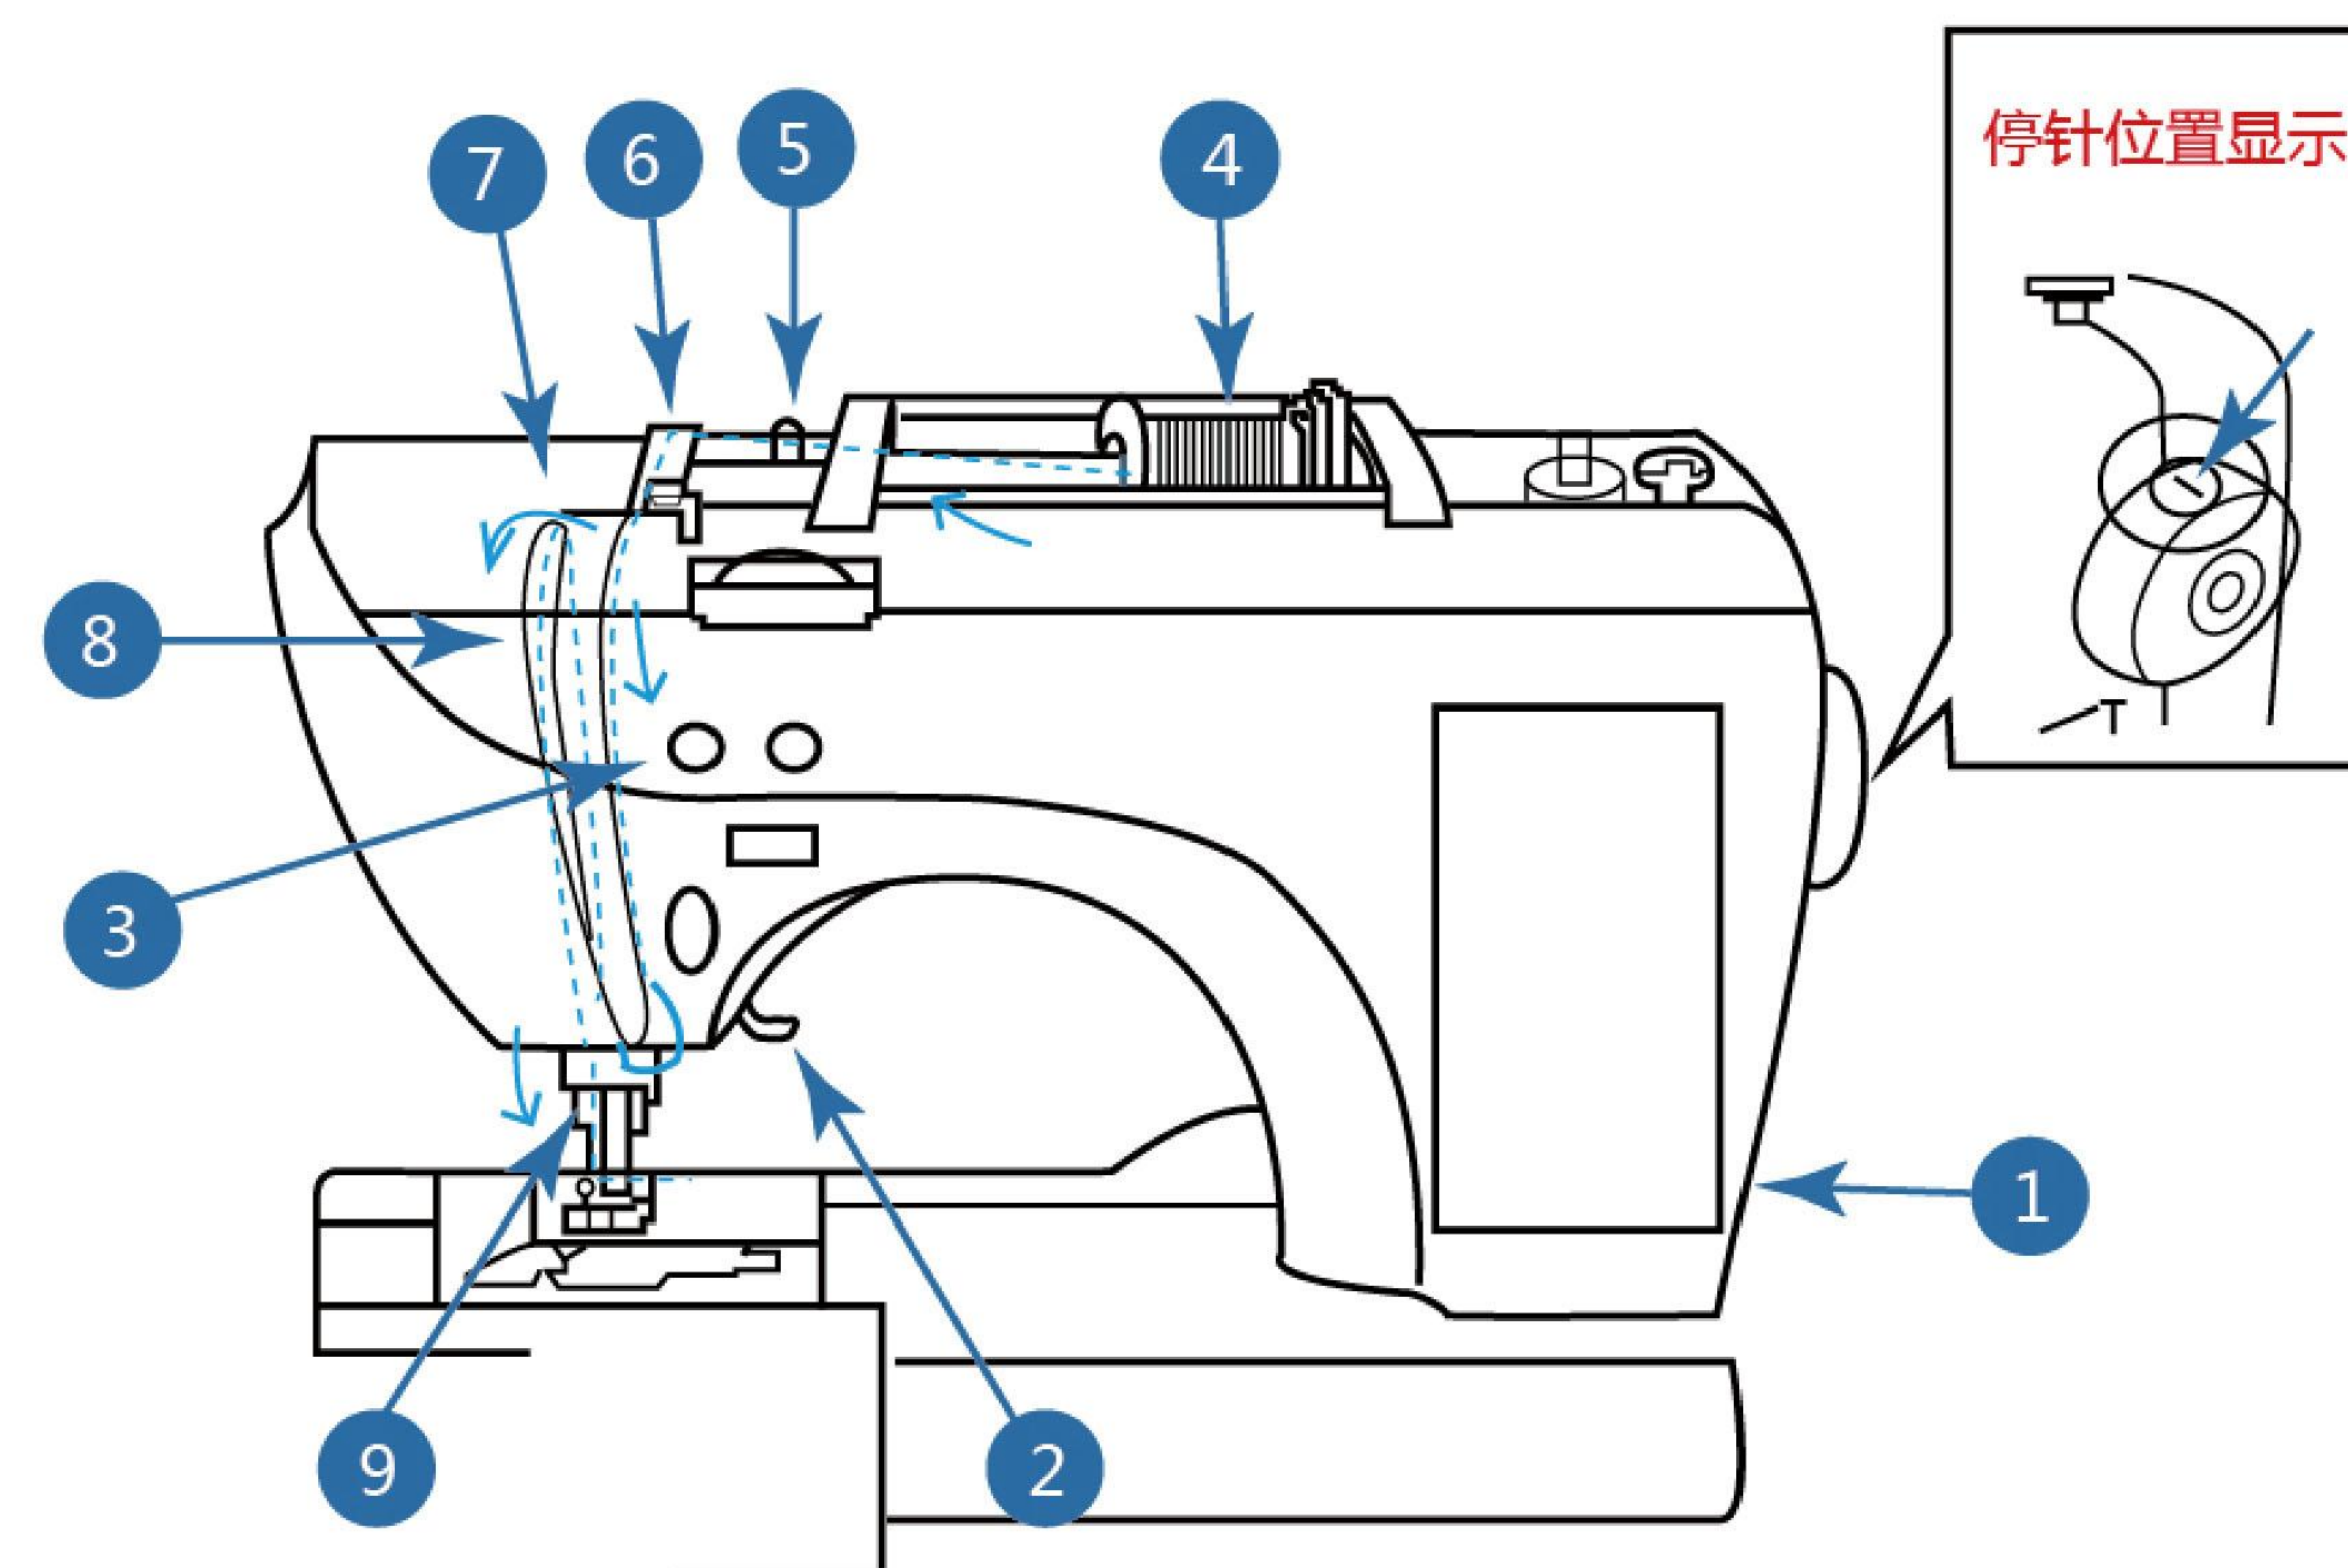

GC-2710/GC-2720


200 built-in stitches
100 built-in Alphabets stitches
9 styles of one step buttonhole stitches
Manual start and speed control
Backlight LCD display
Convenient stitches selection button
Upper and lower needle position
Twin needle function
Security auto shut off

Top loading hook system
Automatic threader
Automatic clutch for bobbin winding
Drop feed system
Easy thread cutter
Snap-on presser foot
Portable handle
Long life LED light
Electronic foot controller



Extend table optional


Standard Accessories

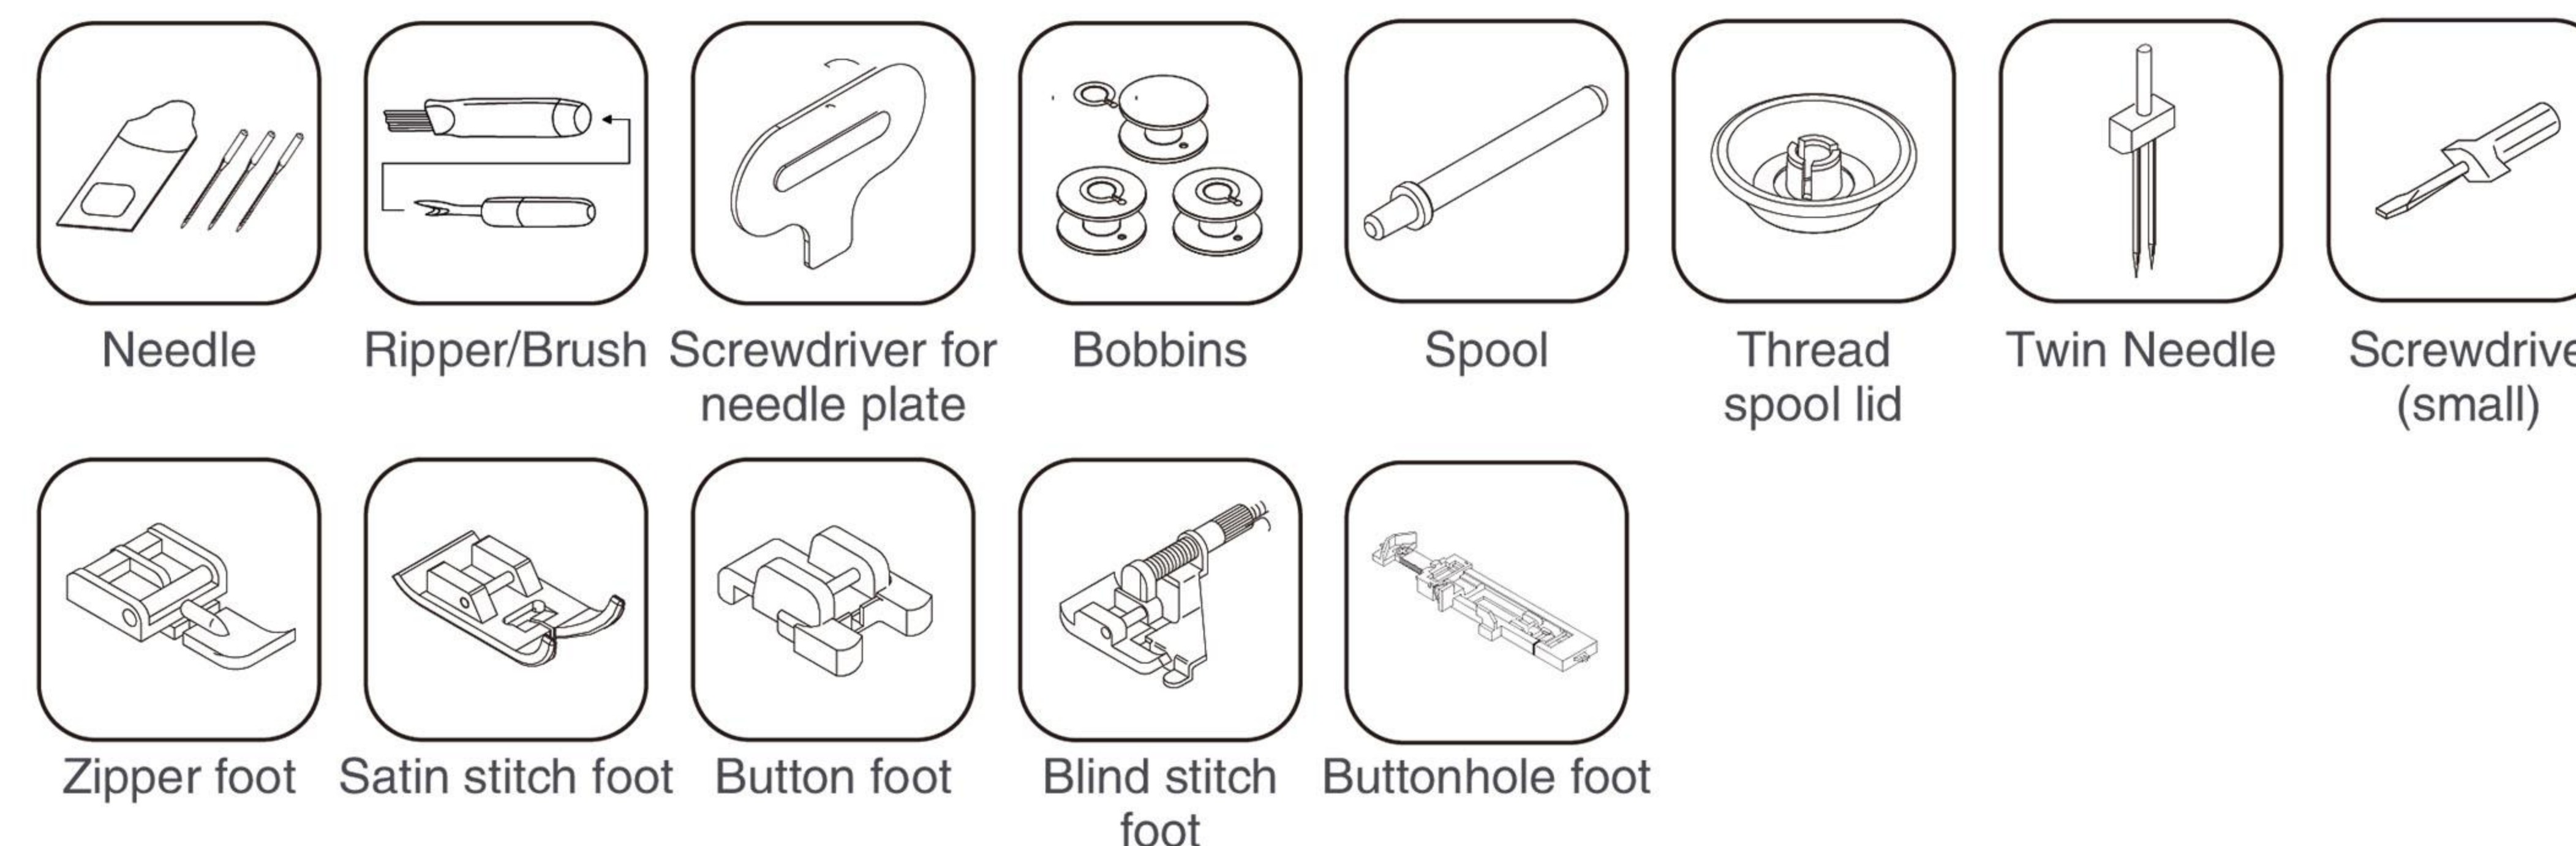

Specification

11#-14#	3/90	700RPM±50RPM	5.5mm	7mm	4.5mm	100~240 VAC	36W	6.6/5.3kg 410x190x310mm 460x255x345mm
Needle Model	Double Needle Model	Maximum speed	Foot lifts height	Stitch width	Stitch length	Input Voltage	Input Power	GW/NW Machine Package Size

Stitch

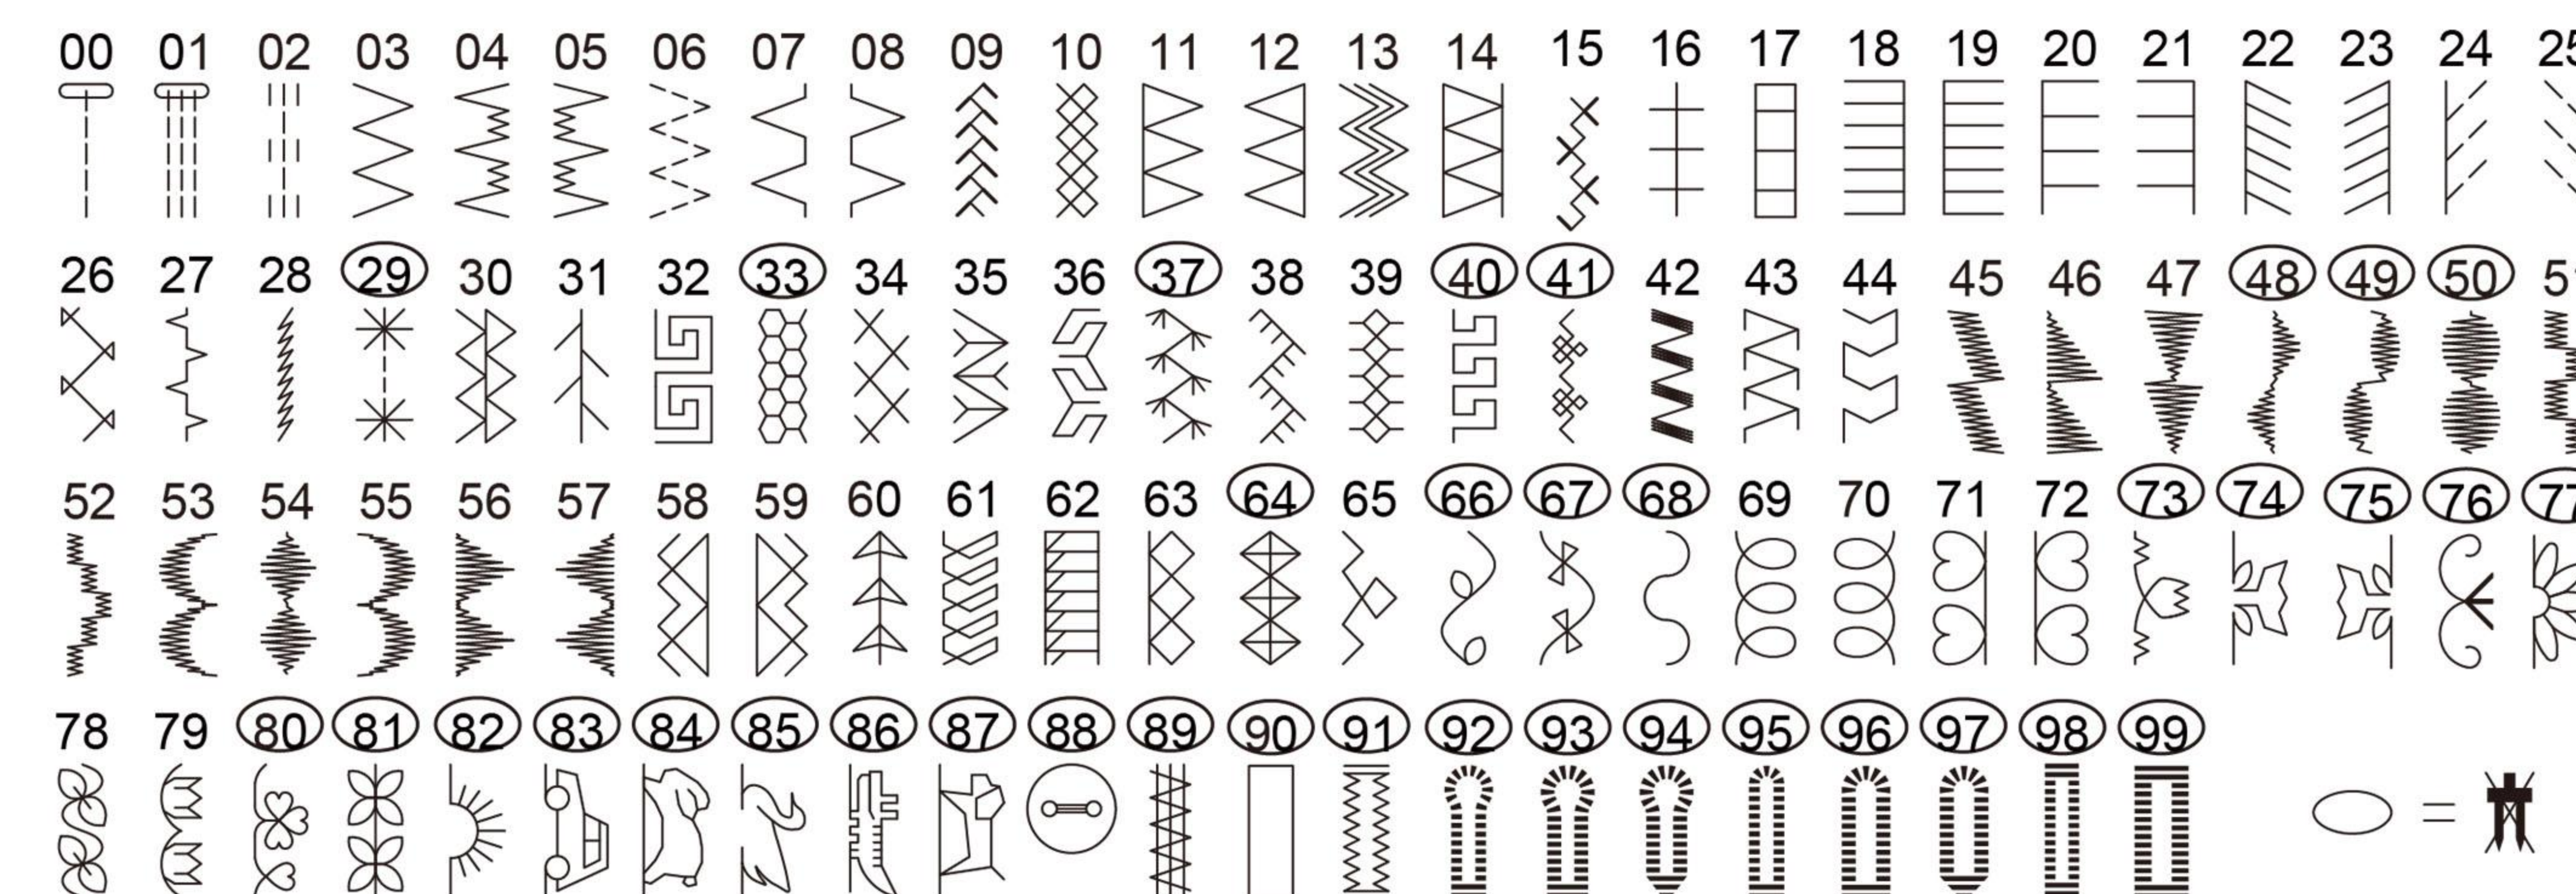

仅限 2720 (Only For 2720)

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20
0 1 2 3 4 5 6 7 8 9 A B C D E F G H I J K
21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41
L M N O P Q R S T U V W X Y Z a b c d e f
42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62
g h i j k l m n o p q r s t u v w x y z @
63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83
! ? & ' " , . - : ; A A E à ä å è é
84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99
ë ê ç œ ÿ ì ñ ò ï ö ø ù ü



Extend table optional

GC-2685/GC-2685A

200 built-in stitches
100 built-in Alphabets stitches
8 styles of one step buttonhole stitches
Manual start and speed control
Backlight LCD display
Convenient stitches selection button
Upper and lower needle position
Twin needle function
Security auto shut off


Top loading hook system
Automatic threader
Automatic clutch for bobbin winding
Drop feed system
Easy thread cutter
Snap-on presser foot
Portable handle
Long life LED light
Electronic foot controller




Specification

11#-14#	3/90	700RPM±50RPM	5.5mm	7mm	4.5mm	100~240 VAC	36W	6.4/5.1kg 400x175x310mm 460x255x345mm
Needle Model	Double Needle Model	Maximum speed	Foot lifts height	Stitch width	Stitch length	Input Voltage	Input Power	GW/NW Machine Package Size

Standard Accessories

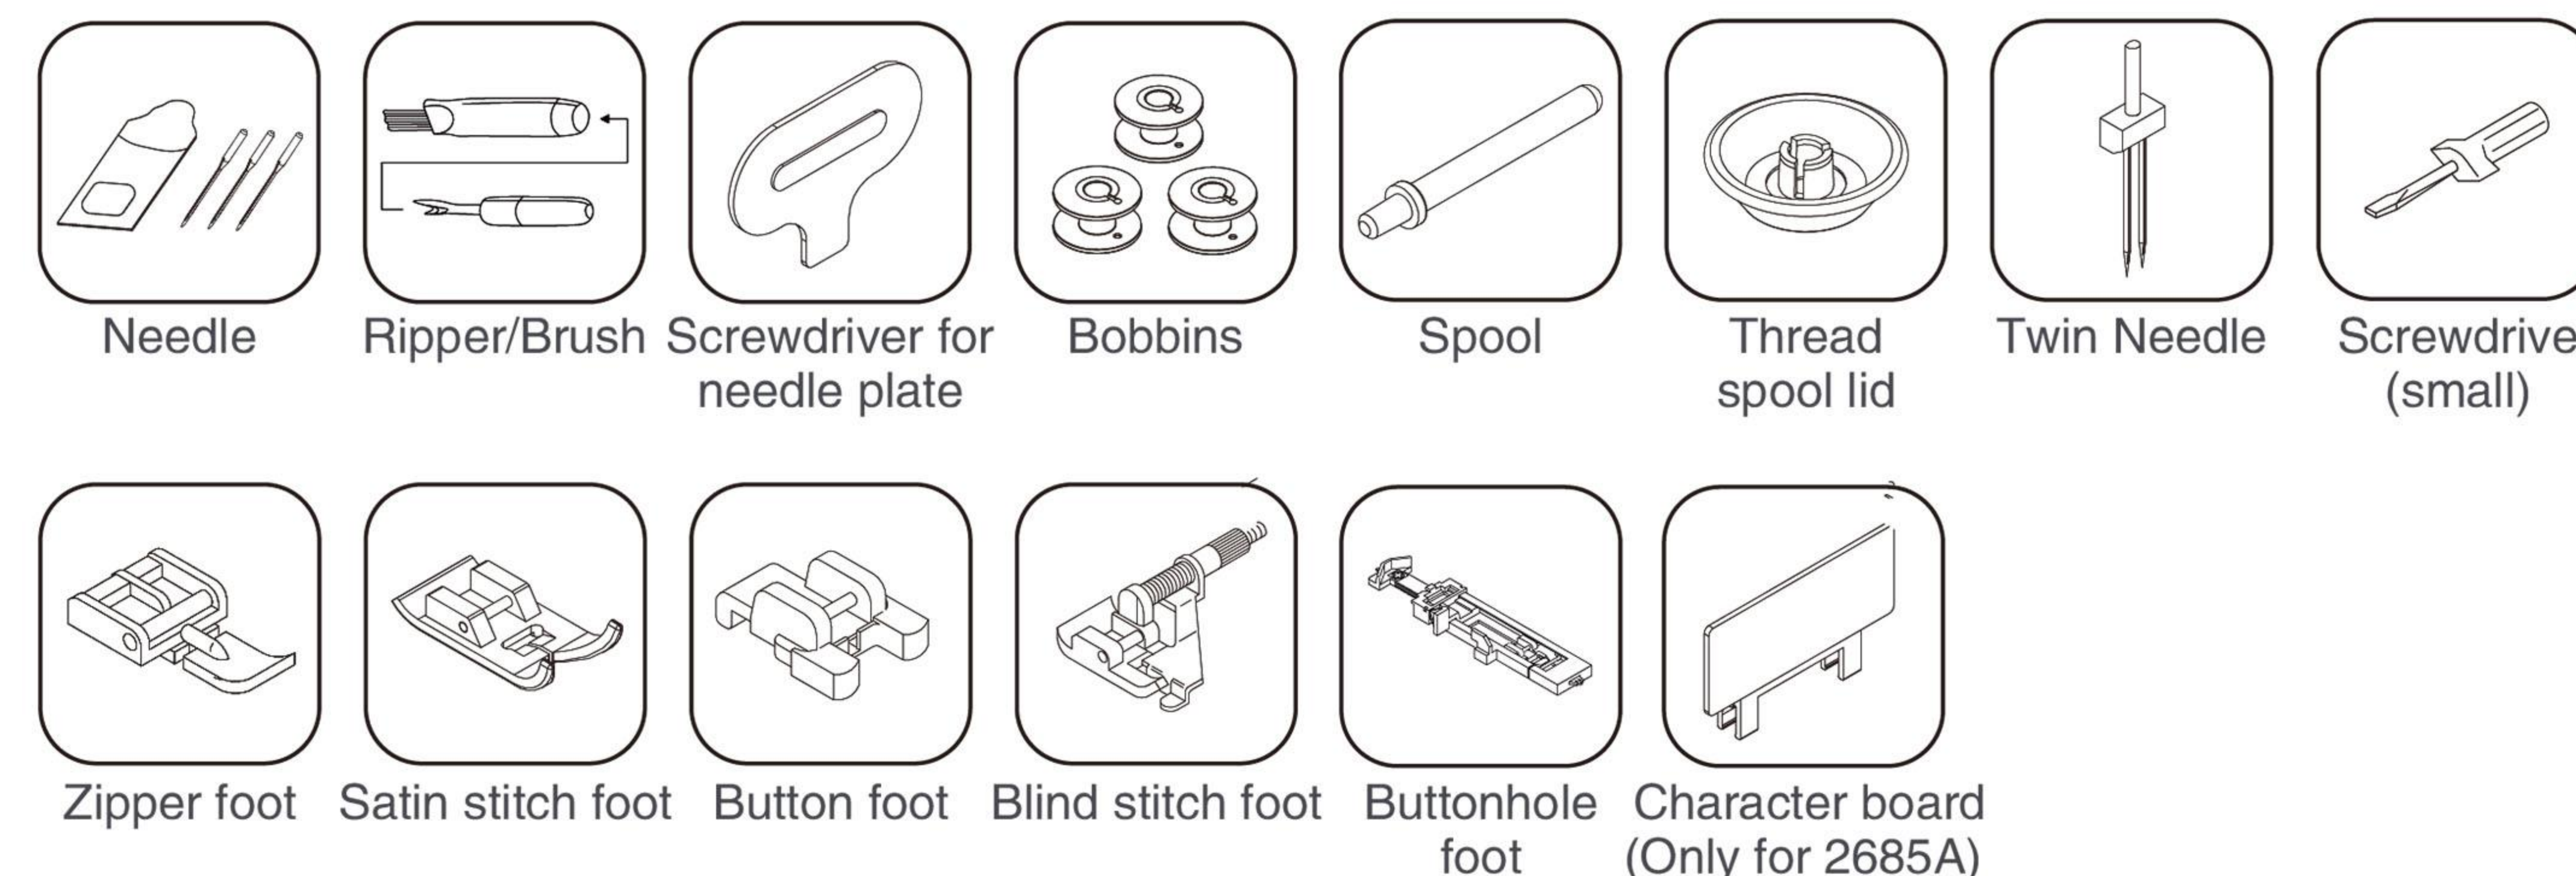

Stitch

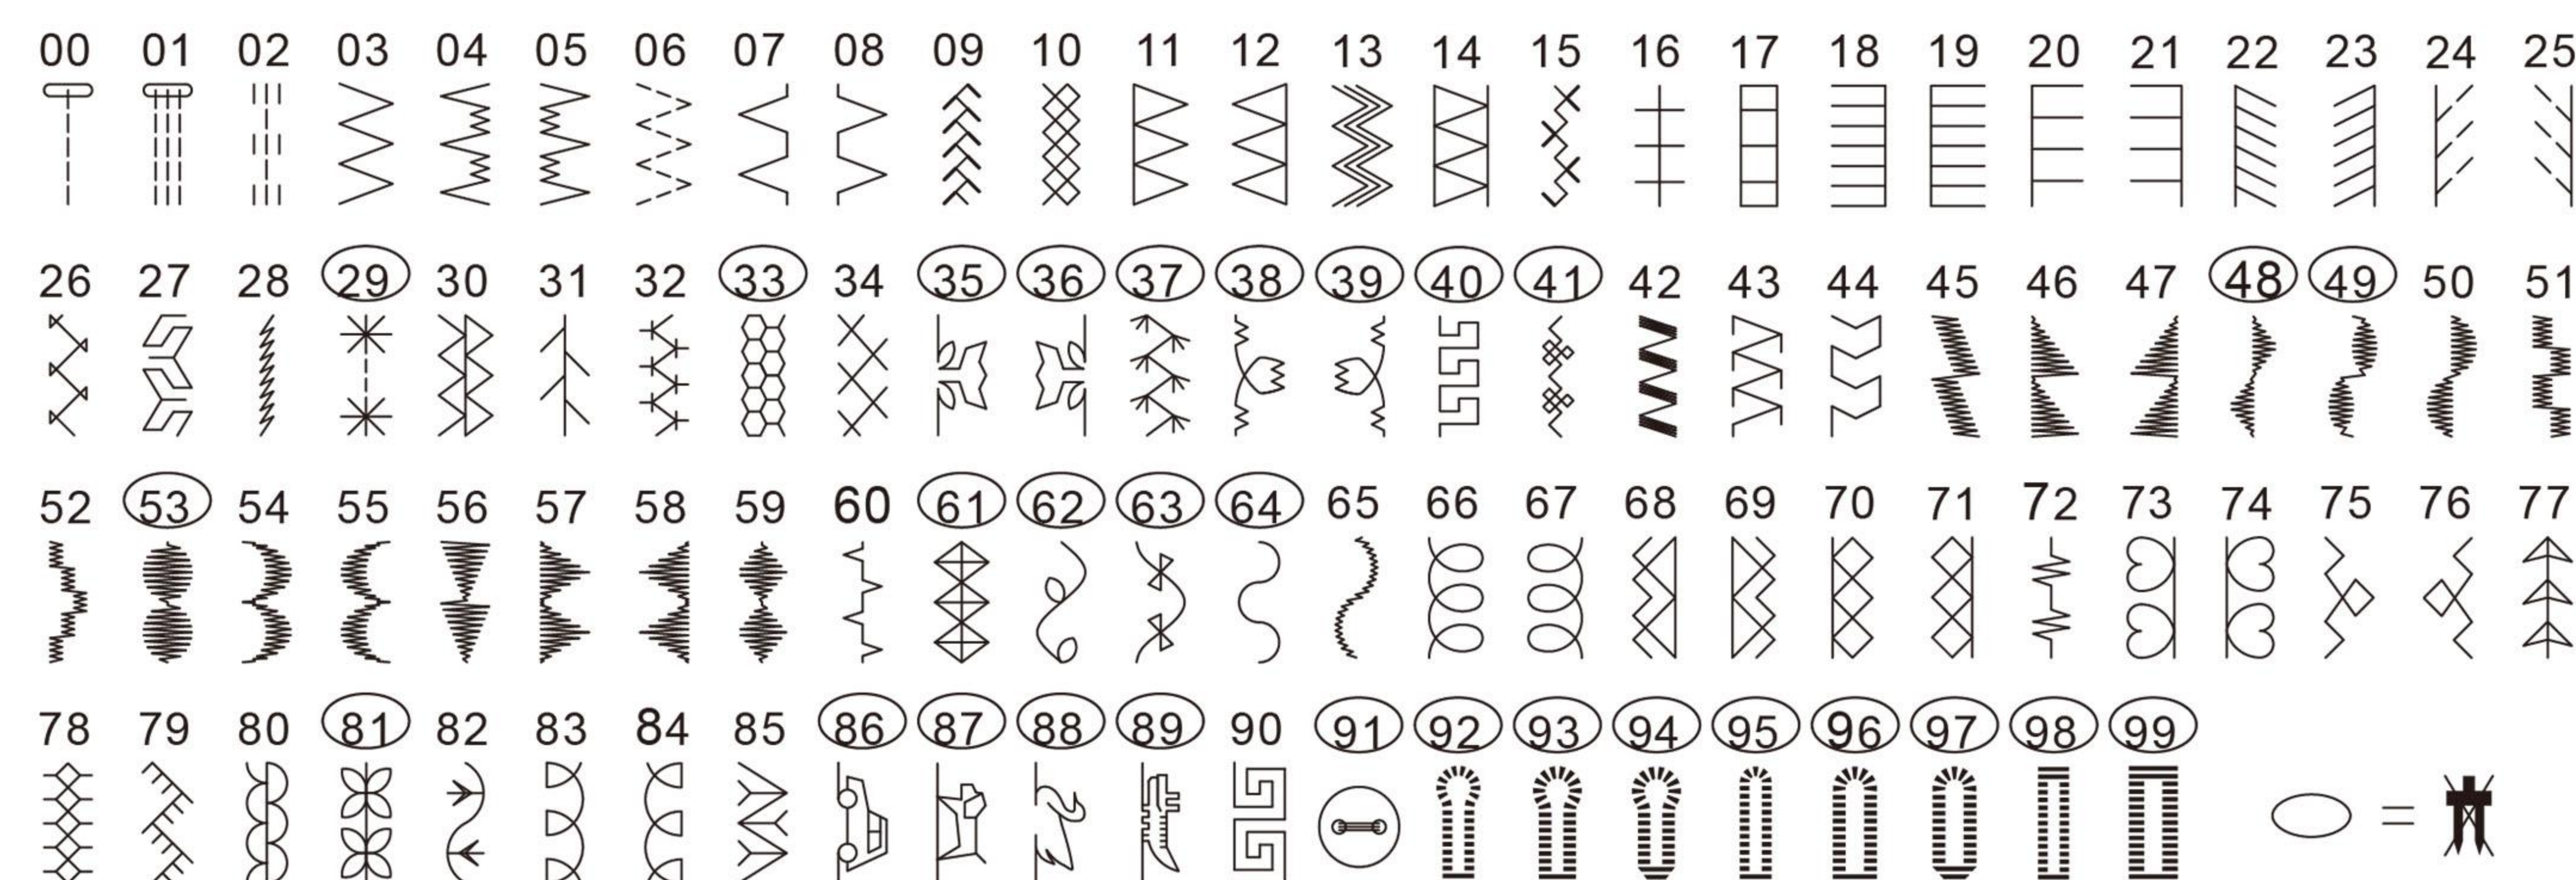

仅限 2685A (Only For 2685A)

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20
0 1 2 3 4 5 6 7 8 9 A B C D E F G H I J K
21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41
L M N O P Q R S T U V W X Y Z a b c d e f
42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62
g h i j k l m n o p q r s t u v w x y z @
63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83
! ? & ' " , . - ' / : ; Å Ä Æ à ä å è é
84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99
ê ë ç œ ç ì ñ ò ø ò ö ø ù ü ü



GC-2685A

GC-2600/2600A

200 built-in stitches
100 built-in Alphabets stitches
8 styles of one step buttonhole stitches
Manual start and speed control
Backlight LCD display
Convenient stitches selection button
Upper and lower needle position
Twin needle function
Security auto shut off


Top loading hook system
Automatic threader
Automatic clutch for bobbin winding
Drop feed system
Easy thread cutter
Snap-on presser foot
Portable handle
Long life LED light
Electronic foot controller




Specification

11#-14#	3/90	700RPM±50RPM	5.5mm	7mm	4.5mm	100~240 VAC	30W	6.6/5.3kg 400x175x310mm 460x255x345mm
Needle Model	Double Needle Model	Maximum speed	Foot lifts height	Stitch width	Stitch length	Input Voltage	Input Power	GW/NW Machine Package Size

Standard Accessories

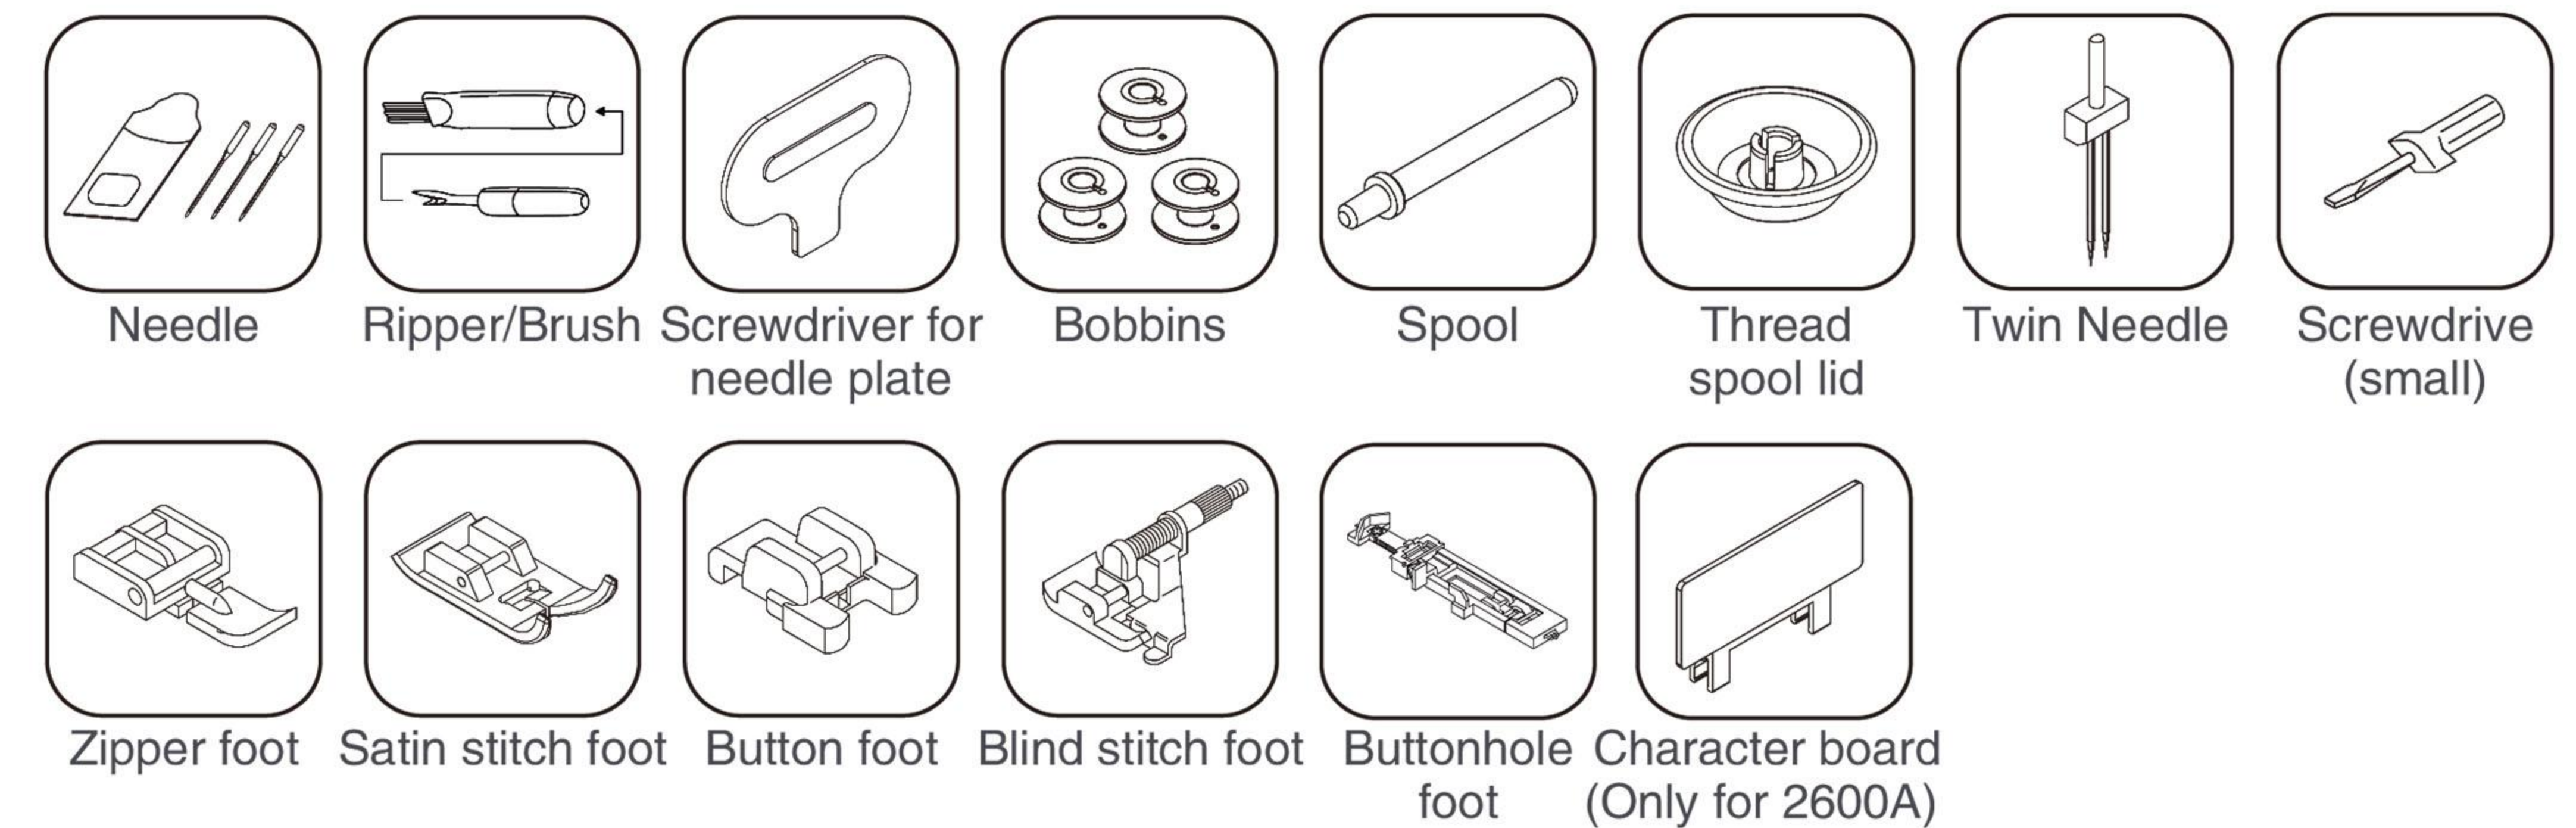

Stitch

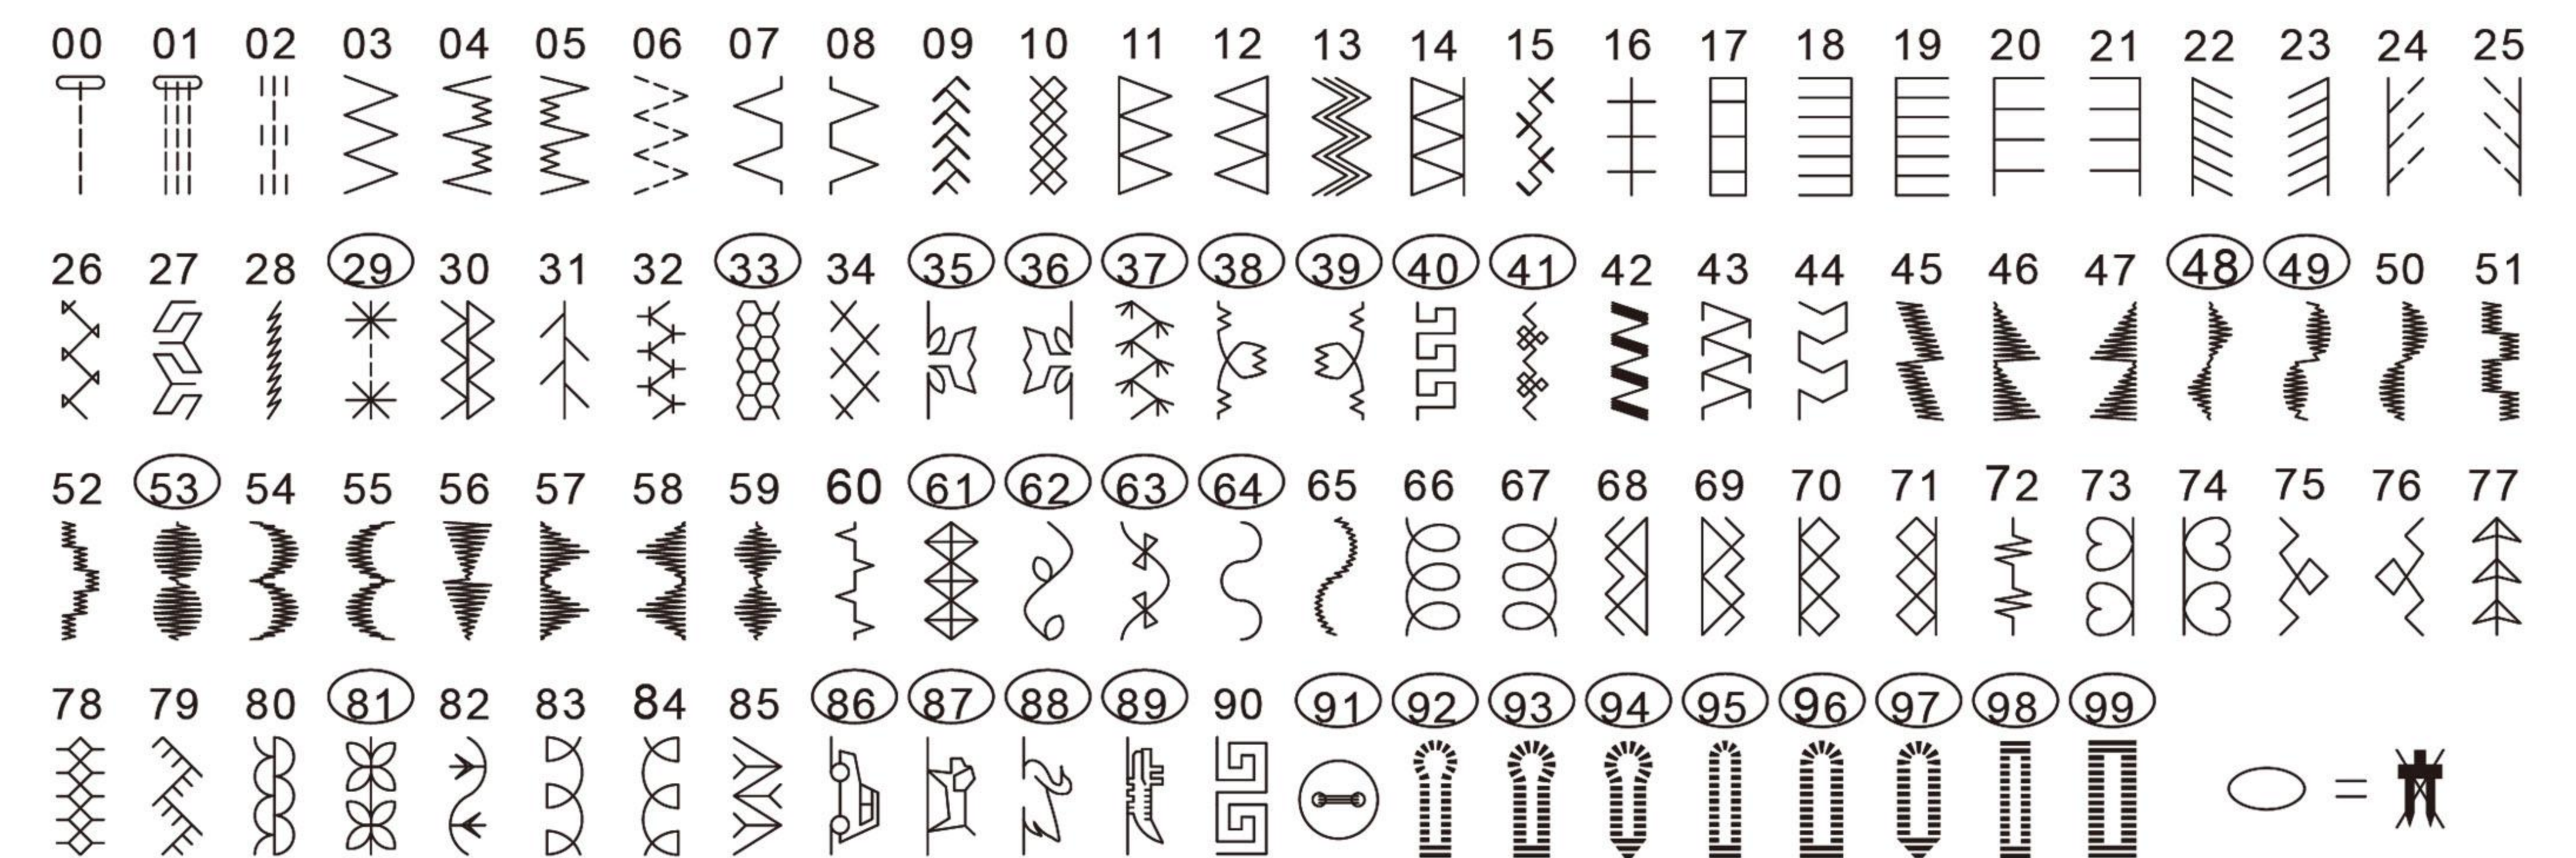

仅限 2600A (Only For 2600A)

00 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
0 1 2 3 4 5 6 7 8 9 A B C D E F G H I J K L M N O P Q R S T U V W X Y Z
36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69
a b c d e f g h i j k l m n o p q r s t u v w x y z @ ! ? & ' " ,
70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99
. - . / : ; Å Ä Æ à ä å è é ê ë ç œ ç ì Ñ ñ Ò Ó ò ö ø Ù ù



Extend table optional



Extend table optional

GC-6624


- Aluminium body in side with plastic body outside
- Built-in light
- 24 Stitches
- 4 Step buttonholer
- Adjustable zigzag stitch width
- Automatic clutch for bobbin winding
- Telescopic spool pin
- Easy thread cutter
- Easy pass foot change
- Free arm
- Powerful electric motor
- Foldable handle



Specification

700spm	5mm	70W	8/7KG 445x230x345mm
Speed	Foot lifts height	Power	GW/NW Package Size

Stitch

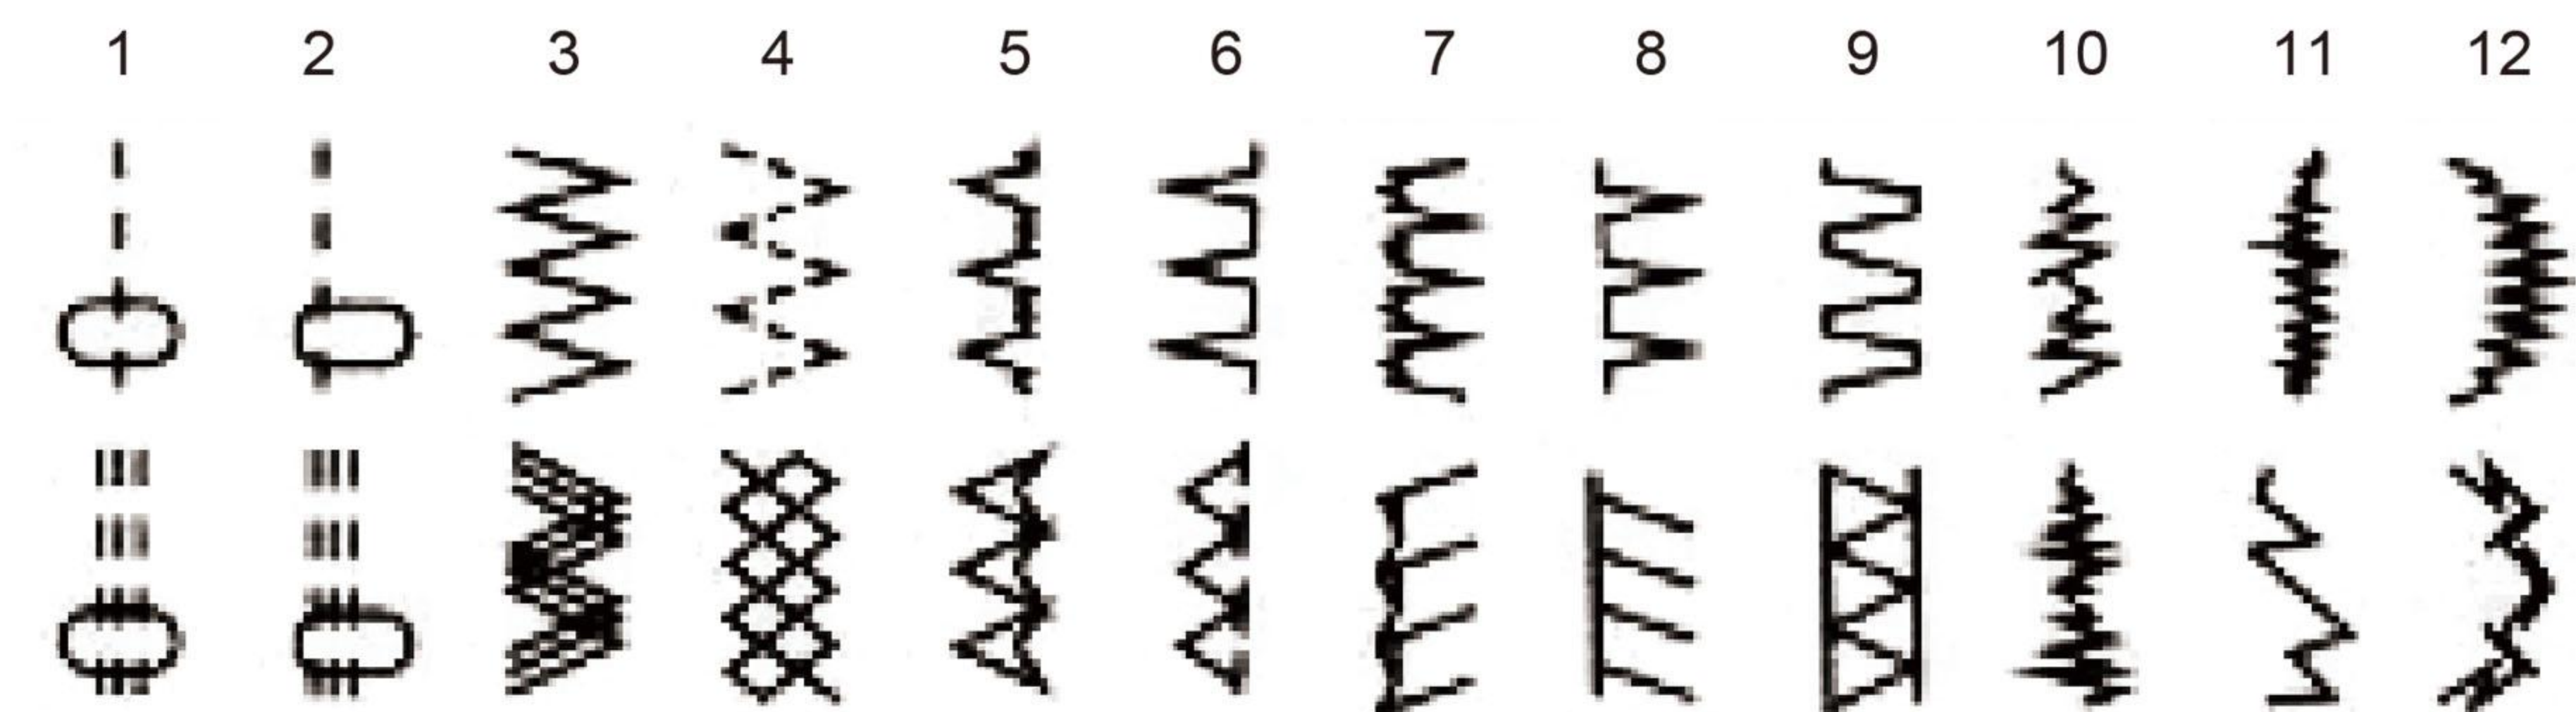

24 built-in stitches
Four step buttonhole
Twin needle function
(24 types)
Light weight free arm
Telescopic spool pin
Easy thread cutter
Automatic clutch for bobbin winding

Snap on presser foot
Portable handle
Long life LED light
Automatic threader
Electronic foot controller
Drop feed system(optional)



GC-988 Purple



GC-988 Green



GC-988 Red




GC-989 White



GC-989 Pink


Standard Accessories

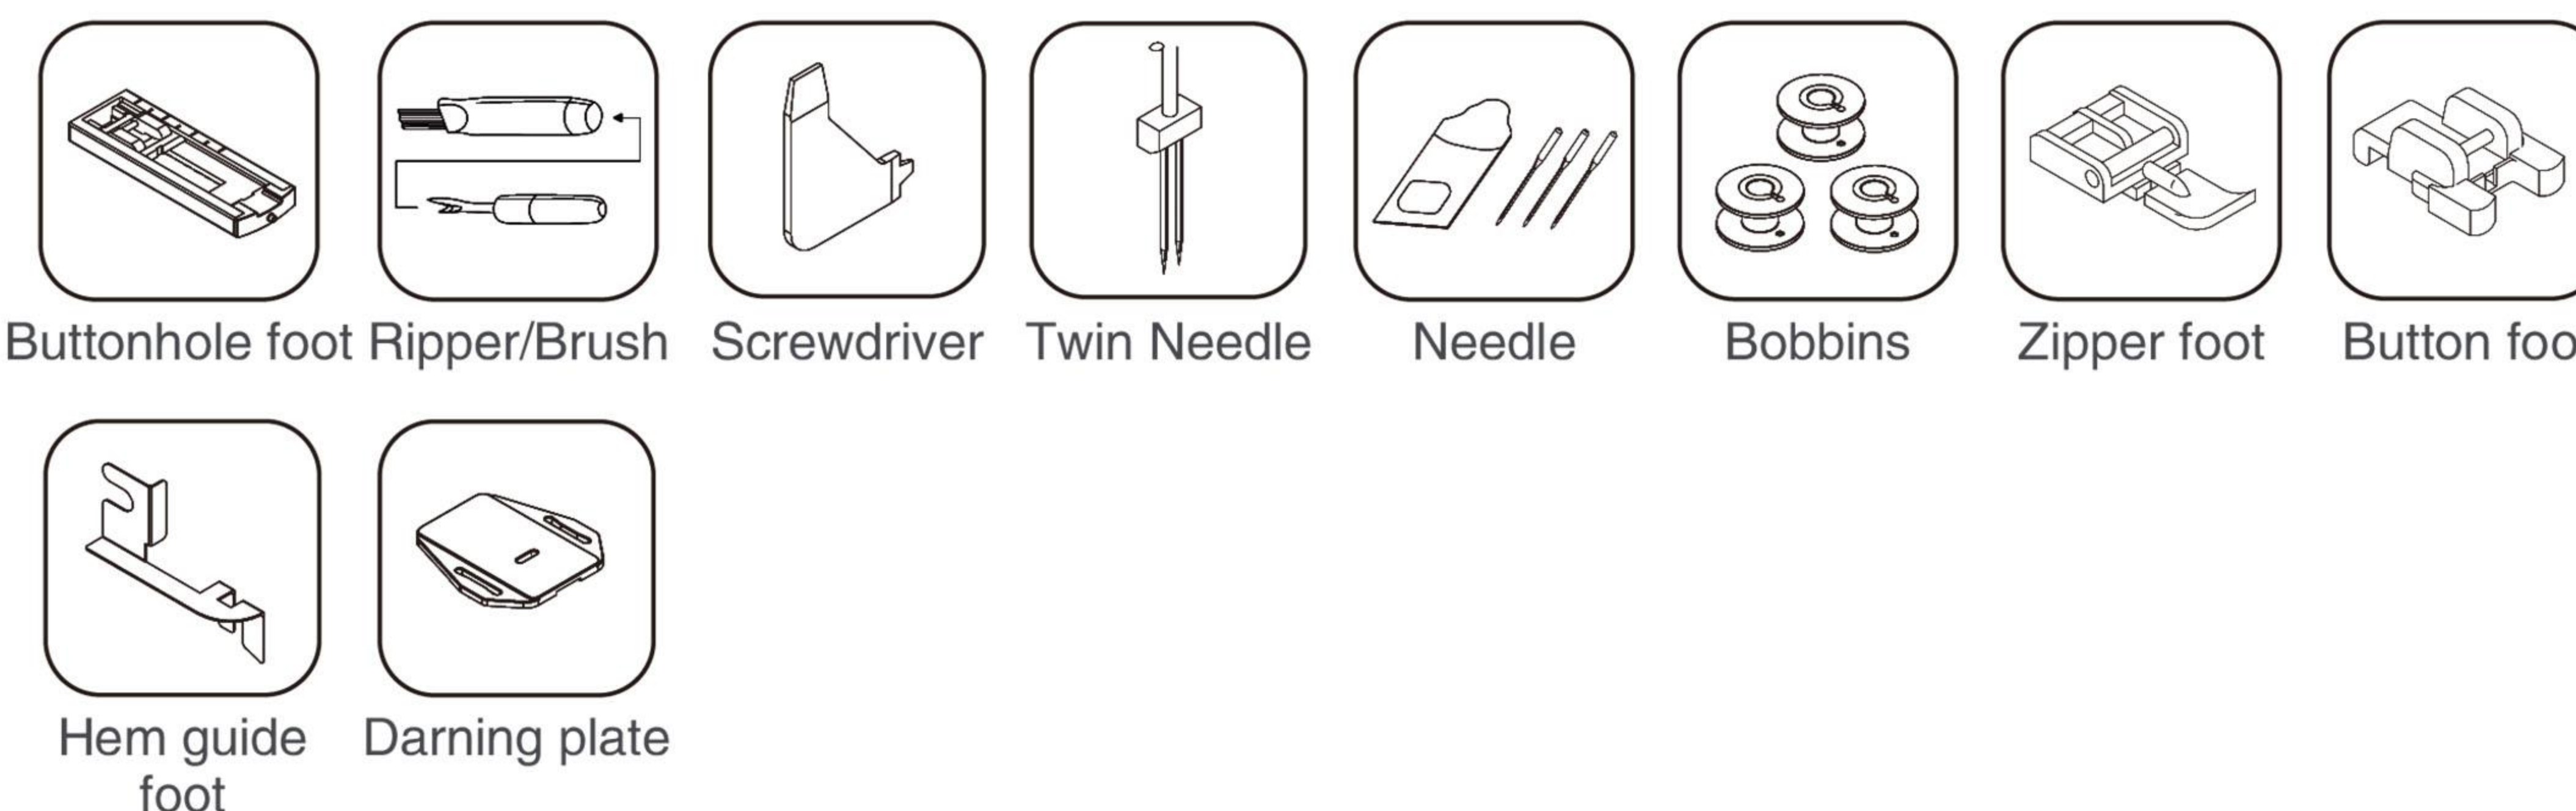

Specification

11#-14#	2/90	700RPM ±50RPM	5.5mm	4mm	4mm	220~240 VAC	62W (电机: 60W, 灯: 2W)	7.3/6.3kg 390x150x295mm 445x235x345mm
Needle Model	Double Needle Model	Maximum speed	Foot lifts height	Stitch width	Stitch length	Input Voltage	Input Power	GW/NW Machine Package Size

Stitch

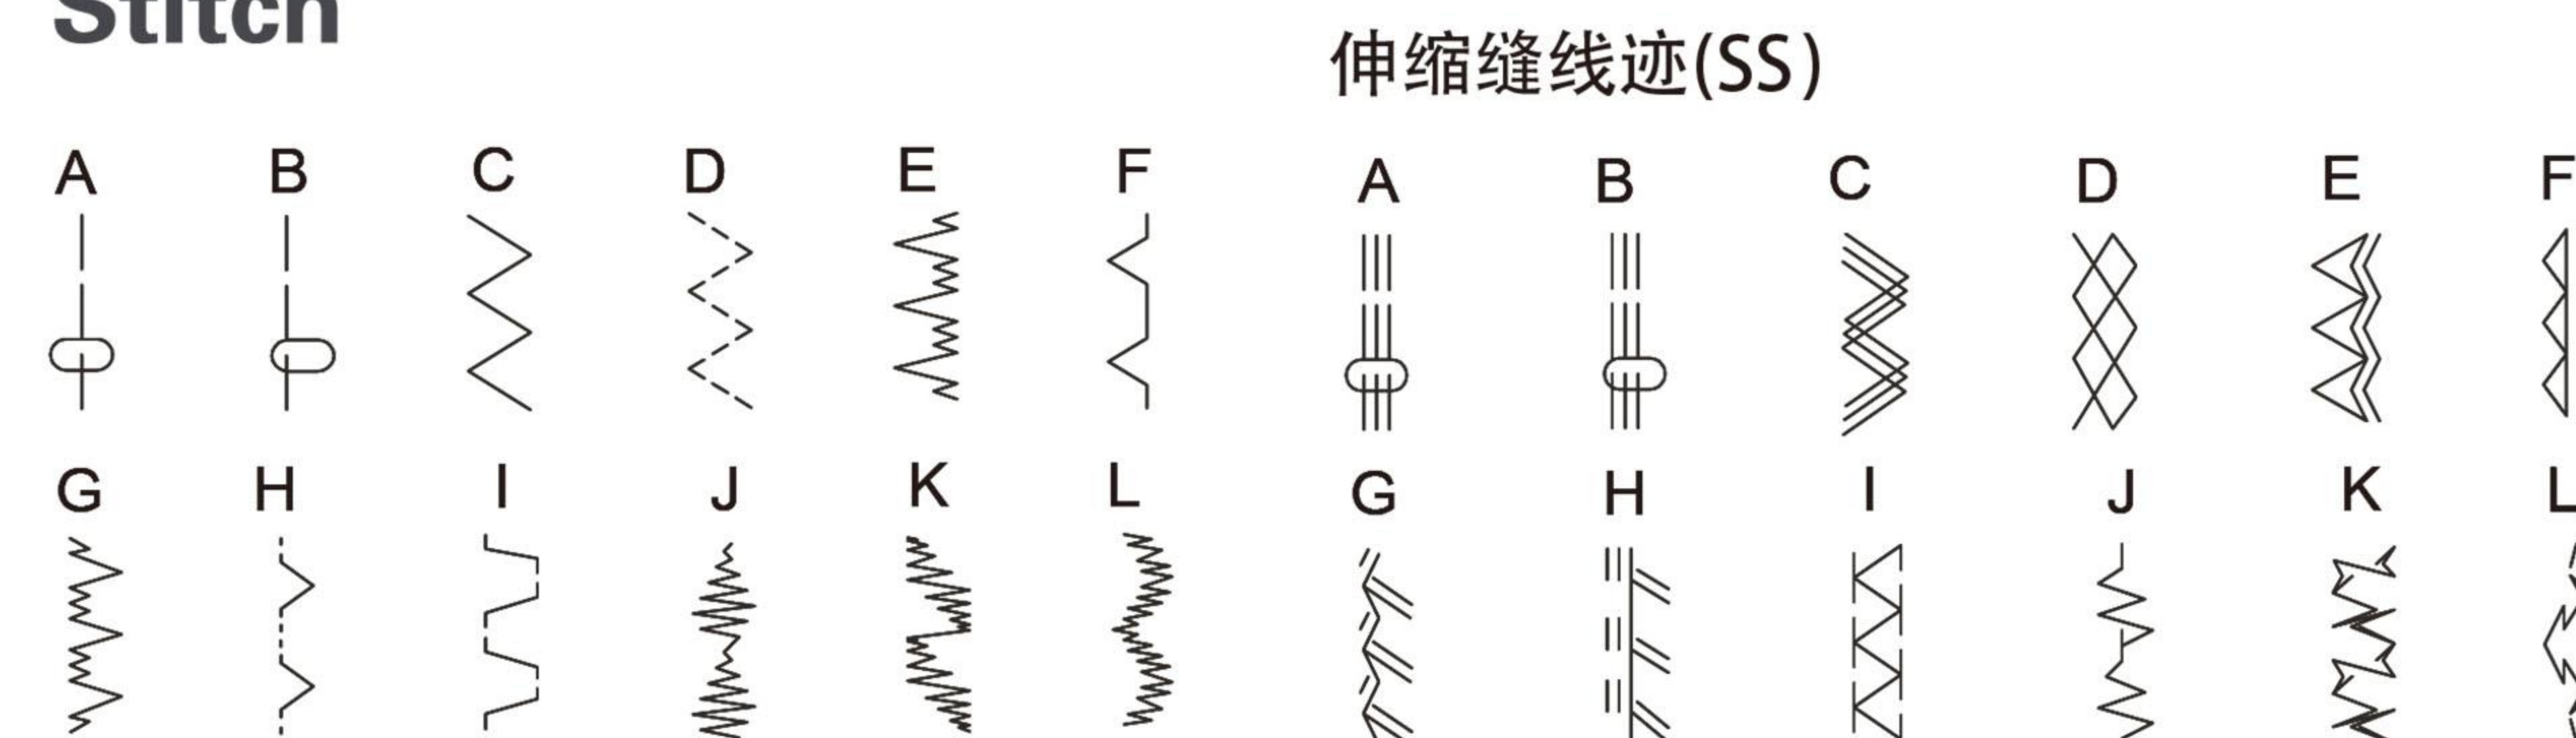

GC-1212

- Aluminium body in side with plastic body outside
- Built-in light
- 12 stitches
- 4 Step buttonholer
- Oscillating hook
- Free arm lightweight
- Built-in powerful electric motor, upper thread tension
- Automatic clutch for bobbin winding
- Reverse stitch button
- Foldable handle




Blue



Pink

Specification

700spm	5mm	70W	6.5/5.5KG	410x210x325mm
Speed	Foot lifts height	Power	GW/NW	Package Size

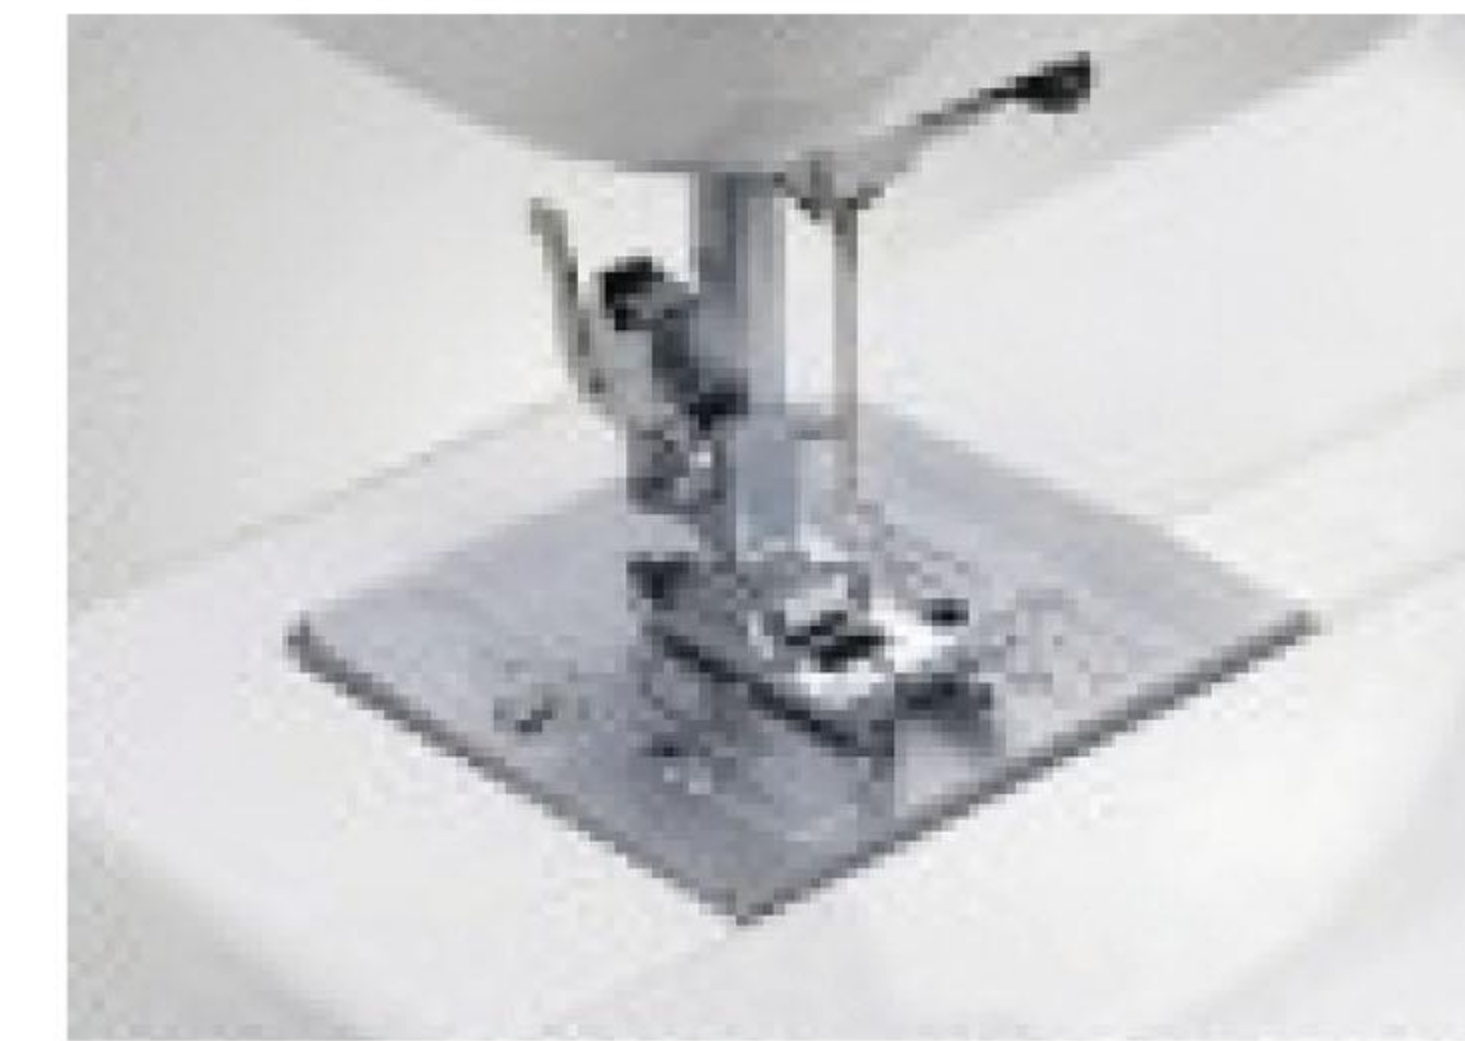


Accessory



GC-300F


- 24-stitches
- 4-Step buttonhole
- Free arm
- Auto winding
- Scalable thread bar
- Easy side cutter
- Easy change foot
- Portable handle
- Led light
- Auto threading
- Electronic stepless foot pedal controller
- Servo motor, Powerful stitch

Stitch

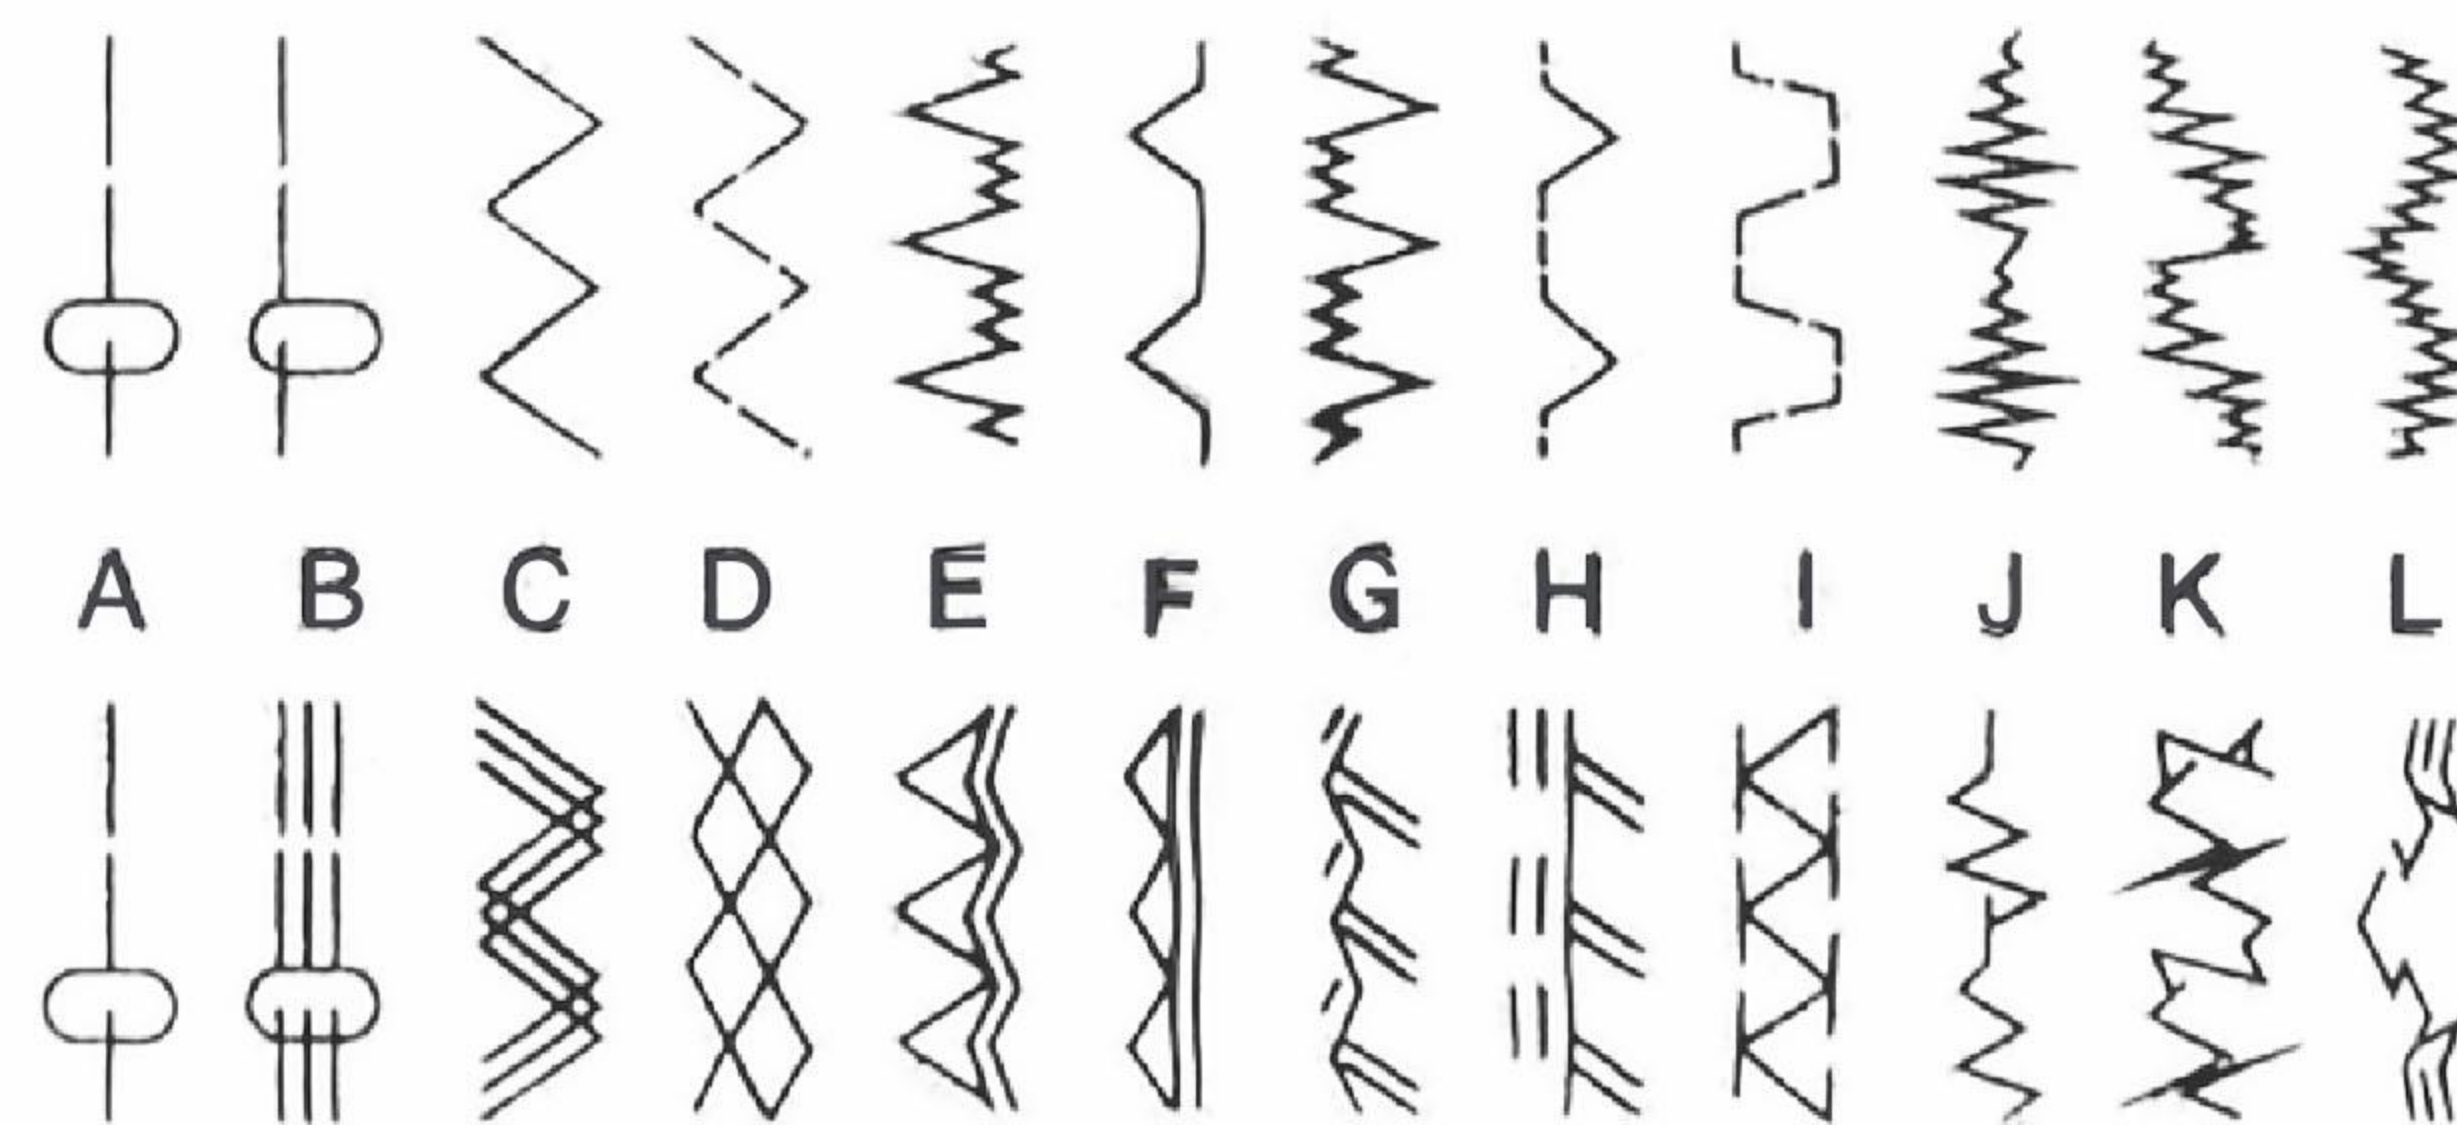

Specification

Nm75- Nm110 (11#-18#)	750rpm	5mm	4mm	3.6mm	180-240V	310V	300W	7.0/6.15KG
Needle Model	Maximum speed	Foot height	Max stitch width	Max stitch length	Input Voltage	Output Voltage	Power	GW/NW
450*240*350mm	10 Layers of thin Jean							
Package Size								

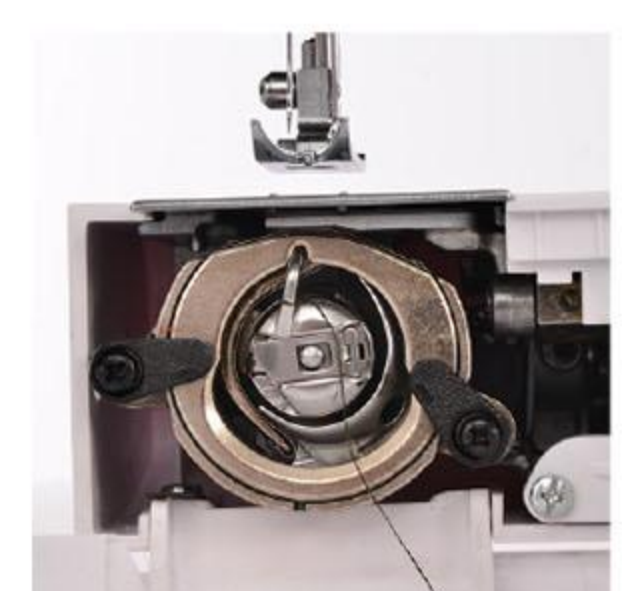

Industrial vertical swing shuttle



Install press foot quickly



Automatic needle threading



Metal needle plate and feeding teeth



Pattern knob



Needle distance knob



One-click backstitch



Surface line tightness adjustment



Stepless pedal




Barrel sewing



GC-890
Sewing & embroidery machine



GC-E890B
Embroidery machine

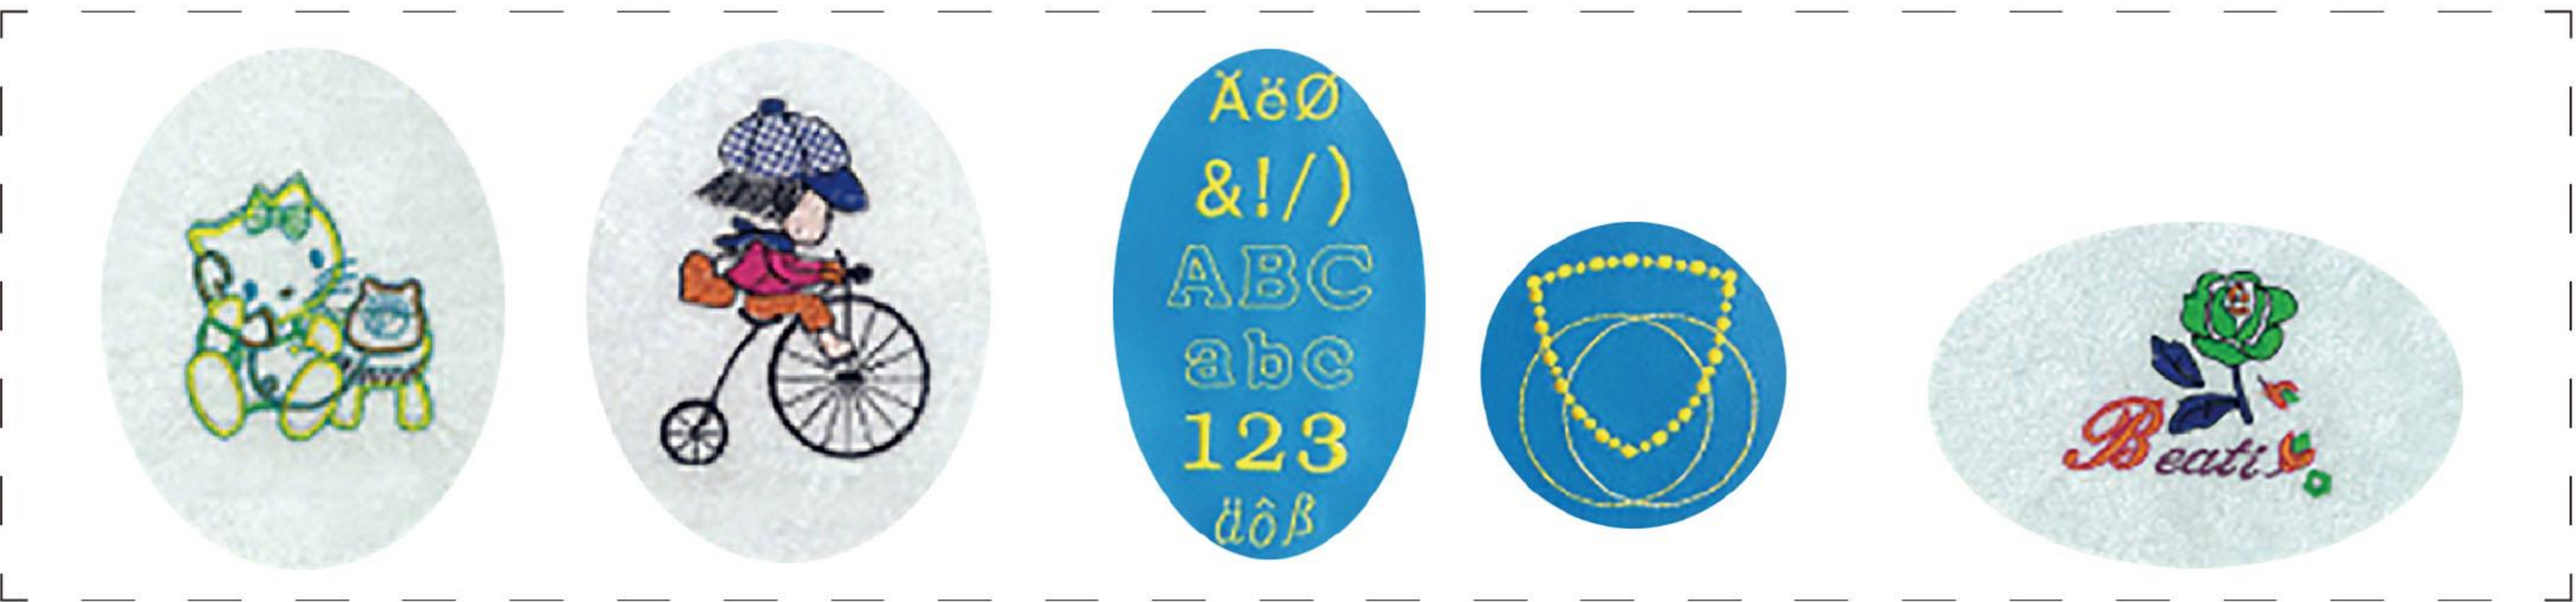

Specification

GC-890

绣花速度 Speed	最大绣花范围 Embroidery area (Max)	绣花图案 Build-in embroidery design	字母和数字 Letters and Numbers	边框式样 borderstyle	记忆能力 Memory capability	USB输入/ 自动剪线 USB/Auto thread cutter	自动绕线 Auto bobbin winding	断线报警 Thread break alarm	故障报警提示 Error warning and prompt function
0-650rpm	235*100mm	75(10 big patterns)	5 King of fonts	10	2000000	Yes	Yes	Yes	Yes
绣花图案编辑 Pattern size adjustable	刺绣图案旋转 Pattern rotation	刺绣文件格式 Embroidery file format	数据连接 Operation software support	快速穿线/快速放置梭芯 Fast threading/Quick-set bobbin	照明灯 Sewing light	起止按钮/LED显示屏 Start stop button/LED display screen	缝纫速度 Sewing speed	缝纫线迹 Build-in sewing design	针幅范围 The needle of range
Supports scaling, mirroring, Translation, rotation	1-360°	DST	XP/Win7/Win8/Win10	Yes	LED	Yes	0-850RPM	67	0-7mm
针距范围 Scope of stitch	速度调节 Adjust speed	点动上下停针 Click and hold the needle up and down	锁眼/钉扣 buttonhole / button sewing	纽扣孔数 Number of button holes	语言 Operation language	适用电源 Power supply	功率 Power	包装尺寸 Packing size	净重/毛重 NW/GW
0-4mm	Yes	Yes	Yes	10	10	100-240V/50HZ/60HZ	45w	445 × 365 × 385 mm	8.5kg/10.5kg

GC-E890B

绣花速度 Speed	最大绣花范围 Embroidery area (Max)	绣花图案 Build-in embroidery design	字母和数字 Letters and Numbers	边框式样 borderstyle	记忆能力 Memory capability	USB输入 USB	自动剪线 Auto thread cutter	自动绕线 Auto bobbin winding	断线报警 Thread break alarm
0-650rpm	235*100mm	75(10 big patterns)	5 Kinds of fonts	10	2000000	Yes	Yes	Yes	Yes
故障报警提示 Error warning and prompt function	图案大小可调 Pattern size adjustable	图形旋转 Pattern rotation	刺绣文件格式 Embroidery file format	操作软件支持 Operation software support	快速穿线 Fast threading	刺绣范围(标准) Embroidery area (Standard)	启动停止按钮 Start stop button	快速放置梭芯 Quick-set bobbin	液晶显示屏 LED display screen
Yes	Yes	1-360°	DST	XP/Win7/Win8/Win10	Yes	100*100mm	Yes	Yes	Yes
操作语言 Operation language	缝纫灯 Sewing light	电压 Voltage	功率 power	机器尺寸 Machine size	包装尺寸 Packing size	净重 NW	毛重 GW		
10	LED	100-240V/50HZ/60HZ	45w	390 × 220 × 300mm	445 × 365 × 385mm	8.5kg	10.5kg		

GC-1500
Sewing & embroidery machine



Purple



Blue



Pink

GC-E1500B
Embroidery machine



Blue



Purple

Specification

GC-1500

绣花速度 Speed	最大绣花范围 Embroidery area (Max)	绣花图案 Build-in embroidery design	字母和数字 Letters and Numbers	边框式样 borderstyle	记忆能力 Memory capability	USB输入/ 自动剪线 USB/Auto thread cutter	自动绕线 Auto bobbin winding	断线报警 Thread break alarm	故障报警提示 Error waring and prompt function
0-650rpm	235*100mm	75(10 big patterns)	5 Kings of fonts	10	2000000	Yes	Yes	Yes	Yes
绣花图案编辑 Pattern size adjustable	刺绣图案旋转 Pattern rotation	刺绣文件格式 Embroidery file format	数据连接 Operation software suppot	快速穿线 Fast threading	照明灯 Sewing light	起止按钮/ LED显示屏 Start stop button/ LED display screen	缝纫速度 Sewing speed	缝纫线迹 Build-in sewing design	针幅范围 The needle of range
Supports scaling, mirroring, Translation, rotation	1-360°	DST	supportXP/ Win7/Win8/ Win10	Yes	LED	Yes	0-850RPM	67	0-7mm
针距范围 Scope of stitch	速度调节 Adjust speed	点动上下停针 Click and hold the needle up and down	锁眼/钉扣 buttonhole / button sewing	纽扣孔数 Number of button holes	语言 Operation language	适用电源 Power supply	功率 Power	包装尺寸 Packing size	净重/毛重 NW/GW
0-4mm	Yes	Yes	Yes	10	10items	100-240V 50HZ/60HZ	45w	445*365*385 mm	8.5kg/10.5kg


GC-1500B

绣花速度(最快) Embroidery speed(Max)	最大绣花范围 Embroidery area (Max)	绣花图案 Build-in embroidery design	字母和数字 Letters and Numbers	边框式样 borderstyle	记忆能力 Memory capability	USB输入 USB	自动剪线 Auto thread cutter	自动绕线 Auto bobbin winding	断线报警 Thread break alarm
650rpm	235*100mm	75(10 big patterns)	5 Kings of fonts	10	2000000	Yes	Yes	Yes	Yes
故障报警提示 Error waring and prompt function	图案大小可调 Pattern size adjustable	图案旋转 Pattern rotation	刺绣文件格式 Embroidery file format	操作软件支持 Operation software suppot	快速穿线 Fast threading	刺绣范围(标准) Embroidery atea (Standard)	启动停止按钮 Start stop button	快速放置梭芯 Quick-set bobbin	液晶显示屏幕 LED display screen
Yes	Yes	1-360°	DST	XP/Win7/Win8/ Win10	Yes	100*100mm	Yes	Yes	Yes
操作语言 Operation language	缝纫灯 Sewing light	电压 Voltage	功率 Power	机器尺寸 Machine size	包装尺寸 Packing size	净重 NW	毛重 GW		
10	LED	100-240V 50HZ/60HZ	45w	390×220×300 mm	445×365×385 mm	8.5kg	10.5kg		


GC-600K




Standard Accessories

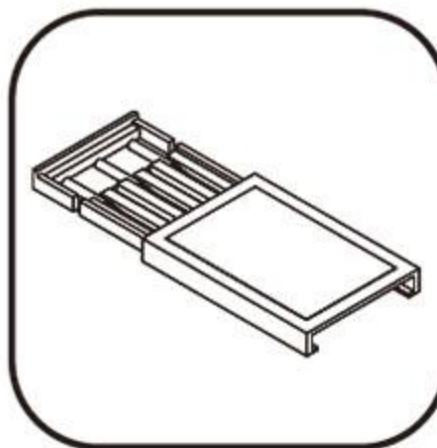

Needle kit

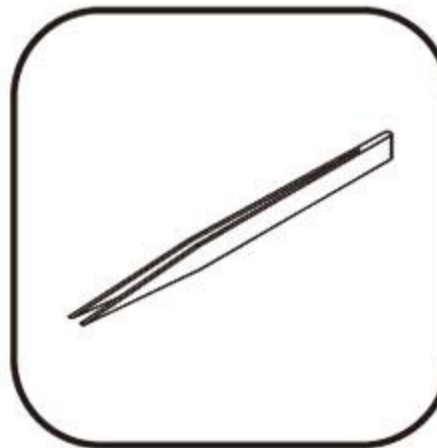


Tweezers

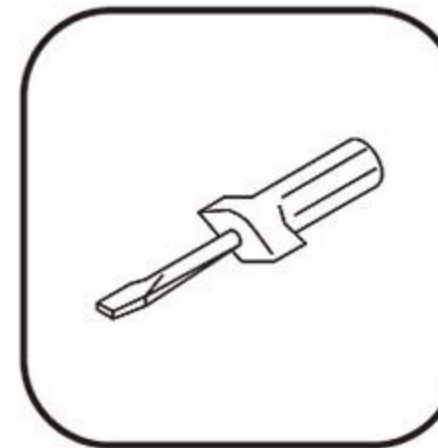


Screwdriver (small)

Standard stitch display

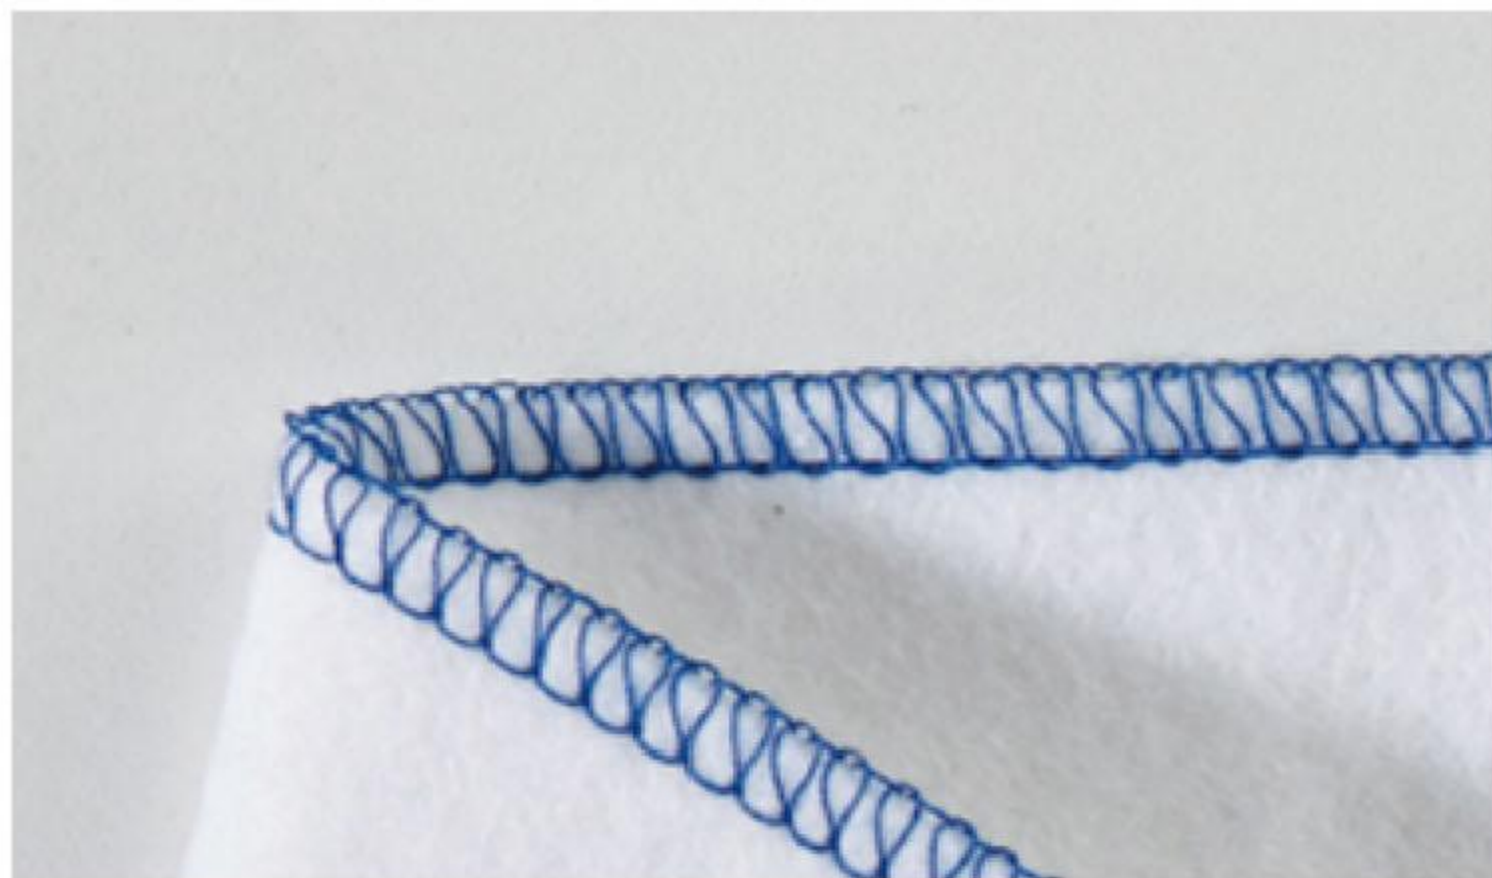

3-thread edge stitching (5mm)

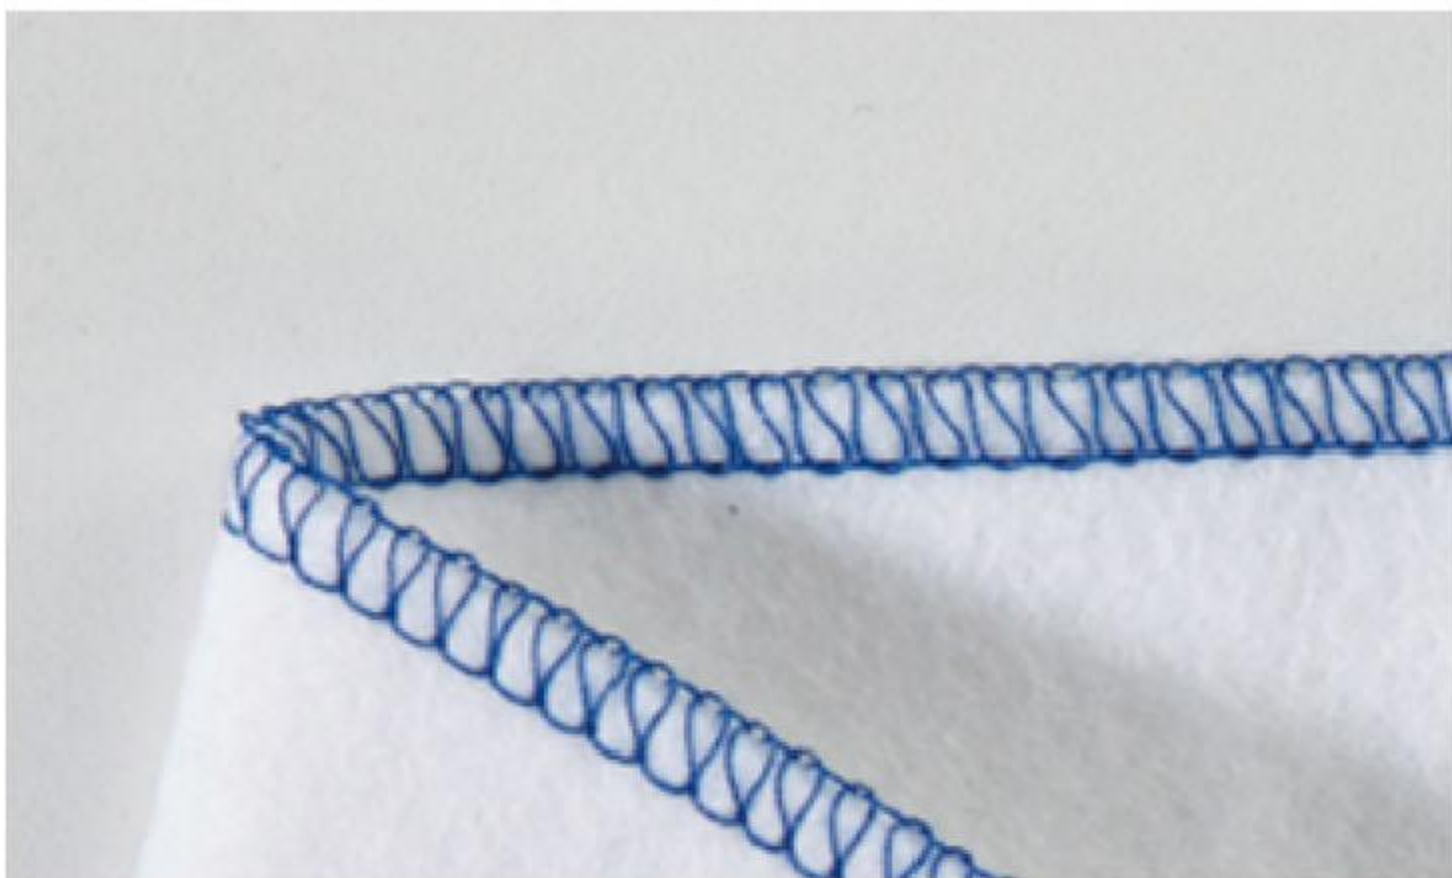


3-thread edge stitching (2.8mm)




4-thread edge stitching



2-thread edge stitching

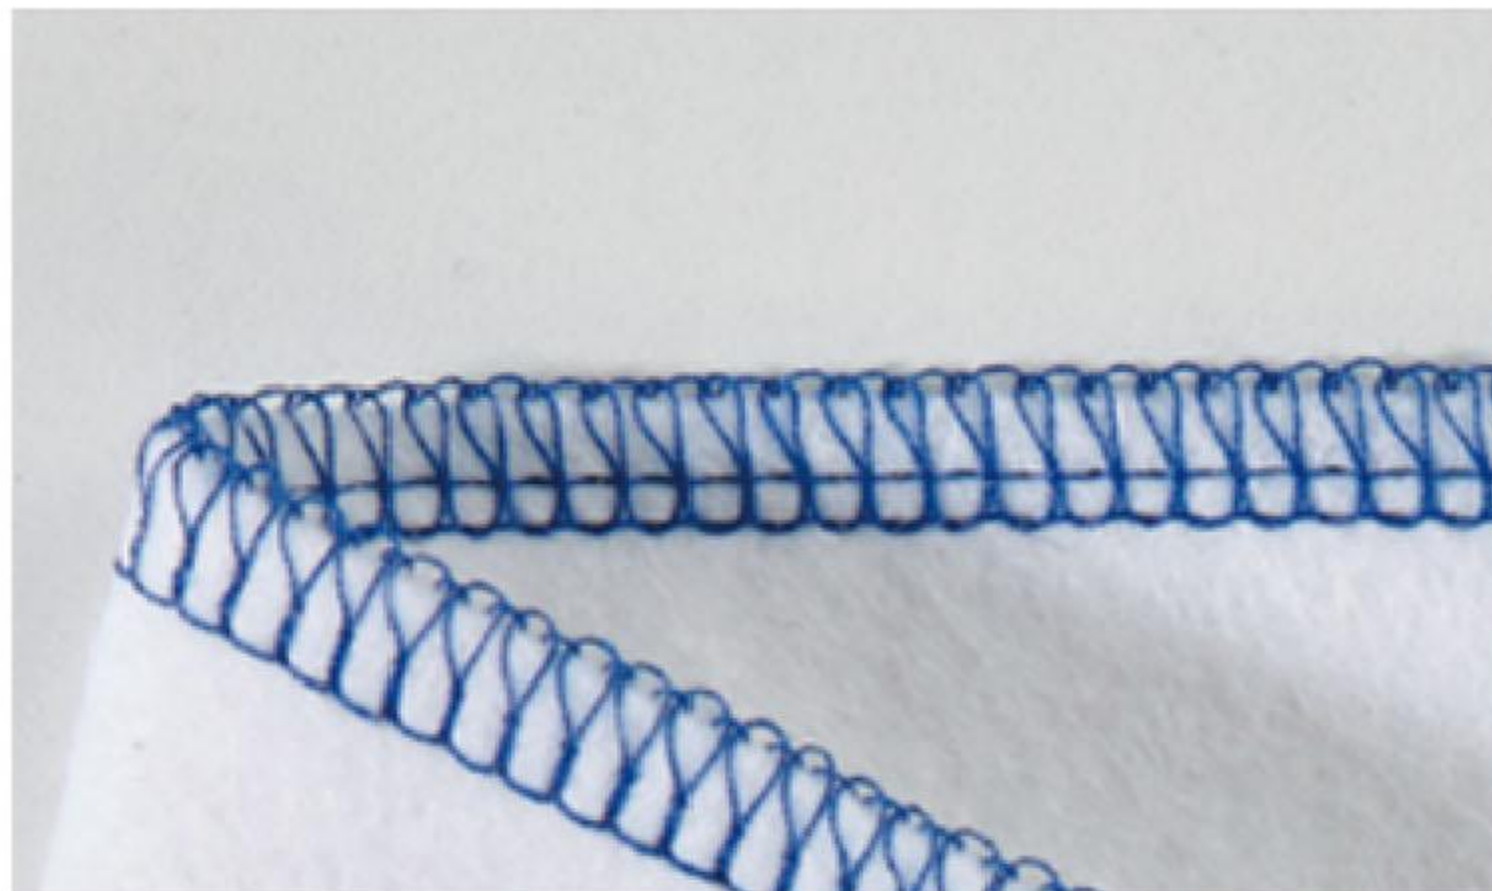

Sewing cover stitch effect

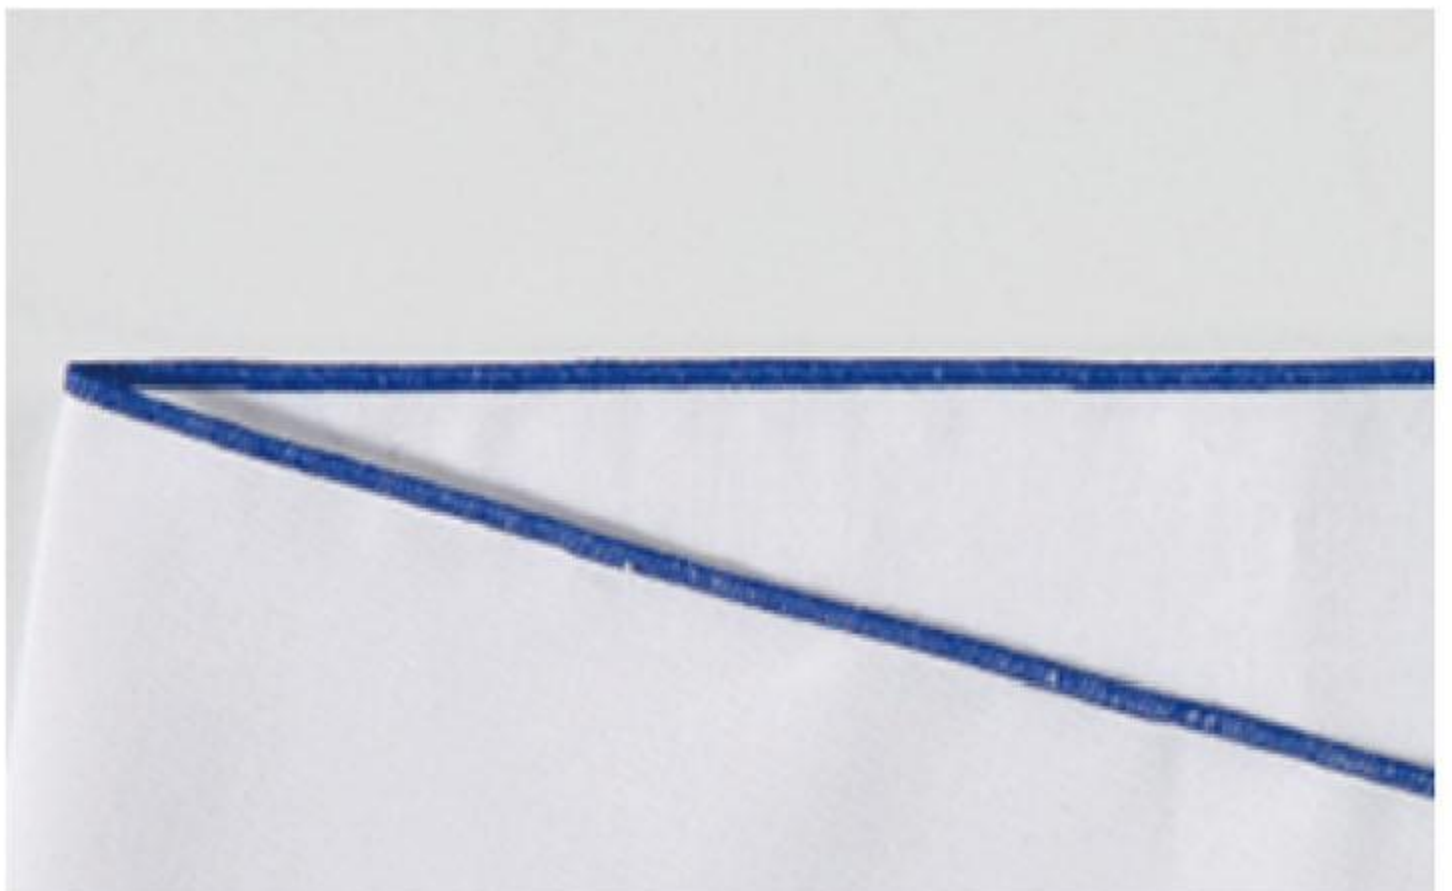

Sewing cover stitch effect


Specification

单针/双针 3线/4线/密拷 Single/double needles 3/4 threads/cover stitch	差动送料 差动比 1:0.7-1:2 Differential Feeding differential ratio 1: 0.7-1: 2	包缝密度 1-4mm Overlock density 1-4mm	包缝宽度 3.0-7.7mm Overlock width 3.0-7.7mm
照明灯 LED Lumination: LED	彩色穿线示意图 Colorful draw of threading	电压:110V/220V Voltage: 110V/220V	功率: 90W Power: 90W
1100针/每分钟 1100 needles/ minute	毛重: 7.3KG G.W: 7.3KG	净重: 5.9KG N.W: 5.9KG	包装尺寸(mm) 379(L)x319(W)x312(H) Package size(mm) 379(L)X319(W)X312(H)

GC-700K




Standard Accessories

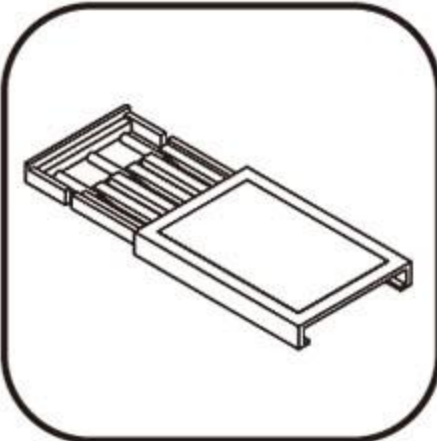

Needle kit




Tweezers

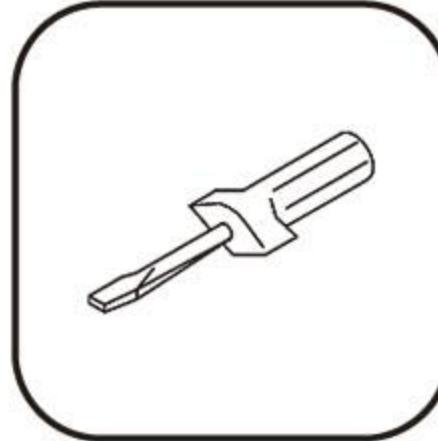


Screwdriver
(small)

Standard stitch display

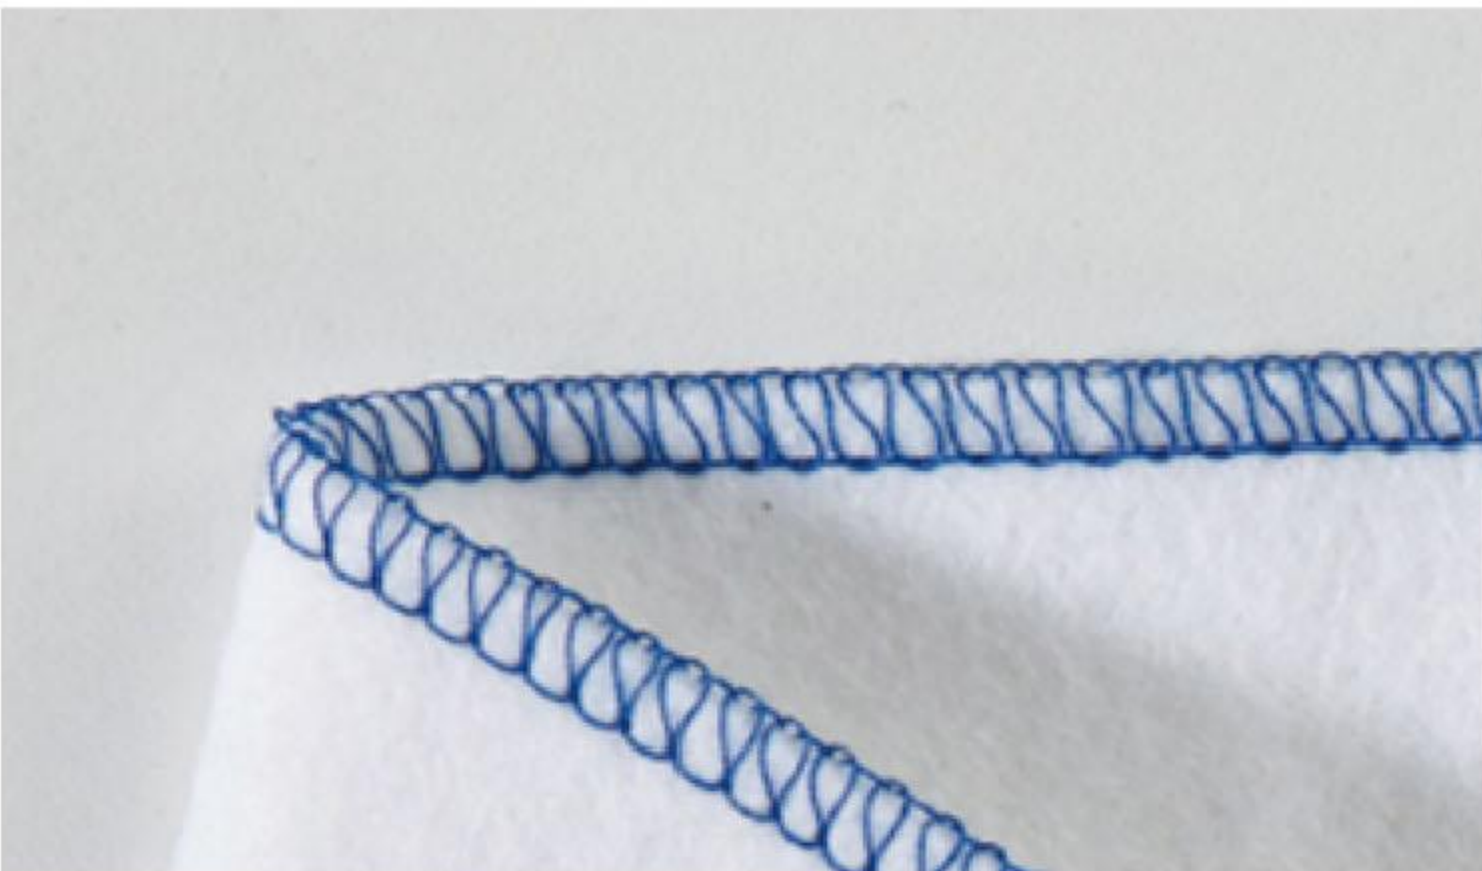

3-thread edge stitching (5mm)

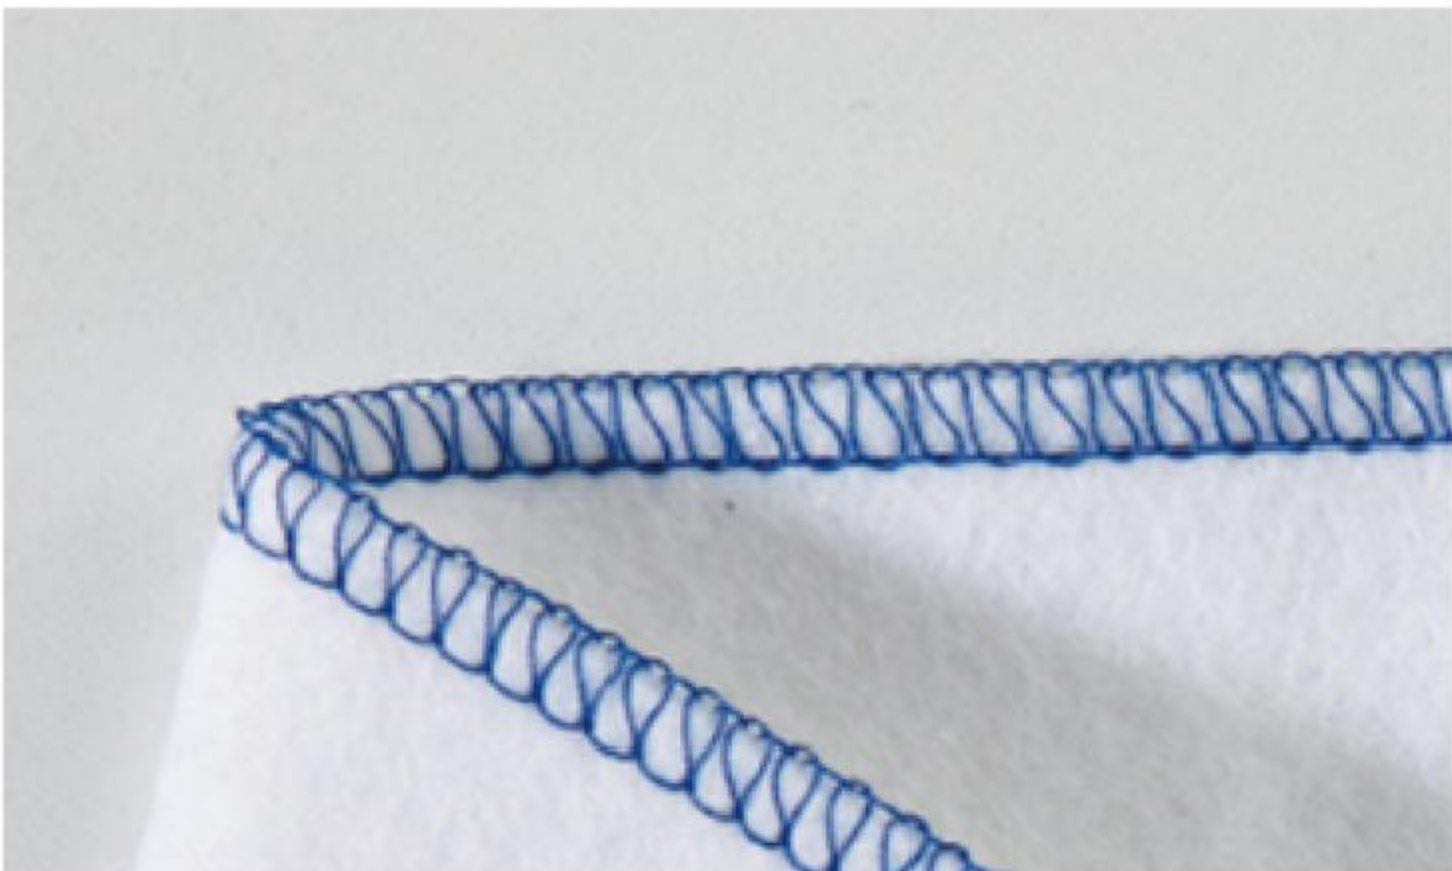


3-thread edge stitching (2.8mm)




4-thread edge stitching



2-thread edge stitching

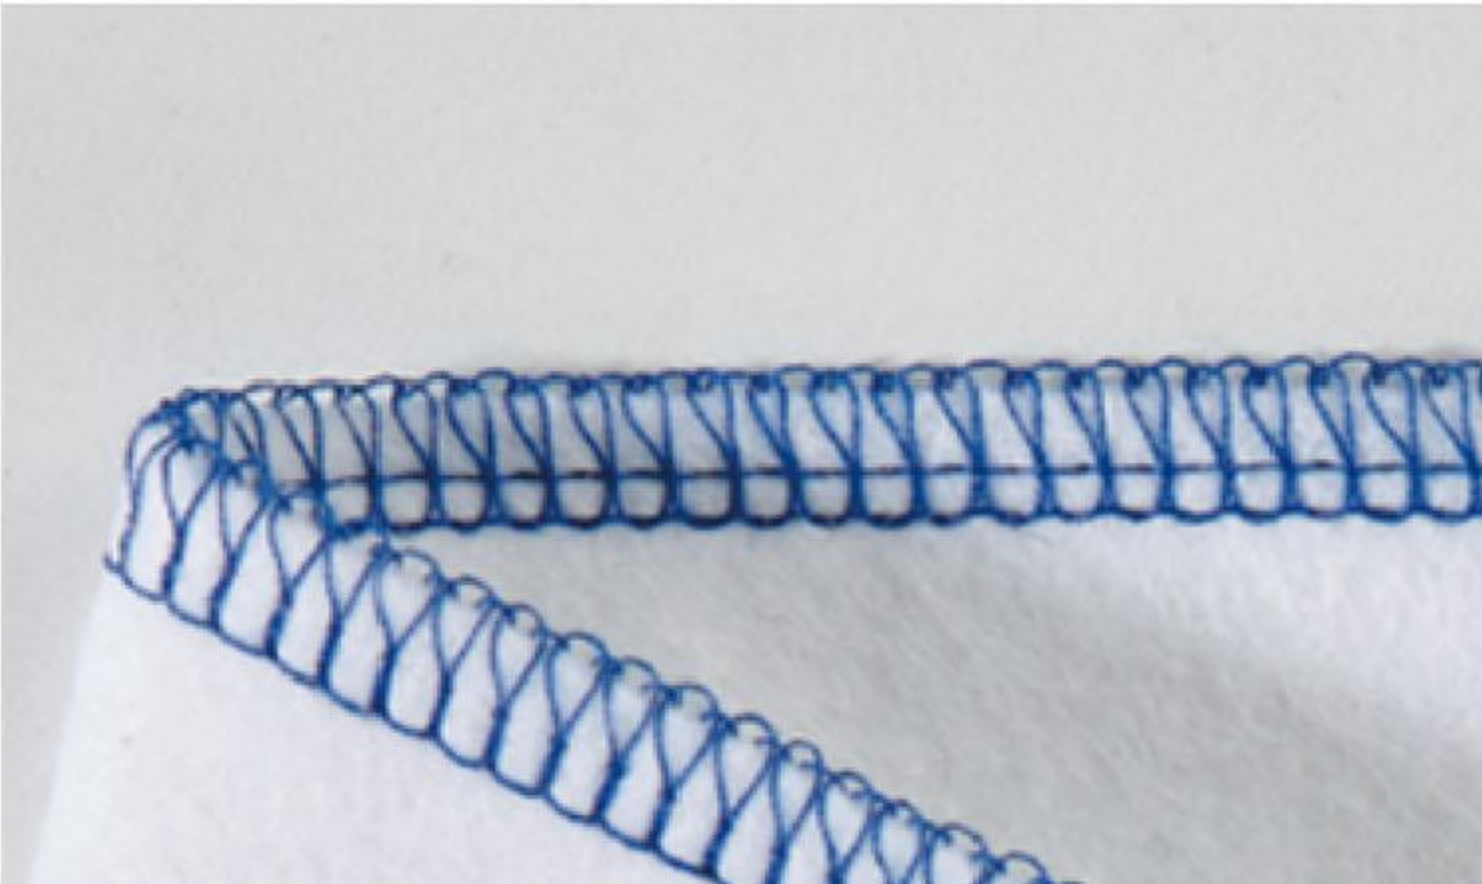

Sewing cover stitch effect

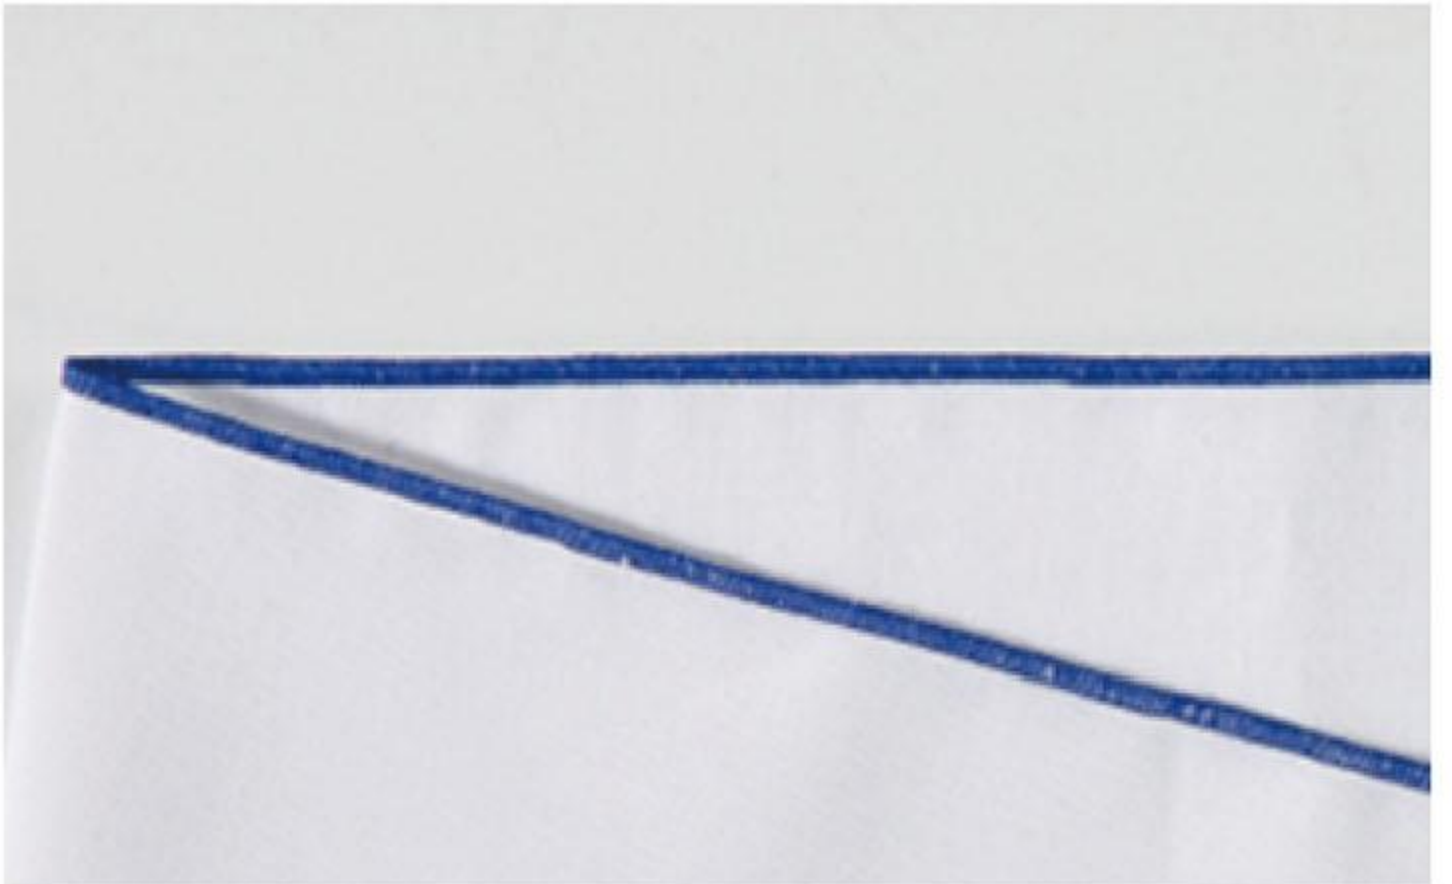

Sewing cover stitch effect


Specification

单针/双针 2线/3线/4线/密拷 Single/double needles 2/3/4 threads/ cover stitch	差动送料 差动比 1:0.7-1:2 Differential Feeding differential ratio 1: 0.7-1: 2	包缝密度 1-4mm Overlock density 1-4mm	包缝宽度 3.0-7.7mm Overlock width 3.0-7.7mm
照明灯 LED Lumination: LED	彩色穿线示意图 Colorful draw of threading	电压:110V/220V Voltage: 110V/220V	功率: 90W Power: 90W
1100针/每分钟 1100 needles/ minute	毛重: 7.5KG G.W: 7.5KG	净重: 6.1KG N.W: 6.1KG	包装尺寸(mm) 377(L)x373(W)x325(H) Package size(mm) 377(L)X373(W)X325(H)


GC-800K



Standard stitch display

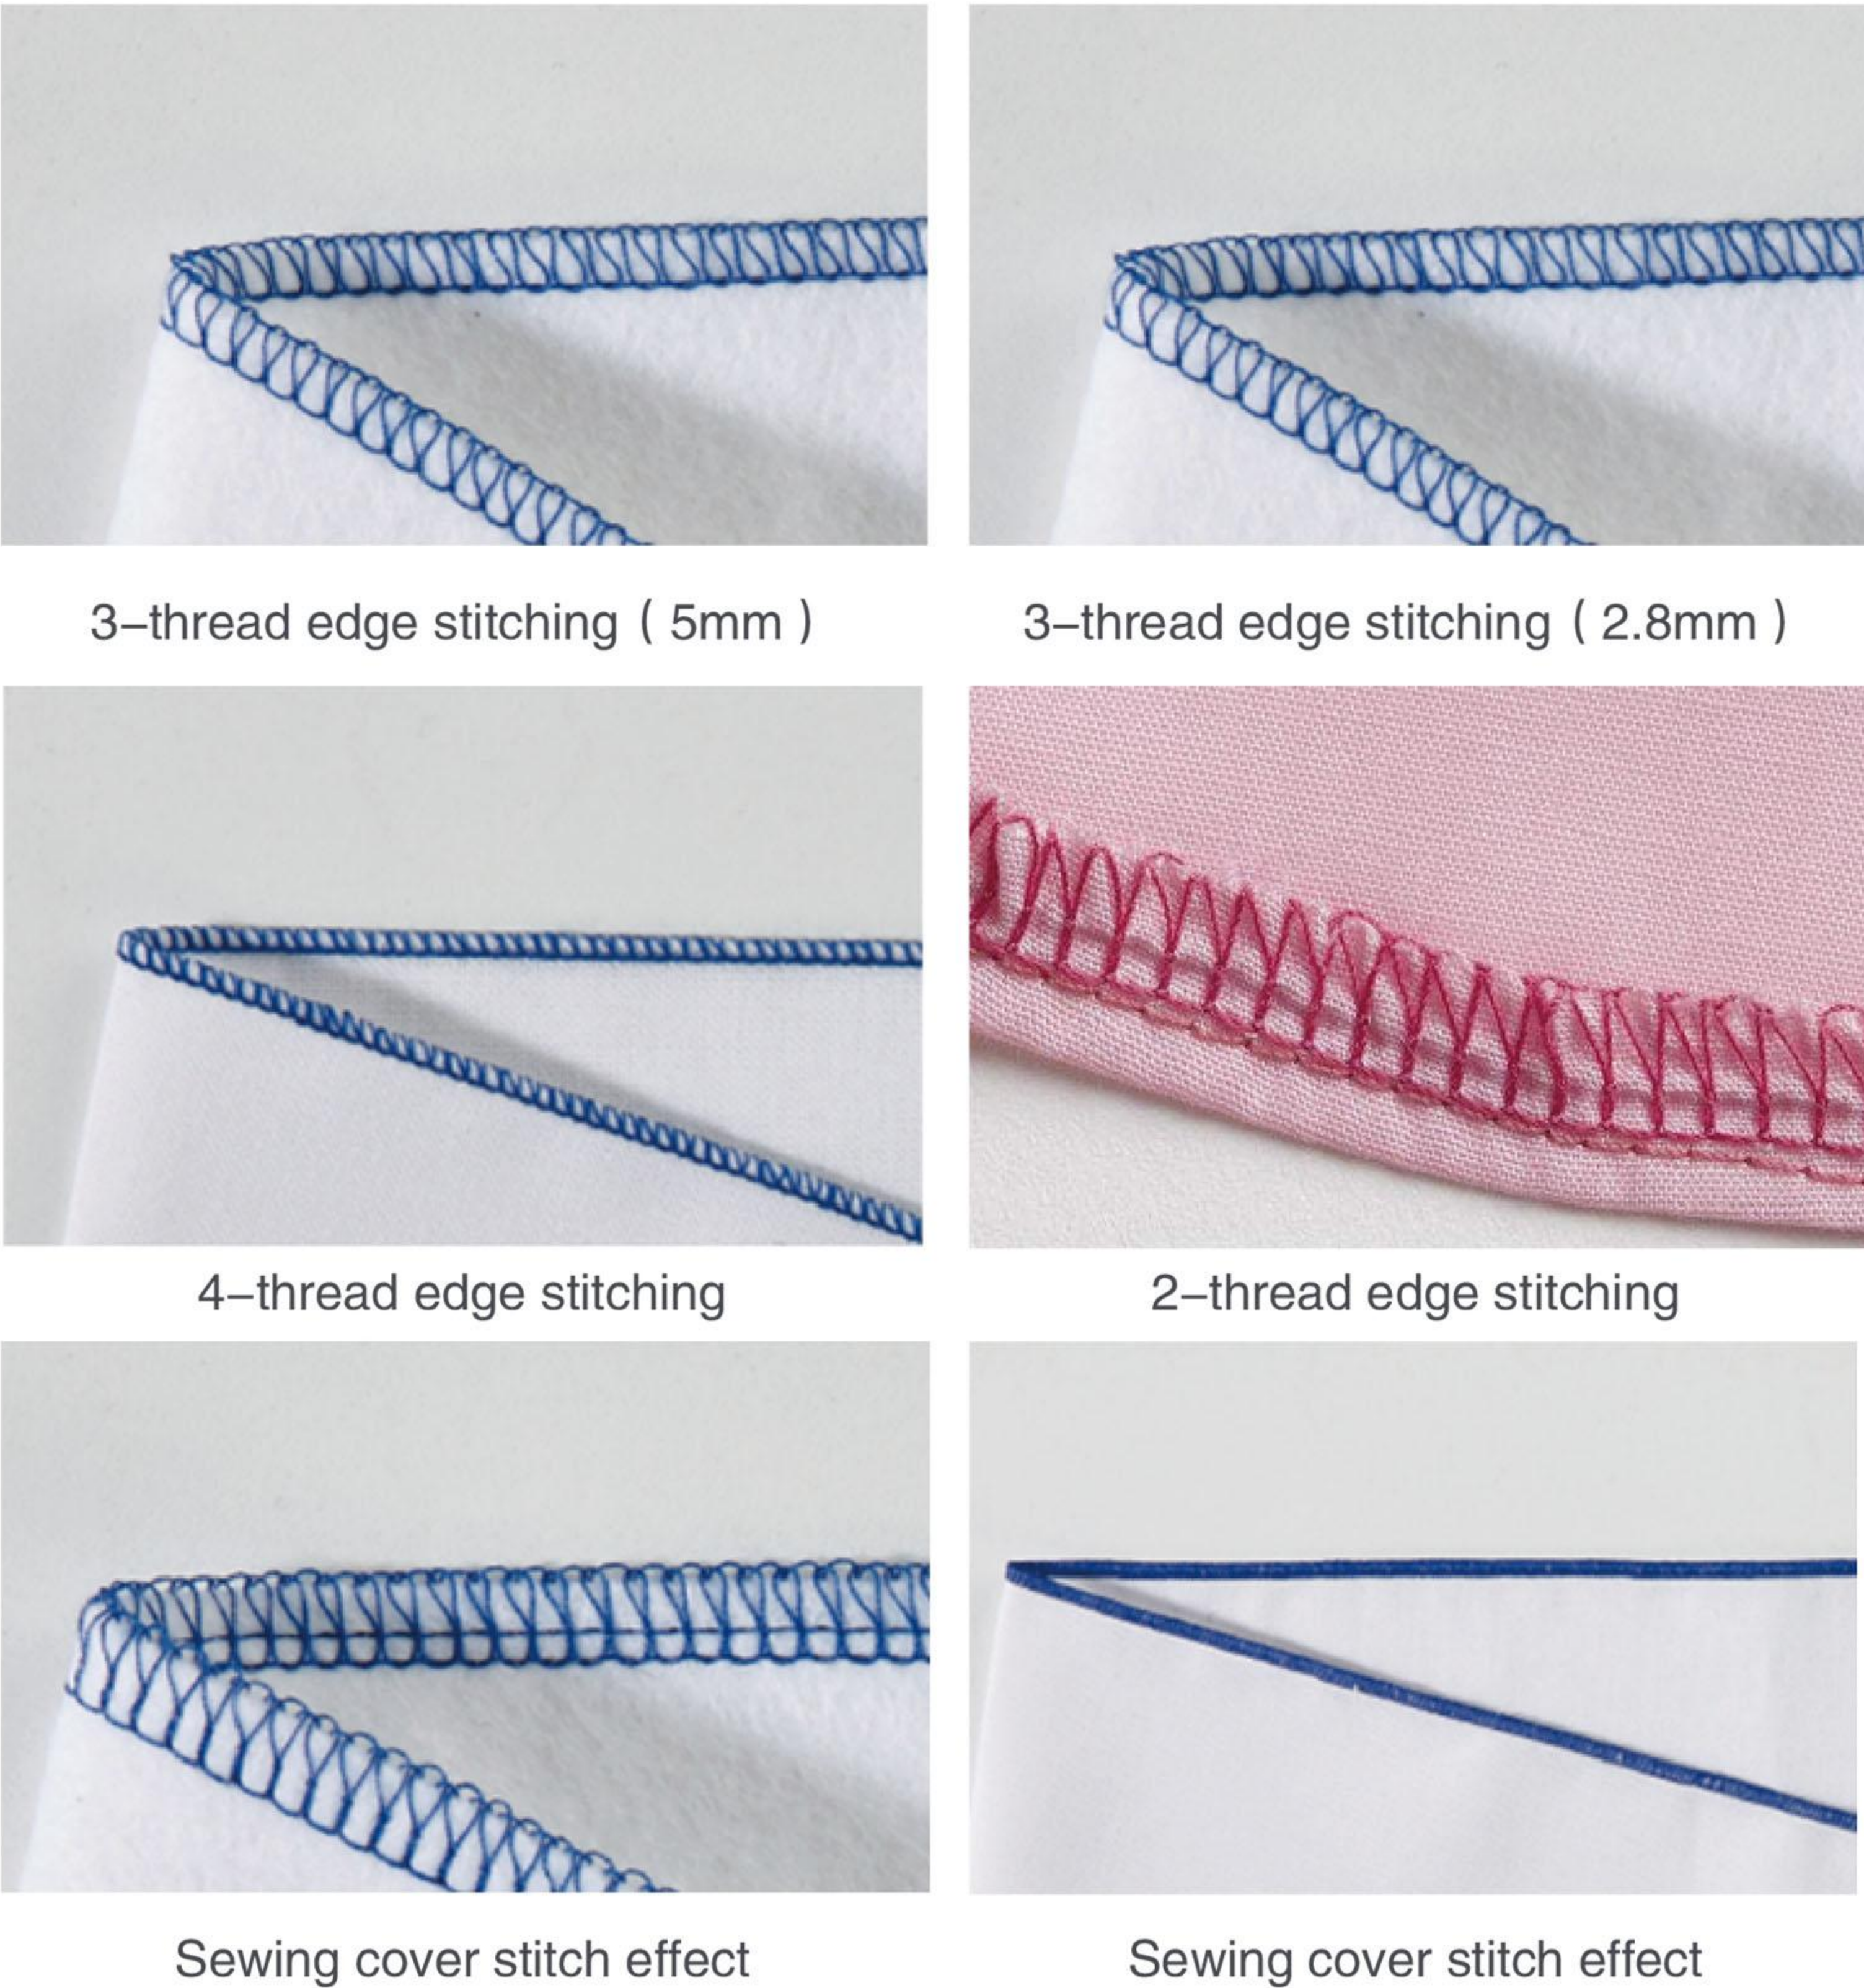

Standard Accessories

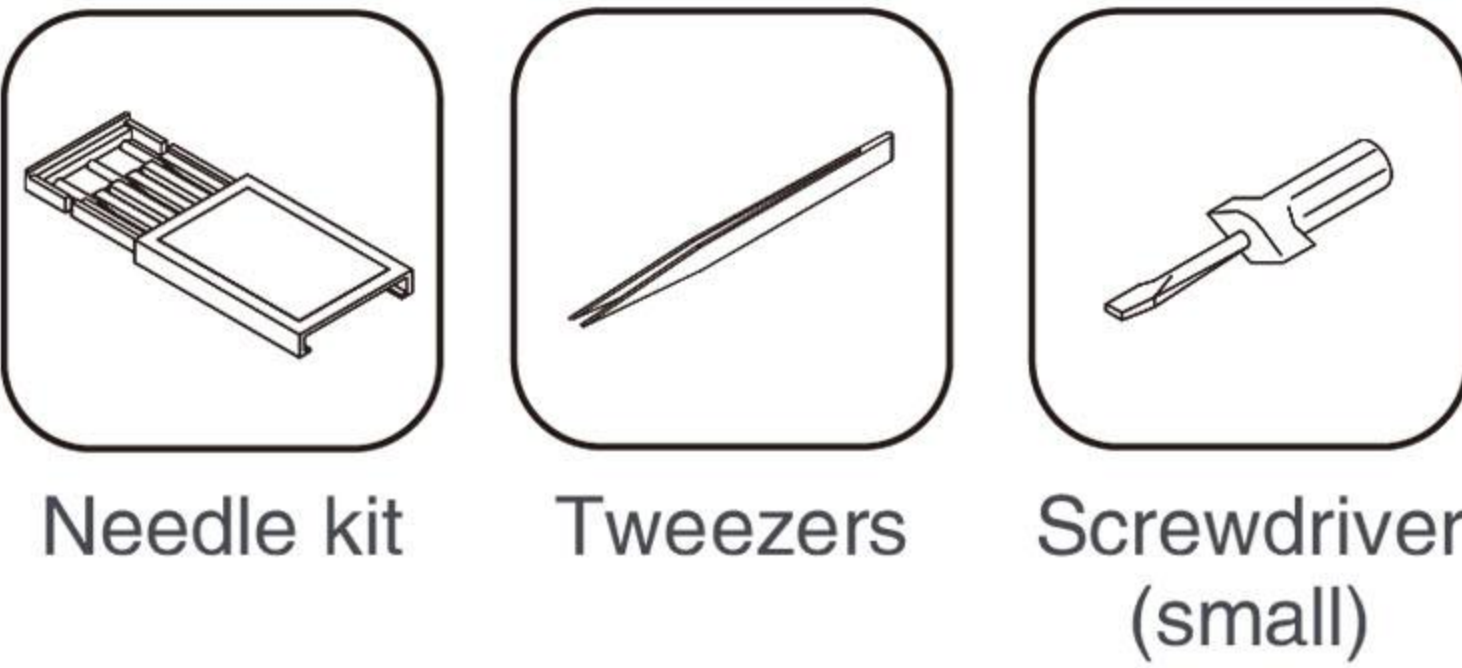

Product feaatures



Specification


单针/双针 2线/3线/4线/密拷 Single/double needles 2/3/4 threads/ cover stitch	差动送料 差动比 1:0.7-1:2 Differential Feeding differential ratio 1: 0.7-1: 2	包缝密度 1-4mm Overlock density 1-4mm	包缝宽度 3.0-7.7mm Overlock width 3.0-7.7mm
照明灯 LED Lumination: LED	彩色穿线示意图 Colorful draw of threading	电压:110V/220V Voltage: 110V/220V	功率: 90W Power: 90W
1100针/每分钟 1100 needles/ minute	毛重: 8.5KG G.W: 8.5KG	净重: 6.2KG N.W: 6.2KG	包装尺寸(mm) 448(L)x363(W)x319(H) Package size(mm) 448(L)X363(W)X319(H)

GC-320


1. Sewing table can be open, easy for threading lower loopers
2. Integral thread cutter
3. Cut width gauge
4. Built-in accessory storage
5. Lower knife driving mechanism
6. 4-3-2 4-3-2 wire adjustment, 12 different stitch types
7. Differential fee for perfect sewing, eliminates puckering or stretching
8. Rotatable upper knife
9. Adjustable stitch length
10. Electronic foot controller




Standard Accessories

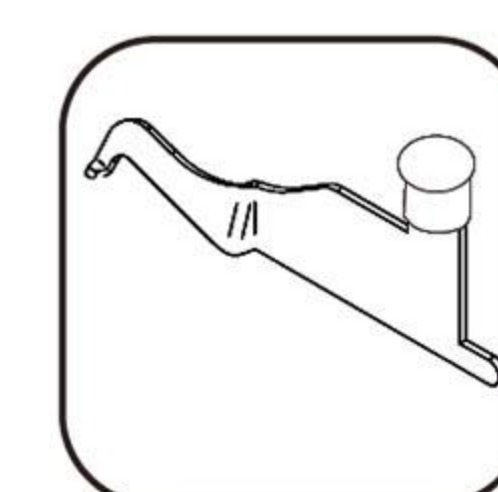


Two thread looper

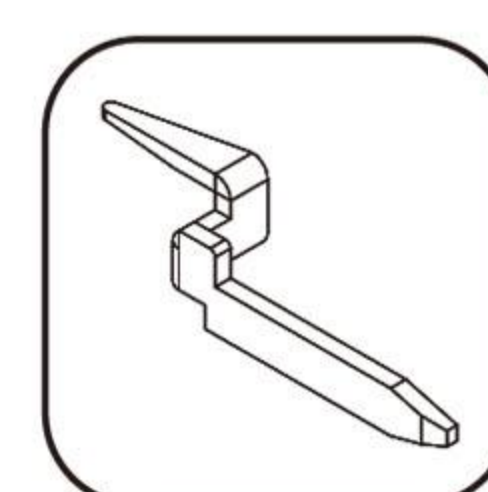


Stitch finger

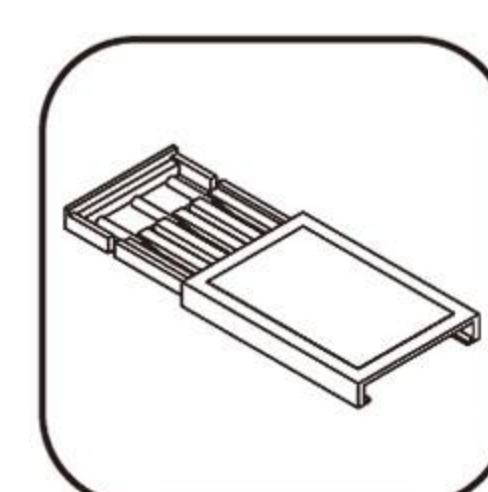


Needle kit

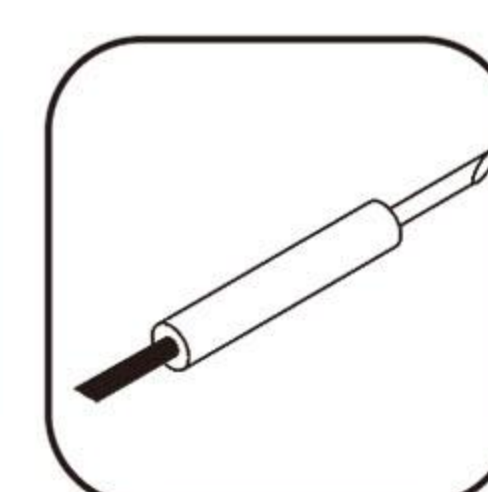


Brush

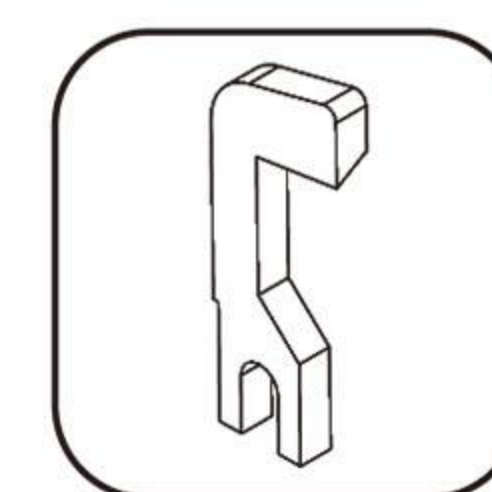


Upper cutter

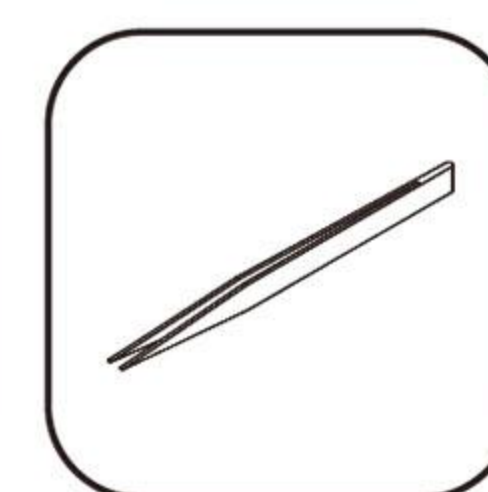


Tweezers

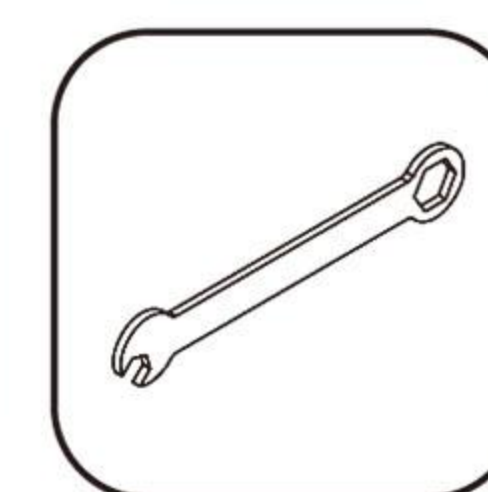


Spanner

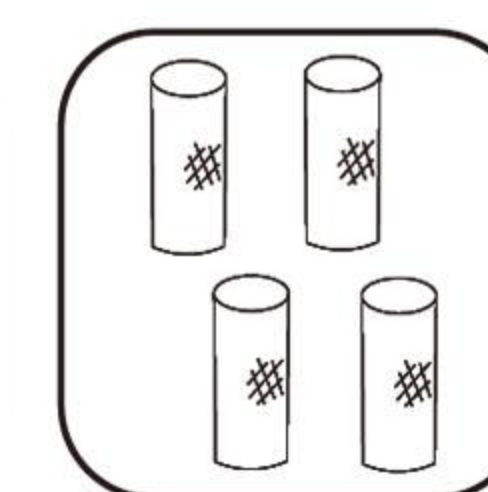


Thread net

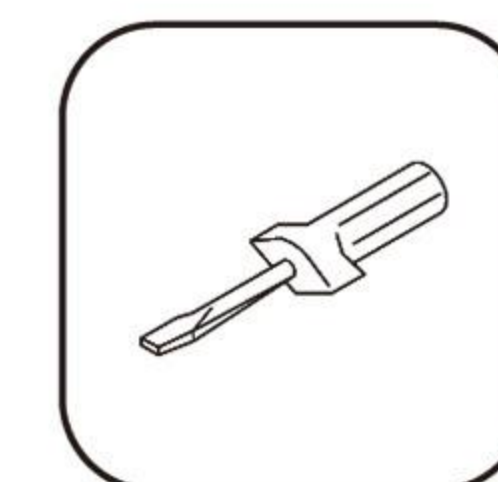


Screwdriver (small)

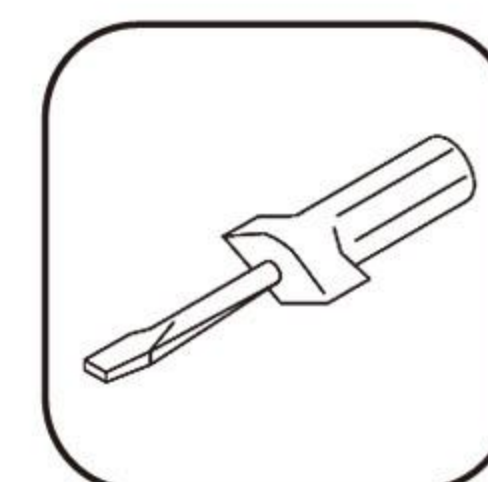

Screwdriver (large)

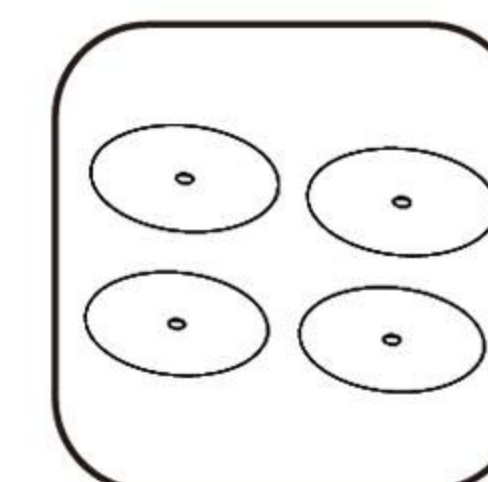

Spool disc

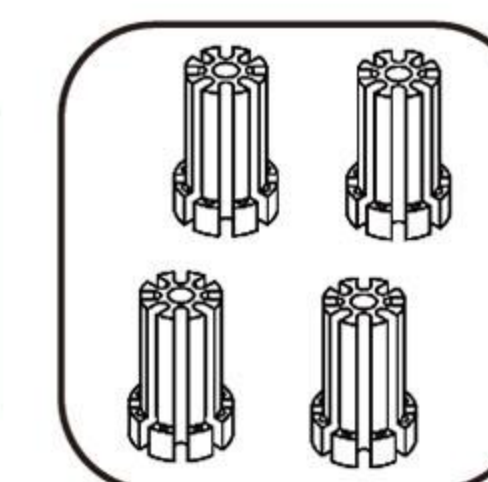

Spool holder

Specification

11#-14#

Needle Model

1200RPM
以上

Maximum
speed

5mm

Foot lifts
height

220~240
VAC

Input Voltage

105W
(电机: 90W,
灯: 15W)

Input
Power

10/9kg
320x280x320mm
390x325x360mm

GW/NW
Machine
Package Size



BETTER CHOICE
**BETTER
CLOTHING**



GC-811

- Aluminium alloy body with extension bed
- Light weight, convenient to carry



Red



Blue

Specification

800spm

Speed

5mm

Foot lifts
height

8.5/7.5KG

GW/NW

418 x225x345mm

Package Size

Stitch

